

Most - Often - Needed

1967-1969

Volume R-27

**RADIO
DIAGRAMS**

and Servicing Information



Compiled by
Hartford Beitman

SUPREME PUBLICATIONS

SUPREME TV & Radio Manuals

ORDER FORM

SIMPLIFIES TV REPAIRS

These giant TV manuals have complete circuits, needed alignment facts, printed boards, servicing hints, production changes, voltage charts, waveforms, and double-page schematics. Here are your authentic service instructions to help you do expert work quicker; and priced at only \$3 per large annual manual.

COVER ALL POPULAR SETS

Here is your service data for faster, easier TV repairs. Lowest priced. Best by comparison. *Supreme TV* manuals have all needed service material on every popular TV set. Helpful, practical, factory-prepared data that will really make TV servicing easy for you. Benefit and save with these amazing values in service manuals. Only \$3 per large volume. Used by 184,000 wise servicemen for faster repairs. Join them; begin to make TV repairs easily and quickly.

RADIO DIAGRAMS

Your best source for all needed RADIO diagrams and service data. Covers everything from most recent 1966 radios to pre-war old-timers; home radios, stereo, combinations, transistor portables, FM, auto sets. Only \$2.50 for many volumes. Every manual has large schematics, all needed alignment facts, printed boards, voltages, trimmers, dial stringing, and hints. Volumes are big, 8½x11 inches, about 190 pages. See coupon at right for list of SUPREME popular radio service manuals ▶

Simplified Radio Servicing by COMPARISON Method

Revolutionary different **COMPARISON** technique permits you to do expert work on all radio sets. Most repairs can be made without test equipment or with only a volt-ohmmeter. Many simple, point-to-point, cross-reference, circuit suggestions locate the faults instantly. Plan copyrighted. Covers every radio set — new and old models. This new servicing technique presented in handy manual form, size 8½ x 11 inches, 48 pages. Over 1,000 practical service hints. 26 large, trouble-shooting blueprints. Charts for circuit analysis. 114 tests using a 5c resistor. Developed by M. N. Beitman. New edition. Price only. **\$150**




TELEVISION SERVICING COURSE

Let this new course help you in TV servicing. Amazing bargain complete, only \$3, full price for all lessons. Giant in size, mammoth in scope. Topics just like a \$200.00 correspondence course. Lessons on picture faults, circuits, adjustments, short-cuts, UHF, alignment facts, hints, antenna problems, trouble-shooting, test equipment, picture analysis. Special, only **\$3**



RADIO MATHEMATICS

Explains arithmetic and simple algebra in connection with units, color code, meter scales, Ohm's law, alternating currents, ohmmeter testing, wattage rating, series and parallel connections, capacity, inductance, mixed circuits, vacuum tubes, curves, the decibel, etc., and has numerous examples. Only **25¢**



SUPREME PUBLICATIONS

1760 Balsam Rd., Highland Park, ILL.

★ Ship immediately Radio and TV manuals in quantities marked below.

Most-Often-Needed TELEVISION Manuals @ \$4

QUANTITY	VOLUME #TV	YEAR COVERED
	TV-28	1969
	TV-27	1968
	TV-26	1967

Most-Often-Needed TELEVISION Manuals @ \$3.

	TV-25	1966
	TV-24	Late 1965
	TV-23	Early 1965
	TV-22	1964
	TV-21	1963
	TV-20	Late 1962
	TV-19	Early 1962
	TV-18	1961
	TV-17	1960
	TV-16	Late 1959
	TV-15	Early 1959
	TV-14	1958
	TV-13	Late 1957
	TV-10	Late 1955
	TV-9	Early 1955
	TV-8	1954
	TV-5	1951

Most-Often-Needed RADIO Manuals @ \$2.50

QUANTITY	VOLUME #R	YEAR COVERED
	R-26	1966
	R-25	1965
	24	1964
	23	1963
	22	1962
	21	1961
	20	1960
	19	1959
	18	1958
	17	1957
	16	1956
	15	1955
	14	1954
	13	1953
	12	1952
	11	1951
	10	1950
	9	1949
	8	1948
	7	1947
	6	1946
	5	1942
	4	1941
	3	1940
	1	1926-1938

Master INDEX to above manuals, 25¢

TRAINING BOOKS

- Auto Radio 1964-1965 Diagrams, \$2.50
- Radio Servicing Course, new ed. 2.50
- Simplified Radio Servicing, 1.50
- Radio Mathematics (Self-help) .25
- Practical Radio & Electronics, 3.95
- Television Servicing Course, 3.00

- I am enclosing \$ Send postpaid.
- Send C.O.D. I am enclosing \$. . . deposit.

Name: _____

Address: _____


Supreme Publications
Sold by All Leading Parts Jobbers

Admiral

5E6 & 5E6A



CHASSIS

Models: YR503, YH713, YH717, YH723, YH727, YH731, YHC777, YHC793, YHC799, YHC801, YK803.

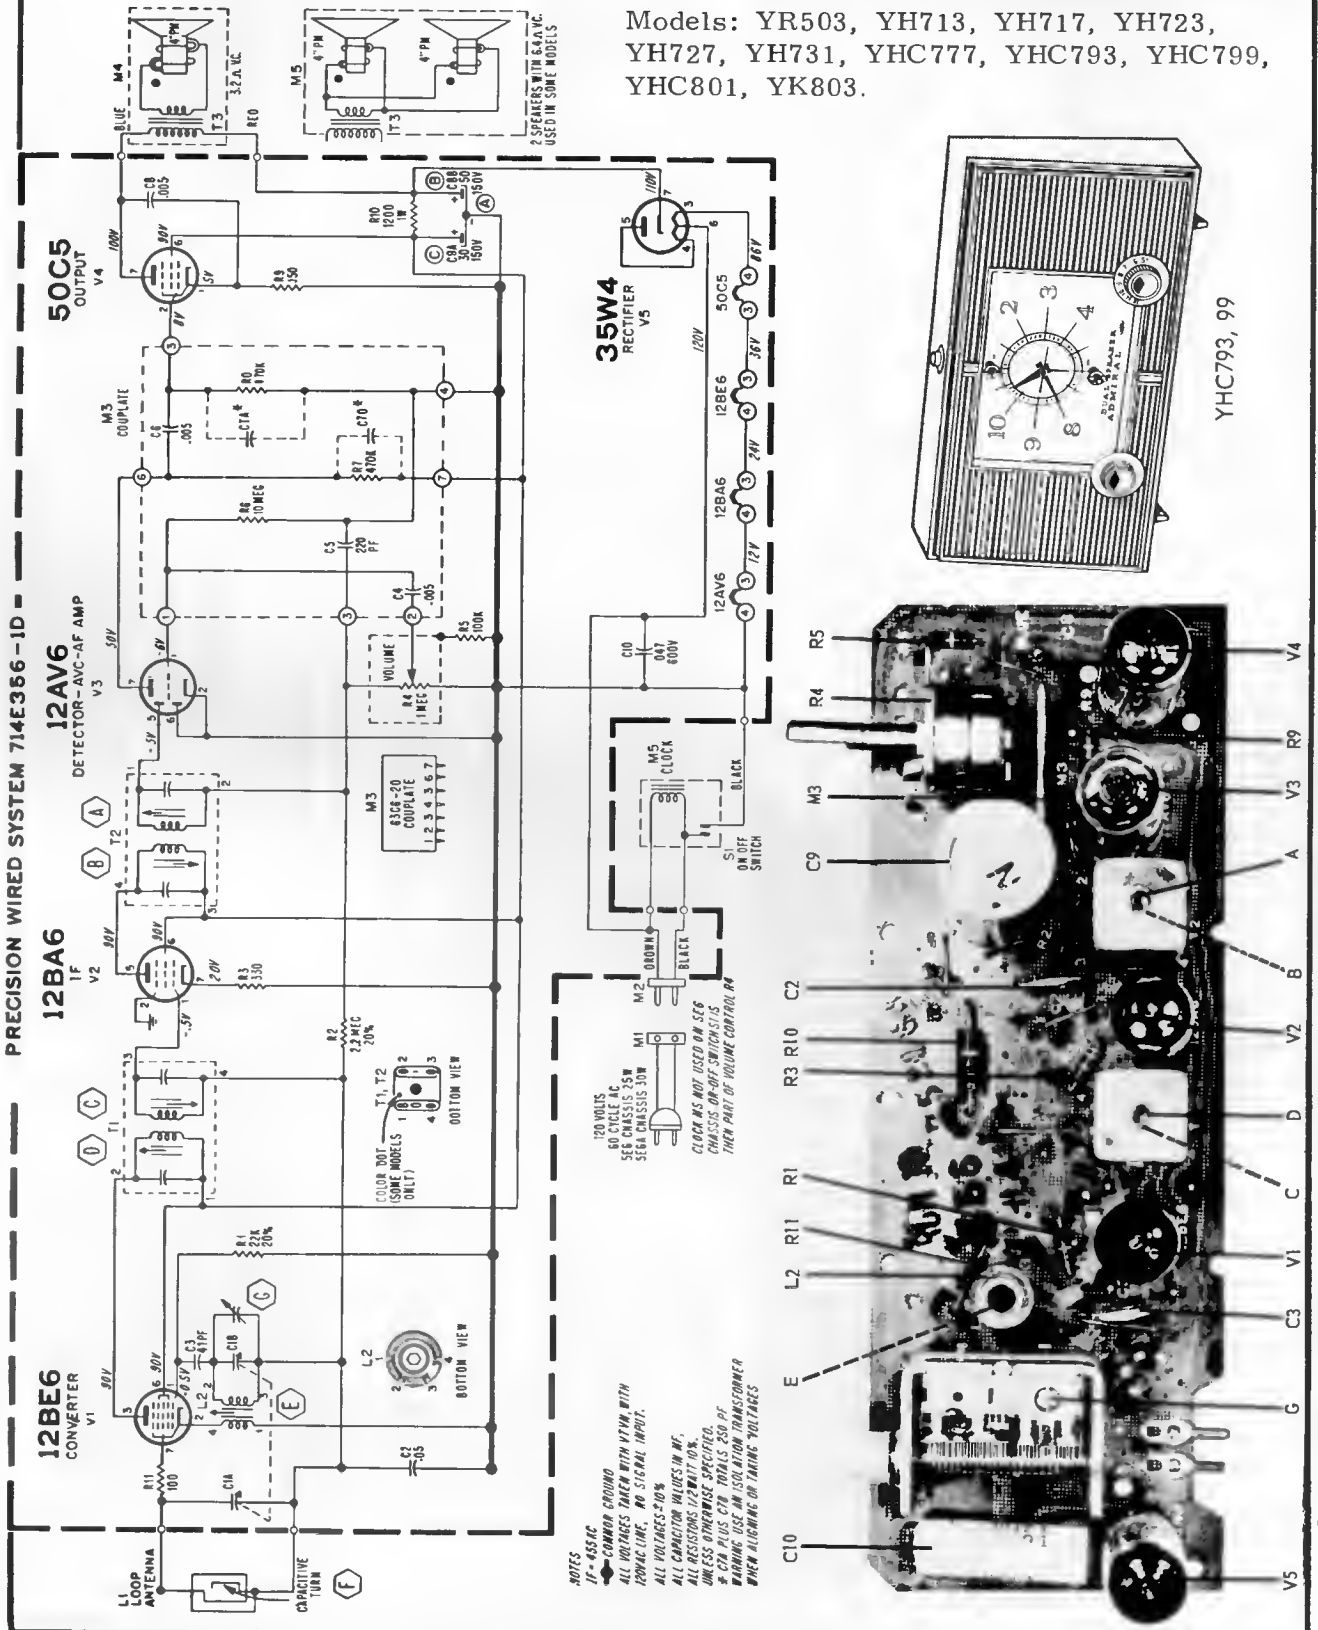


Admiral CORPORATION

PWS 714D430-1

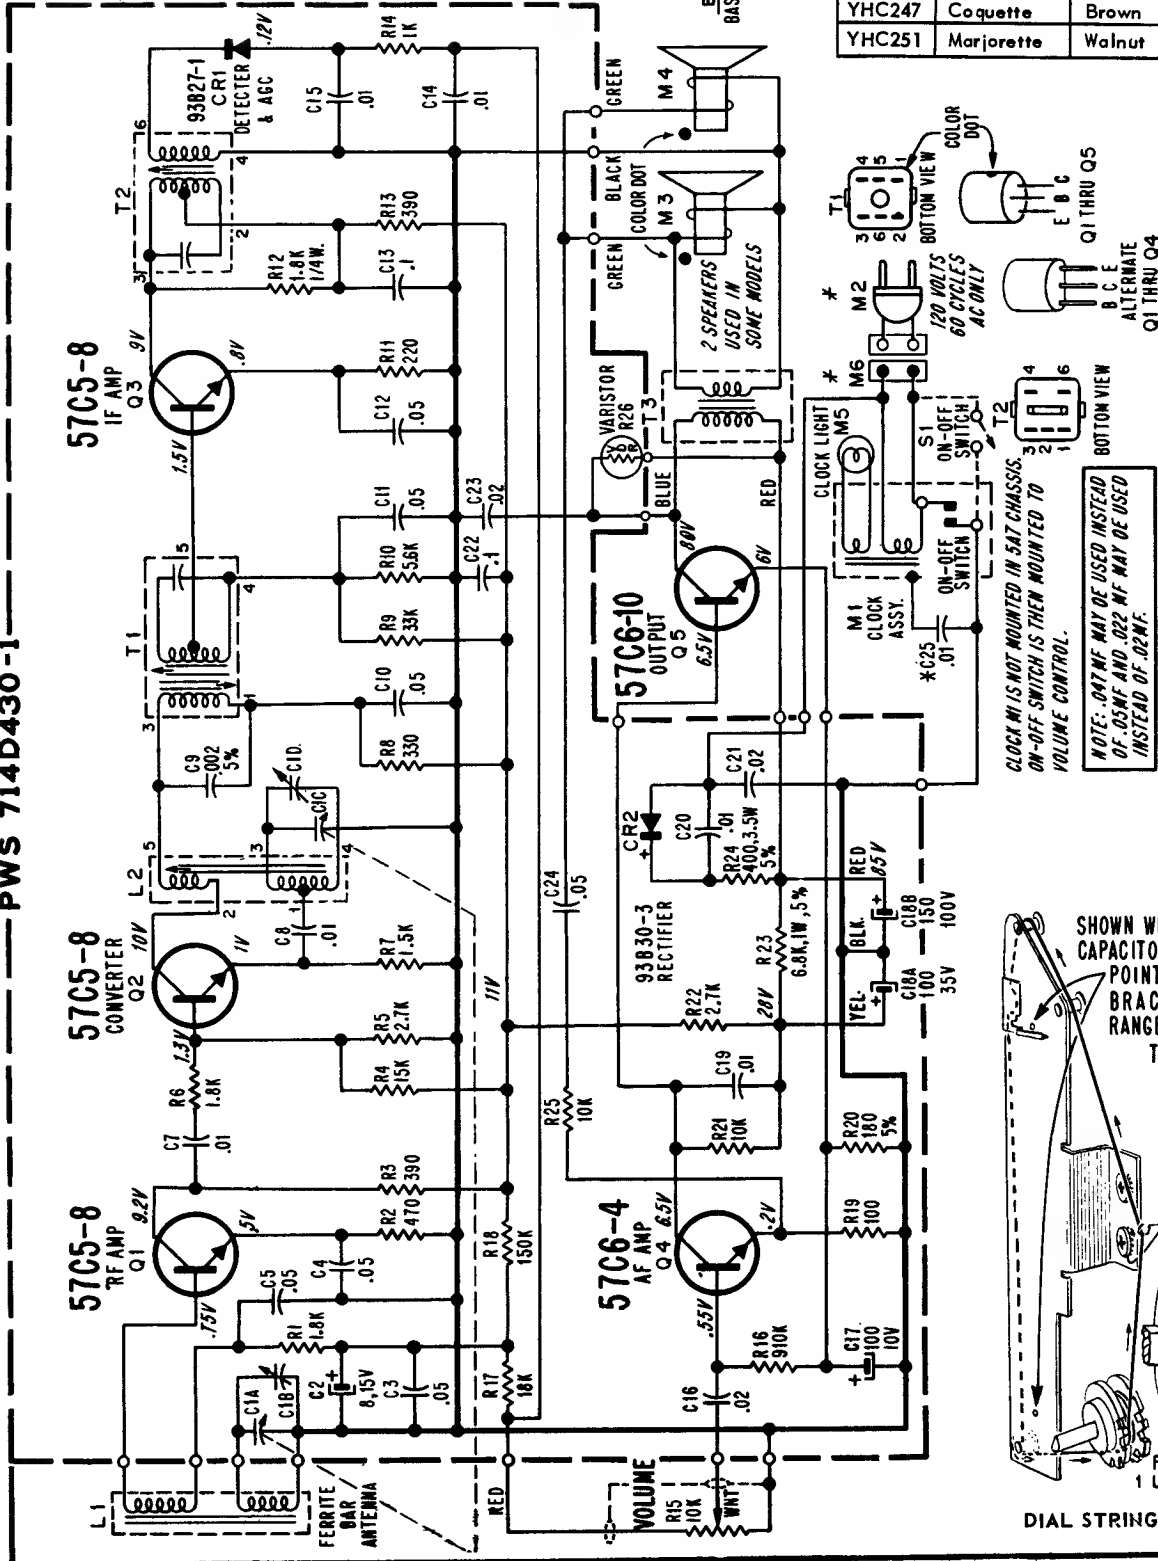

MODEL CHART



MODEL	NAME	COLOR	CHASSIS
YH203	Varsity	White	5A7
YH207	Varsity	Beige	
YH211	Musical	Walnut	
YHC223	Mount Clair	White	5A7A
YHC237	Zephyr	Beige	
YHC243	Coquette	White	
YHC247	Coquette	Brown	
YHC251	Marjorette	Walnut	

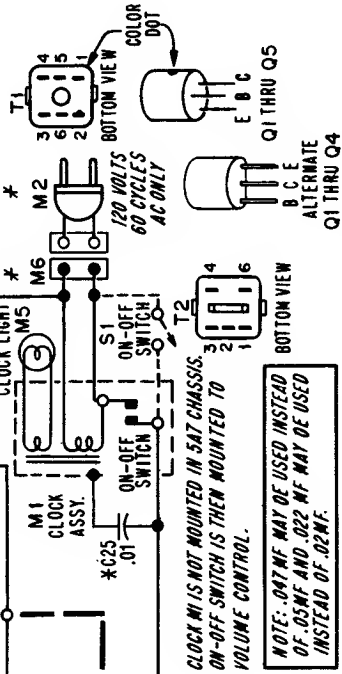

CLOCK M5 IS NOT MOUNTED IN 5A7 CHASSIS. ON-OFF SWITCH IS THEN MOUNTED TO VOLUME CONTROL.


NOTE: .007 MF MAY BE USED INSTEAD OF .05 MF AND .022 MF MAY BE USED INSTEAD OF .02 MF.

- NOTES:
- COMMON PRECISION WIRED GROUND. IF = 455 KC UNLESS OTHERWISE SPECIFIED.
 - CAPACITOR VALUES IN MICROFARADS. RESISTOR VALUES IN OHMS 1/2 WATT, 10% VOLTAGE READINGS TAKEN AT 120 VOLT AC LINE. BETWEEN POINTS SHOWN AND COMMON GROUND (0-), NO SIGNAL, VOLUME CONTROL AT MINIMUM. 17TVW USED.
 - *C25, M2, AND M6 ONLY USED IN SOME MODELS.

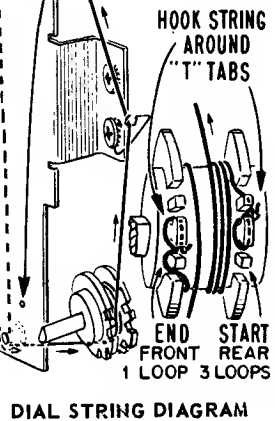



DIAL STRING DIAGRAM

Admiral

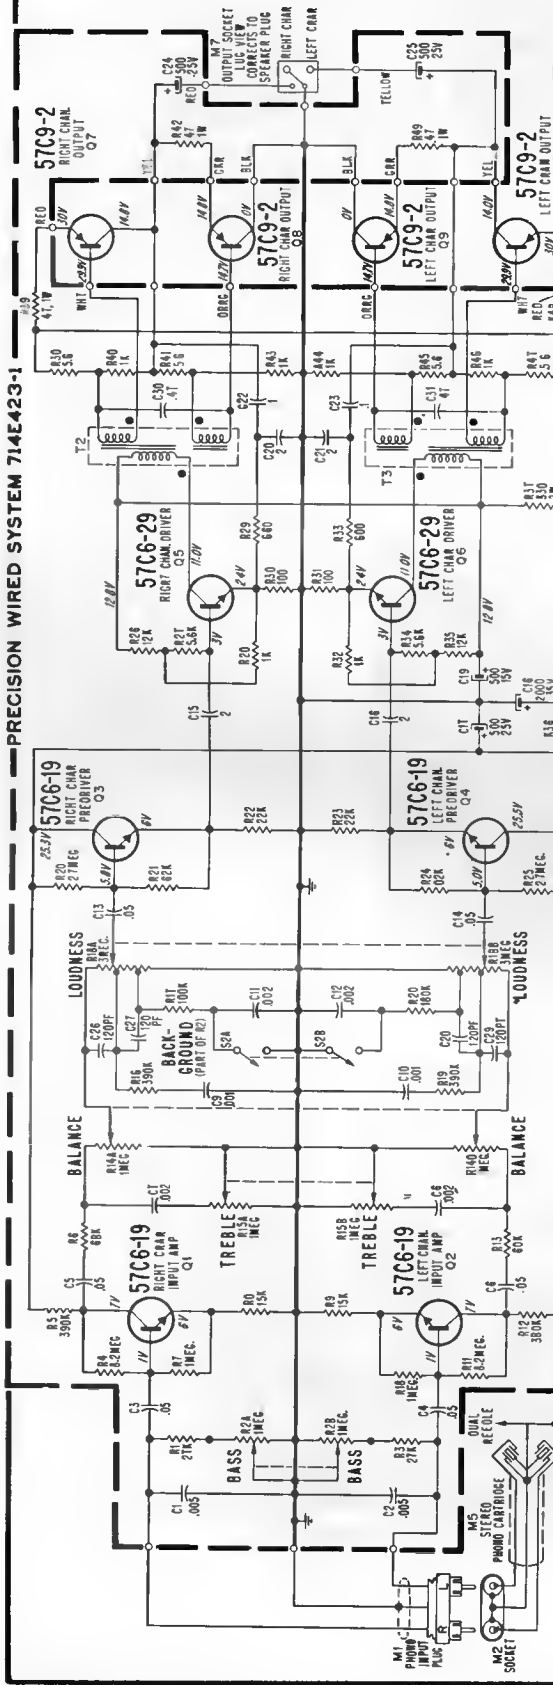

MODEL CHART				
MODEL	NAME	COLOR	CHANGER	CHASSIS
YHS1741	Minstrel	Black	RC7W5S-67BB	8M3
YHS1771C	Virtuoso	Block	RC7W5S-67BB	
			or RC7W5W-67BB	




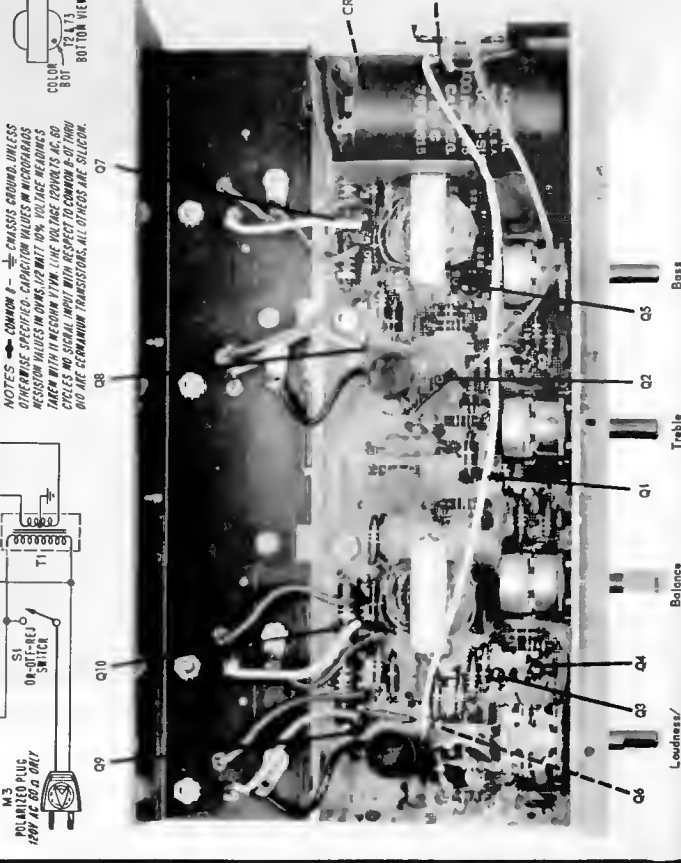
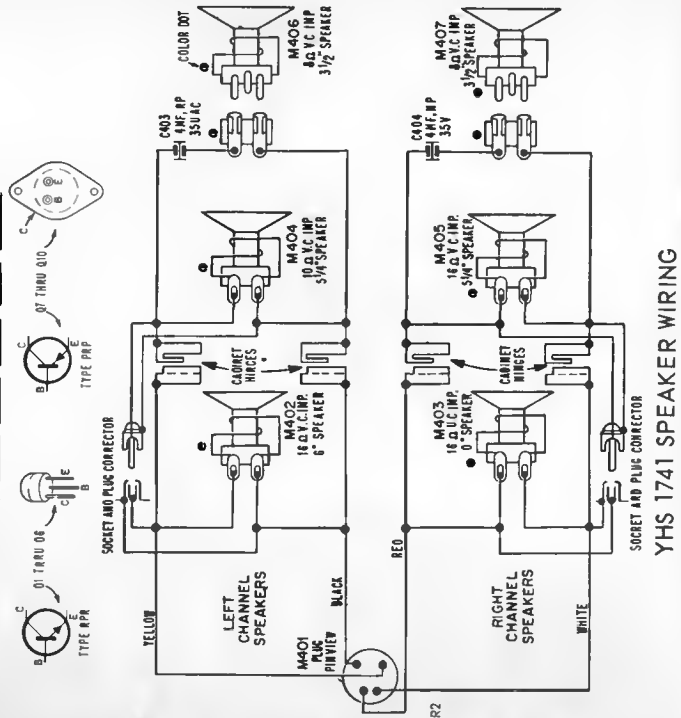


TOP VIEW OF CHASSIS OPENED FOR SERVICING

Admiral


(See page 7 for schematic diagram.)

MODEL CHART			
MODEL	NAME	COLOR	CHASSIS
YH601	Celestial	Black	6M4
YH607	Celestial	Brown	
YH611	Melodist	Walnut	
YH619	Polonaise	Cherry	6M4A
YHC621	Concerto	Black	
YHC627	Concerto	Brown	
YHC631	Caprice	Walnut	
YHC641	Reverie	Walnut	
YHC649	Lullaby	Cherry	

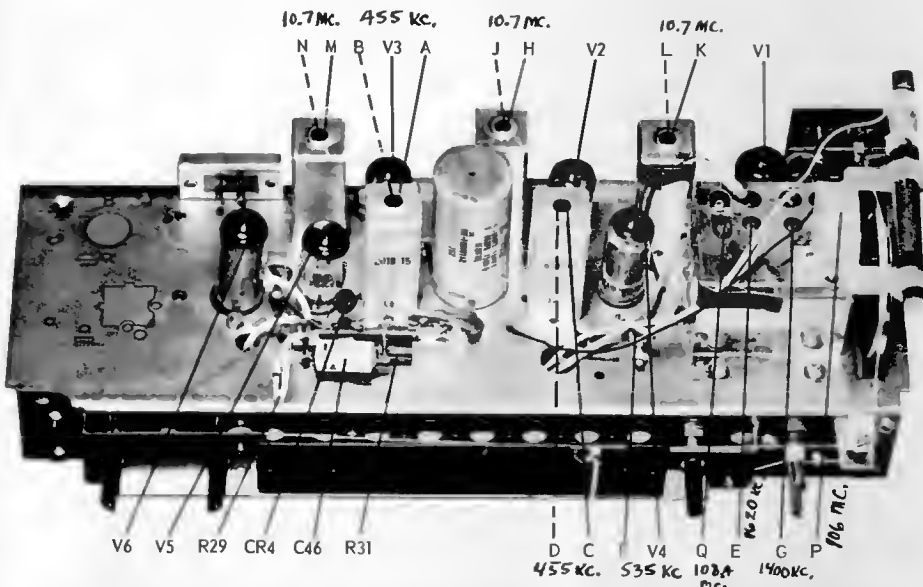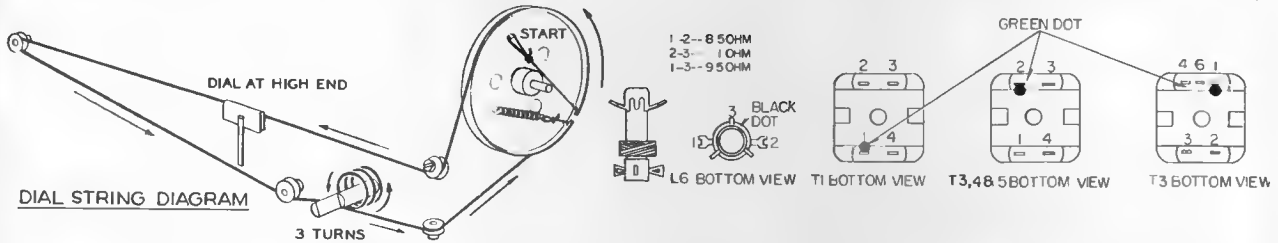

TOP VIEW OF CHASSIS SHOWING ALIGNMENT POINTS AND COMPONENTS

Note: Dashed (---) lines indicate slug nearest chassis.

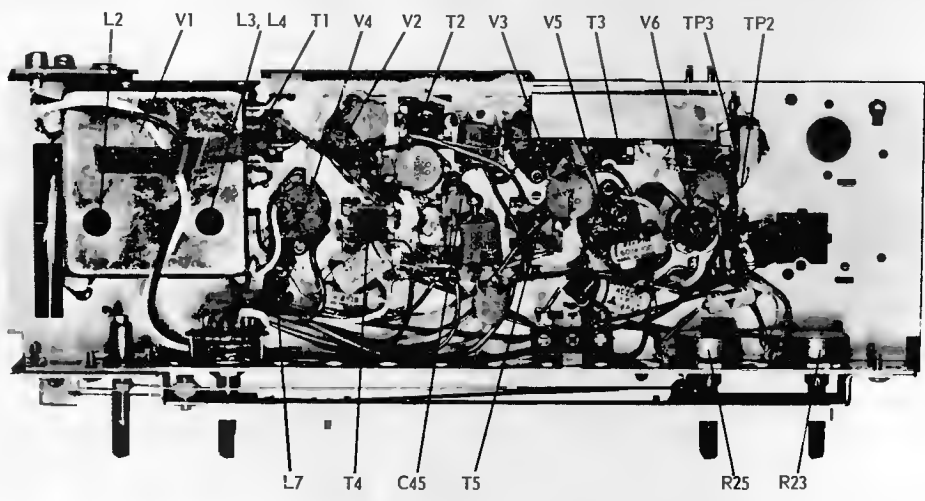


BOTTOM VIEW OF CHASSIS

17EW8/HCC85

12BA6

12BA6

ADMIRAL Chassis 6M4, A (Continued)

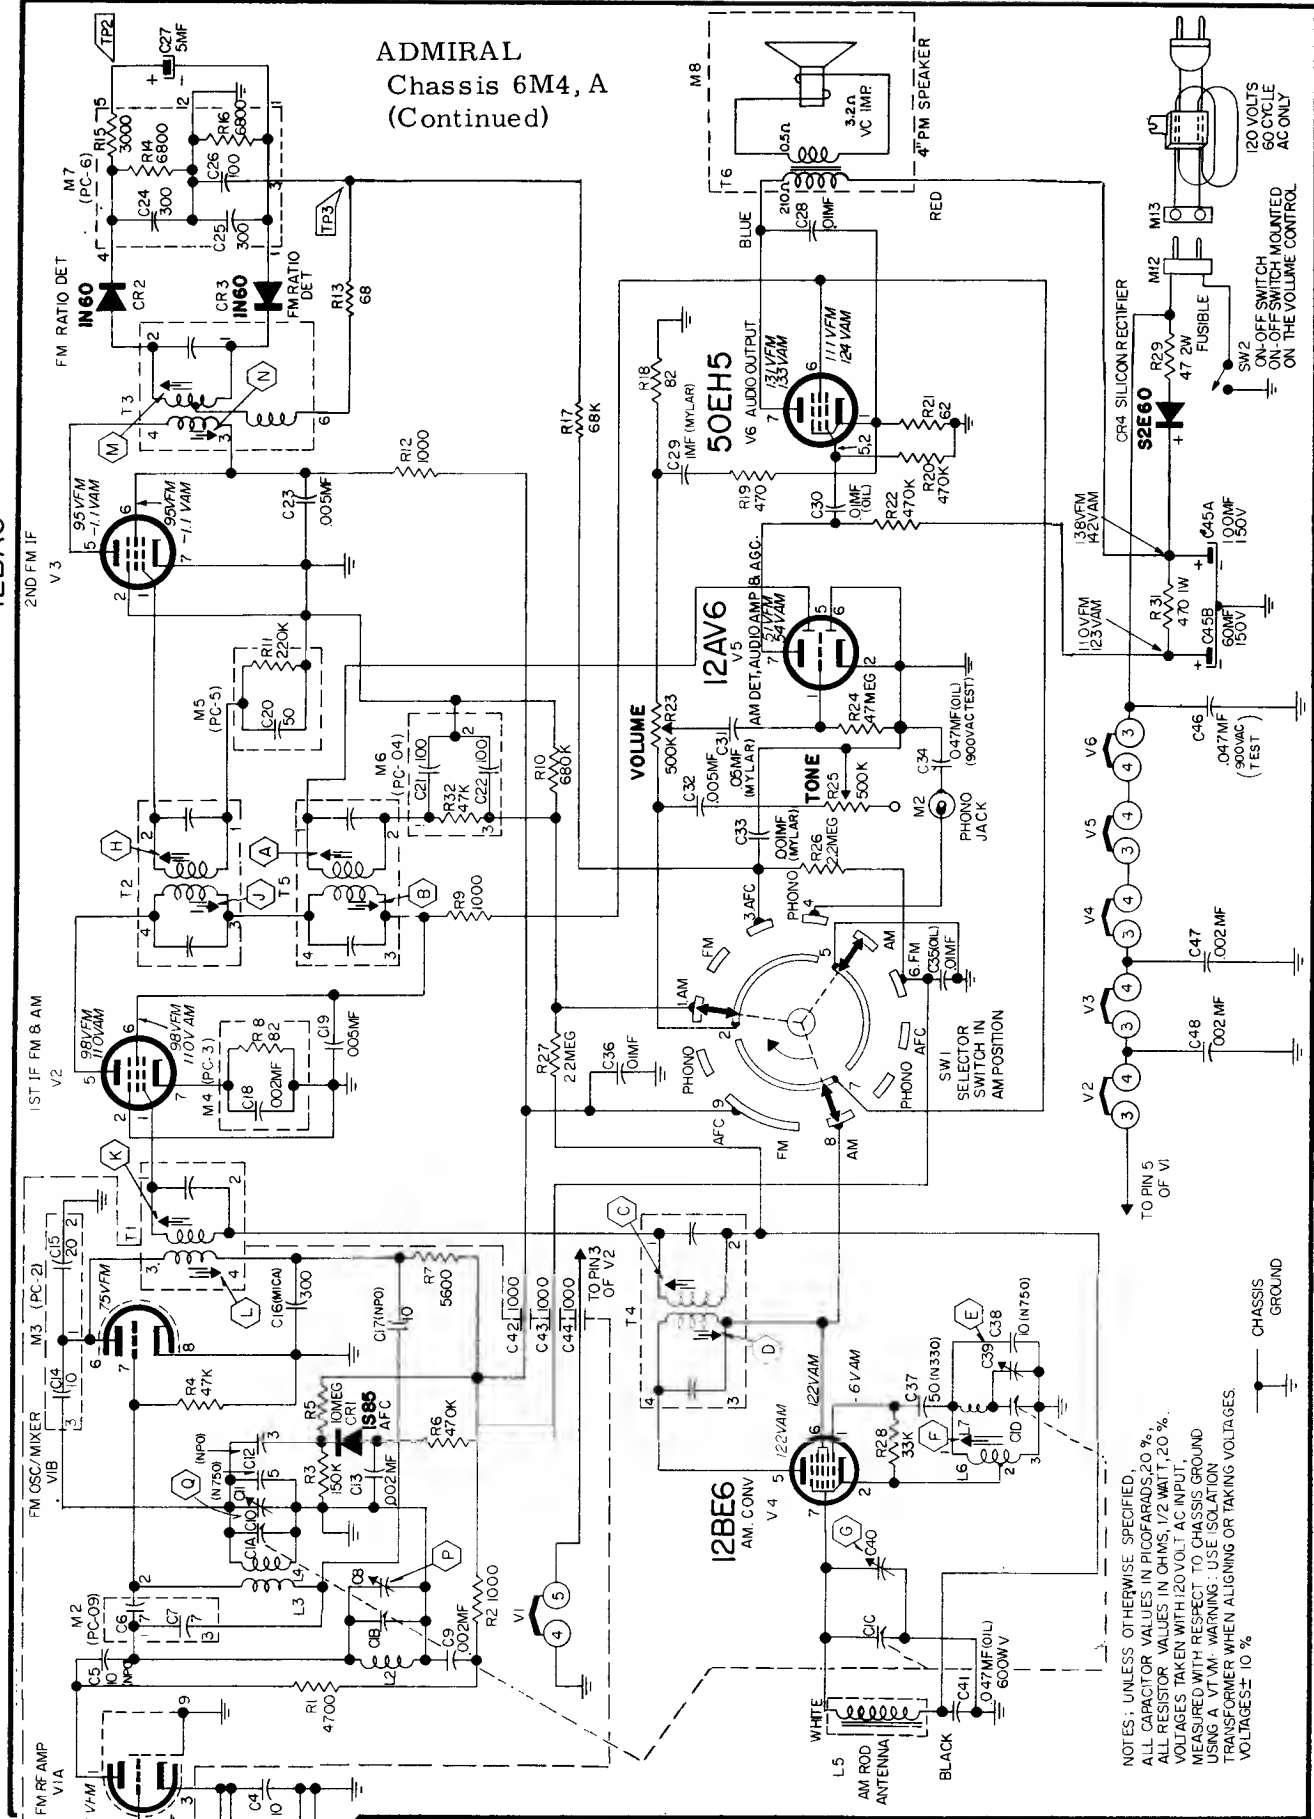


NOTES: UNLESS OTHERWISE SPECIFIED,
 ALL CAPACITOR VALUES IN PICOFARADS; 20%
 ALL RESISTOR VALUES IN OHMS, 1/2 WATT, ±20%
 VOLTAGES TAKEN WITH 120 VOLT AC INPUT;
 MEASURED WITH RESPECT TO CHASSIS GROUND
 USING A VTVM. WARNING: USE ISOLATION
 TRANSFORMER WHEN ALIGNING OR TAKING VOLTAGES.
 VOLTAGE± 10%.

SCHEMATIC DIAGRAM 6M4 CHASSIS

Admiral

Chassis 5B7, Models: YK103, YK117, YK118, YK121
 Chassis 5B7A, Models: YKC133, YKC147, YKC148, YKC151

PWS 714C438-2

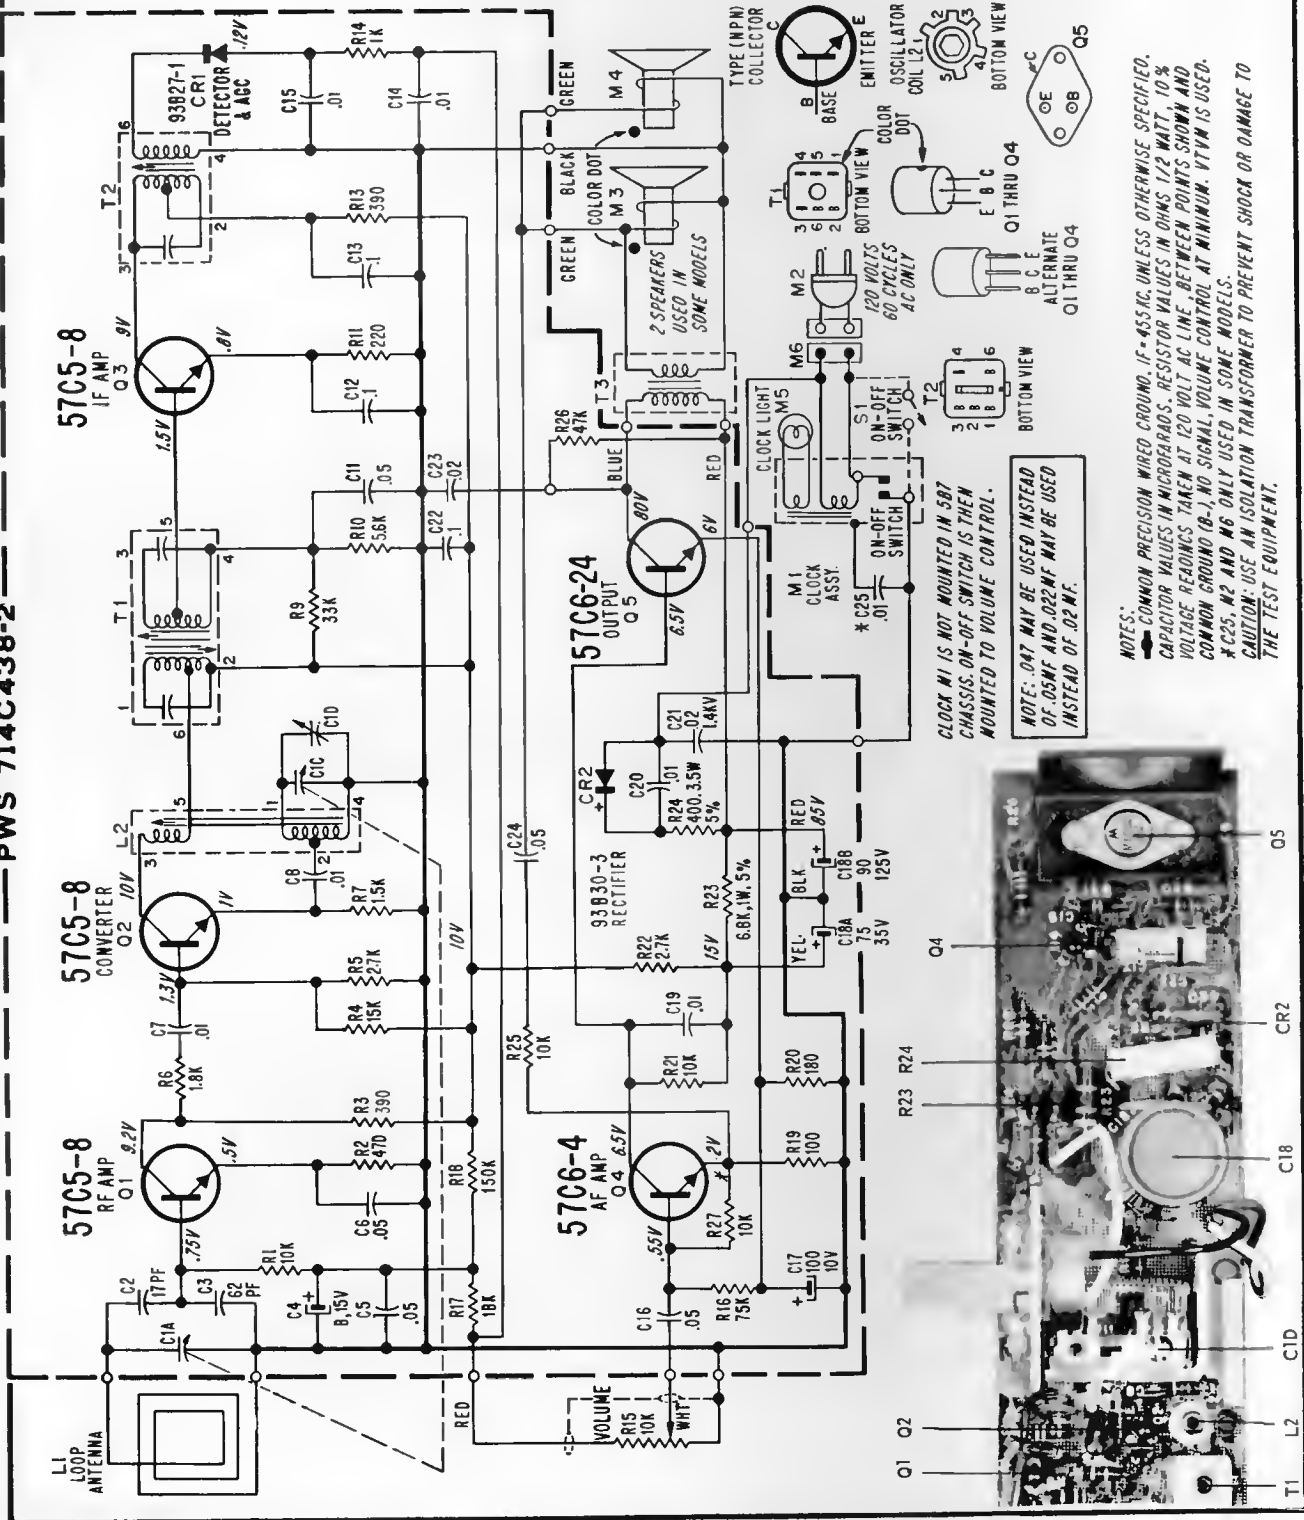



NOTES:
 COMMON PRECISION WIRED GROUND. IF-455 KC. UNLESS OTHERWISE SPECIFIED.
 CAPACITOR VALUES IN MICROFARADS. RESISTOR VALUES IN OHMS 1/2 WATT, 10%
 VOLTAGE READINGS TAKEN AT 120 VOLT AC LINE. BETWEEN POINTS SHOWN AND
 COMMON GROUND (B-), NO SIGNAL, VOLUME CONTROL AT MINIMUM. VTVM IS USED.
 *C25, R2 AND R6 ONLY USED IN SOME MODELS.
 CAUTION: USE AN ISOLATION TRANSFORMER TO PREVENT SHOCK OR DAMAGE TO
 THE TEST EQUIPMENT.

CLOCK M1 IS NOT MOUNTED IN 5B7
 CHASSIS. ON-OFF SWITCH IS THEN
 MOUNTED TO VOLUME CONTROL.
 NOTE: .047 MAY BE USED INSTEAD
 OF .05MF AND .022MF MAY BE USED
 INSTEAD OF .02 MF.





TOP VIEW OF CHASSIS

PRECISION WIRED SYSTEM

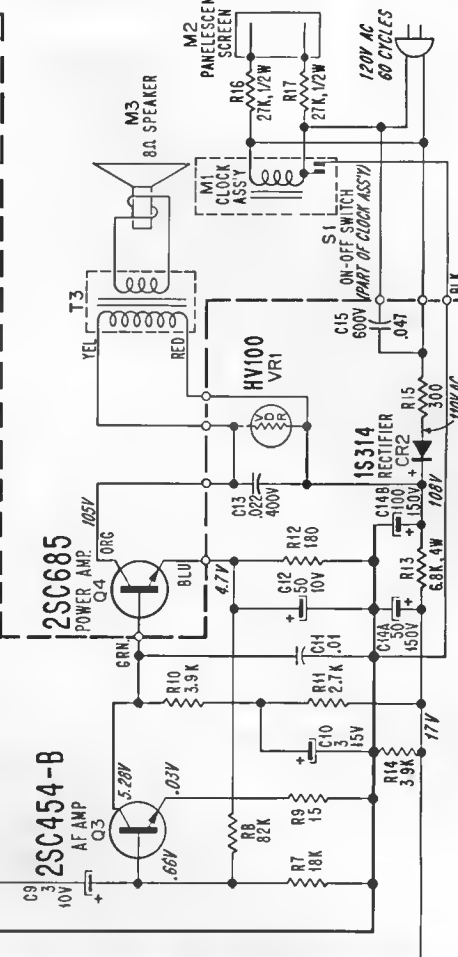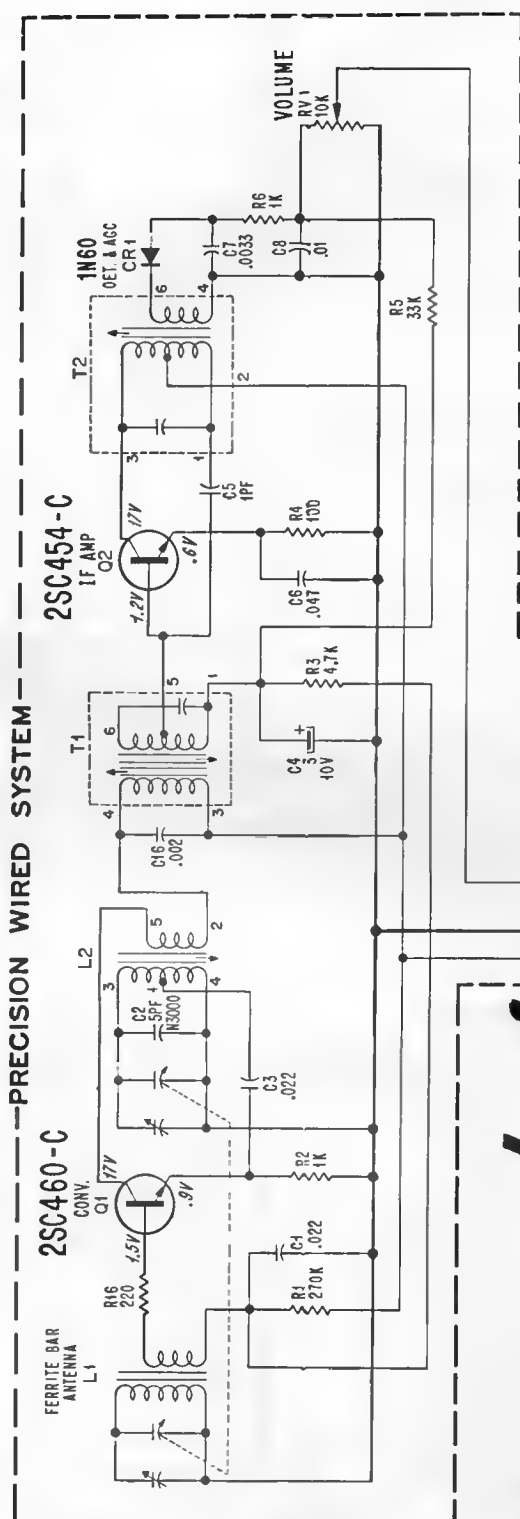


SCHEMATIC DIAGRAM

NOTES:
 — COMMON PRECISION WIRED GROUND, IF=455KC.
 UNLESS OTHERWISE SPECIFIED, CAPACITOR VALUES IN MICROFARADS.
 RESISTOR VALUES IN OHMS 1/4 WATT, 10% VOLTAGE READINGS TAKEN AT 120 VOLTS AC LINE. BETWEEN POINTS SHOWN AND COMMON GROUND (B-), NO SIGNAL VOLUME CONTROL AT MINIMUM. VOLUME IS USED. CAUTION: WHEN ALIGNING OR TAKING VOLTAGES, USE AN ISOLATION TRANSFORMER TO PREVENT SHOCK OR DAMAGE TO TEST EQUIPMENT.

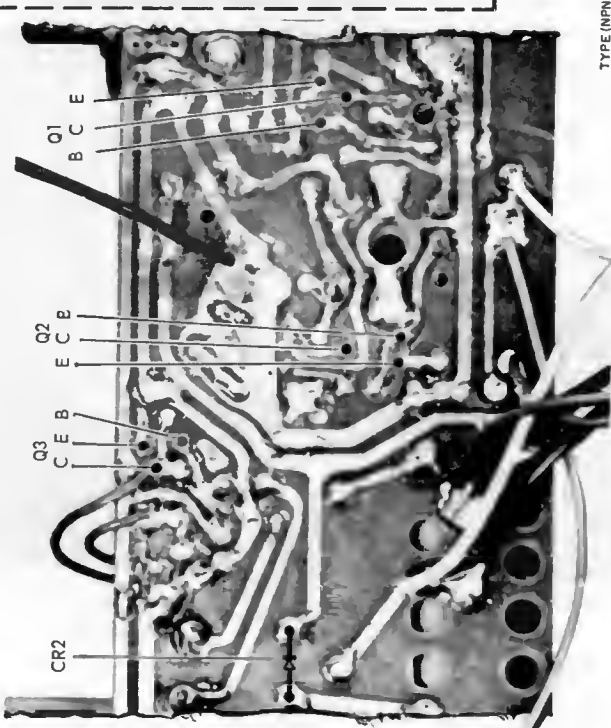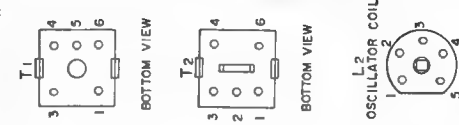

BOTTOM VIEW OF BOARD

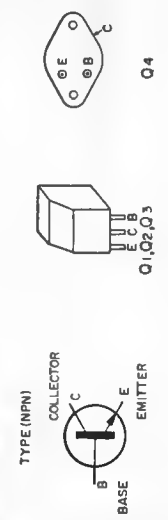

IF 455 KC

To Q4


ADMIRAL (Chassis numbers on next page, model numbers below.)

FM TUNER ASSEMBLY

2SA235
FM RF
Q1



2SA235
FM CONVERTER
Q2

2SA350
1ST FM IF AND
AM CONVERTER
Q3

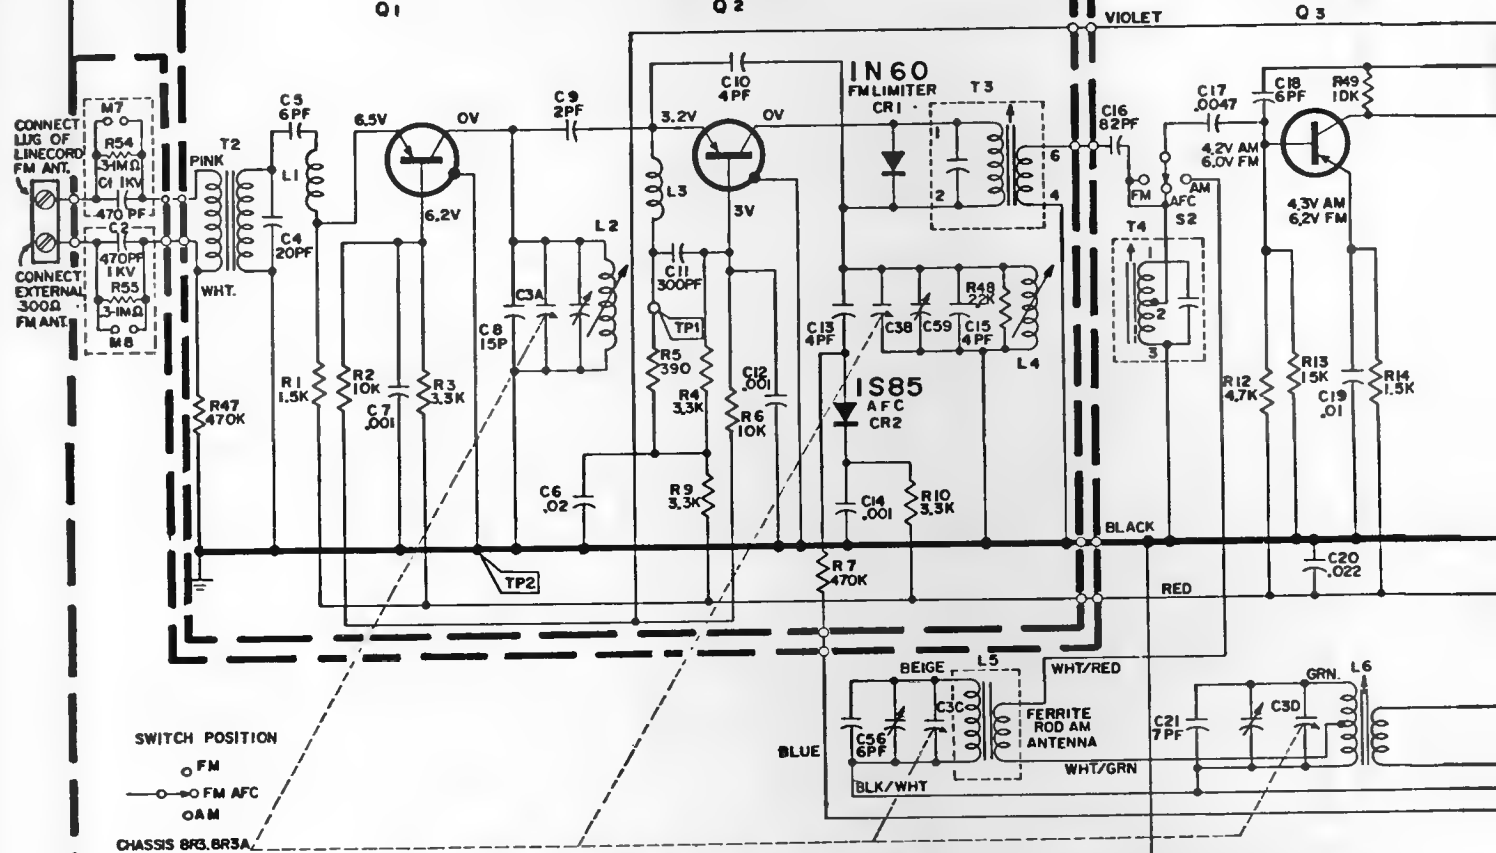

SWITCH POSITION
 ○ FM
 ○ FM AFC
 ○ AM
 CHASSIS 8F3, 8R3A

TOP VIEW OF BOARD SHOWING COMPONENTS & ALIGNMENT LOCATIONS

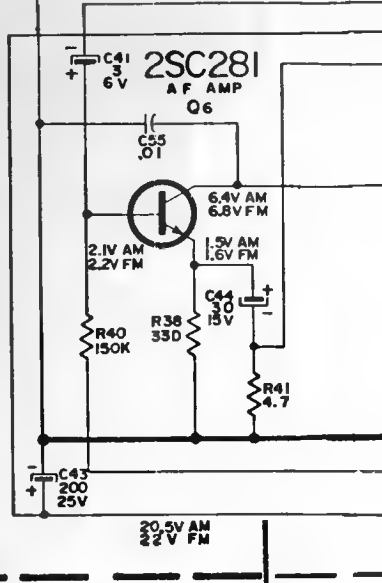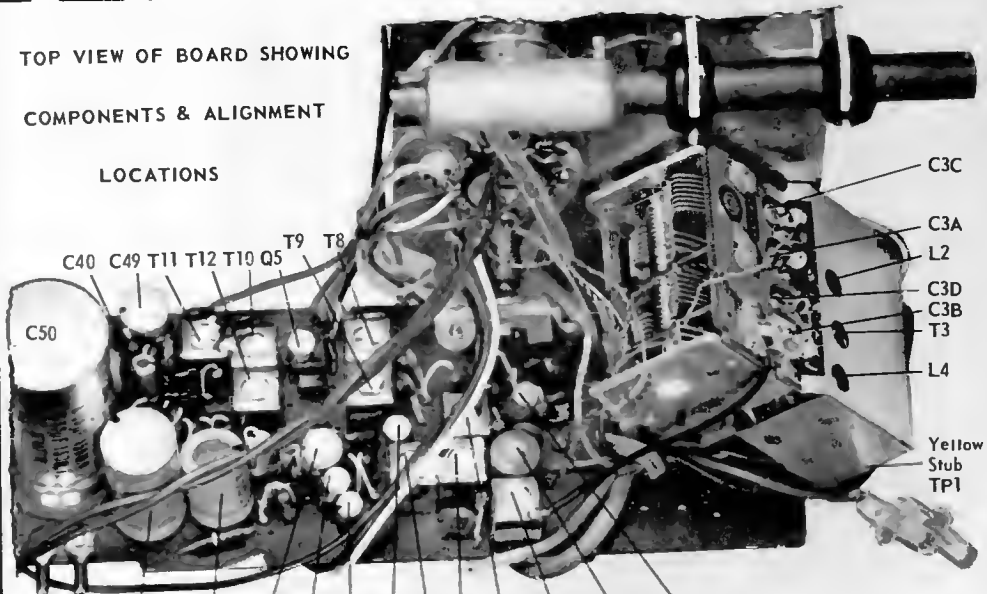


- Models: Y441RA YC521, 531, 541, 551, 561RA
 Y421RA Y461RA YR407, 703, 717, 718, 721, 731, 733, 741, 743
 Y431RA Y471RA YRC417, 803, 817, 818, 821, 831, 833, 841, 843

Notes:
 FM IF 10.7 MC
 AM IF 455 KC


ADMIRAL Chassis numbers 8R3, A; 8S3, A, D, E, F, G; 8Y3


PRECISION WIRED SYSTEM

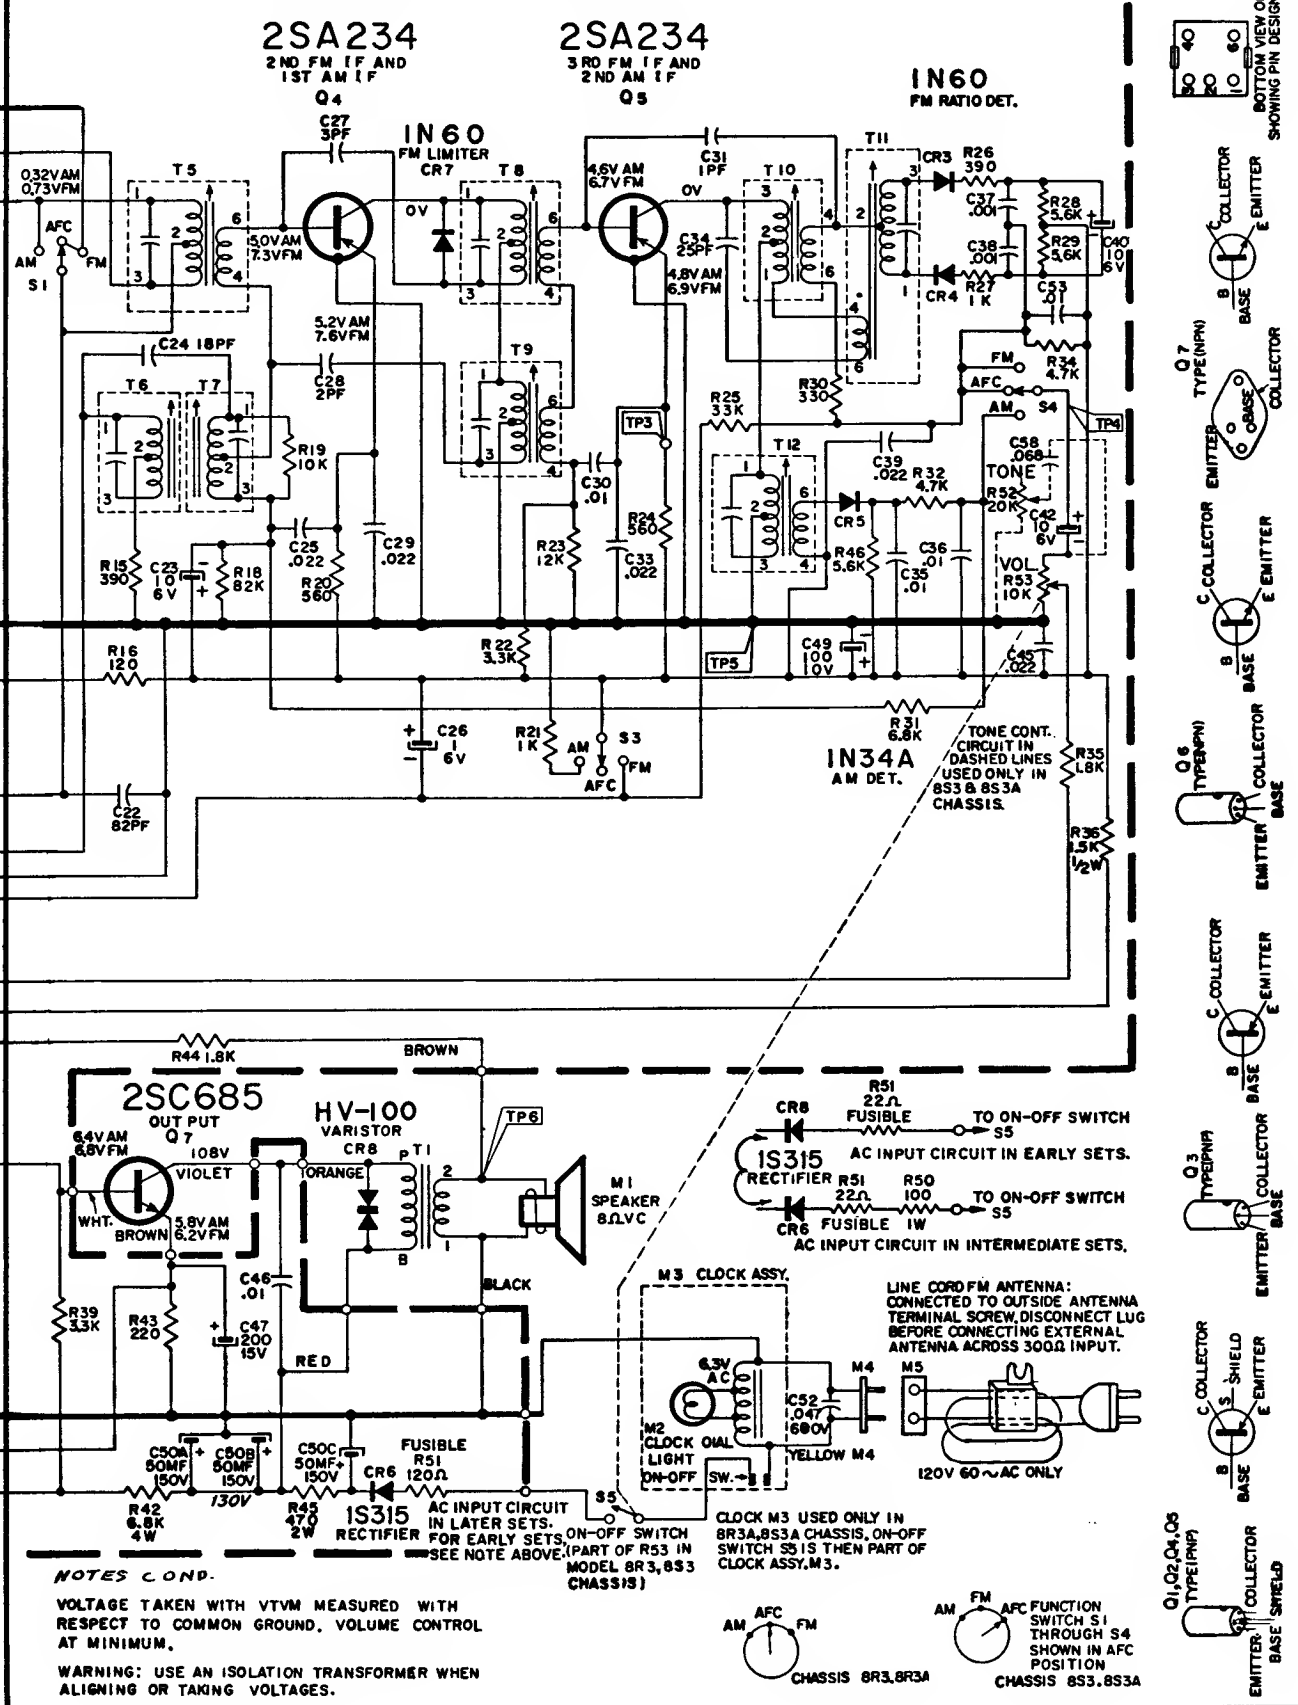

NOTES COND.
 VOLTAGE TAKEN WITH VTVM MEASURED WITH RESPECT TO COMMON GROUND. VOLUME CONTROL AT MINIMUM.
 WARNING: USE AN ISOLATION TRANSFORMER WHEN ALIGNING OR TAKING VOLTAGES.

AM AFC FM
 AFC FUNCTION SWITCH S1 THROUGH S4 SHOWN IN AFC POSITION
 CHASSIS 8R3,8R3A
 CHASSIS 8S3,8S3A


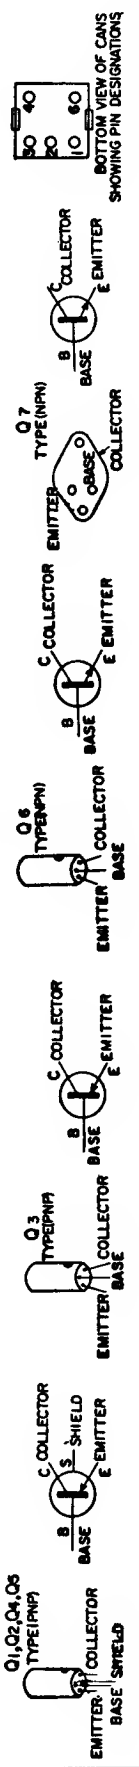


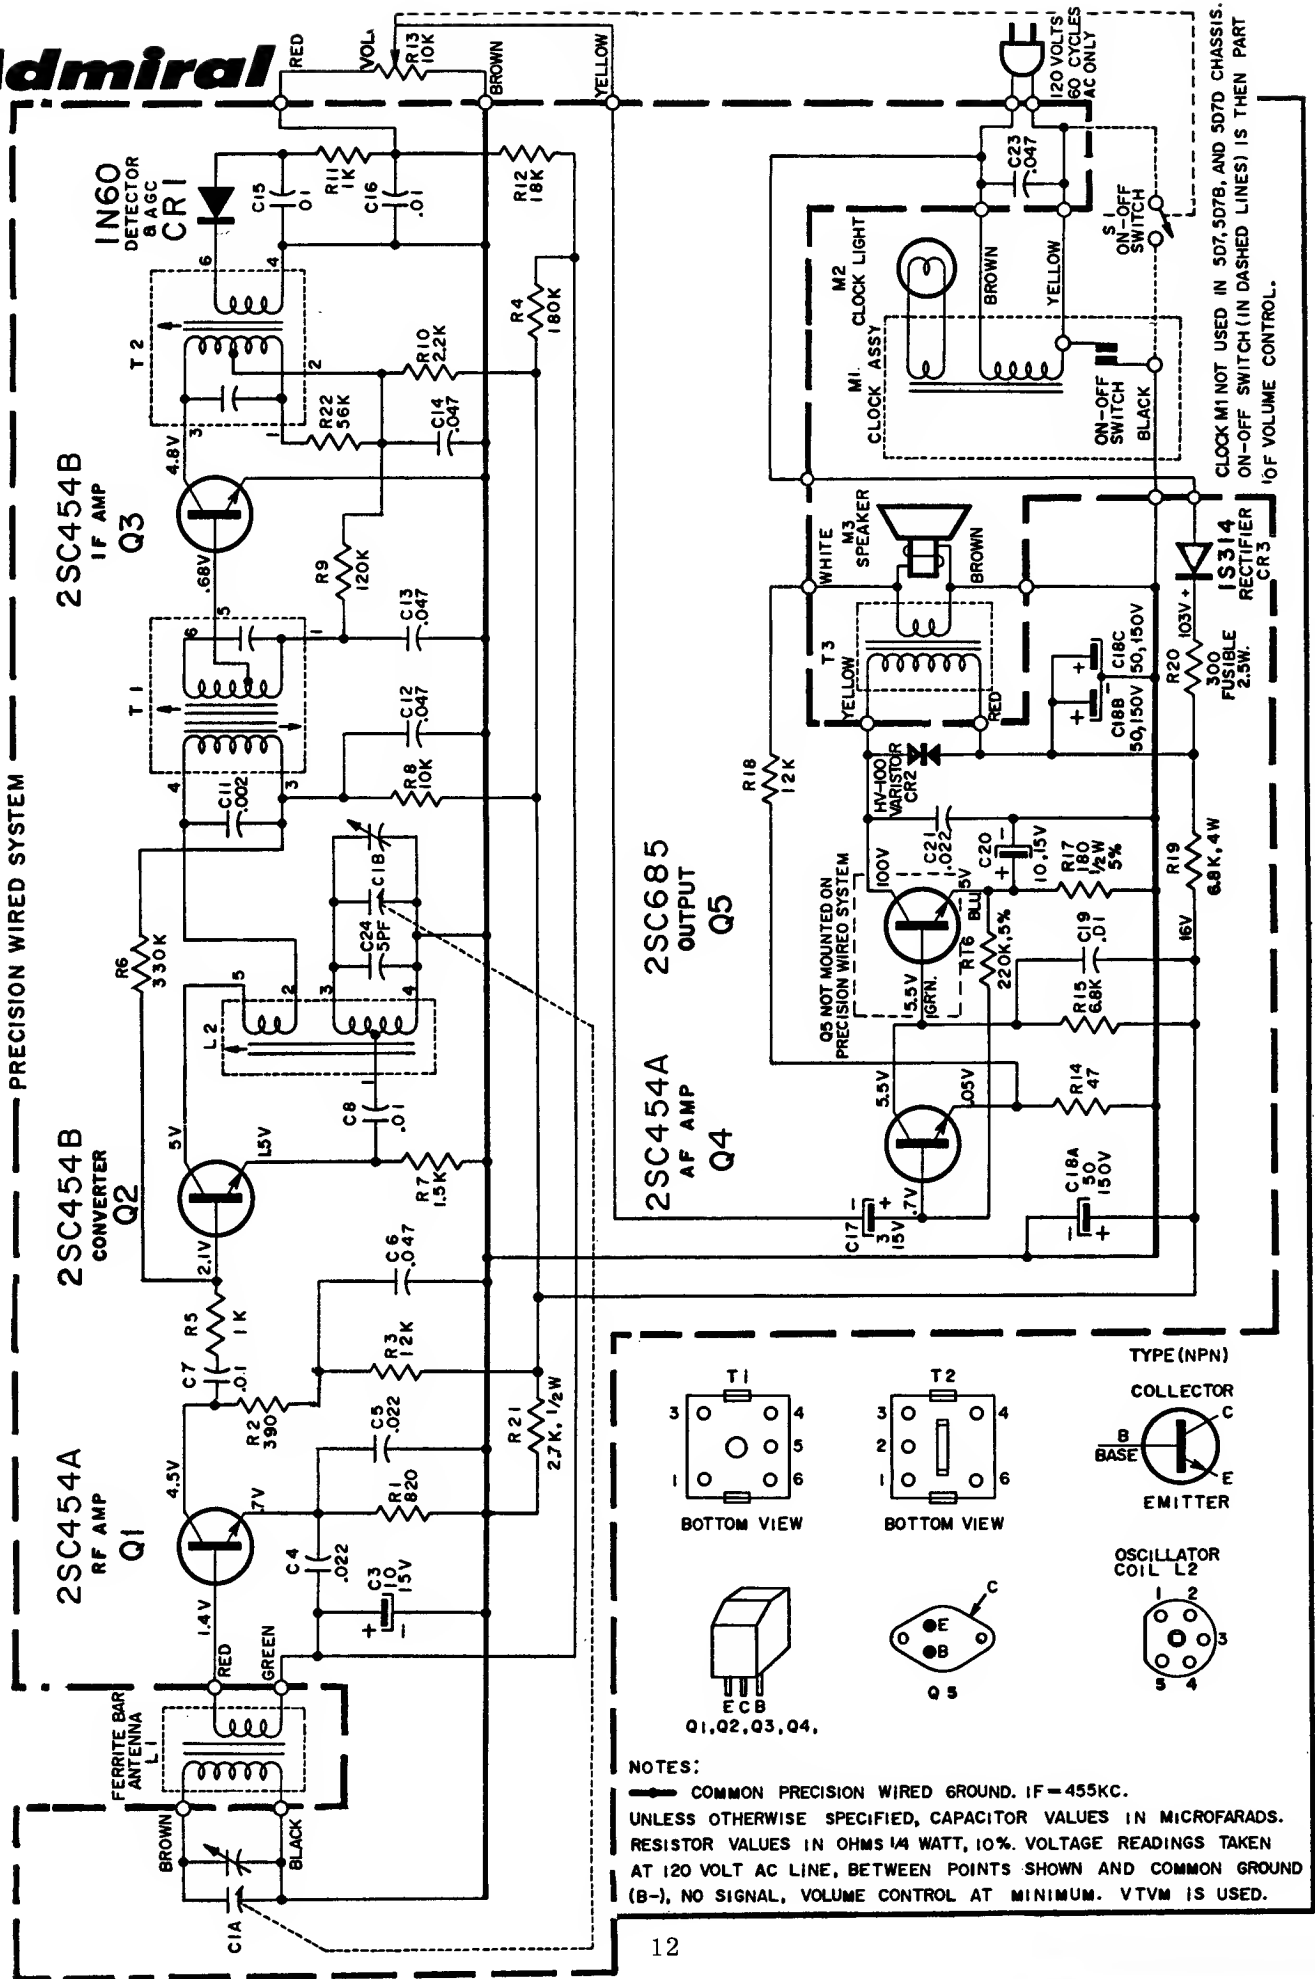

5D7, 5D7A, 5D7B, 5D7C, 5D7D, 5D7E SCHEMATIC DIAGRAM

Admiral



Chassis 10A3
Models: YK211GP,
YK212GP

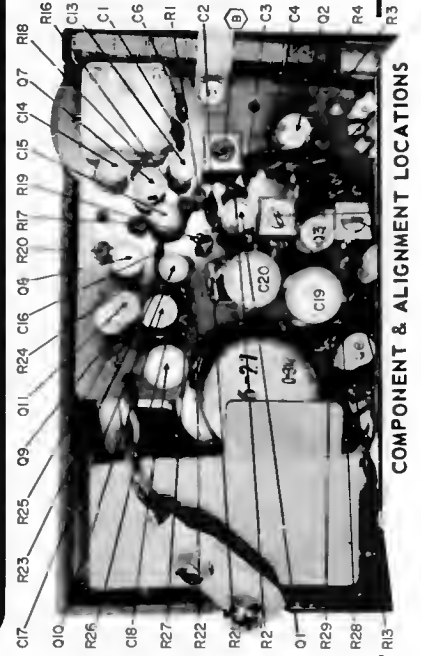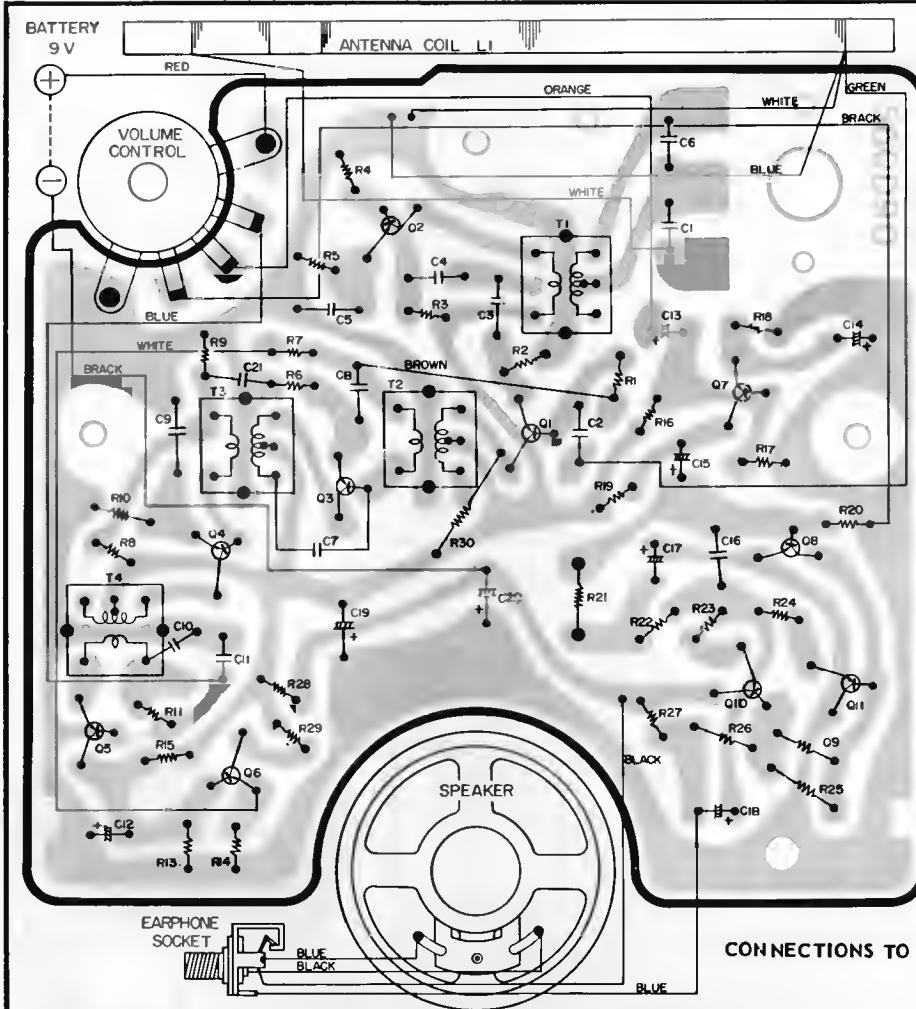

COMPONENT & ALIGNMENT LOCATIONS

CONNECTIONS TO BACK OF BOARD & WIRING

PRECISION WIRED SYSTEM

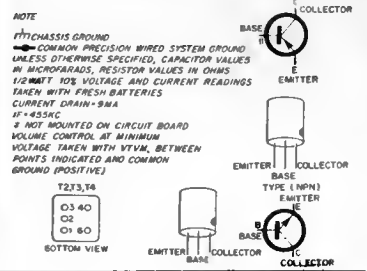
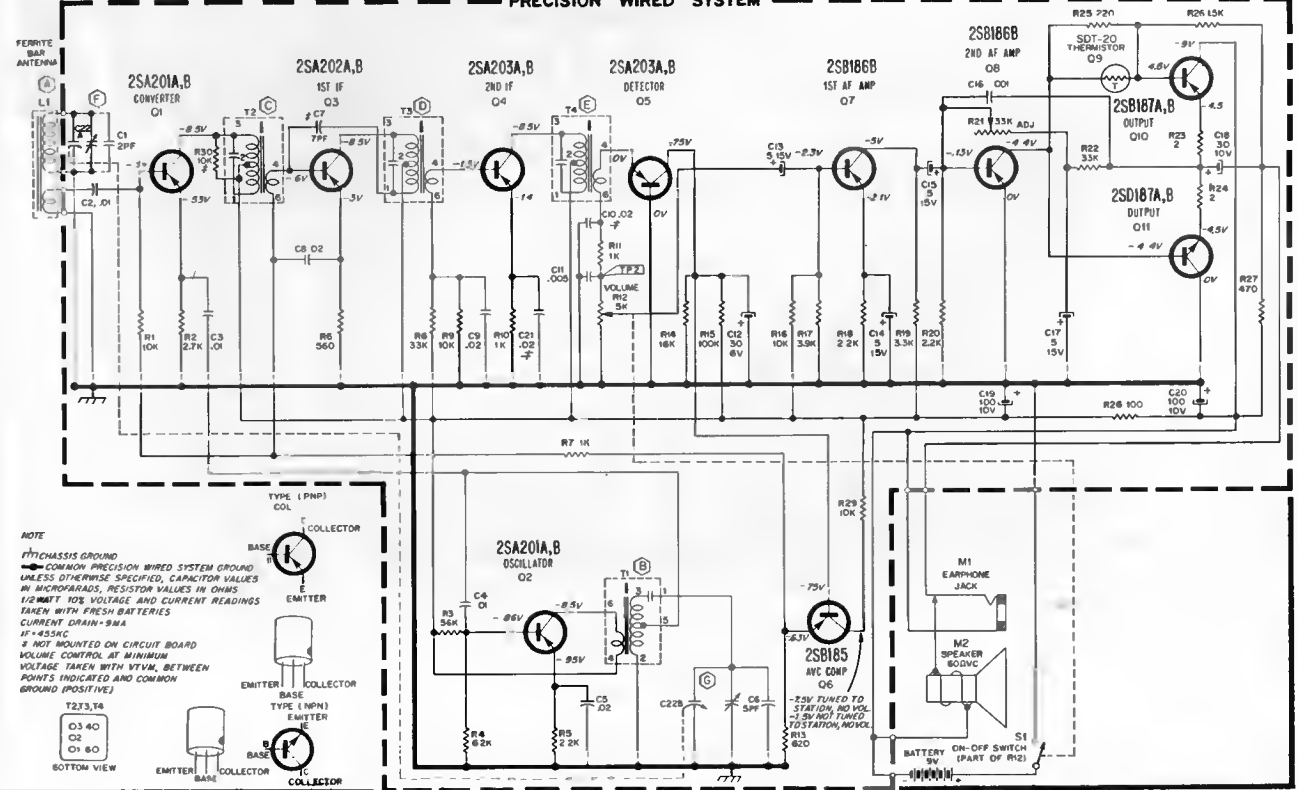


Admiral


MODEL: YK220

CHASSIS: 10B3

PRECISION WIRED SYSTEM

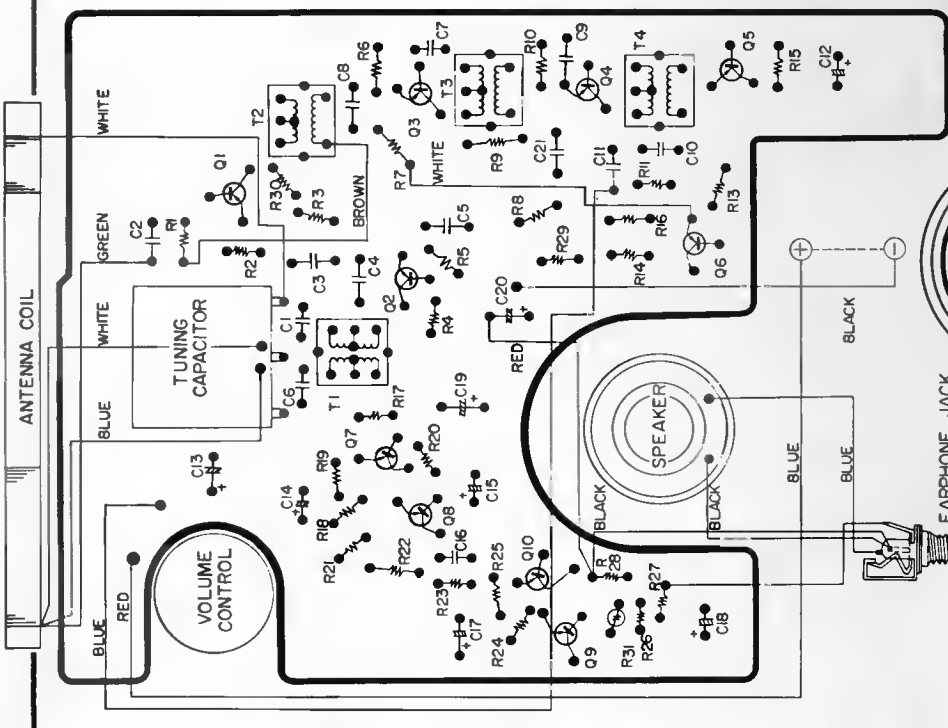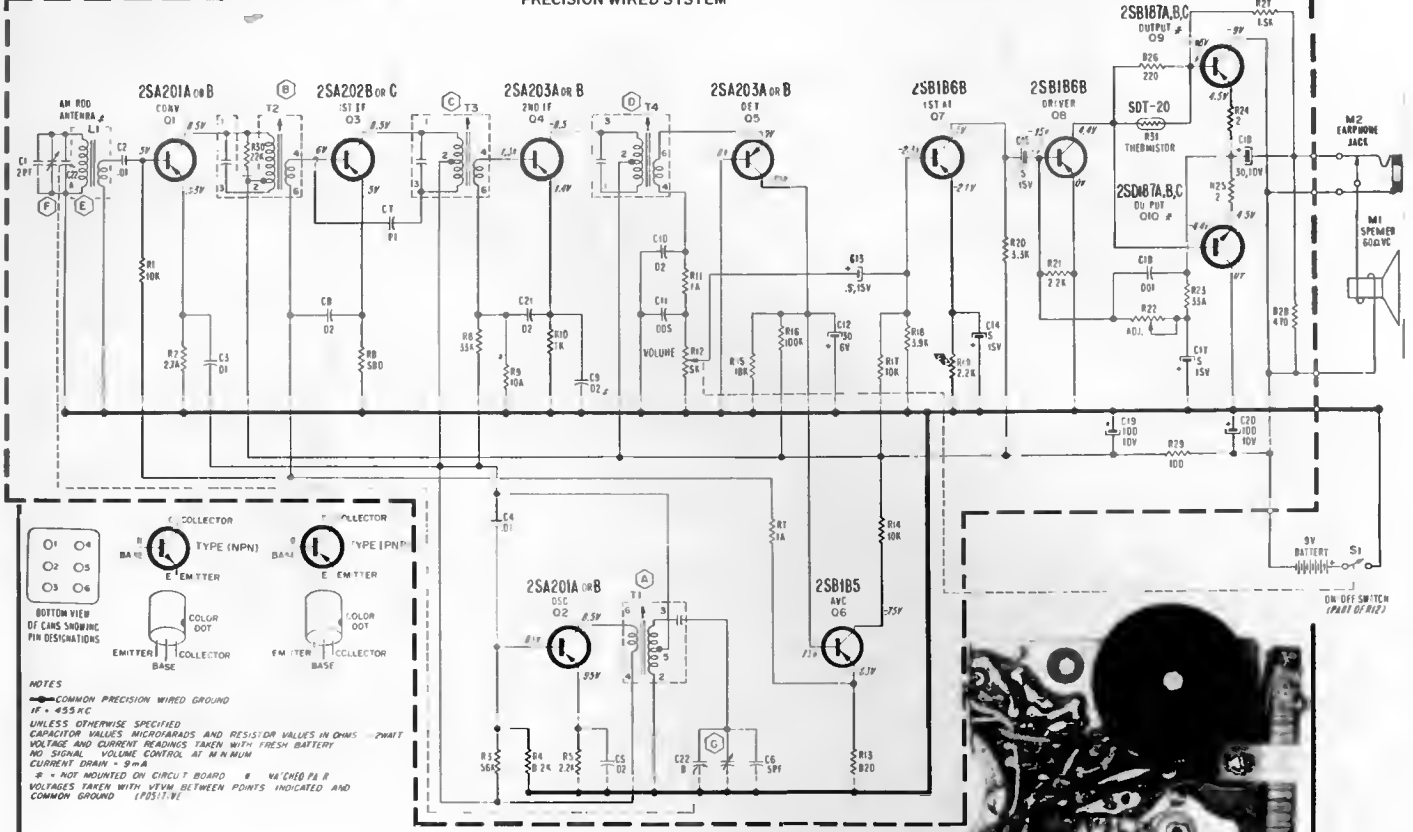



COMPONENT CONNECTIONS TO BACK OF BOARD & WIRING


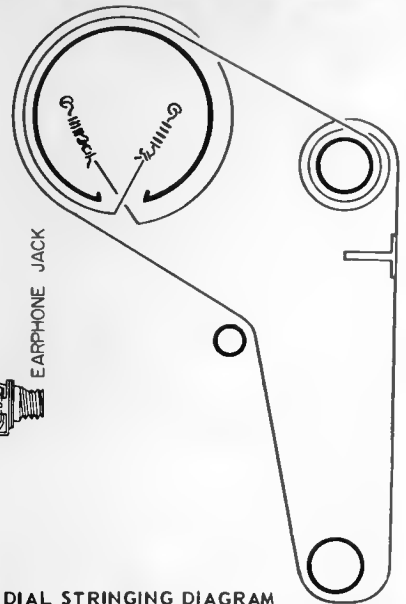


DIAL STRINGING DIAGRAM


Admiral

MODEL: YK237
CHASSIS: 10C3

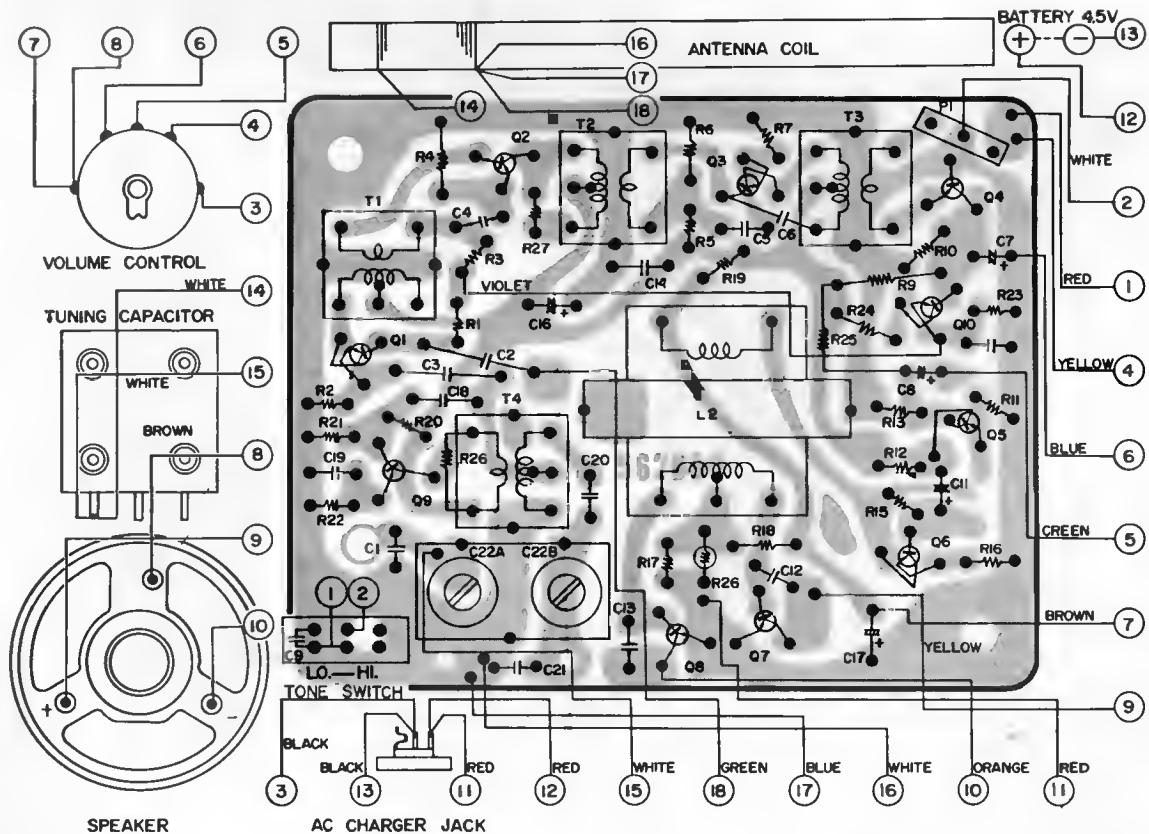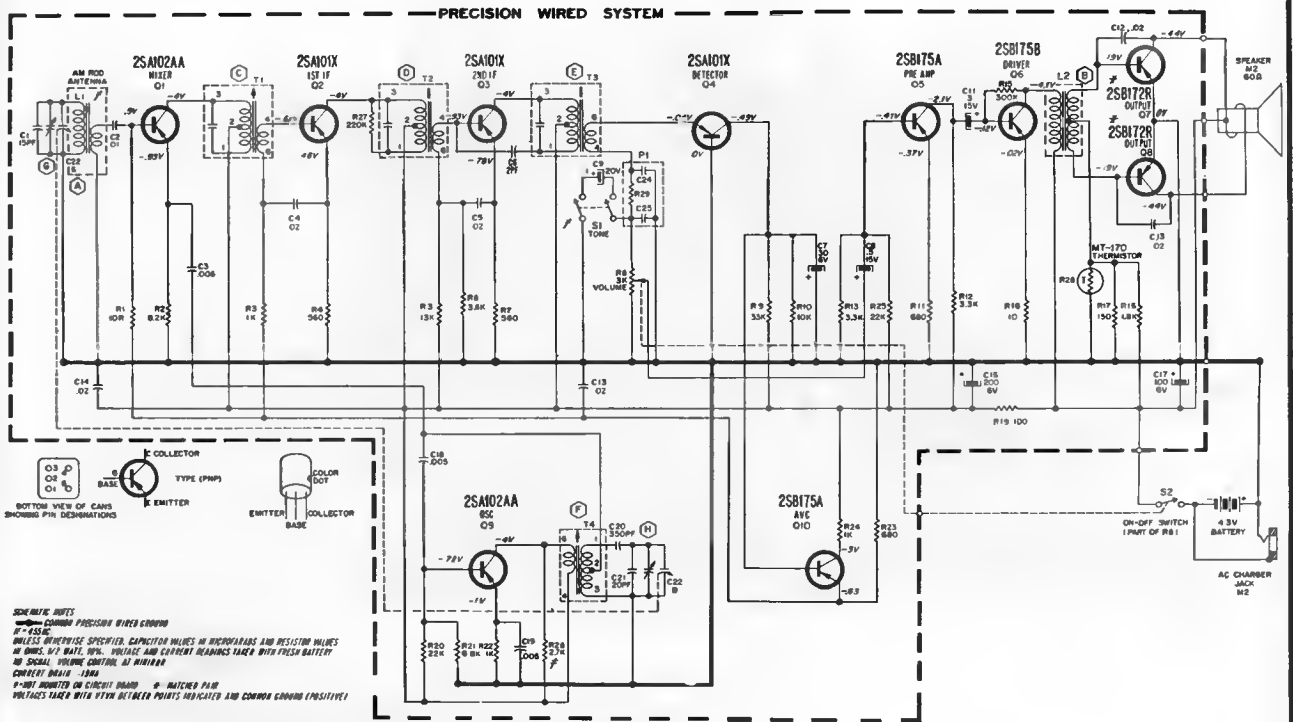

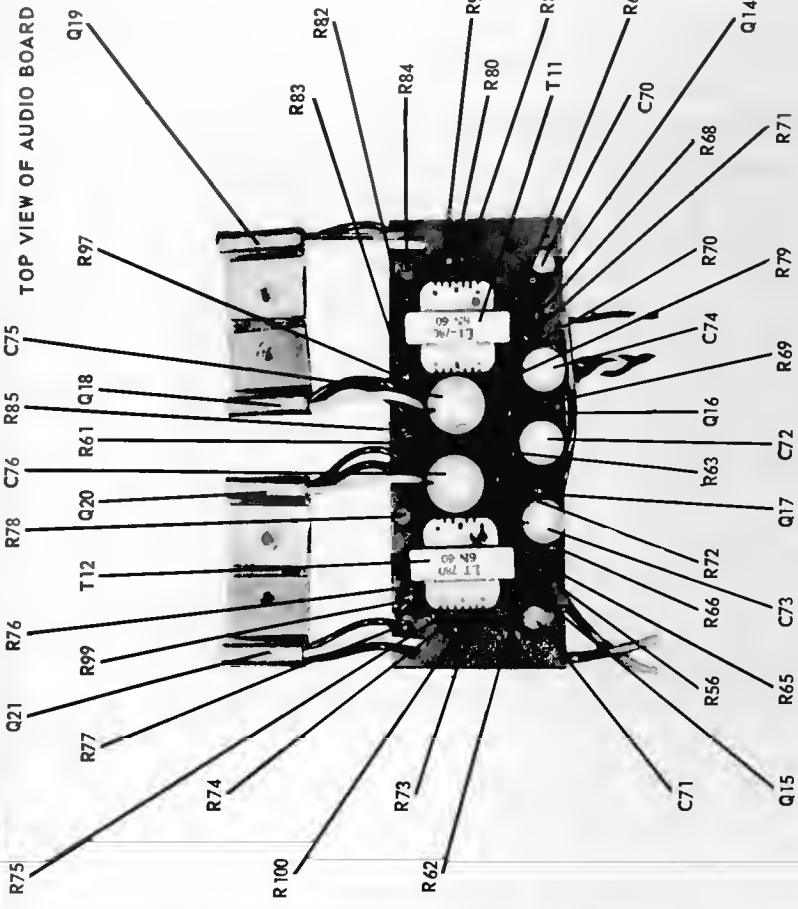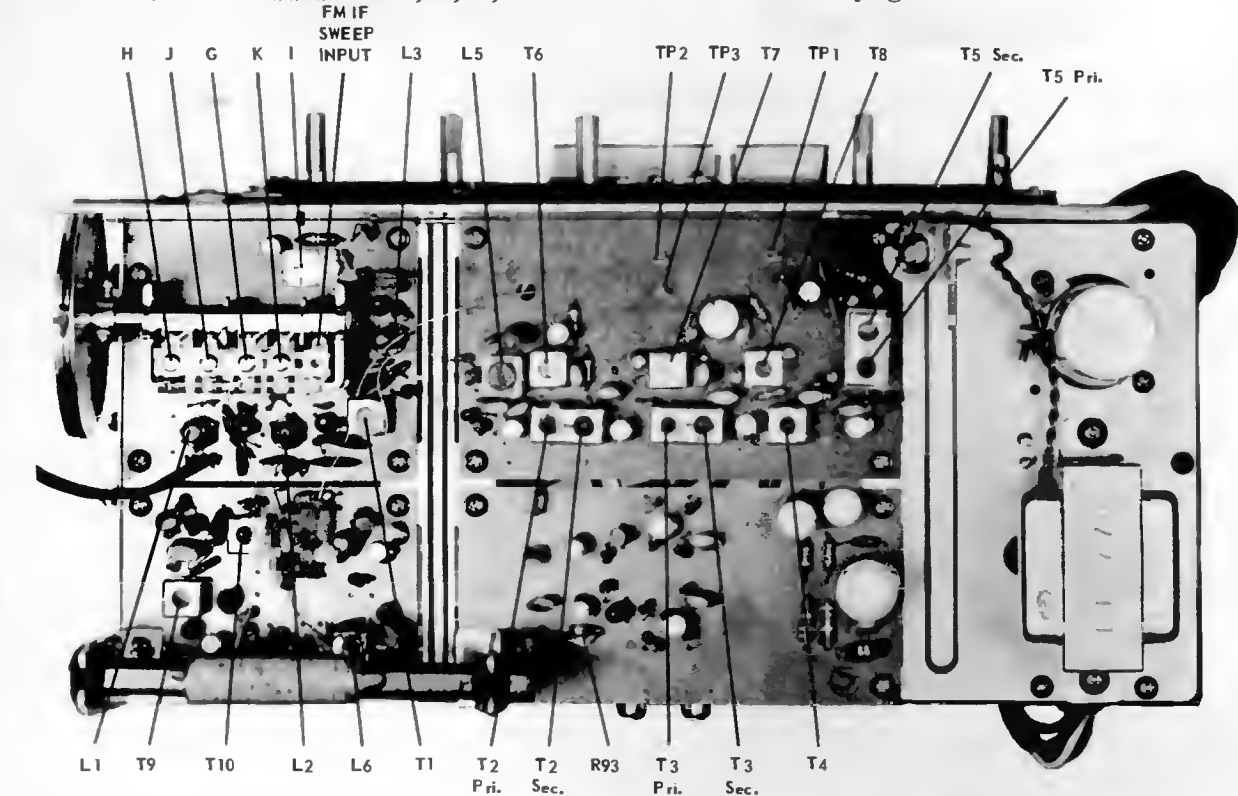


TOP VIEW OF AUDIO BOARD

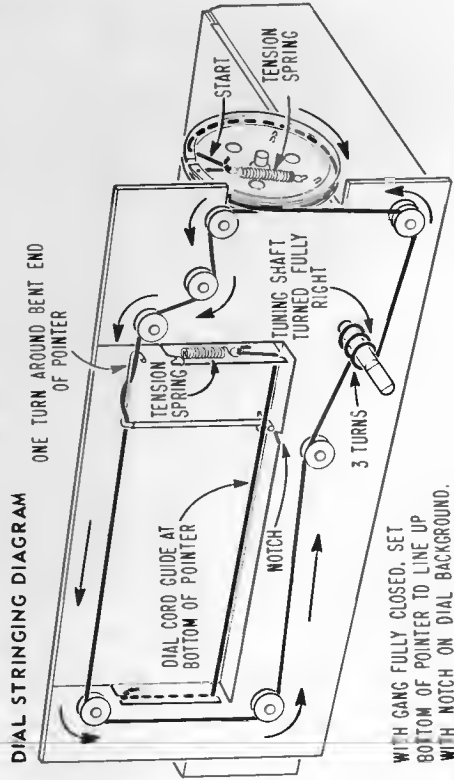

WITH GANG FULLY CLOSED, SET BOTTOM OF POINTER TO LINE UP WITH NOTCH ON DIAL BACKGROUND.

ADMIRAL Chassis 20A6, A, B, C;
Models below


Continued from preceding page.

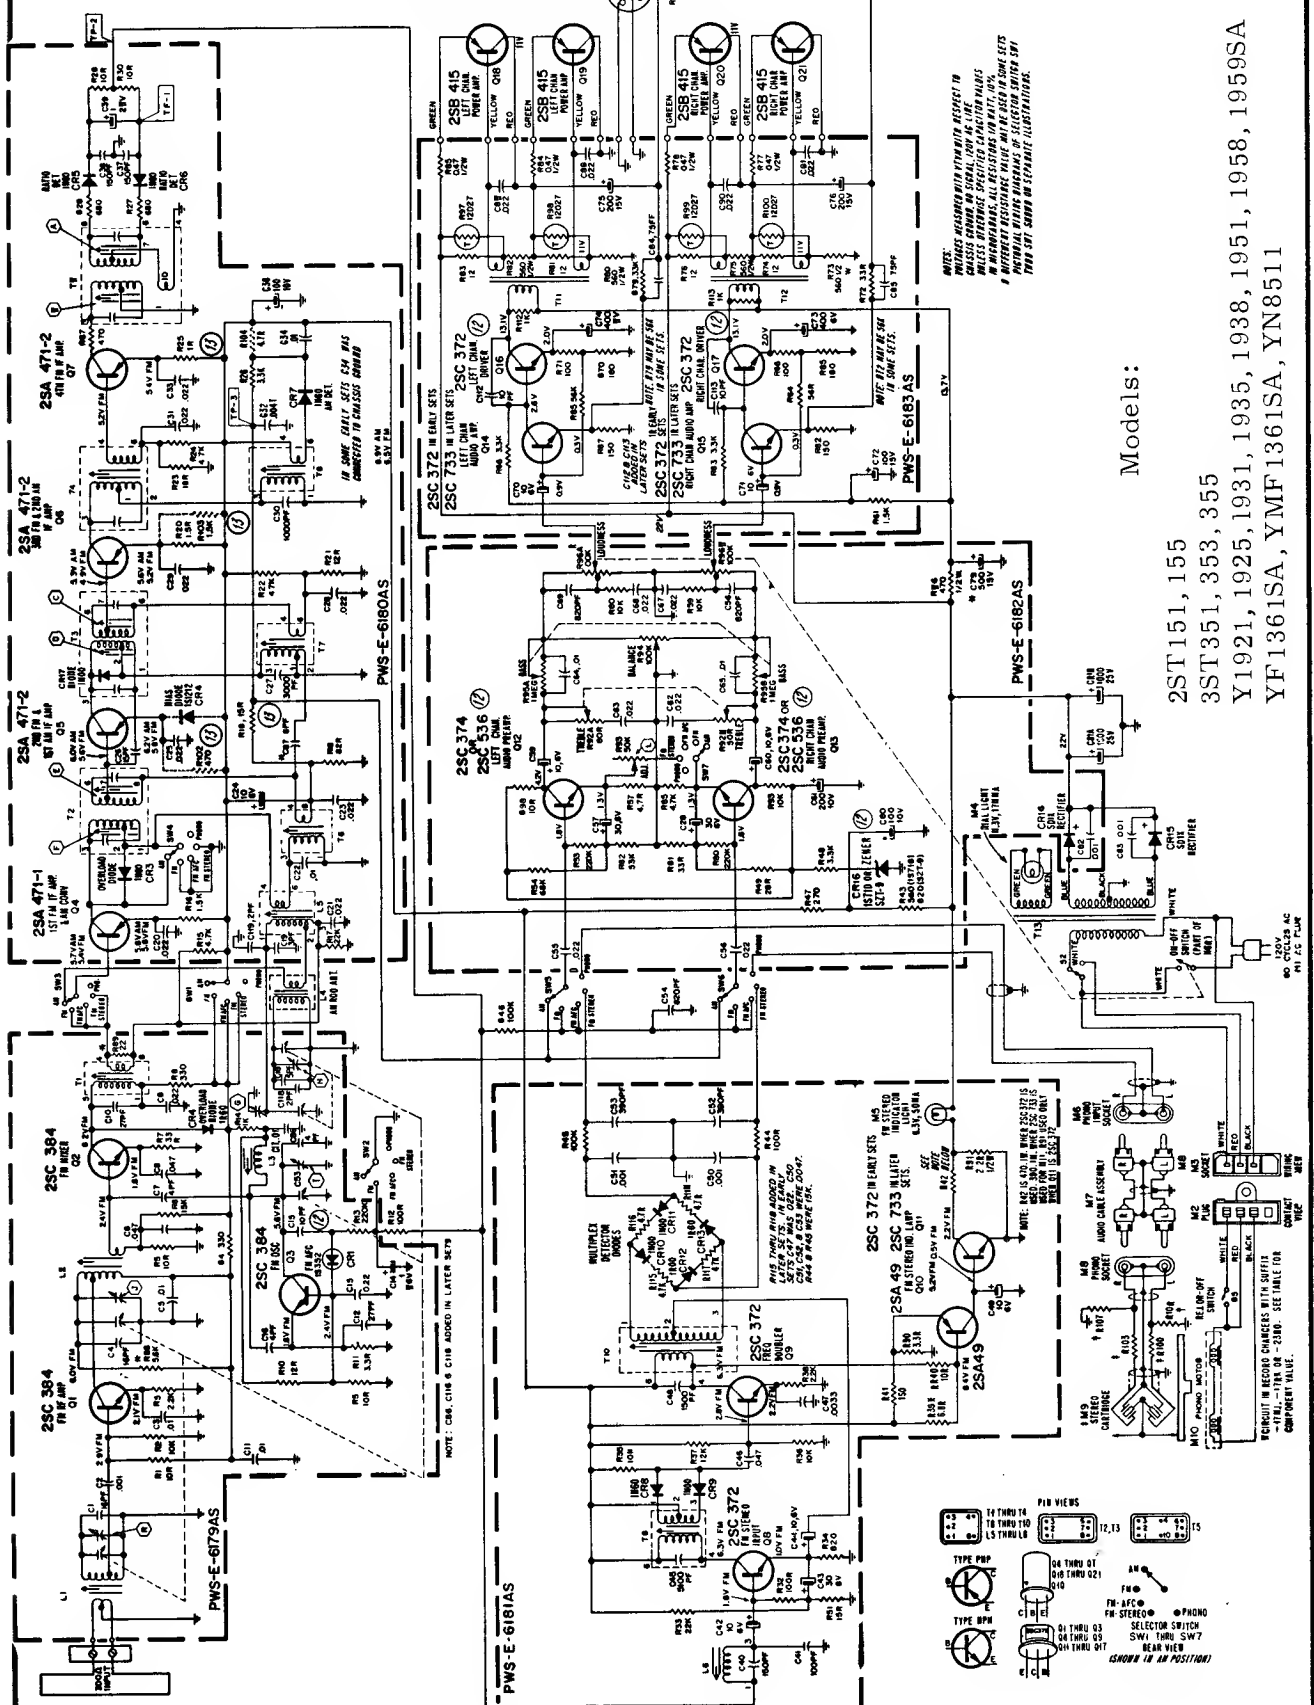


NOTES:
1. PIN VIEWS INDICATED WITHIN RESPECT TO
2. ALL RESISTORS SPECIFIED IN THIS SCHEMATIC
3. IN PARALLELS, ALL RESISTORS IN OHMS, UNLESS
4. IN DIFFERENT ASSOCIATION THERE MAY BE USED IN SOME SETS
5. THIS UNIT SHOULD BE SEPARATE ILLUSTRATIONS.

Models:



- 2ST151, 155
- 3ST351, 353, 355
- Y1921, 1925, 1931, 1935, 1938, 1951, 1958, 1959SA
- YF1361SA, YMF1361SA, YN8511




ADMIRAL Chassis 10T1, Model Y741R

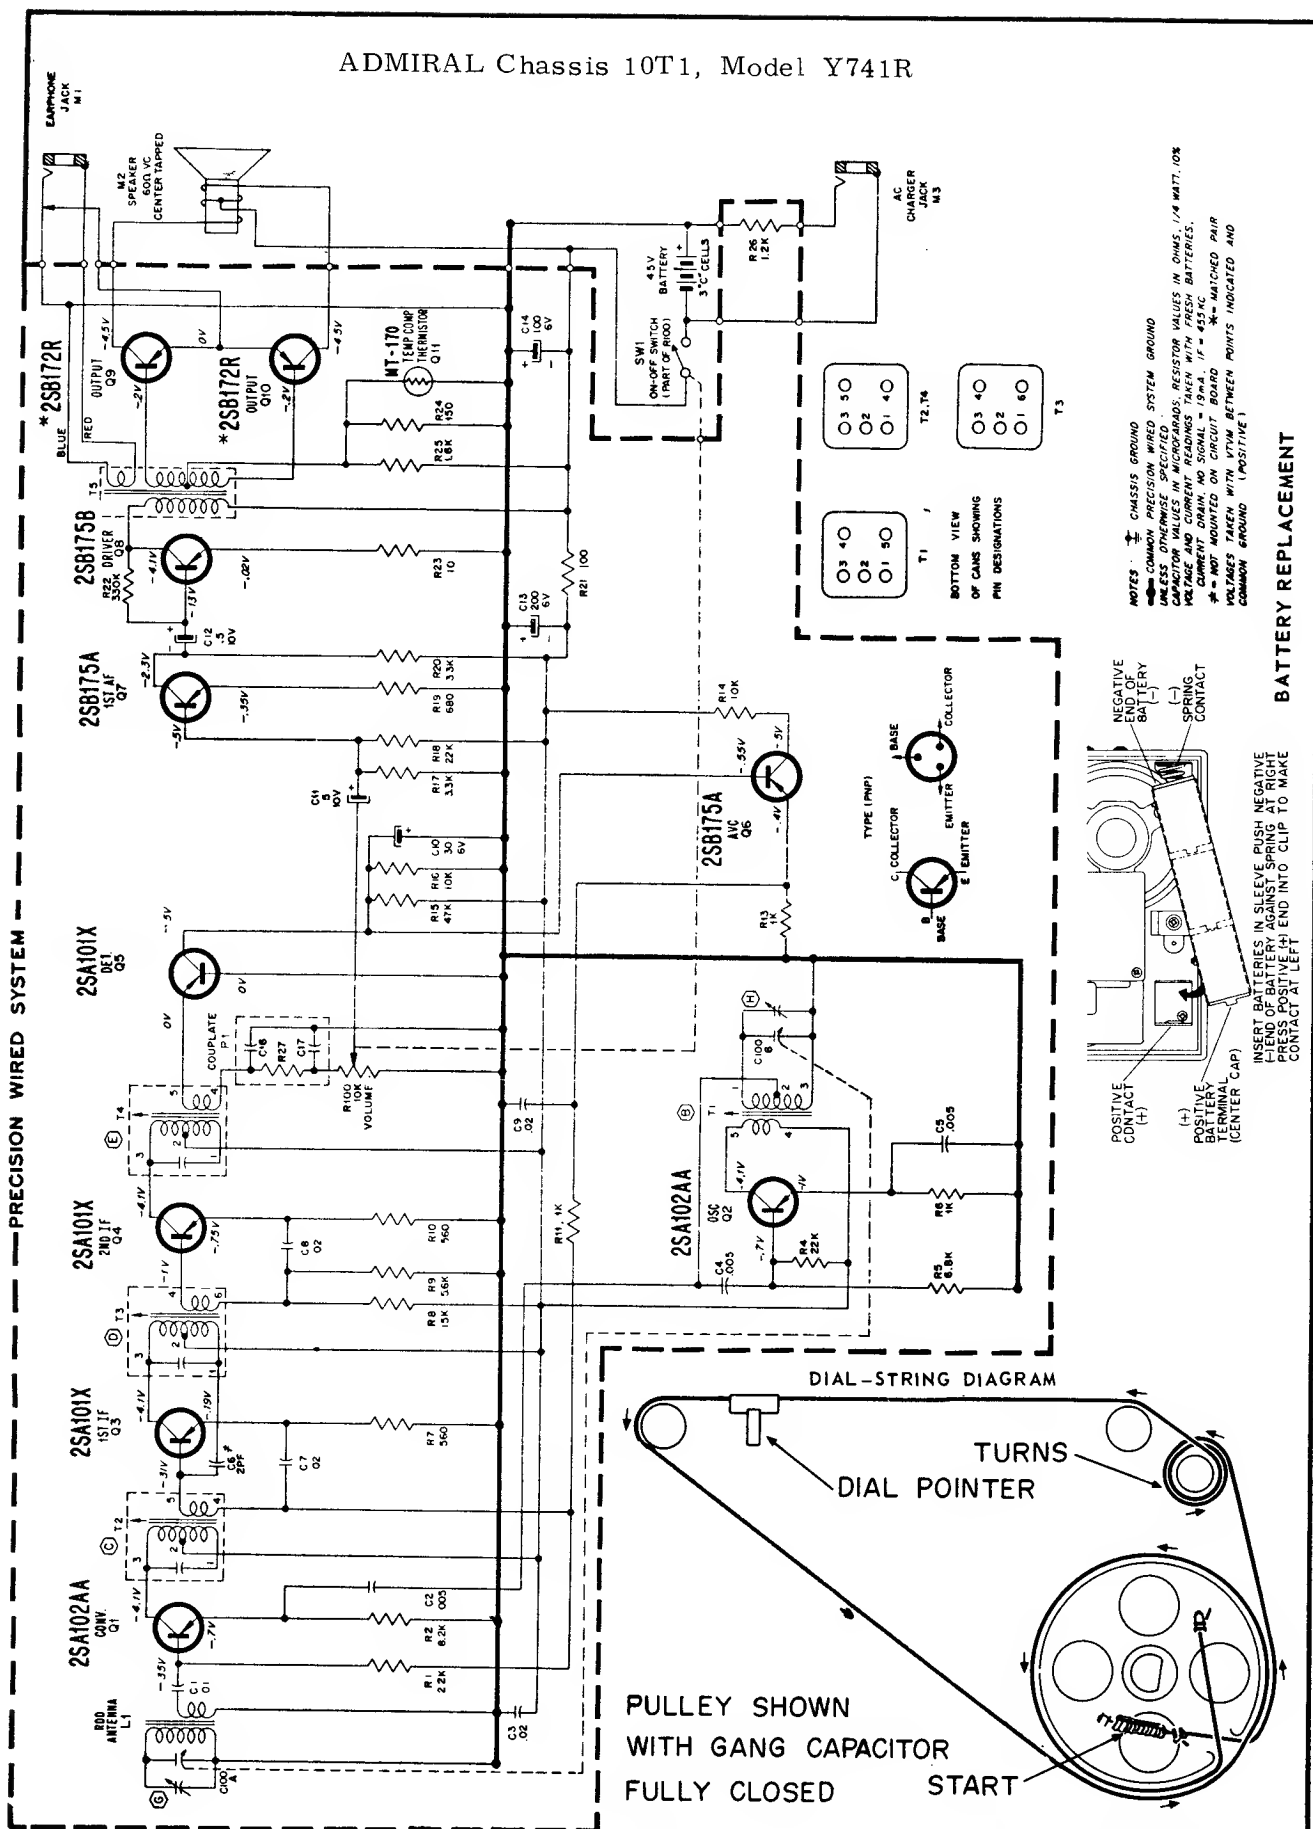

NOTES:
 * CHASSIS GROUND
 - COMMON PRECISION WIRED SYSTEM GROUND
 - UNLESS OTHERWISE SPECIFIED, RESISTOR VALUES IN OHMS, 1/4 WATT, 10% TOLERANCE AND CURRENT RATINGS TAKEN WITH FRESH BATTERIES.
 - CURRENT DRAIN, NO SIGNAL = 19mA. IF = 455 KC
 - * = NOT MOUNTED ON CIRCUIT BOARD
 - ** = MATCHED PAIR
 - VOLAGES TAKEN WITH VTVM BETWEEN POINTS INDICATED AND COMMON GROUND (POSITIVE)

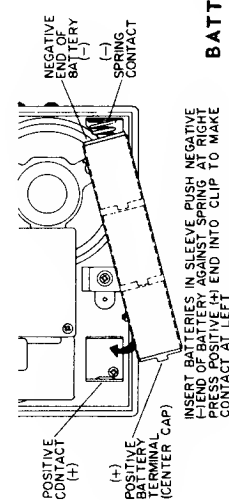


BATTERY REPLACEMENT

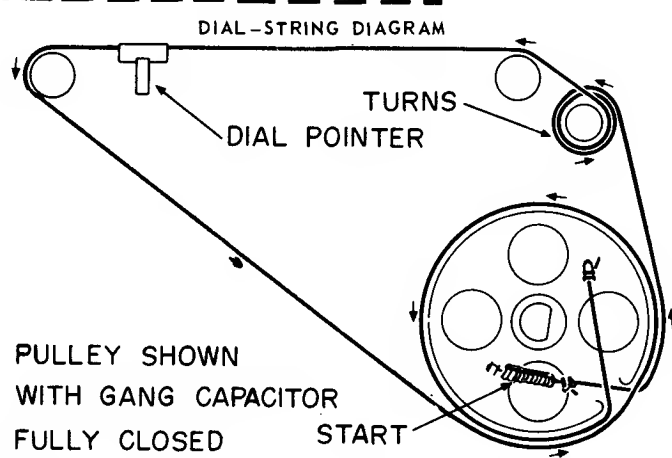




Models 57R72, 57R75, 57R78

TR-2 S99103 1ST I.F.
 TR-3 S99102 2ND I.F.
 D-1 IN295 DETECTOR
 TR-4 S99201 AUDIO DRIVER
 TR-5 B-6 S99203 AUDIO OUTPUT

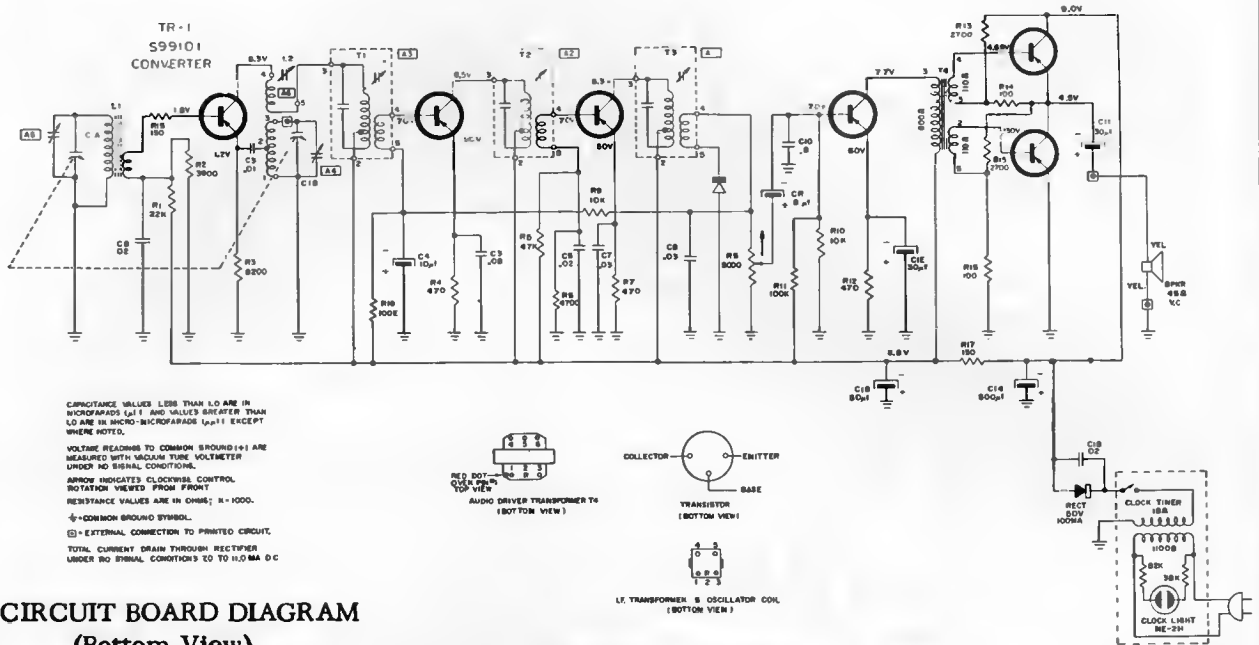

CIRCUIT BOARD DIAGRAM (Bottom View)

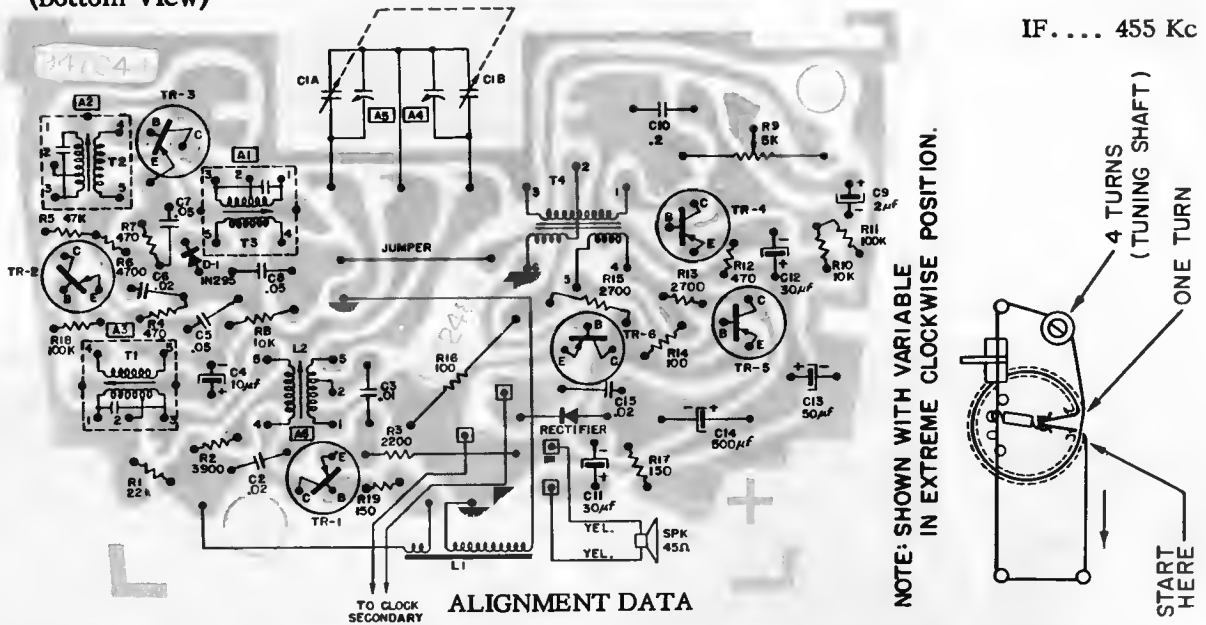

Position of Variable	Frequency of Generator	Dummy Antenna	Generator Output Connection	Trimmer Adj. in order shown for Max. Output	Functions of Trimmer
Open	455 Kc	.05 mf.	C1A	A1 (Top of T3) A2 (Top of T2) A3 (Top of T1)	I. F. I. F.
Open	1640 Kc		Test Loop	A4	Oscillator
1400 Kc	1400 Kc		Test Loop	A5	Antenna
600 Kc	600 Kc		Test Loop	A6 Check Point (LZ)	Oscillator
Recheck A4 at 1640 Kc after adjustment of A6.					



ARVIN Models 37R28, 37R29, 37R38, 47R28, 47R29, 47R38

(Continued on next page.)

TR-3
95126

TR-4
95125

TR-5
95126

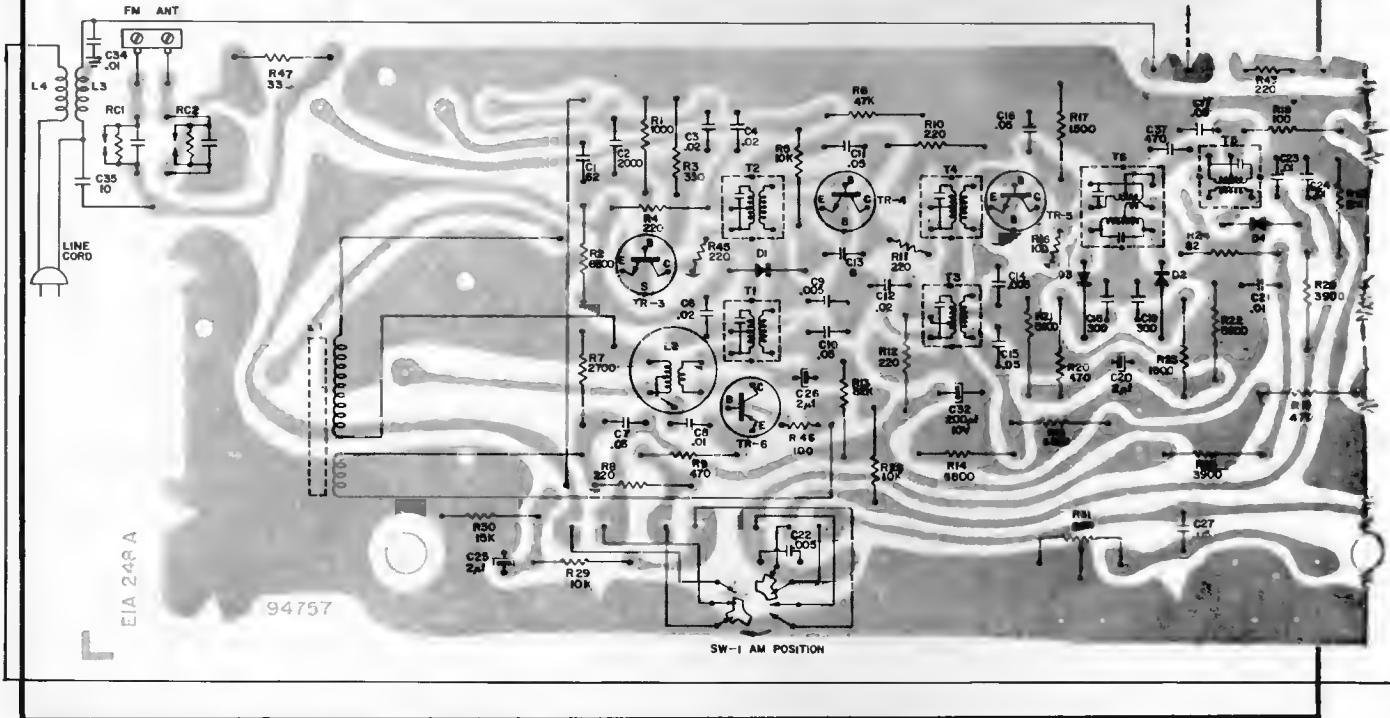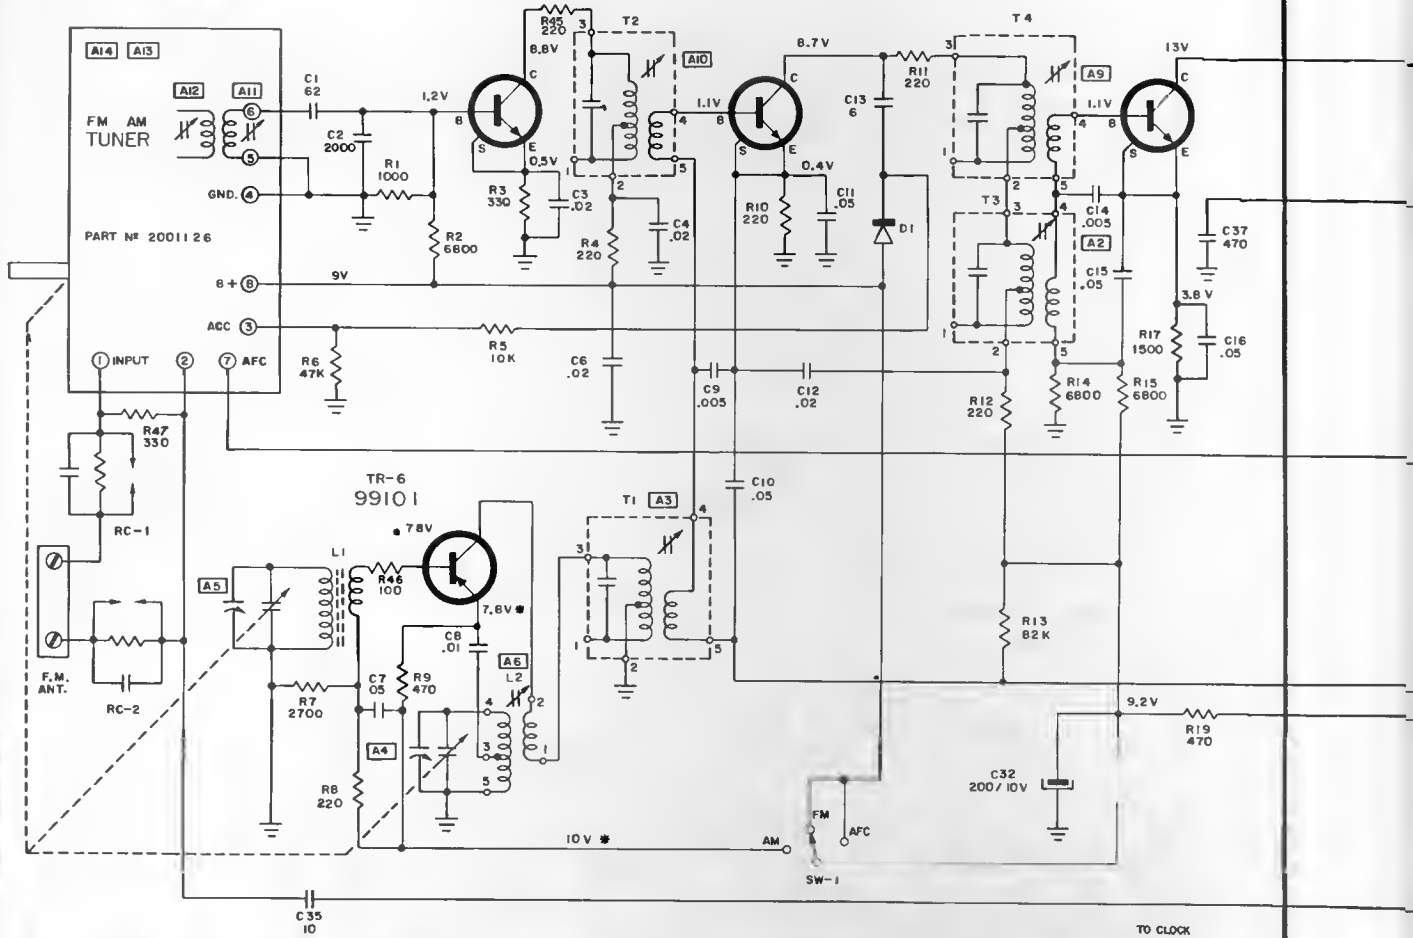


ARVIN Models 37R28, 37R29, 37R38, 47R28, 47R29, 47R38

(Continued from preceding page.)

TR-7
99217

TR-8
99252-2

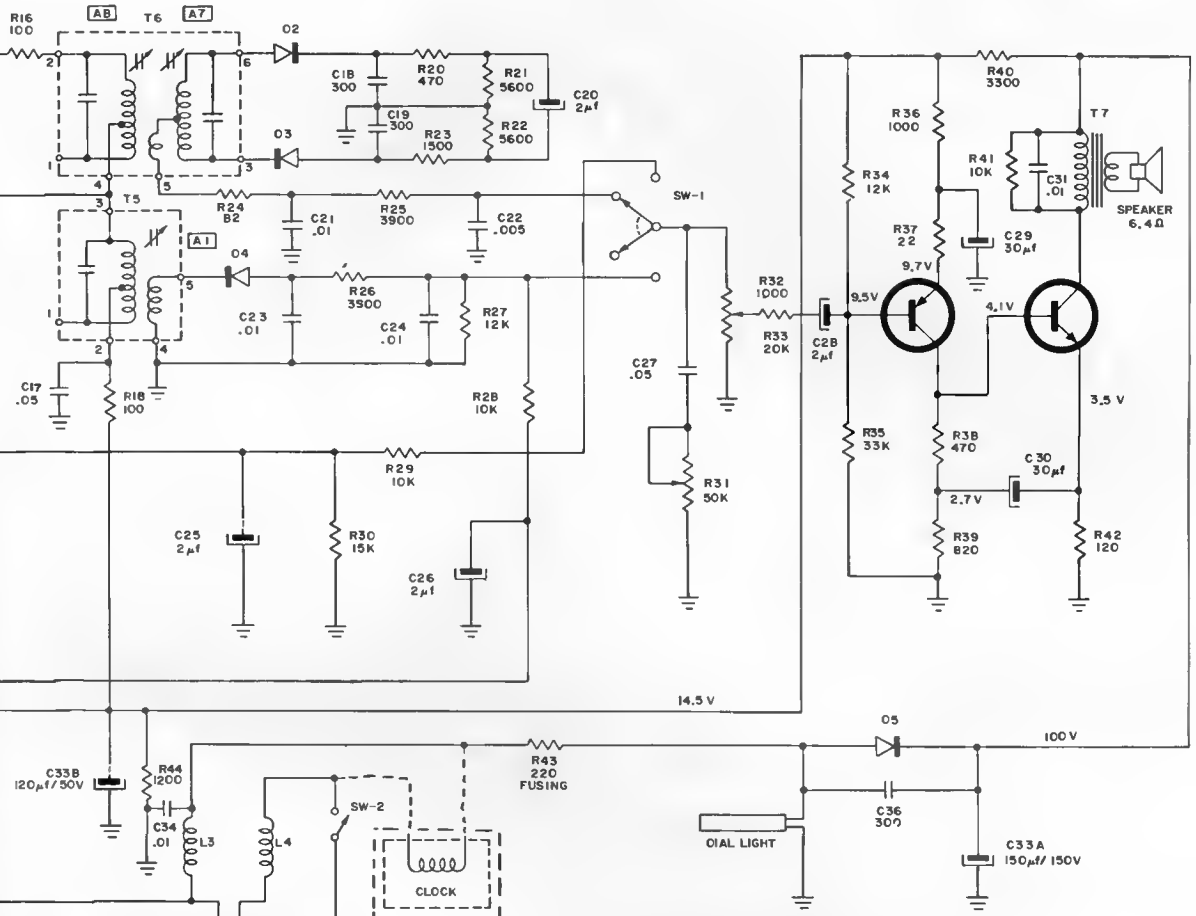

ALL VOLTAGES MEASURED WITH SW-1 IN FM POSITION SHOWN EXCEPT, TR-6 VOLTAGES, WHICH ARE MEASURED IN AM POSITION.

CAPACITANCE VALUES LESS THAN 1.0 ARE IN MICROFARADS (μ F), AND VALUES GREATER THAN 1.0 ARE IN PICO-FARADS (pF) EXCEPT WHERE NOTED.


VOLTAGE READINGS TO COMMON GROUND (+) ARE MEASURED WITH VACUUM TUBE VOLTMETER UNDER NO SIGNAL CONDITIONS.

RESISTANCE VALUES ARE IN OHMS, K=1000

\perp = COMMON GROUND SYMBOL.


\square = EXTERNAL CONNECTION TO PRINTED CIRCUIT.

Transistor basing, bottom view.

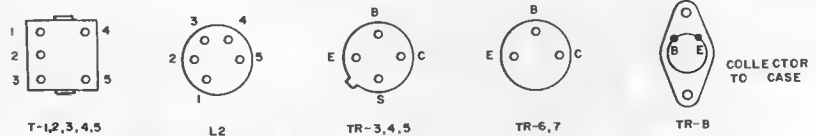

VARIABLE SHOWN IN CLOSED POSITION.

START HERE

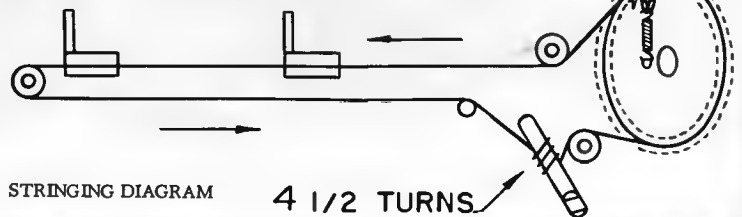


STRINGING DIAGRAM

4 1/2 TURNS

(Continued from preceding page)


ARVIN Models 37R68, 46R48

(Continued on next page)

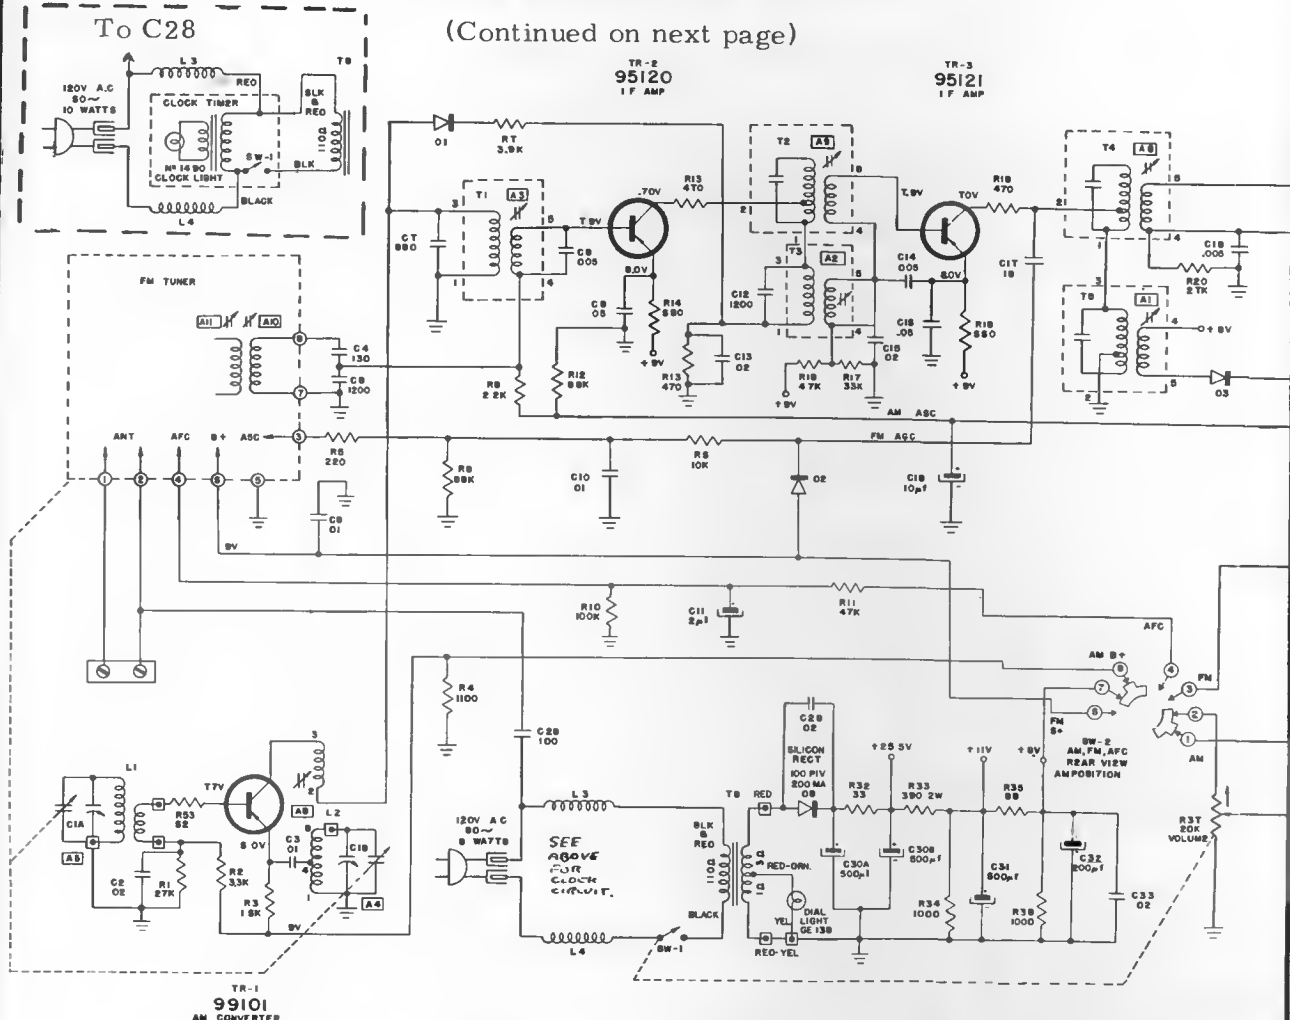

IF Frequency AM FM 455 kc.
 10.7 mc.

Red-Yellow Lead

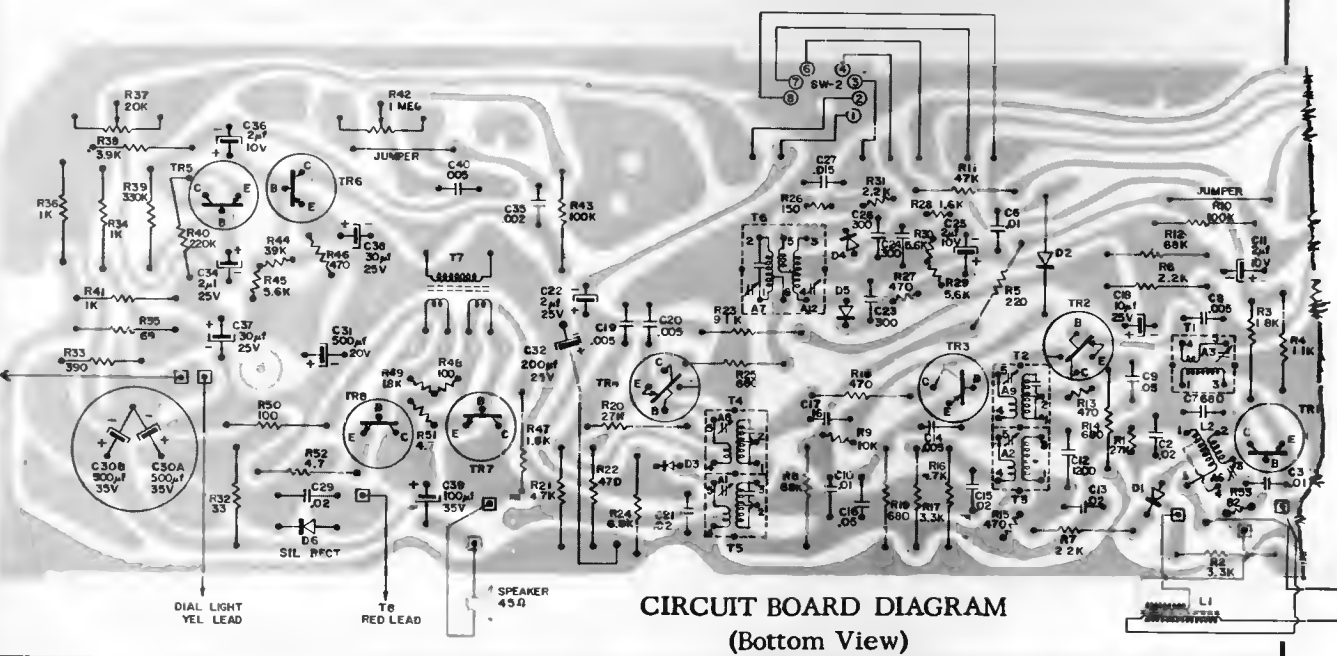


CIRCUIT BOARD DIAGRAM
(Bottom View)


ARVIN Models 37R68, 46R48

(Continued from preceding page)


TR-4
95120
I.F. AMP

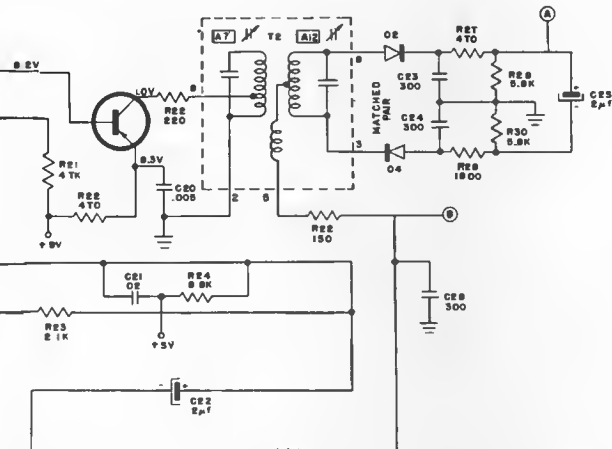

TR-5
99201
AUDIO AMP




TR-8
99201
AUDIO DRIVER








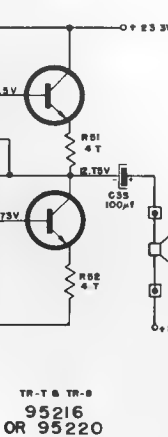


TR-7 & TR-8
95216
OR 95220
AUDIO OUTPUT

LOCATION OF PARTS

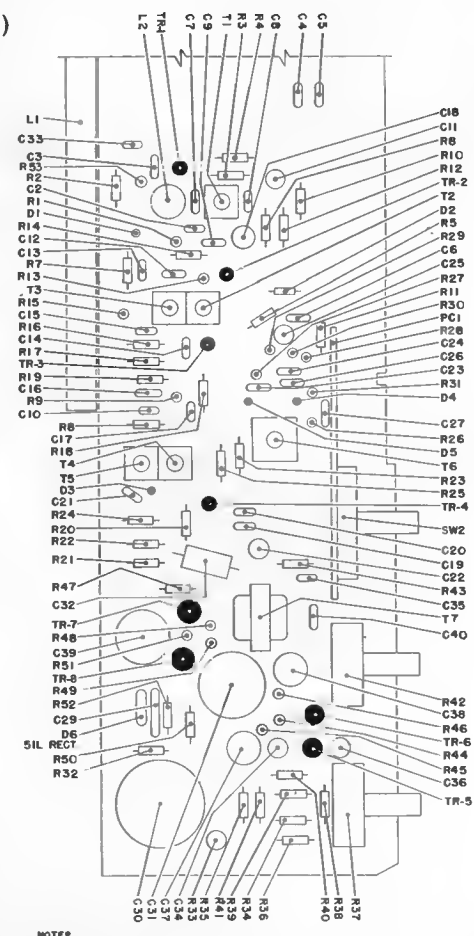


NOTE
RESISTANCE VALUES ARE IN OHMS, K=1000, MEG=1,000,000
-E- EXTERNAL CONNECTIONS TO PRINTED CIRCUIT
CAPACITANCE VALUES LESS THAN 10 ARE IN MICROFARADS (μf) AND VALUES GREATER THAN 10 ARE IN MICRO-MICROFARADS (μμf) EXCEPT WHERE NOTED
VOLTAGE READINGS TO COMMON GROUND (-) ARE MEASURED WITH VACUUM TUBE VOLTMETER UNDER NO SIGNAL CONDITIONS
ARROW INDICATES CLOCKWISE CONTROL ROTATION VIEWED FROM FRONT

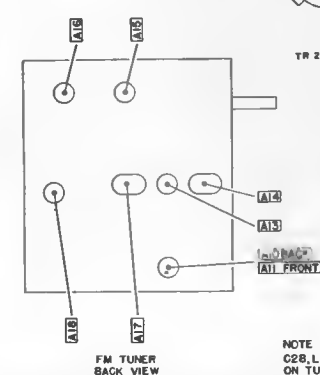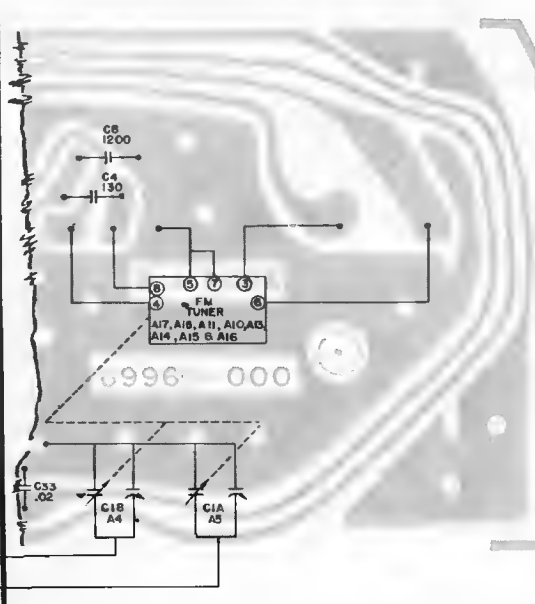


NOTE
C28, L3, & L8 LOCATED ON TUNER BRACKET
(ALL ARE BOTTOM VIEWS)


ARVIN Models 17R17, 17R18, 57R07, 57R08, 57R17, 57R18, 57R25, 57R28

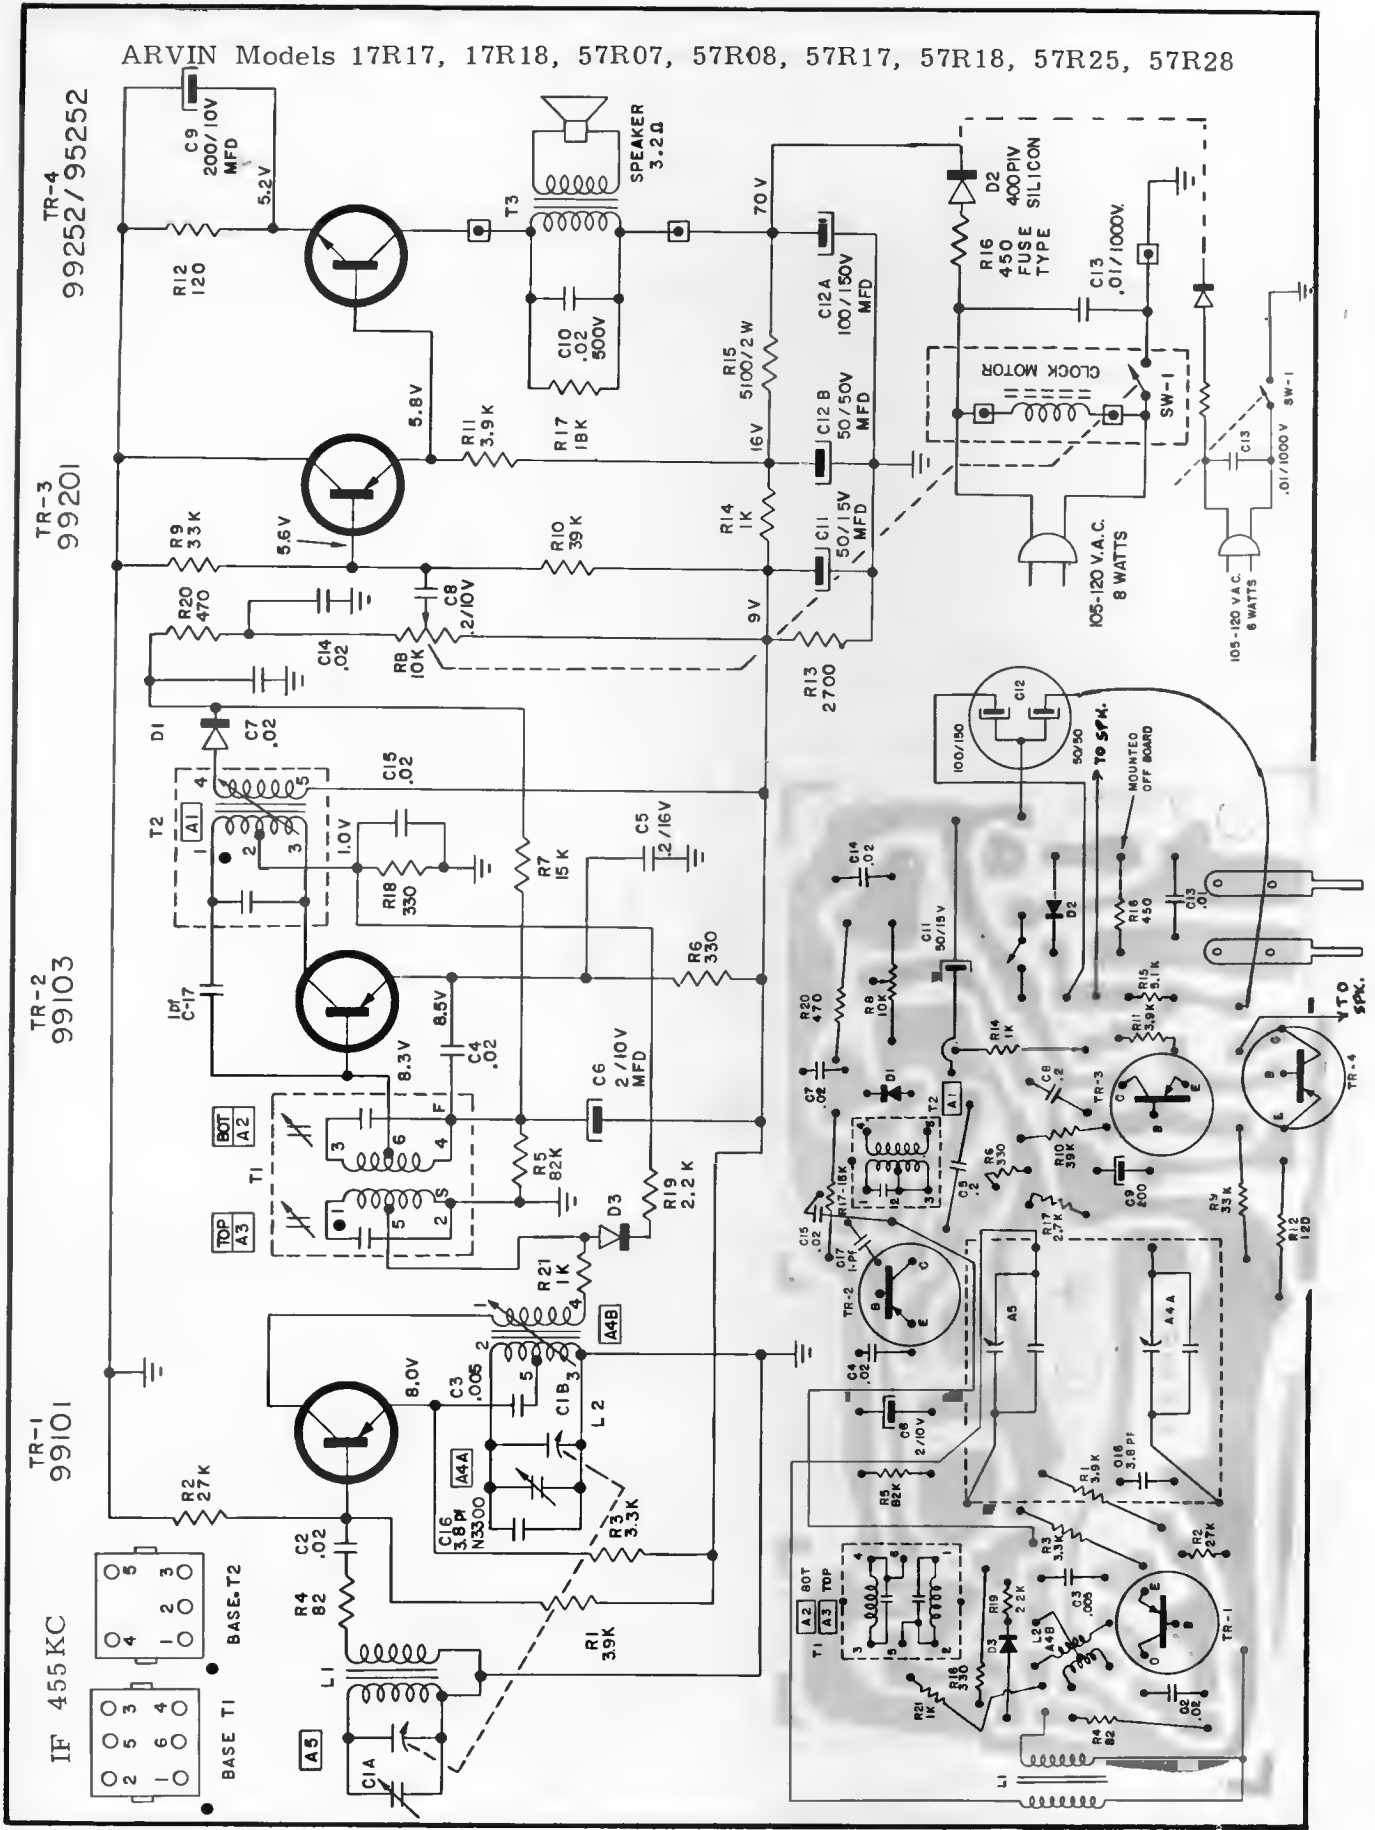

ARVIN Models 55R77, 55R87

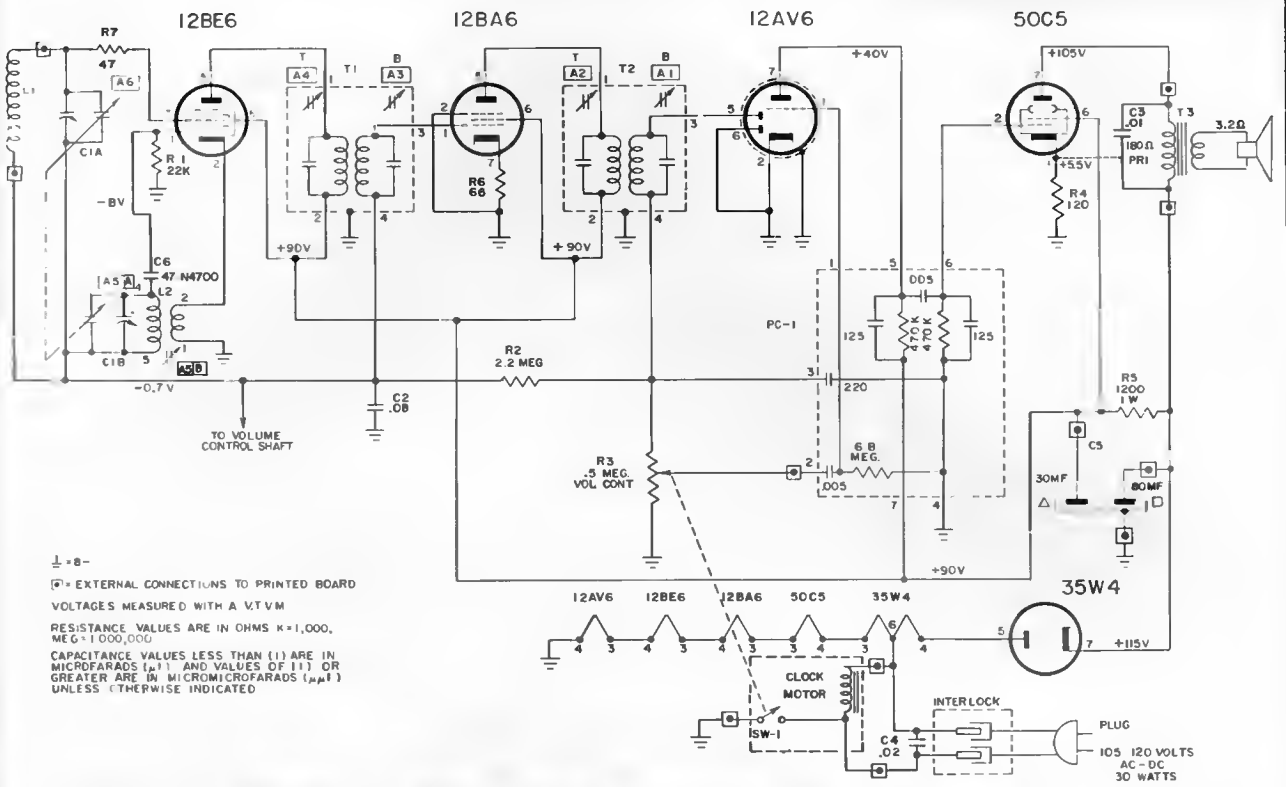



$\frac{1}{2}$ - 8 -
 □ - EXTERNAL CONNECTIONS TO PRINTED BOARD
 VOLTAGES MEASURED WITH A VTVM
 RESISTANCE VALUES ARE IN OHMS $\kappa=1,000$,
 $M\kappa=1,000,000$
 CAPACITANCE VALUES LESS THAN (1) ARE IN
 MICROFARADS (μ) AND VALUES OF (1) OR
 GREATER ARE IN MICROMICROFARADS ($\mu\mu$)
 UNLESS OTHERWISE INDICATED

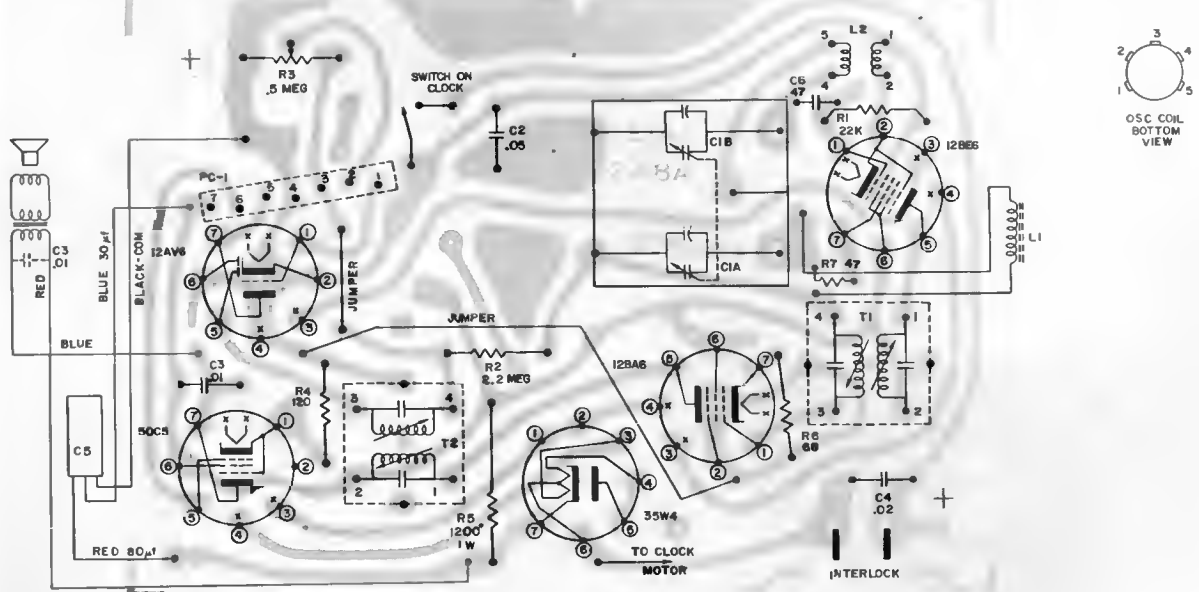


Position of Variable	Frequency of Generator	Dummy Antenna	Generator Output Connection	Adj. Trimmer for Max. Output	Trimmer Function
Open	455 Kc	.05 mfd.	Pin 7 of 12BE6	A1, A2, A3, A4	I. F.
Open	1620 Kc		*Test Loop	A5A	Oscillator
1400Kc	1400Kc		*Test Loop	A6	Antenna
600Kc	600 Kc		*Test Loop	Check Point	
Closed	530 Kc		*Test Loop	A5B	Oscillator

Recheck A5A (1620 kc) after adjustment of A5B.
 *Three (3) turns of wire 6" in diameter placed about one foot from the receiver antenna.


Q1 2SA201 Q3 2SA203 Q4 2SA329 Q5 2SB270 Q7 Q8 2SB187X2

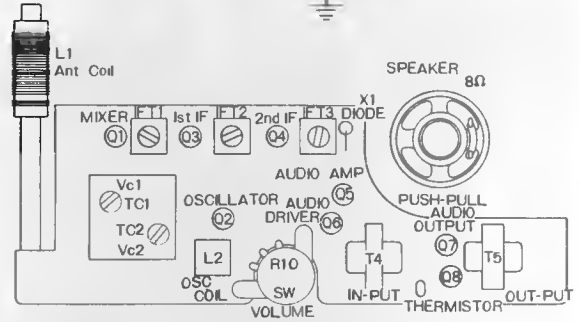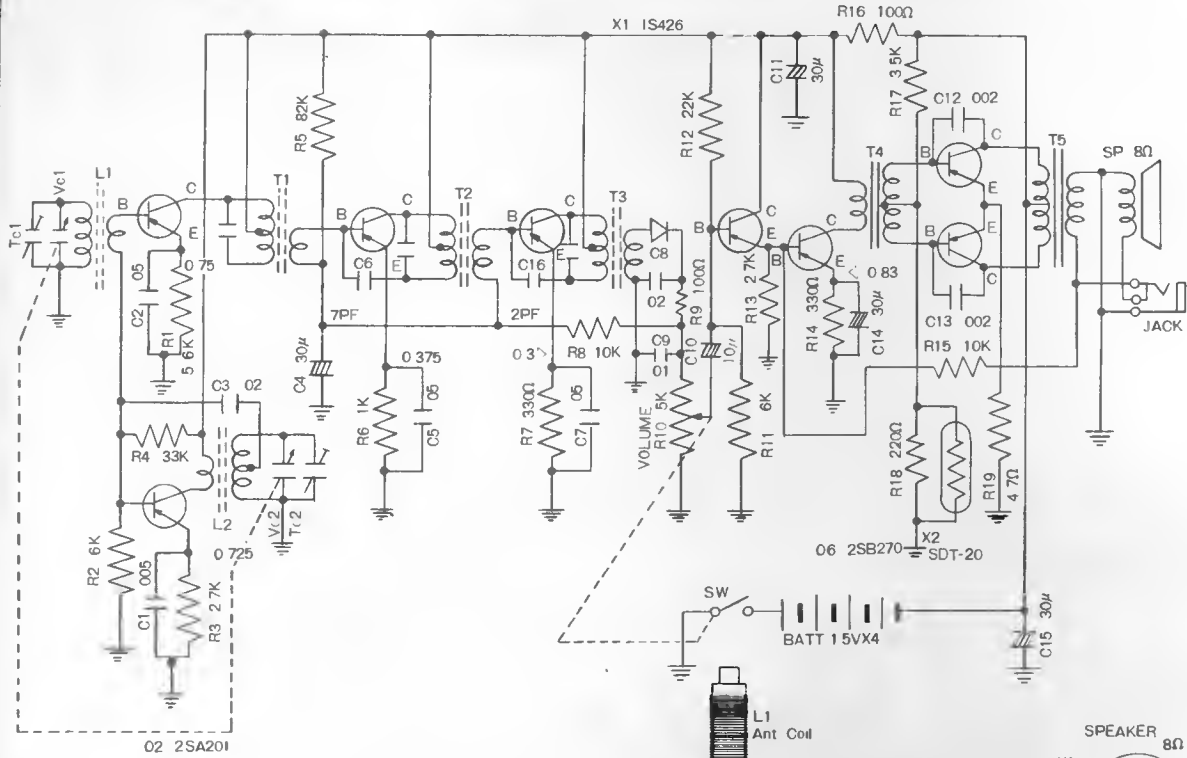

TRANSISTOR AND ALIGNMENT POINT LOCATION

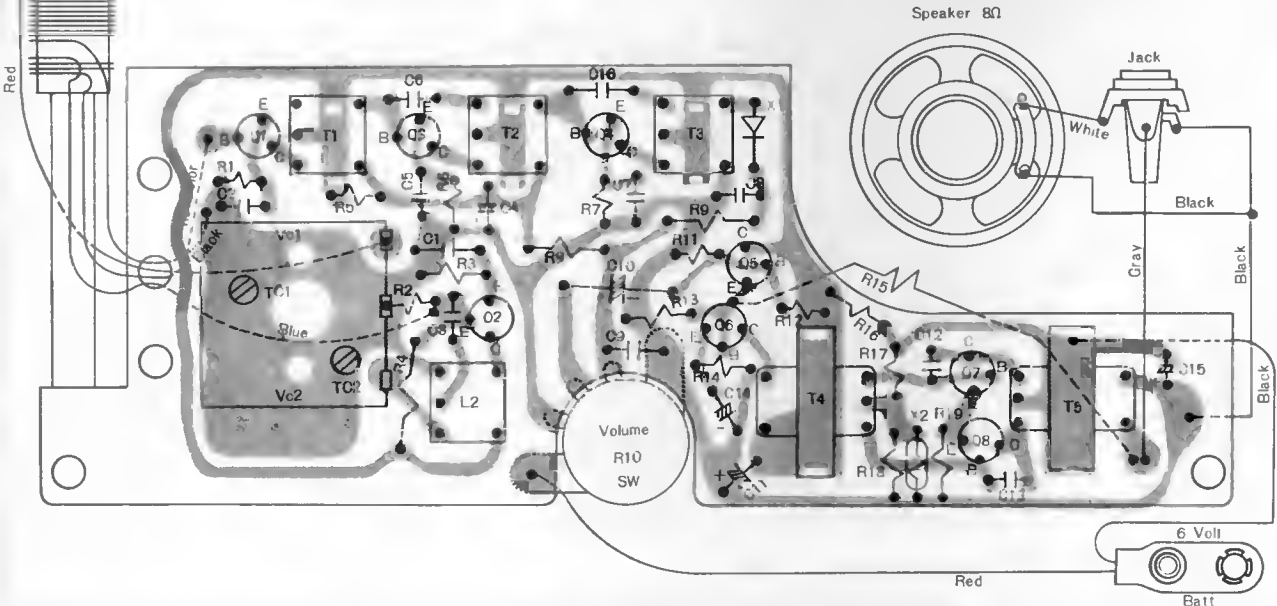


EMERSON Model 31L18, Chassis 120583

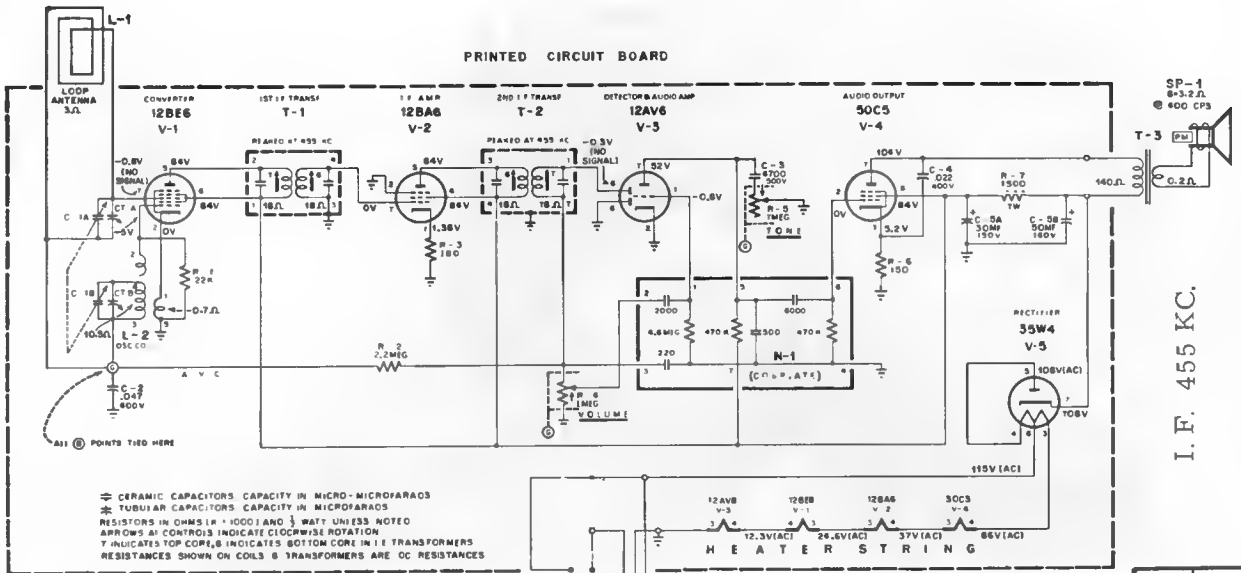


I. F. 455 KC.

MODEL NO.	31L18	CHASSIS NO.	120583	TIMER PART NO.	471329	SPEAKER TYPE & SIZE	6 x 4" - PM
-----------	-------	-------------	--------	----------------	--------	---------------------	-------------

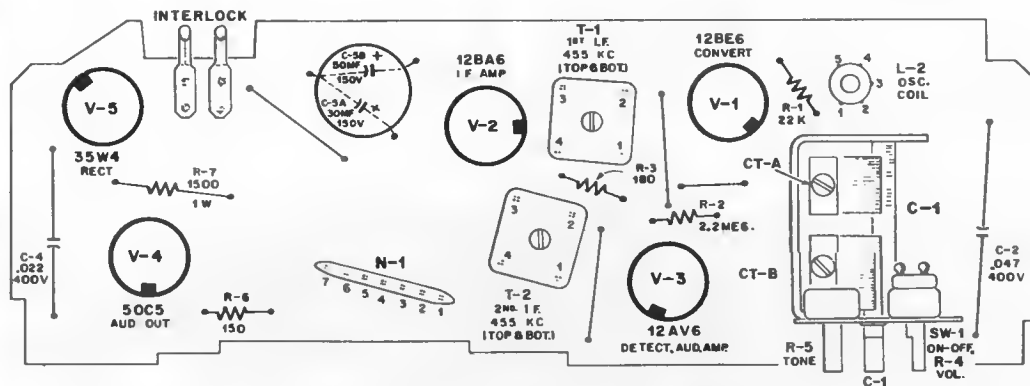



TUBE LOCATIONS AND ALIGNMENT POINTS

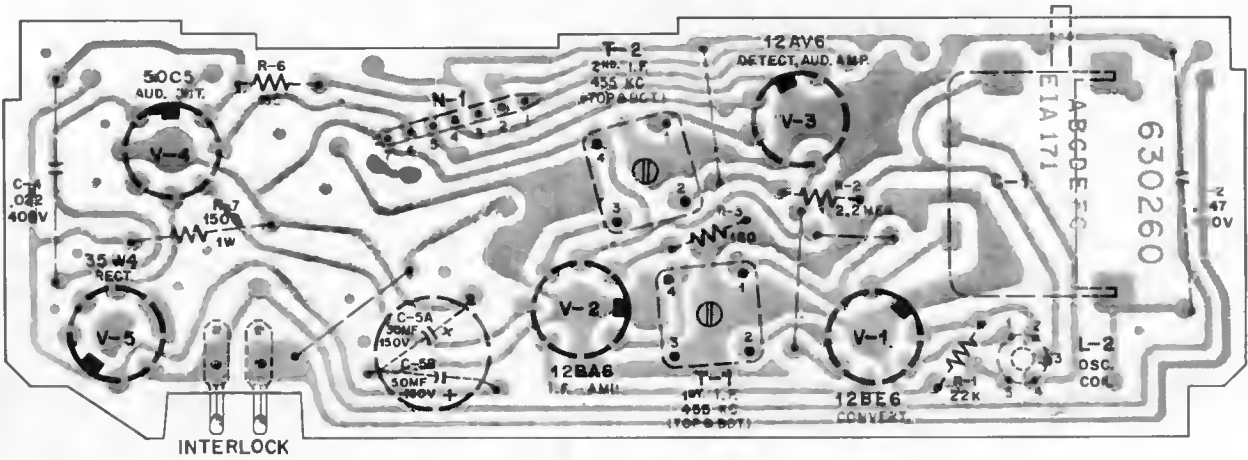


ETCHED PRINTED CIRCUIT CHASSIS (BOTTOM VIEW)

EMERSON Model 31P68

TOP VIEW

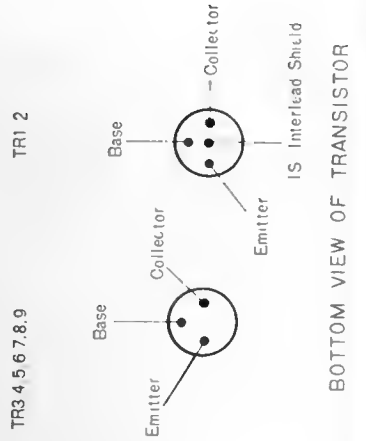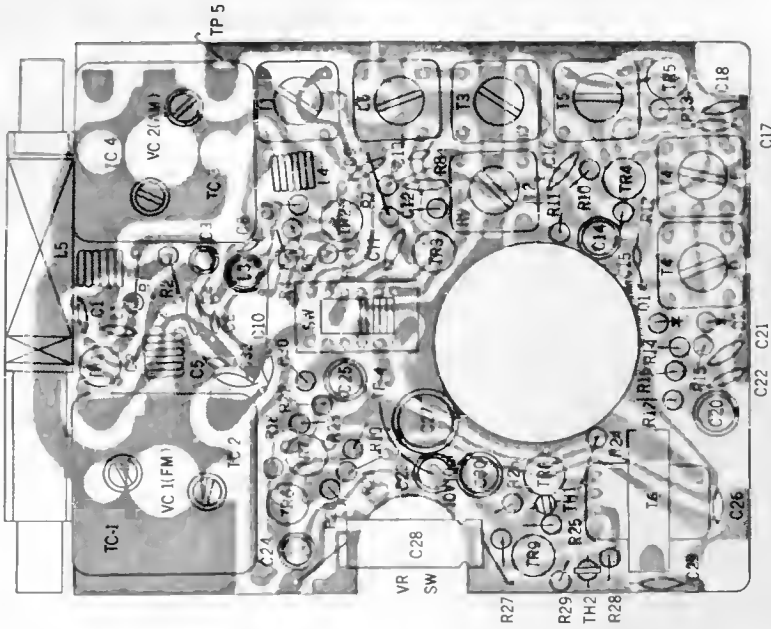

BOTTOM VIEW OF TRANSISTOR

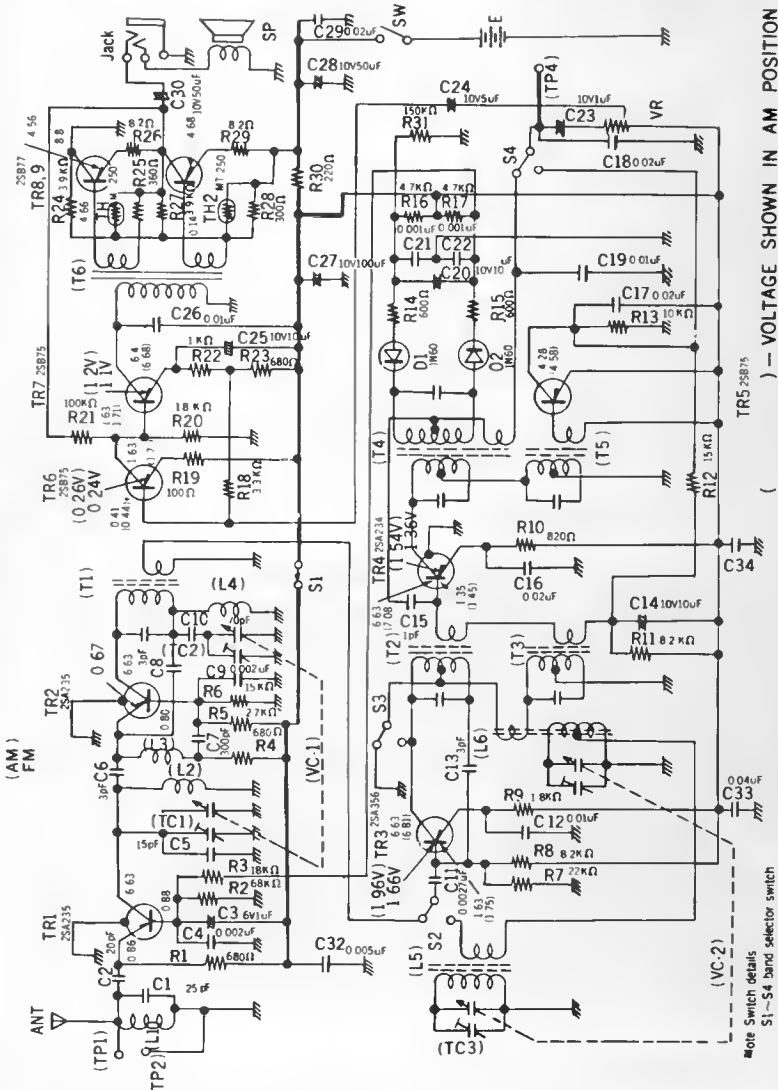


VOLTAGE AND CURRENT AT ELEMENT OF TRANSISTOR

Symbol No.	TRANSISTOR	AM			FM				
		Ve(V)	Vb(V)	Vc(V)	Ie(mA)	Ve(V)	Vb(V)	Vc(V)	Ie(mA)
TR1	28A235	0.86	0.88	6.63	1.27	0.86	0.88	6.63	1.27
TR2	28A234	0.67	0.80	6.63	1.0	0.67	0.80	6.63	1.0
TR3	28A350	1.96	1.75	6.81	1.09	1.66	6.63	0.92	0.92
TR4	28A234	1.54	1.45	7.08	1.88	1.36	6.63	1.66	1.66
TR5	28B75	4.58	4.58	4.28	2.6	0.24	0.41	2.4	2.4
TR6	28B75	0.26	0.44	1.71	1.2	1.1	1.63	1.1	1.1
TR7	28B75	1.2	1.71	6.68	1.2	1.1	1.63	1.1	1.1
TR8	28B77	(VBE)0.15	(VBE)0.15	4.66	8.8	(VBE)0.15	4.66	8.8	8.8
TR9	28B77	(VBE)0.15	(VBE)0.15	0.14	4.68	(VBE)0.15	0.14	4.68	4.68
SECTION		OSCILLATOR FREQ			Min Vosc(mV)		Max Vosc(mV)		
AM		975-2105 KC			150		180		
FM		96.7-120.7 MC			193		235		


LOCAL OSCILLATOR VOLTAGES

EMERSON Model 31P64

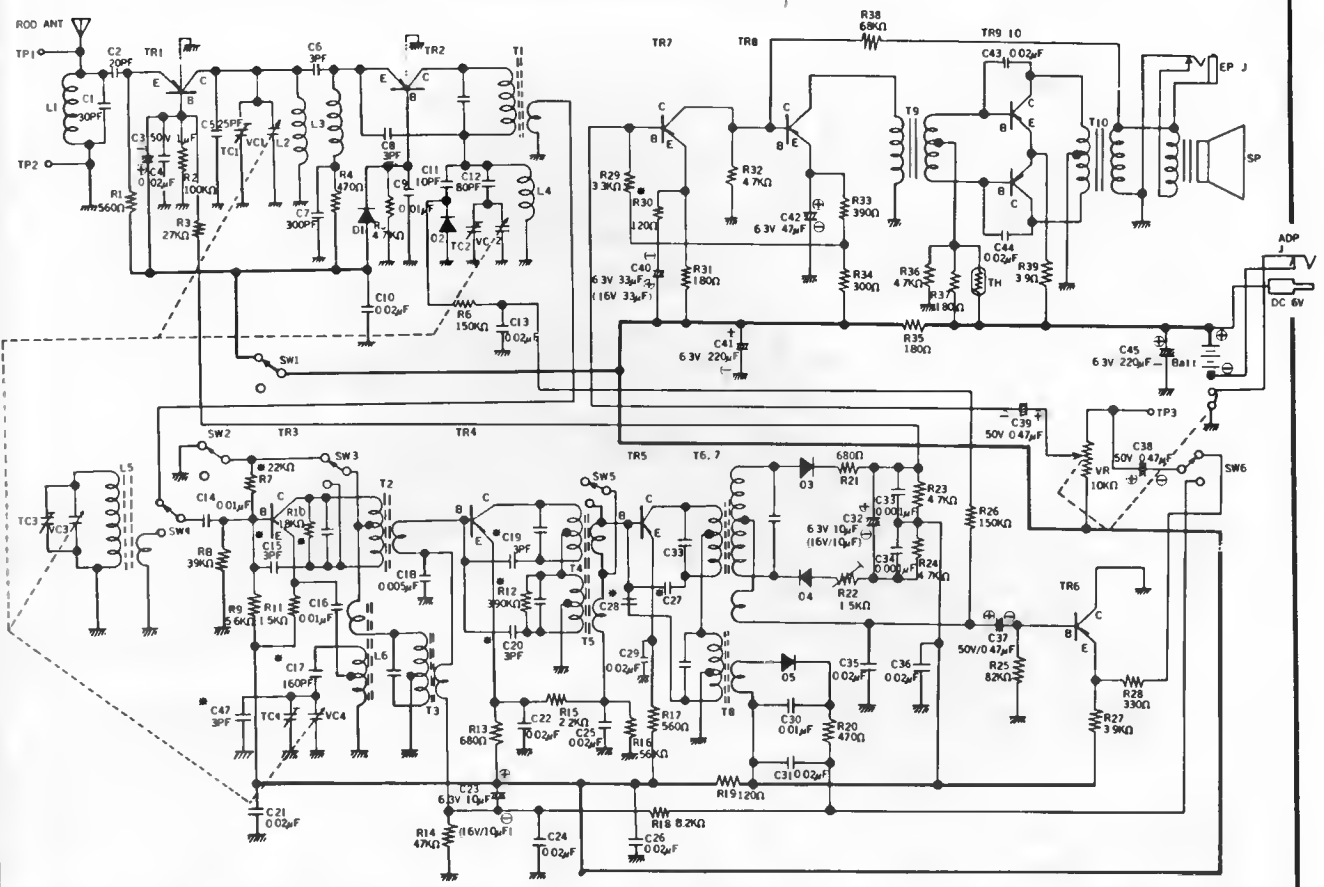


Value may vary every unit


BOTTOM VIEW

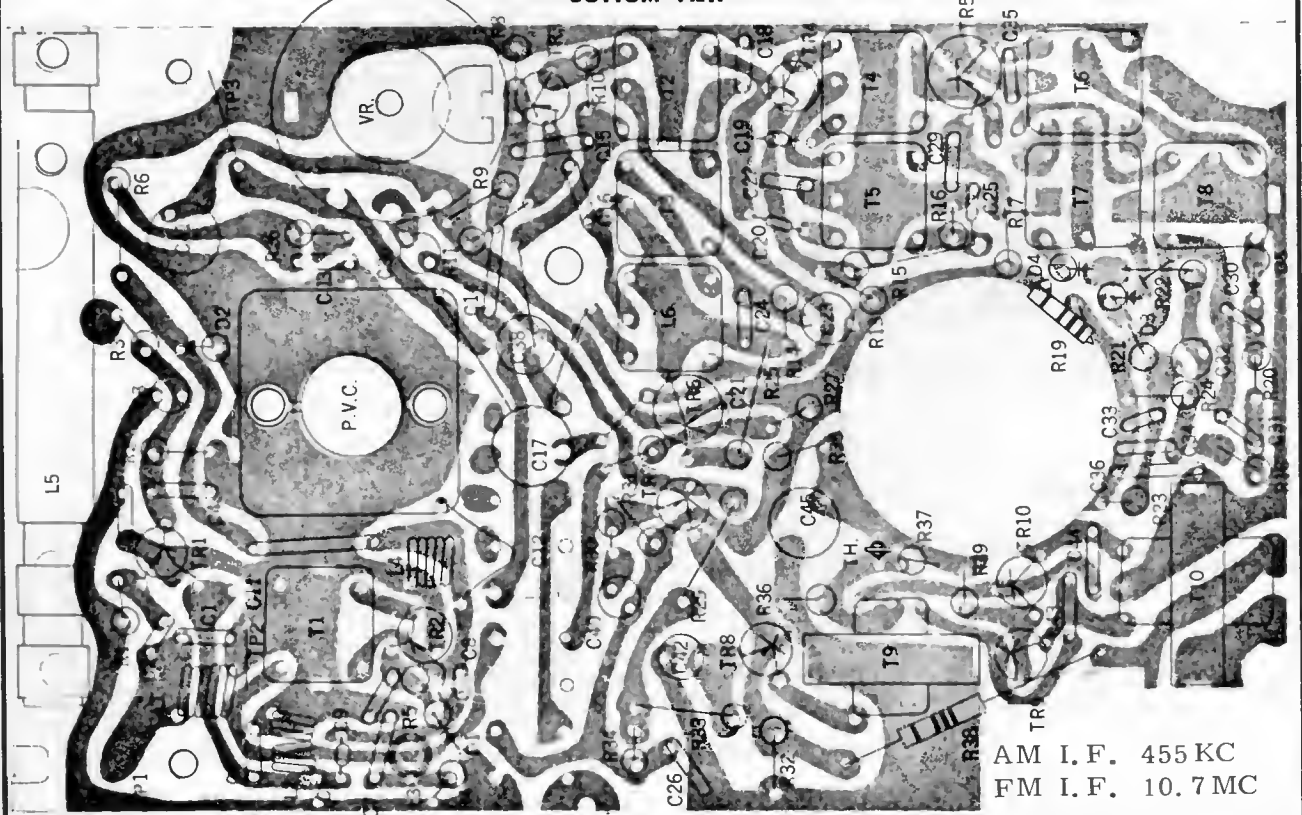


AM I. F. 455 KC
FM I. F. 10.7 MC

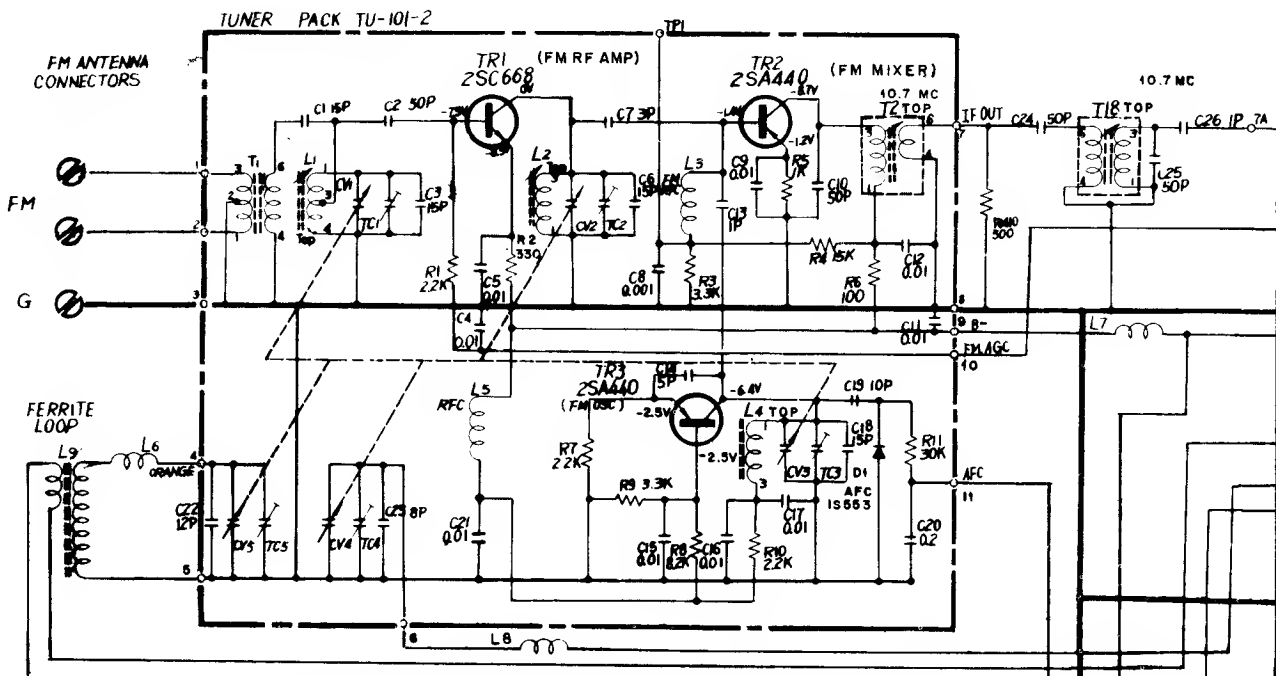


CERAMIC CAPACITORS IN PICO FARADS (pF). 1 pF = 1 MMF
 TUBULAR CAPACITORS, CAPACITY IN MICRO FARADS (MF)
 RESISTORS IN OHMS (K=1000)


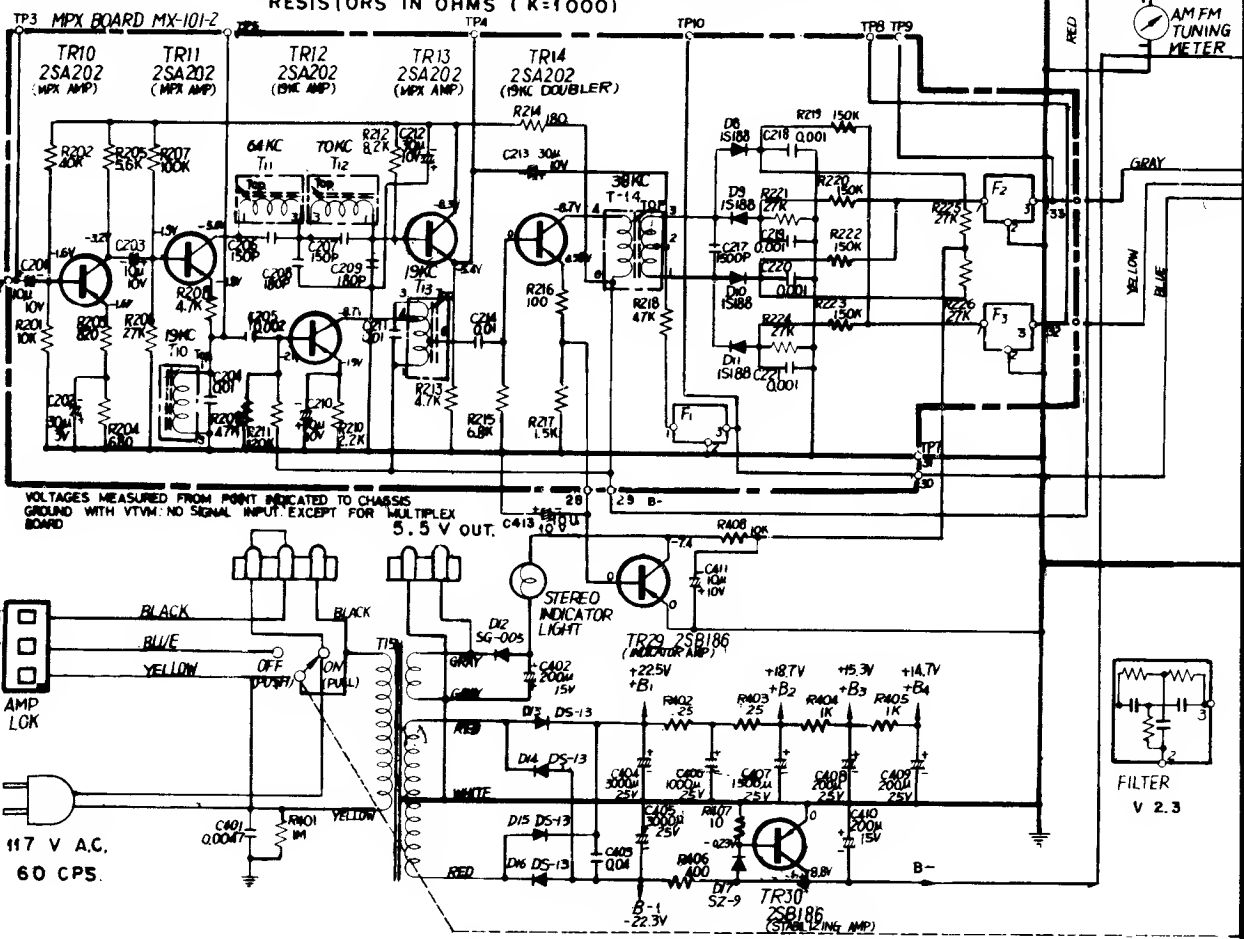


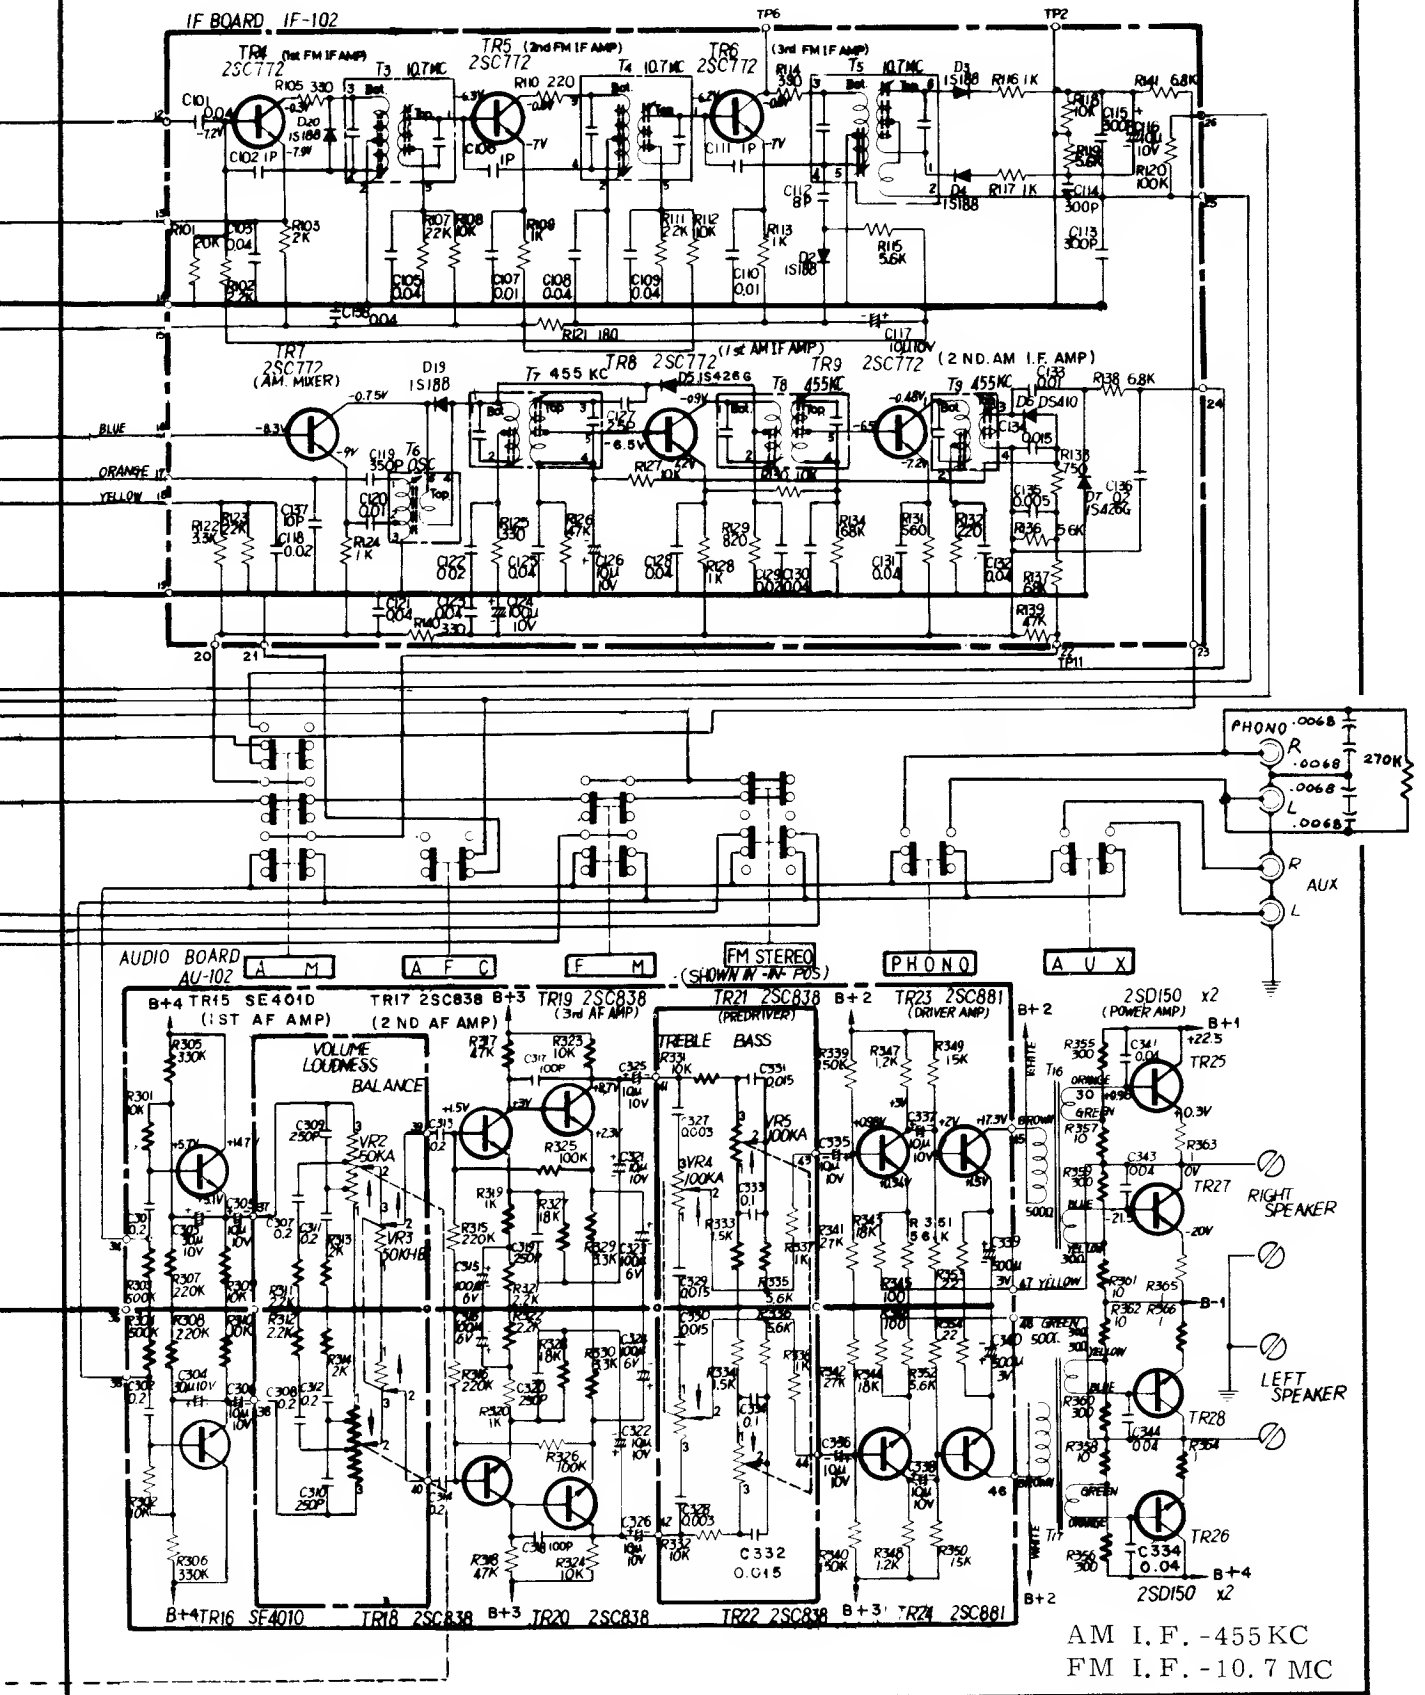


EMERSON Model 31P66

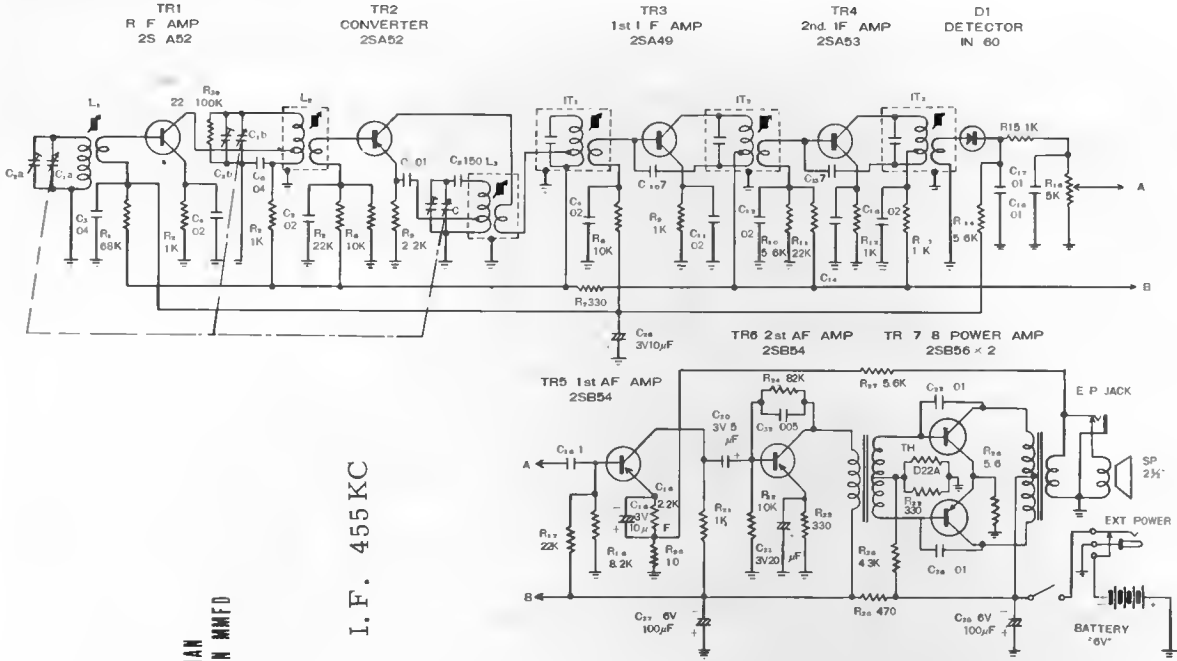


ALL RESISTANCE VALUES IN OHMS
 ALL CAPACITANCE VALUES LESS THAN
 1.0 IN MFD. VALUES ABOVE 1.0 IN MMFD
 UNLESS OTHERWISE INDICATED

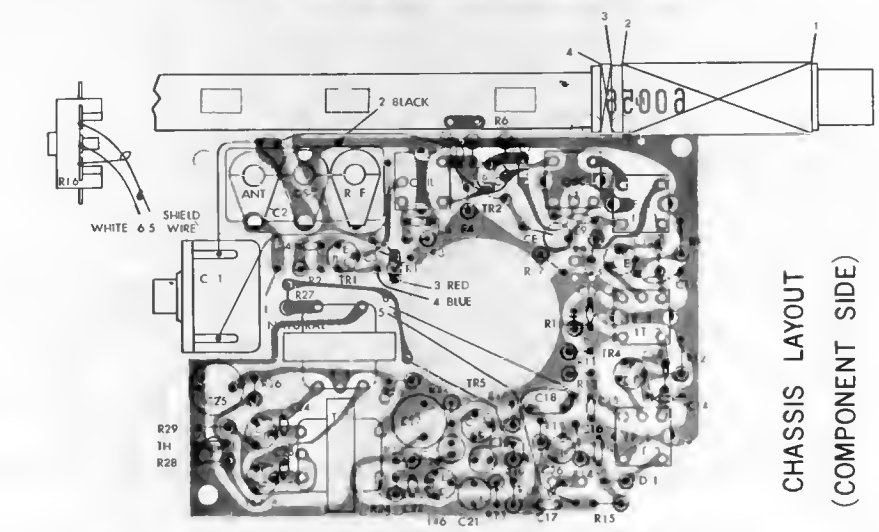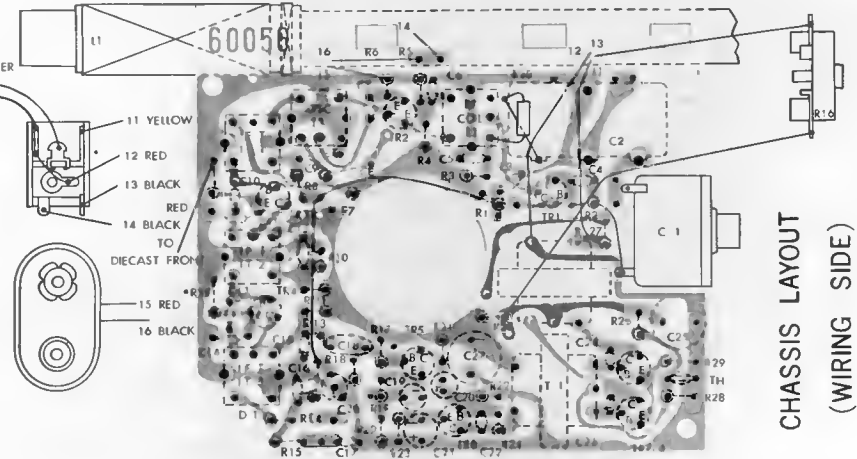

DIAL CORD ARRANGEMENT

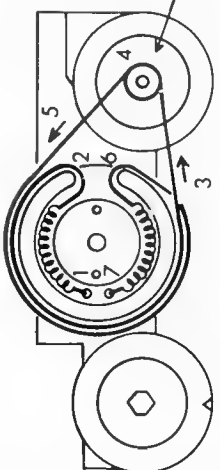

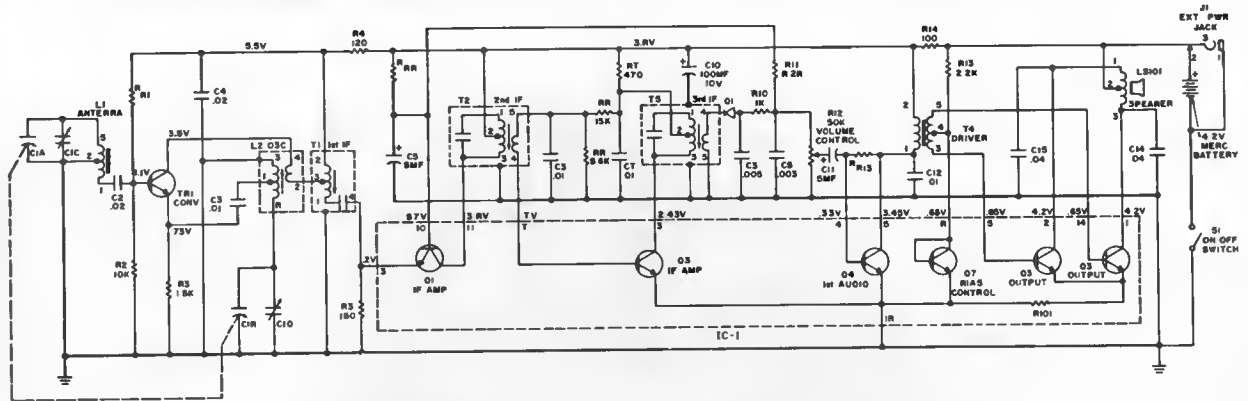

NOTES

1. UNLESS OTHERWISE NOTED CAPACITORS MORE THAN 1 = MMF CAPACITORS LESS THAN 1 = MF RESISTORS ARE 1/2 WATT, K = 1000
2. VOLTAGES ARE POSITIVE WITH RESPECT TO GROUND UNDER NO SIGNAL CONDITIONS AND VOLUME CONTROL MINIMUM
3. SEE TRANSISTOR SUBSTITUTION CHART
4. KHz = KC

ALIGNMENT


1. SET VOLUME CONTROL AT MAX CONNECT OUTPUT METER OR SCOPE ACROSS SPEAKER INDUCTIVELY COUPLE SIGNAL GENERATOR TO RECEIVER
2. ADJUST T1, T2 AND T3 FOR MAX 455KHz SIGNAL
3. ADJUST C10 FOR MAX 1630KHz WITH GANG OPEN
4. ADJUST C1C FOR MAX 1400KHz WHILE ROCKING GANG
5. ADJUST L2 FOR MAX 580KHz WHILE ROCKING GANG
6. REPEAT STEPS 3, 4 AND 5 FOR MAX SENSITIVITY

BOTTOM VIEW OF COMPONENTS

TRANSISTORS




TRANSFORMERS

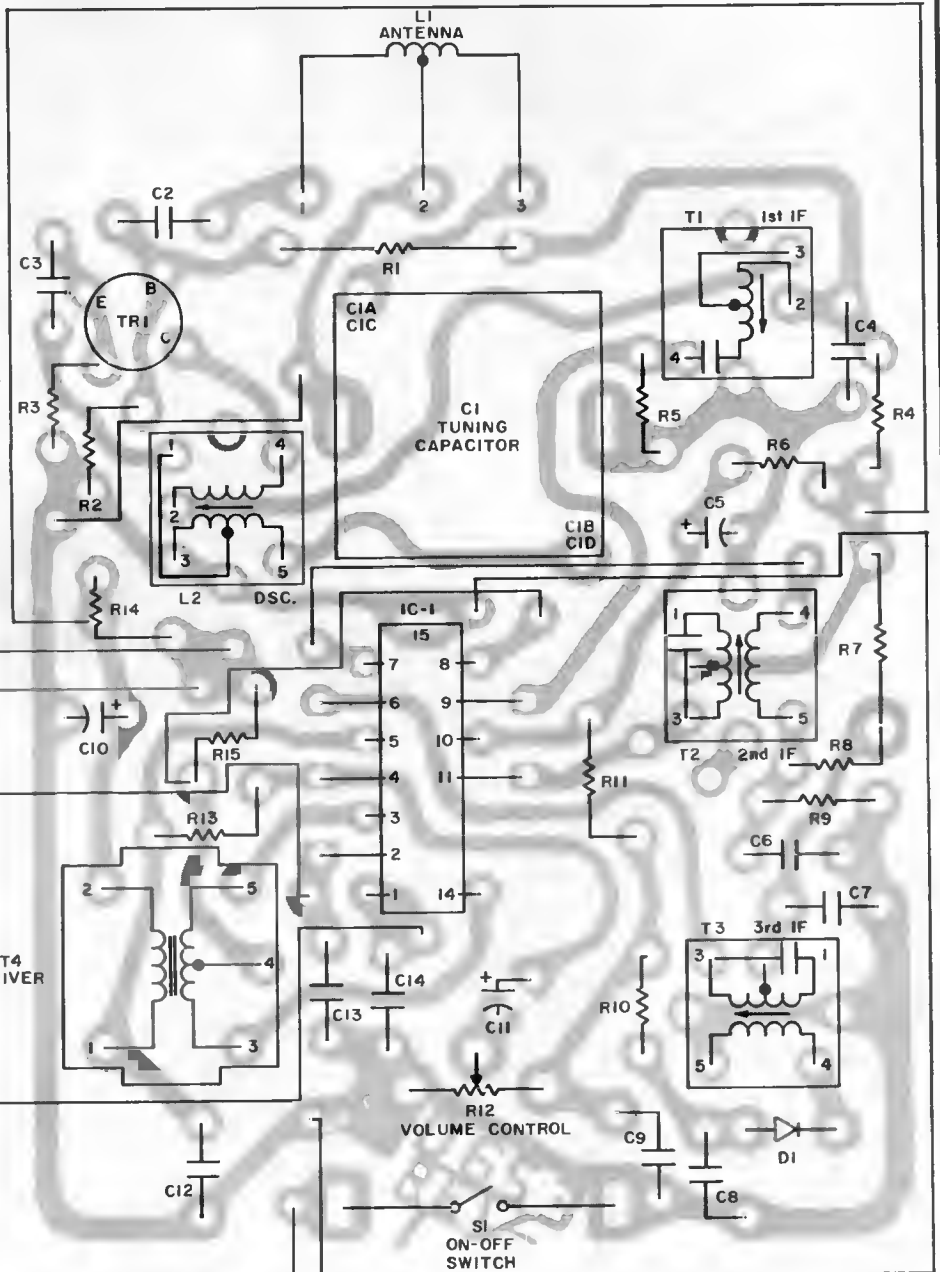

WIRING DIAGRAM (BOTTOM VIEW)

GENERAL ELECTRIC Models C550G, T1130B, T1151B, T1153B, T1175B, C1432C, C1460B, C1479B, C1480B, C1483C, C2415A, C2416A, C4403A, C4405A, C4410A.

WIRING DIAGRAM (BOTTOM VIEW)

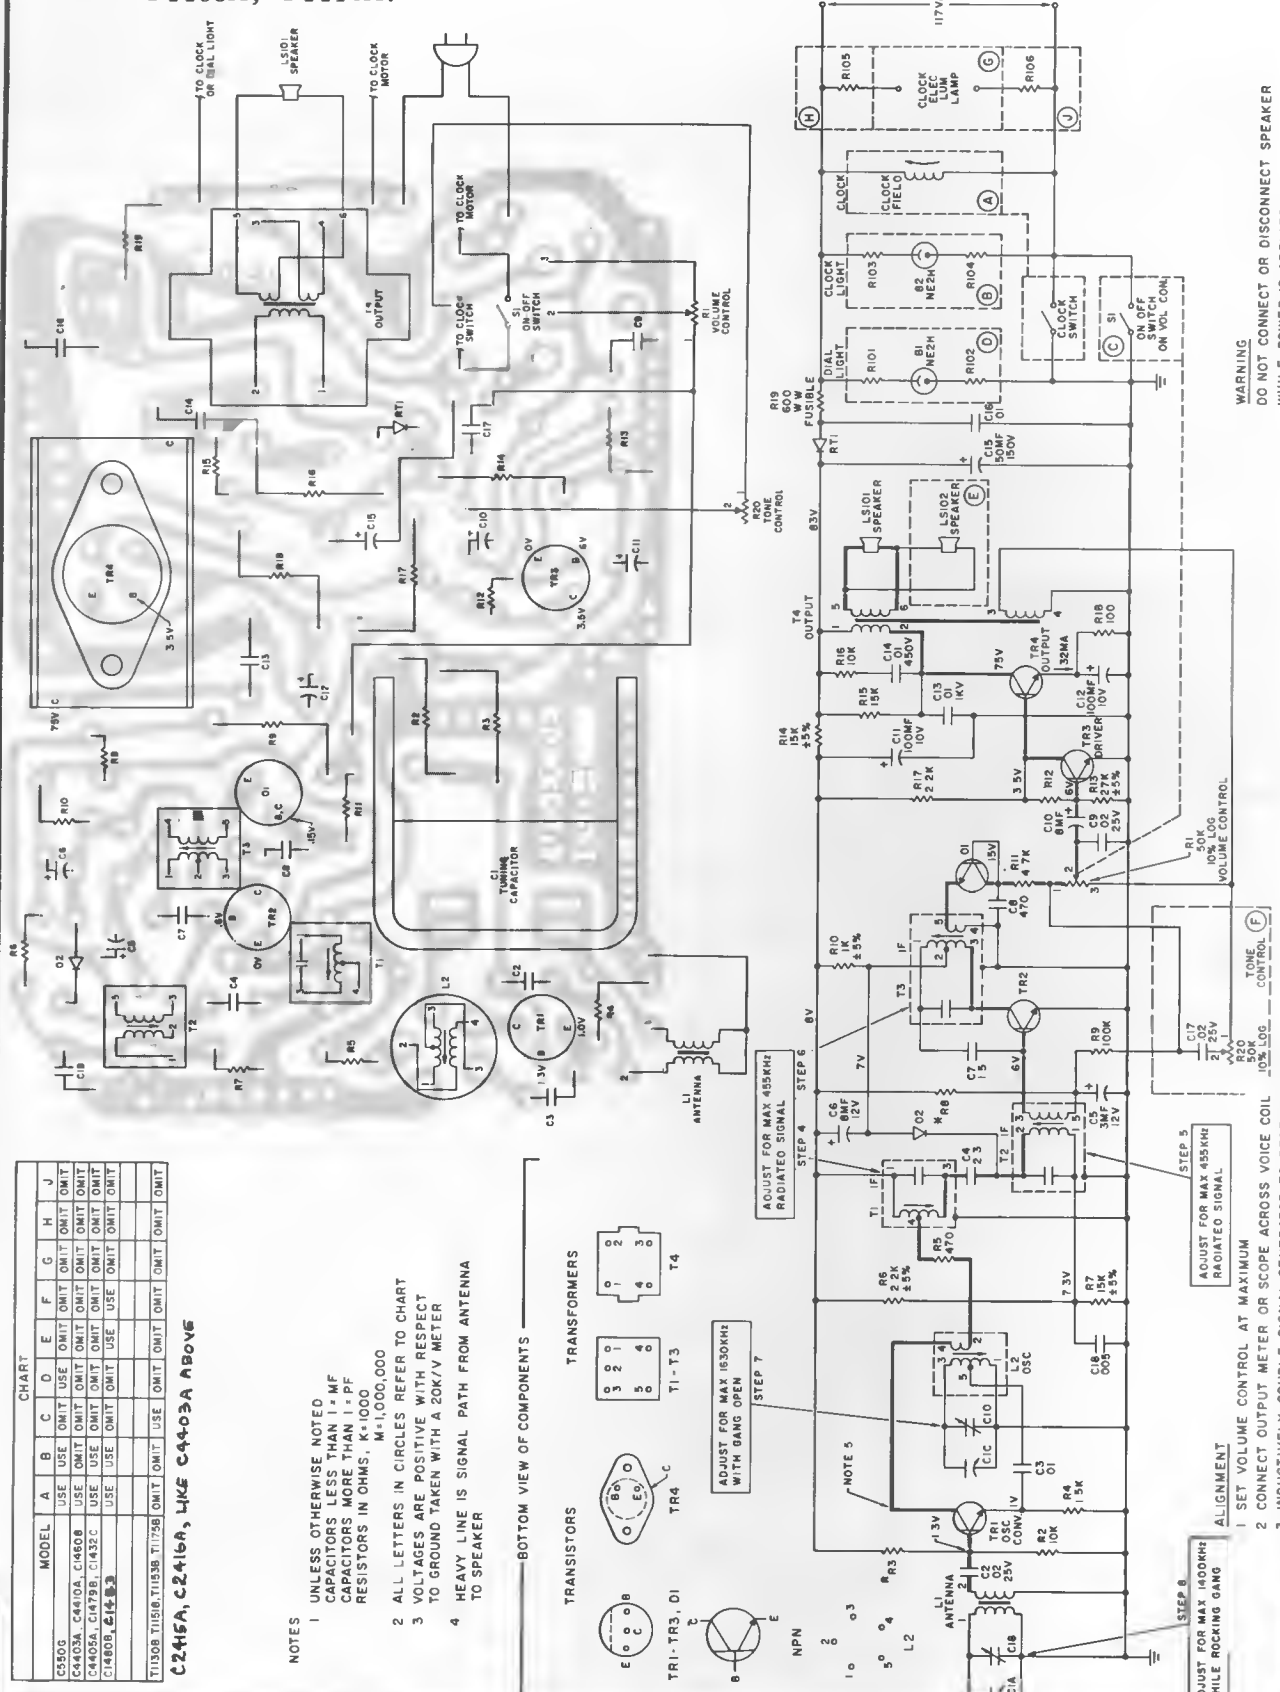


CHART

MODEL	A	B	C	D	E	F	G	H	J
C550G	USE	OMIT	USE	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT
C4403A, C4410A, C1460B	USE	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT
C4405A, C1479B, C1432C	USE	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT
C1480B, C4410A	USE	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT
T1130B, T1151B, T1153B, T1175B	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT

C2415A, C2416A, LIKE C4403A ABOVE

- NOTES
- UNLESS OTHERWISE NOTED CAPACITORS LESS THAN 1 μF CAPACITORS MORE THAN 1 μF PF RESISTORS IN OHMS, K=1000, M=1,000,000
 - ALL LETTERS IN CIRCLES REFER TO CHART
 - VOLTAGES ARE POSITIVE WITH RESPECT TO GROUND TAKEN WITH A 20K/V METER
 - HEAVY LINE IS SIGNAL PATH FROM ANTENNA TO SPEAKER

BOTTOM VIEW OF COMPONENTS

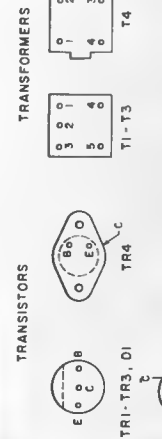

- ALIGNMENT
- STEP 1: SET VOLUME CONTROL AT MAXIMUM
 - STEP 2: CONNECT OUTPUT METER OR SCOPE ACROSS VOICE COIL WHILE ROCKING GANG
 - STEP 3: INDUCTIVELY COUPLE SIGNAL GENERATOR TO RECEIVER
- NOTE 5: ADJUST FOR MAX 455KHZ RADIATED SIGNAL
- NOTE 6: ADJUST FOR MAX 455KHZ RADIATED SIGNAL
- NOTE 7: ADJUST FOR MAX 1630KHZ WITH GANG OPEN
- NOTE 8: ADJUST FOR MAX 1400KHZ WHILE ROCKING GANG


WARNING
DO NOT CONNECT OR DISCONNECT SPEAKER WHILE POWER IS APPLIED

GENERAL ELECTRIC Models T1134B, C4420A, C4421A, and C4430A.


WIRING DIAGRAM (BOTTOM VIEW)

CHART										
MODEL	A	B	C	D	E	F	G	H	J	K
C4420.21	USE	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT
C4430A	USE	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT
T1134B	OMIT	OMIT	USE	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT	OMIT


BOTTOM VIEW OF COMPONENTS

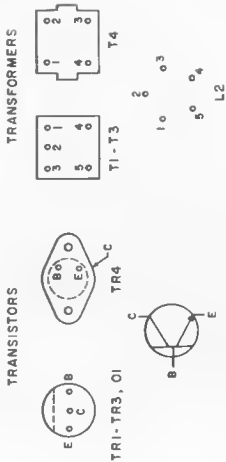

- NOTES
- UNLESS OTHERWISE NOTED CAPACITORS LESS THAN 1 = MF CAPACITORS MORE THAN 1 = PF RESISTORS IN OHMS, K=1000 M=1,000,000
 - ALL LETTERS IN CIRCLES REFER TO CHART
 - VOLTAGES ARE POSITIVE WITH RESPECT TO GROUND TAKEN WITH A 20K/VOLT METER
 - HEAVY LINE IS SIGNAL PATH FROM ANTENNA TO SPEAKER

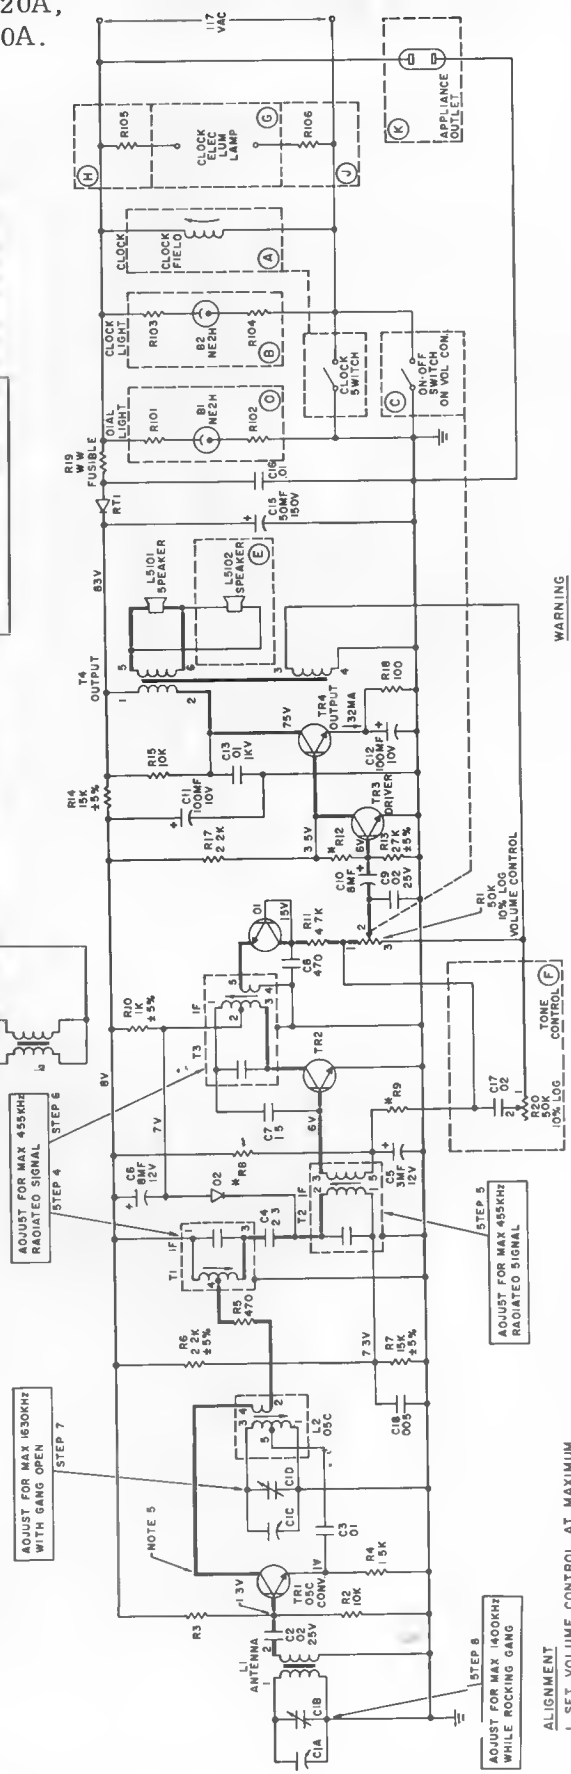

WARNING
DO NOT CONNECT OR DISCONNECT SPEAKER WHILE POWER IS APPLIED

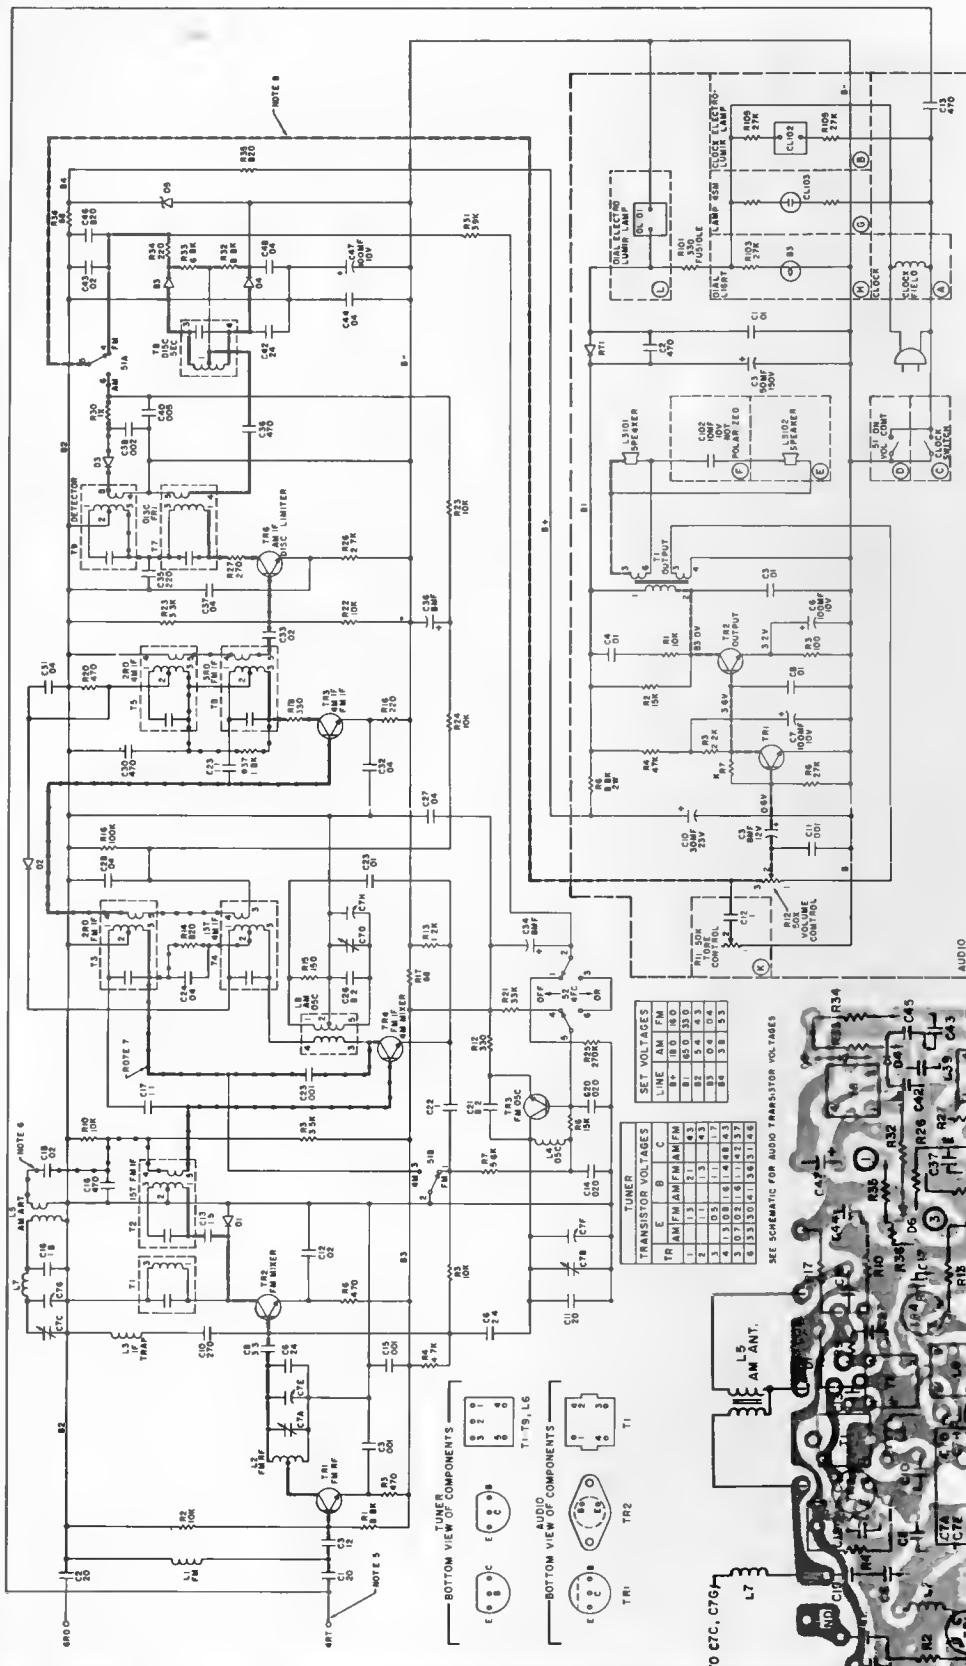

SCHEMATIC DIAGRAM (LATE VERSION)

- NOTES
- UNLESS OTHERWISE NOTED CAPACITORS LESS THAN 1-MF RESISTORS MORE THAN 1-MMF
 - VOLTAGES ARE POSITIVE WITH RESPECT TO B- UNDER NO SIGNAL CONDITIONS AND VOLTAGE OF METER TO B-1 (CONNECT NEGATIVE LEAD OF METER TO B-1)
 - REFER TO TRANSISTOR SUBSTITUTION CHART
 - SHOWN IN FM POSITION
 - LINE SHOWN (---) IS FM SIGNAL PATH FROM ANTENNA TO SIA
 - LINE SHOWN (—) IS AM SIGNAL PATH FROM AM ANTENNA TO SIA
 - AM FM SIGNALS SUPERIMPOSED IN SOME AREAS
 - FM SIGNALS (---) IS COMMON AUDIO PATH FROM SIA TO SPEAKER
 - IN MODEL CHART, RESISTORS PART USAGE OF DOTTED BLOCKS ON SCHEMATIC CIRCLED LETTERS IN DOTTED BLOCKS REFER TO MODEL CHART
 - DO NOT CONNECT OR DISCONNECT SPEAKER WHILE POWER IS APPLIED. DO NOT APPLY POWER WITHOUT CONNECTING B+ AND B- WIRES TO TUNER


MODEL CHART

MODEL	A	B	C	O	E	F	G	H	K	L
T232E, T240	X	X	X	X	X	X	X	X	X	X
T237D, T244	X	X	X	X	X	X	X	X	X	X
T237D, T245	X	X	X	X	X	X	X	X	X	X
T224D, T230	X	X	X	X	X	X	X	X	X	X
T228D	X	X	X	X	X	X	X	X	X	X
C133, 134D	X	X	X	X	X	X	X	X	X	X
C133D, 134	X	X	X	X	X	X	X	X	X	X
C230, 231, 233	X	X	X	X	X	X	X	X	X	X
C230, 234	X	X	X	X	X	X	X	X	X	X
C230, 235	X	X	X	X	X	X	X	X	X	X
C235D, 237B, 243	X	X	X	X	X	X	X	X	X	X
C235D	X	X	X	X	X	X	X	X	X	X
C237E	X	X	X	X	X	X	X	X	X	X
C237E	X	X	X	X	X	X	X	X	X	X
C237E	X	X	X	X	X	X	X	X	X	X

SET VOLTAGES

LINE	AM	FM
TR	AM/FM	AM/FM
B+	180	180
B-	180	180
1	1.5	2.1
2	1.5	2.1
3	0.5	1.7
4	1.3	0.8
5	0.7	0.8
6	1.0	1.1
7	1.0	1.1
8	1.3	1.3

SEE SCHEMATIC FOR AUDIO TRANSISTOR VOLTAGES

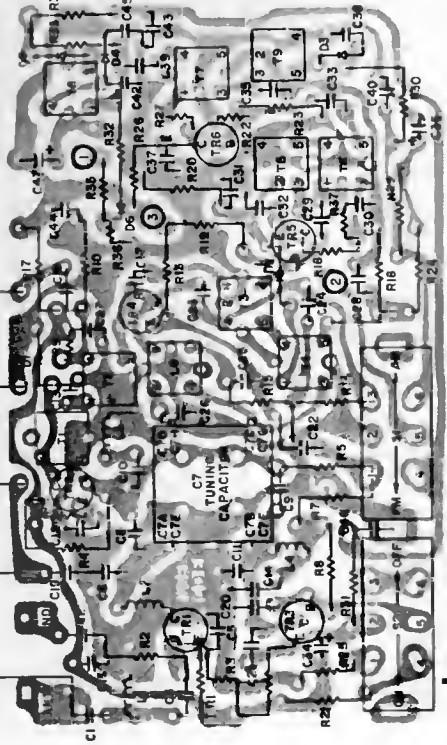

WIRING DIAGRAM (BOTTOM VIEW), LATE VERSION

GENERAL ELECTRIC Models C1405A and T2100A



WARNING
DO NOT CONNECT OR DISCONNECT
SPEAKER WHILE POWER IS APPLIED

ALIGNMENT
1 SET VOLUME CONTROL AT MAXIMUM
2 CONNECT OUTPUT METER OR SCOPE ACROSS VOICE COIL
3 INDUCTIVELY COUPLE SIGNAL GENERATOR TO RECEIVER

STEP 4
ADJUST FOR MAX 455KHZ
RADIATED SIGNAL


STEP 9
ADJUST FOR MAX 580KHZ
WHILE ROCKING GANG

STEP 8
ADJUST FOR MAX 1400KHZ
WHILE ROCKING GANG

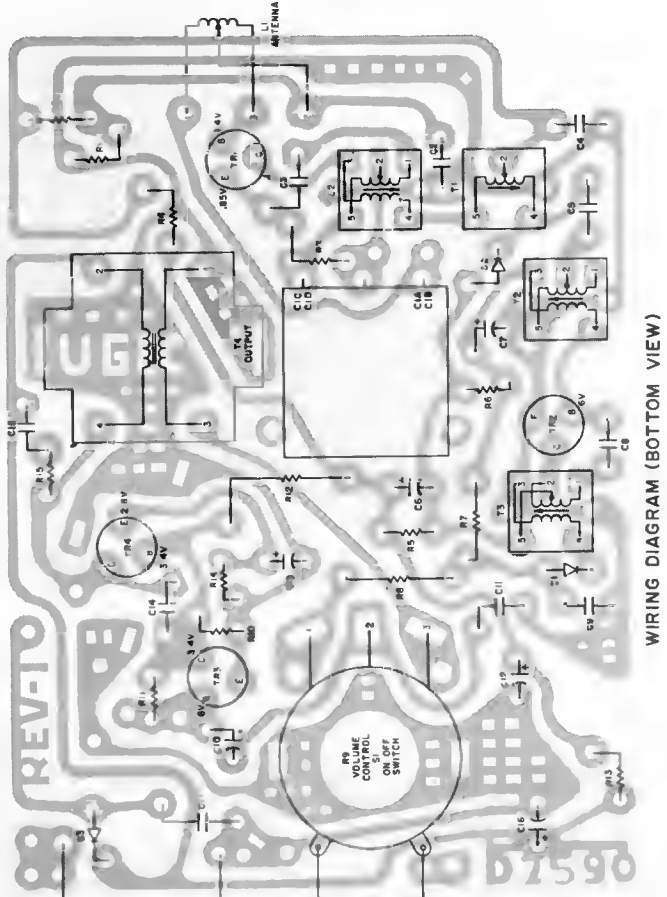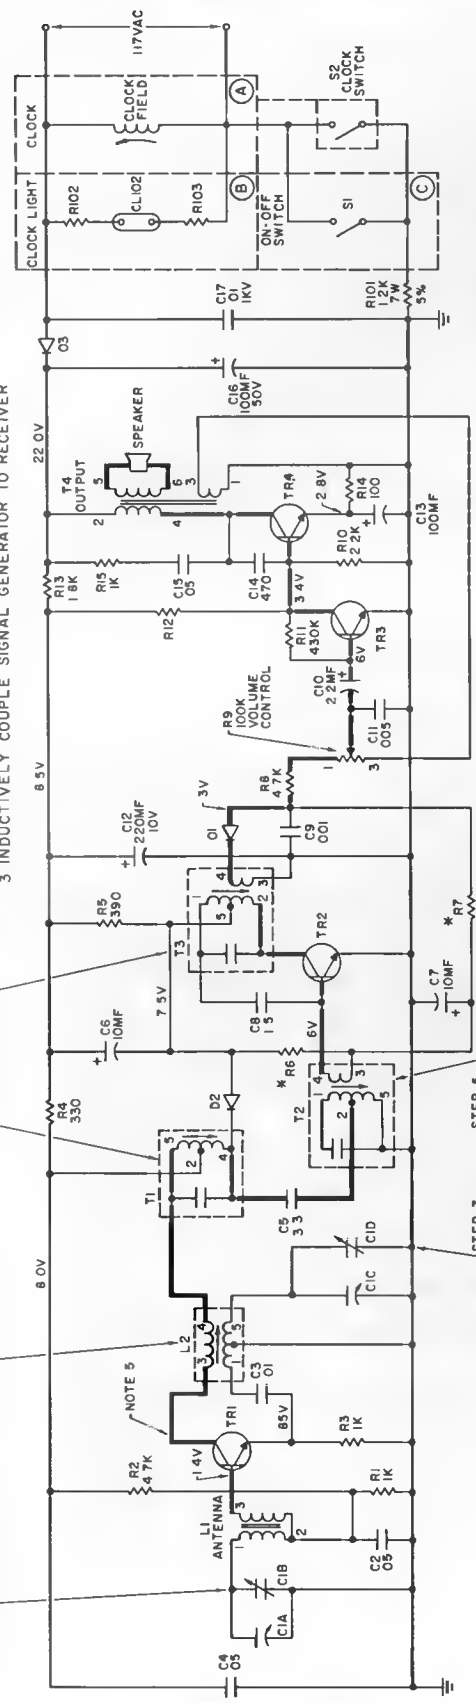



WIRING DIAGRAM (BOTTOM VIEW)



BOTTOM VIEW OF COMPONENTS




MODEL	A	B	C
C1405A	USE	USE	OMIT
T2100A	OMIT	OMIT	USE

- NOTES**
- UNLESS OTHERWISE NOTED CAPACITORS LESS THAN 1 = MF CAPACITORS MORE THAN 1 = PF RESISTORS IN OHMS, K=1000
 - ALL LETTERS IN CIRCLES REFER TO CHART
 - VOLTAGES ARE POSITIVE WITH RESPECT TO GROUND TAKEN WITH A 20K/V METER UNDER NO SIGNAL CONDITIONS AND VOLUME CONTROL MINIMUM
 - HEAVY LINE IS SIGNAL PATH FROM ANTENNA TO SPEAKER

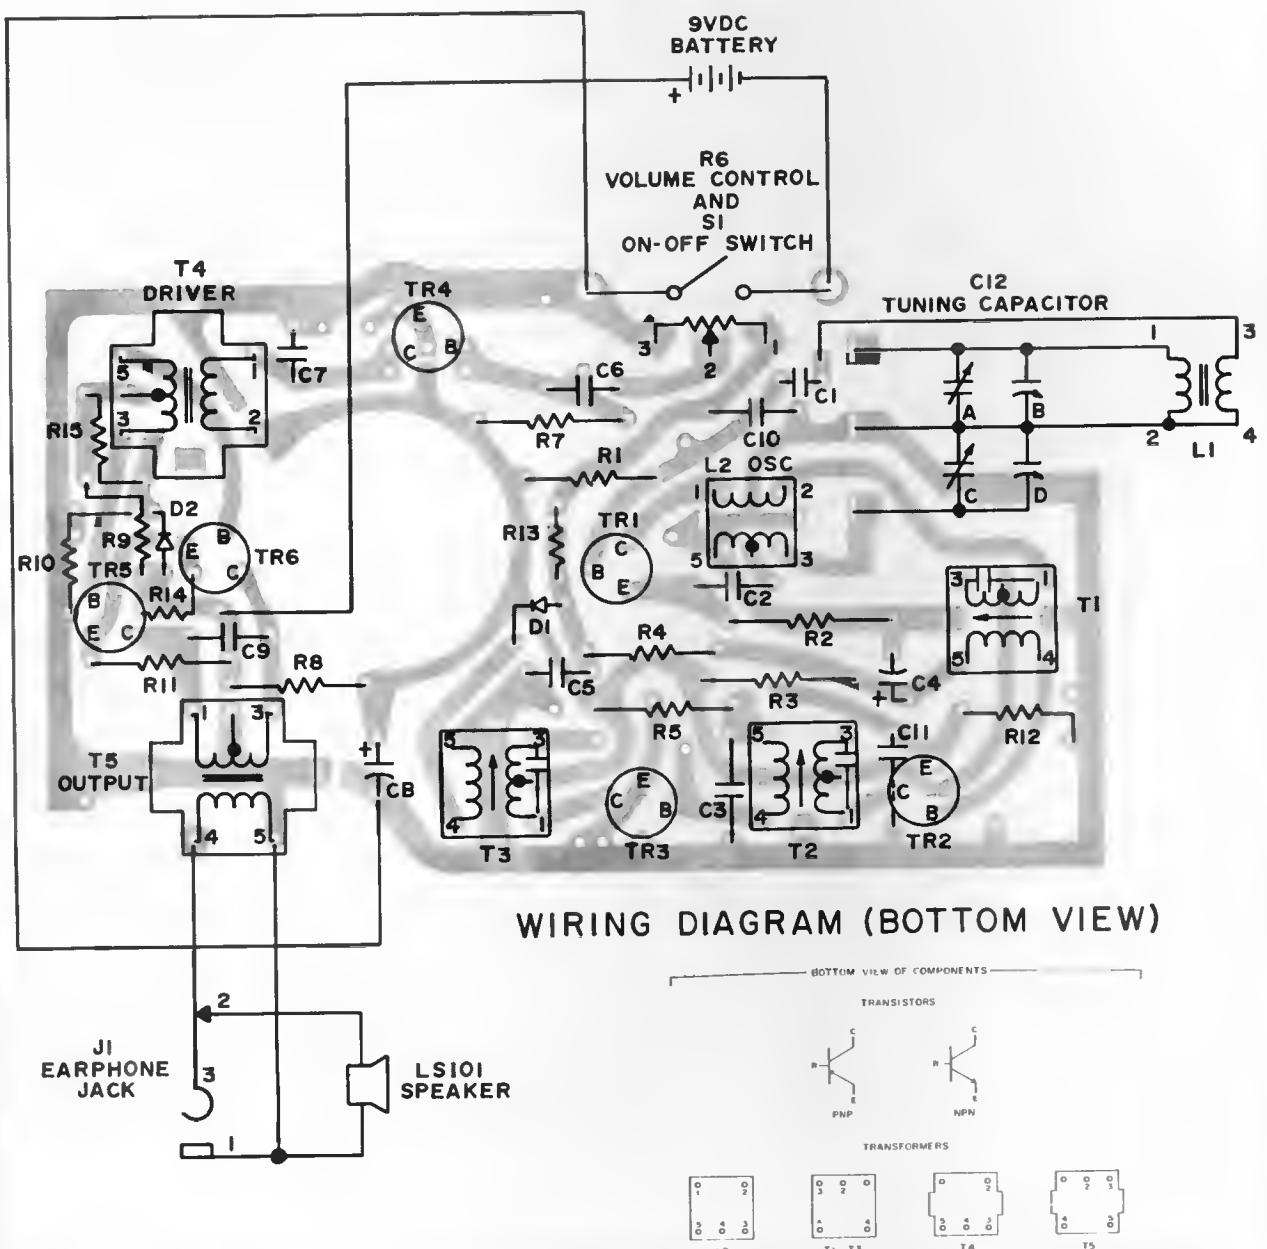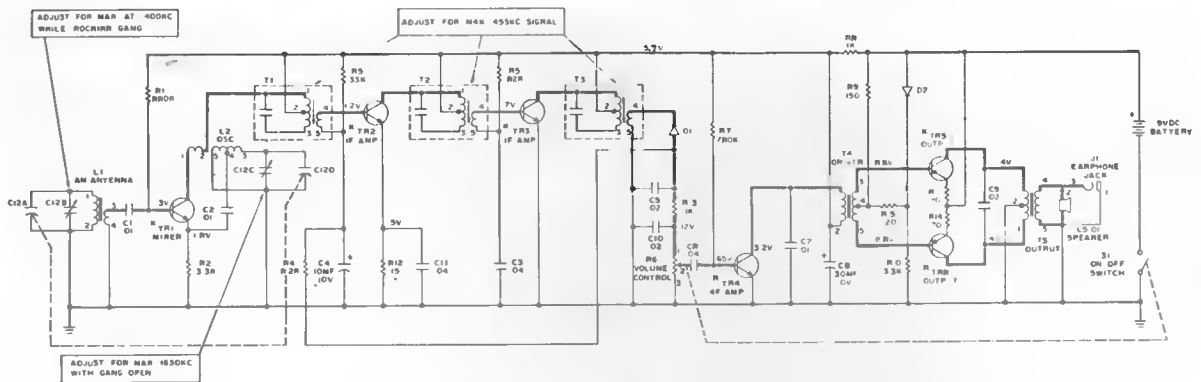

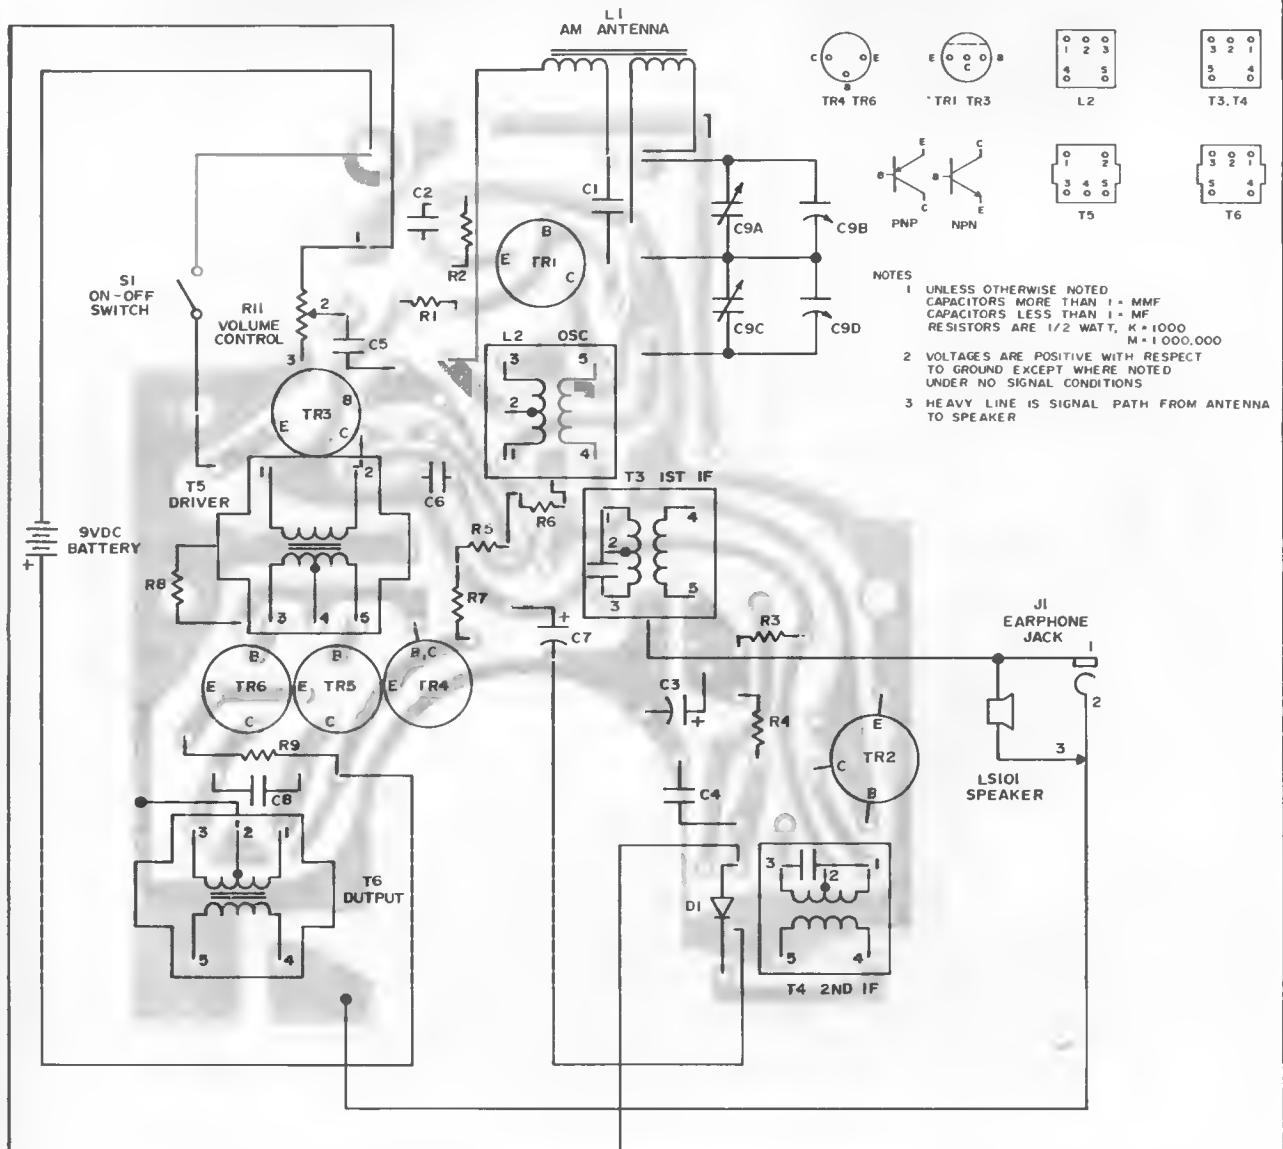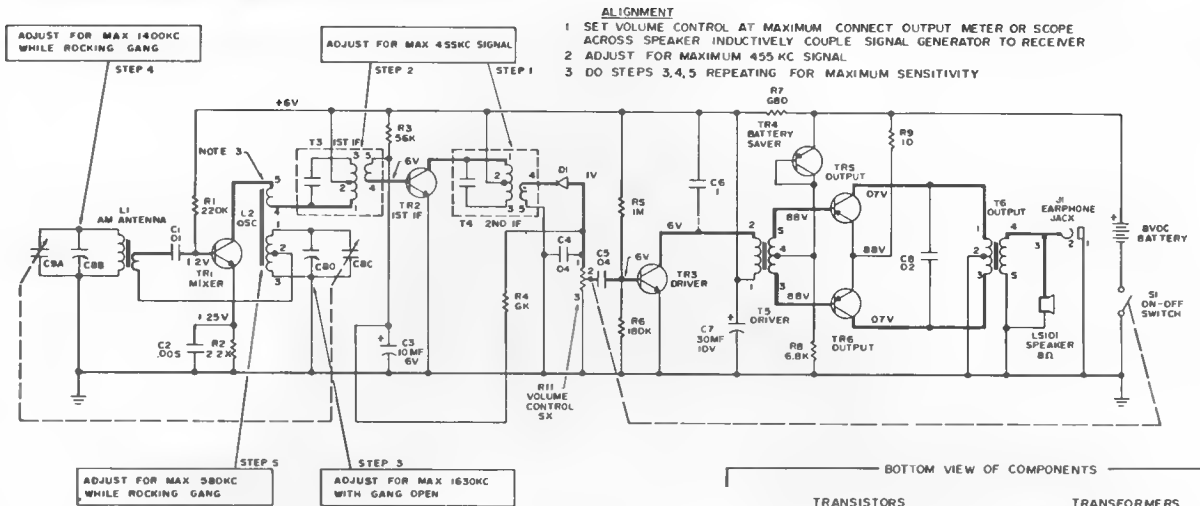


WIRING DIAGRAM (BOTTOM VIEW)

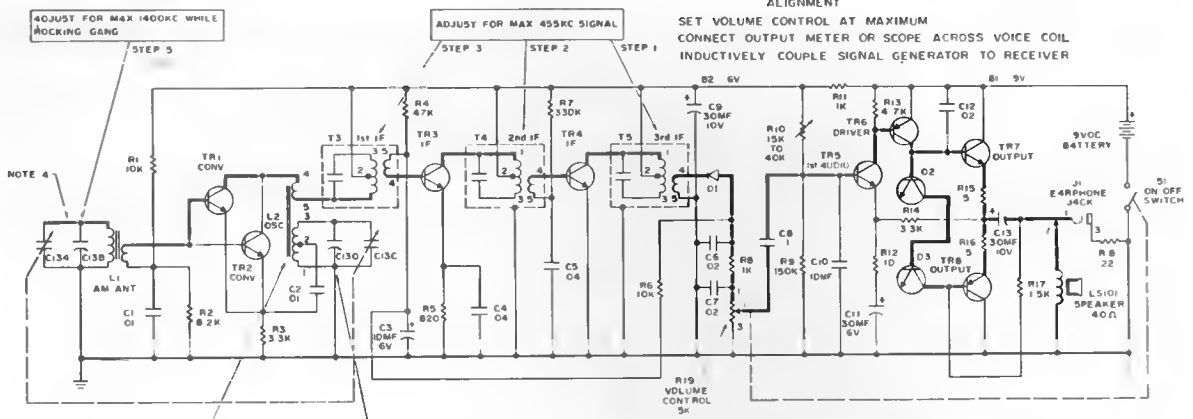

ALIGNMENT
SET VOLUME CONTROL AT MAXIMUM
CONNECT OUTPUT METER OR SCOPE ACROSS VOICE COIL
INDUCTIVELY COUPLE SIGNAL GENERATOR TO RECEIVER

TRANSISTOR VOLTAGES

TR	C	B	E
1	6	2.7	2.5
2	6	2.7	2.15
3	6	1.0	3.5
4	6	4	D
5	0.4	5.4	4.9
6	4.8	0.4	9
7	9	4.8	4.3
8	0	3.5	4.2

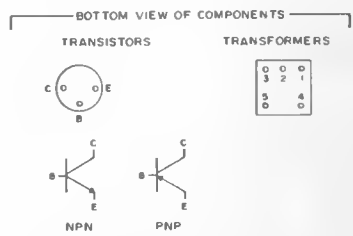

NOTES

- UNLESS OTHERWISE NOTED CAPACITORS MORE THAN 1 = MF CAPACITORS LESS THAN 1 = MF RESISTORS ARE IN OHMS K = 1000
- VOLTAGES ARE POSITIVE WITH RESPECT TO GROUND UNDER NO SIGNAL CONDITIONS AND VOLUME CONTROL MINIMUM

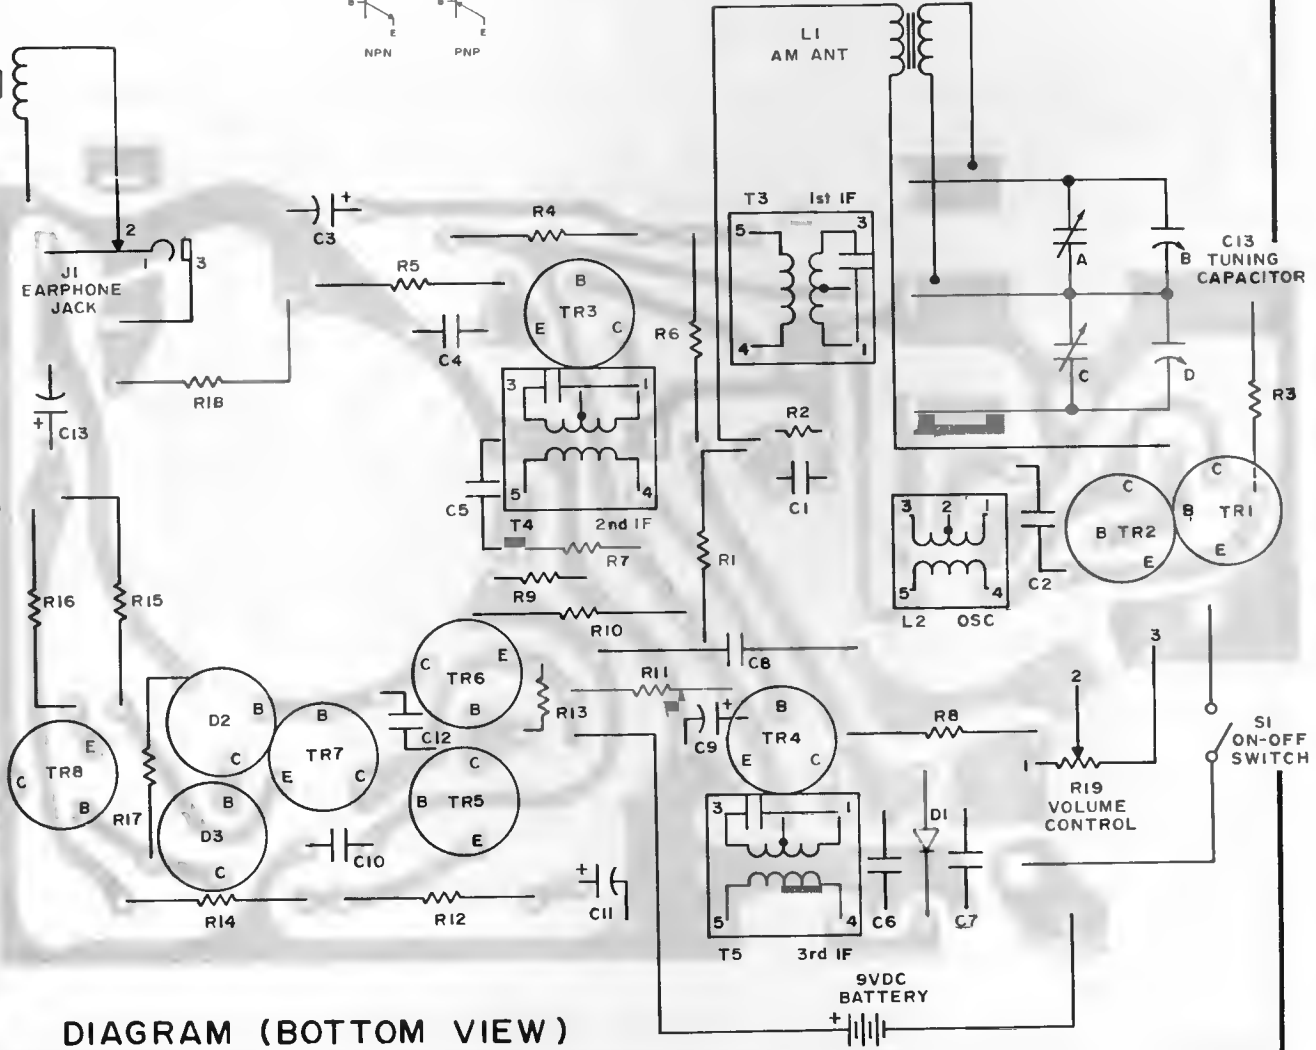


DIAGRAM (BOTTOM VIEW)

MODELS PI780, PI781, PI782

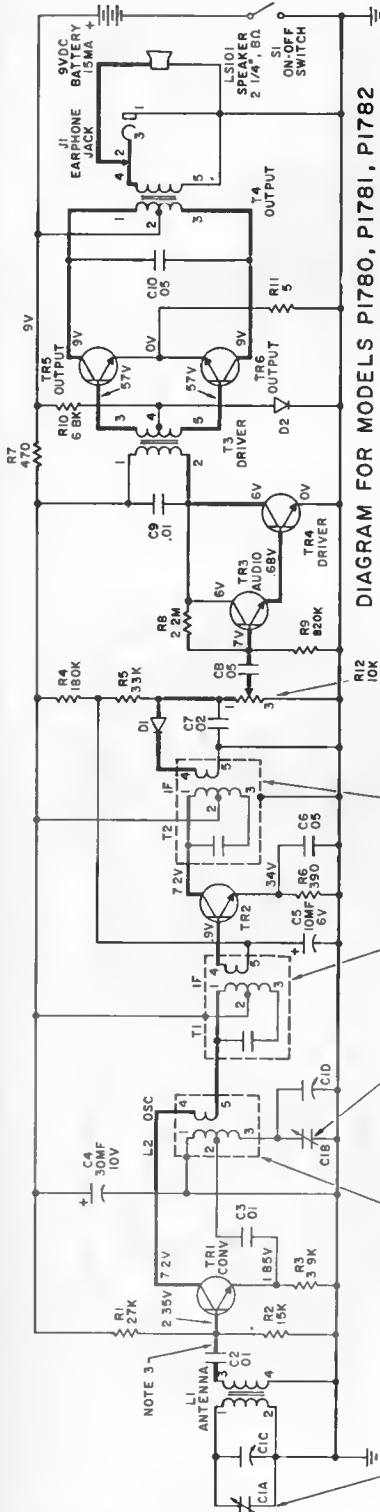


DIAGRAM FOR MODELS PI780, PI781, PI782

ALIGNMENT

- 1 SET VOLUME CONTROL AT MAXIMUM
- 2 CONNECT OUTPUT METER OR SCOPE ACROSS SPEAKER
- 3 INDUCTIVELY COUPLE SIGNAL GENERATOR TO RECEIVER

ALIGNMENT

- STEP 1
ADJUST FOR MAX. 455KHZ SIGNAL
- STEP 2
ADJUST FOR MAX. 1630KHZ WITH GANG OPEN
- STEP 3
ADJUST FOR MAX. 1400KHZ WHILE ROCKING GANG
- STEP 4
ADJUST FOR MAX. 580KHZ WHILE ROCKING GANG
- STEP 5
ADJUST FOR MAX. 580KHZ WHILE ROCKING GANG


TRANSISTOR	VOLTAGES	B	E	C
TR1	1.85	2.35	7.2	
TR2	34	9	7.2	
TR3	.68	7	6.0	
TR4	0	.68	6.0	
TR5	0	.57	9.0	
TR6	0	.57	9.0	

BOTTOM VIEW OF COMPONENTS




TRANSISTORS

TRANSFORMERS




NOTES


- 1 UNLESS OTHERWISE NOTED CAPACITORS LESS THAN 1 = MF CAPACITORS MORE THAN 1 = PF RESISTORS IN OHMS, K=1,000 M=1,000,000
- 2 VOLTAGES ARE POSITIVE WITH RESPECT TO GROUND UNDER NO SIGNAL CONDITIONS AND VOLUME CONTROL MINIMUM.
- 3 HEAVY LINE IS SIGNAL PATH FROM ANTENNA TO SPEAKER

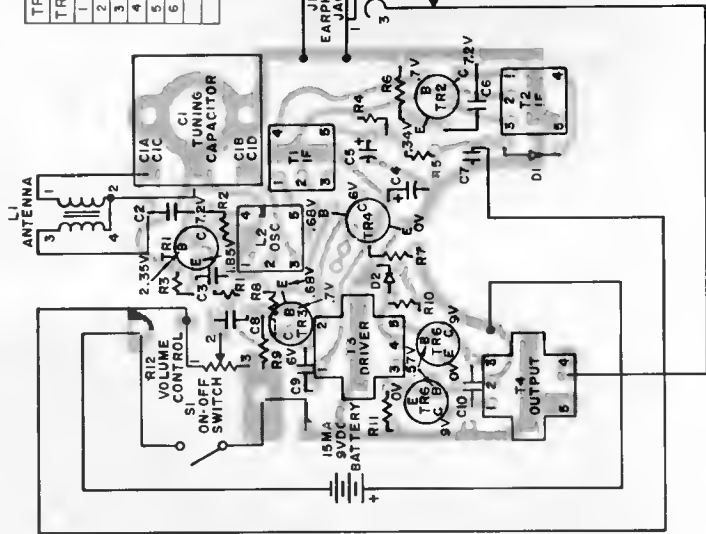

WIRING DIAGRAM (BOTTOM VIEW)

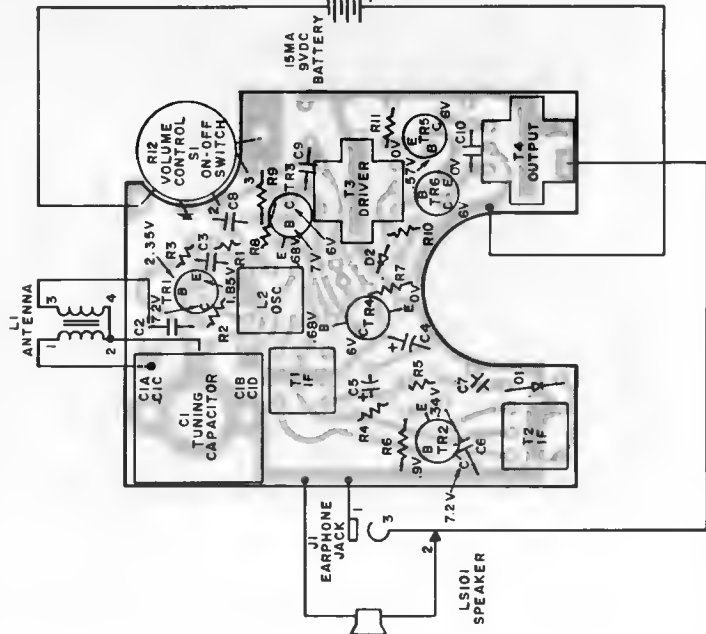

COMPONENT LAYOUT (TOP VIEW)

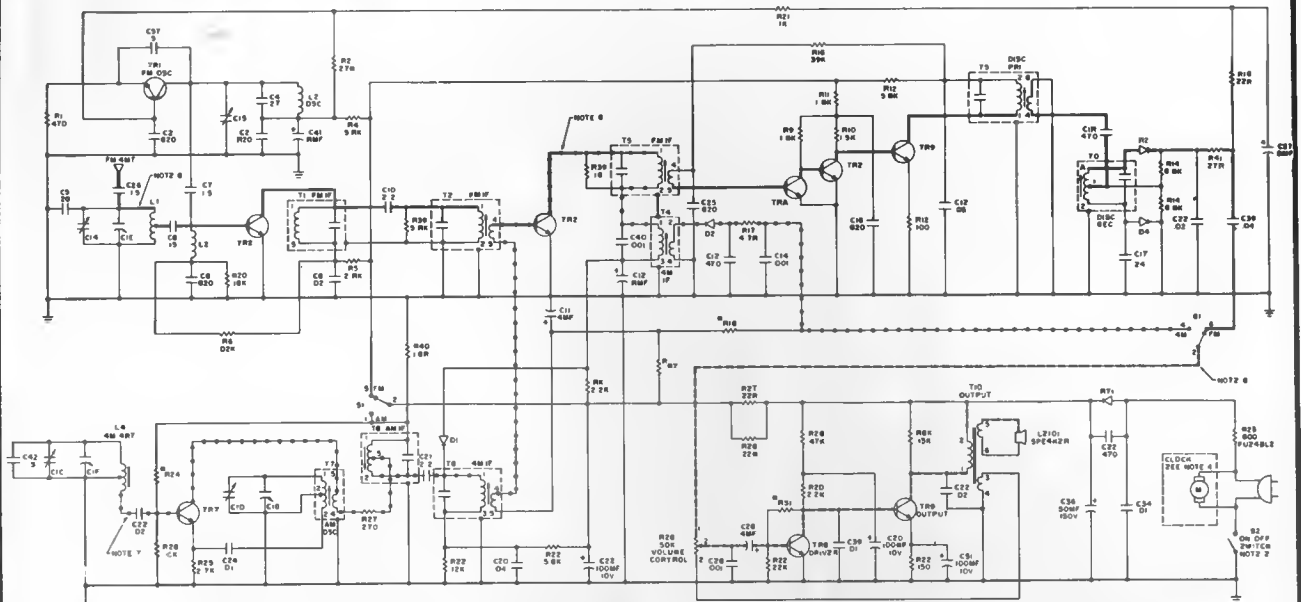

BOTTOM VIEW OF COMPONENTS

TRANSISTORS




TRANSFORMERS



TRANSISTOR VOLTAGES			
TR	E	B	C
FM AM FM AM FM AM	1 20 D	20 C	2 44 D
1 2 D	0 1	3 1 C	2 24 D
3 0 D	1 3	12 2	102 62
4 0 D	7 2	7 2	0
1 3 D	7 1	0	81 2
6 1 D	81	0	3 3 D
7 1 D	20 D	1 53 D	6 11
8 1 D	0 1	24 1	29 34 1 5
5 34 2	4 34 2	1 5 2	2 6 2

NOTES


- UNLESS OTHERWISE NOTED CAPACITORS LESS THAN 1 - MF CAPACITORS MORE THAN 1 - MMF RESISTORS IN OHMS. R-1000
- VOLTAGES ARE POSITIVE WITH RESPECT TO GROUND UNDER NO SIGNAL CONDITIONS AND VOLUME CONTROL MINIMUM
- REFER TO TRANSISTOR SUBSTITUTION CHART
- USED ON CLOCK SETS ONLY
- 52 IS INTEGRAL WITH CLOC6 ON CLOCK SETS 52 IS INTEGRAL WITH R36 ON TABLE SETS
- LINE SHOWN (---) IS FM SIGNAL PATH FROM FM ANTENNA TO S1 6
- LINE SHOWN (---) IS AM SIGNAL PATH FROM AM ANTENNA TO S1 A
- SIGNAL PATHS SUPERIMPOSED IN SOME AREAS (---)
- LINE SHOWN (---) IS COMMON AUDIO PATH FROM S1 S TO SPEAKER

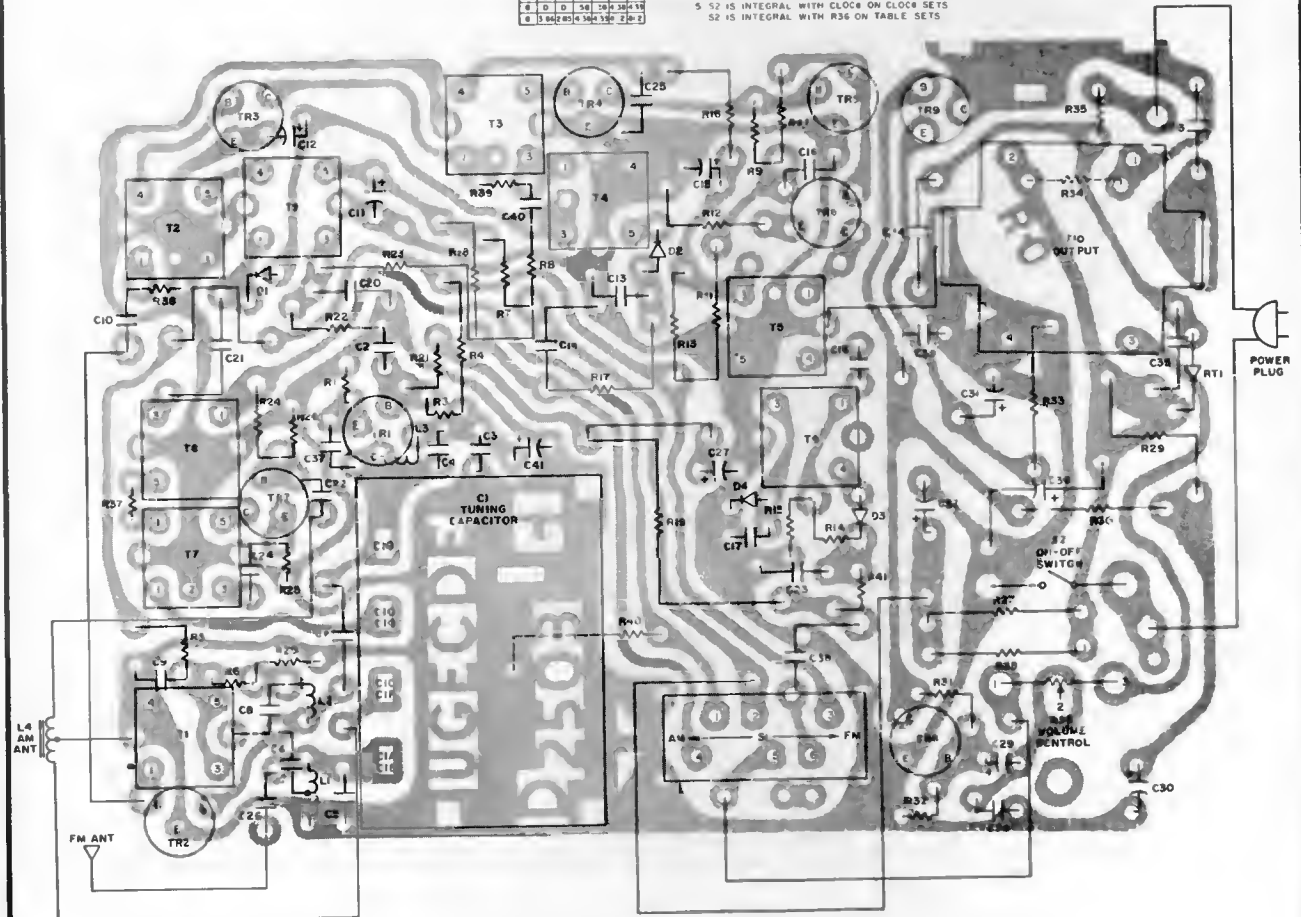


WIRING DIAGRAM (BOTTOM VIEW)

T20E, F, G; T30G, H Amplifiers


**POWER SUPPLY CHASSIS
BOTTOM VIEW**

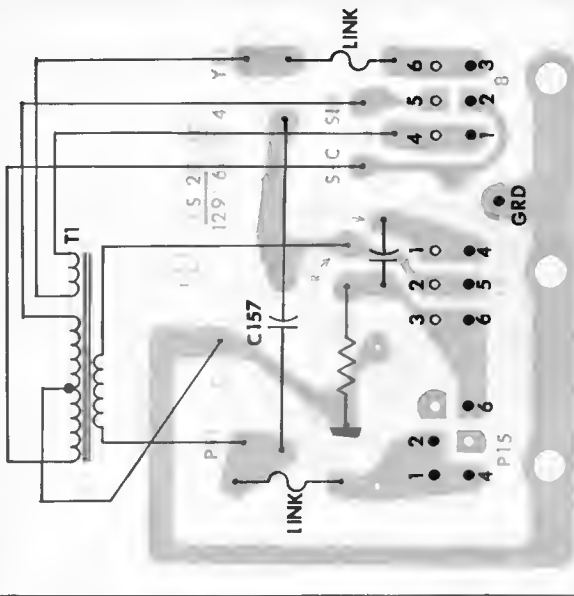

BASS BOOST SWITCH



**T20/T30 AMPLIFIER
COMPONENT BOARD
BOTTOM VIEW**

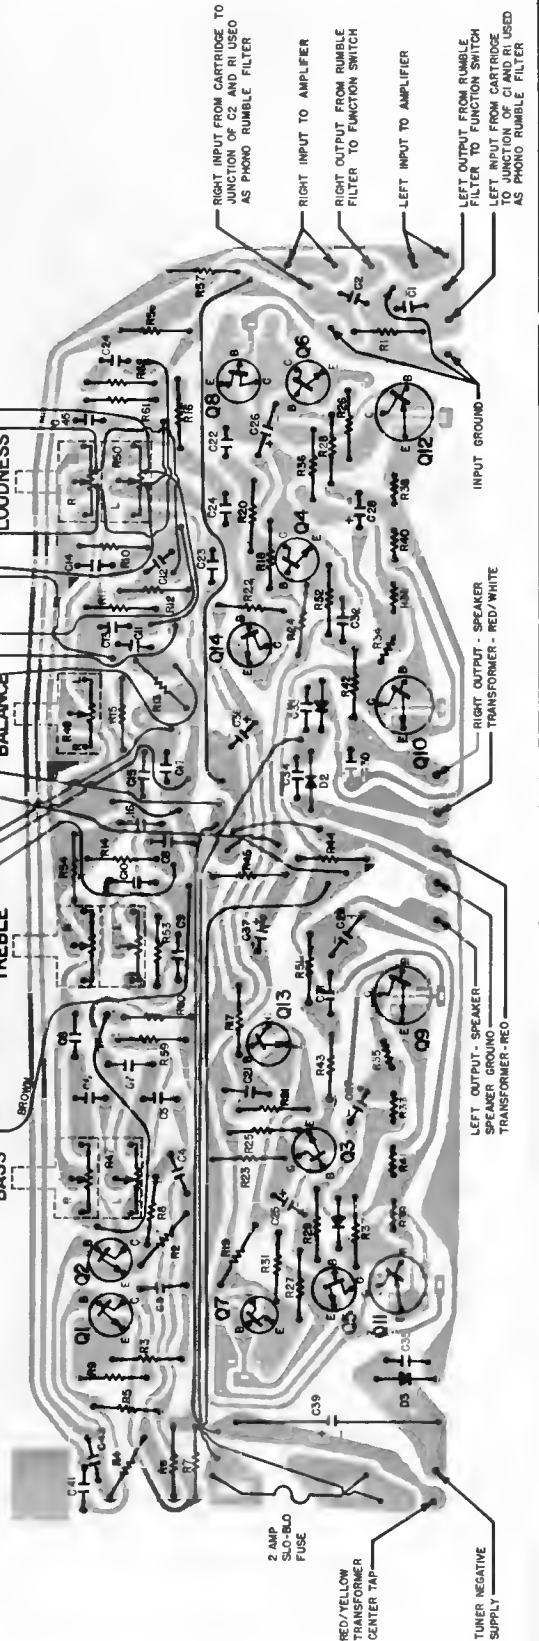


* T20 PP - J15 PINS 3,4 ARE MALE

EARLY PRODUCTION WITH SEPARATE POWER SUPPLY CHASSIS

T20, 30 PP* POWER SUPPLY CHASSIS



GENERAL ELECTRIC

T20E, F, G T30G, H AMPLIFIERS

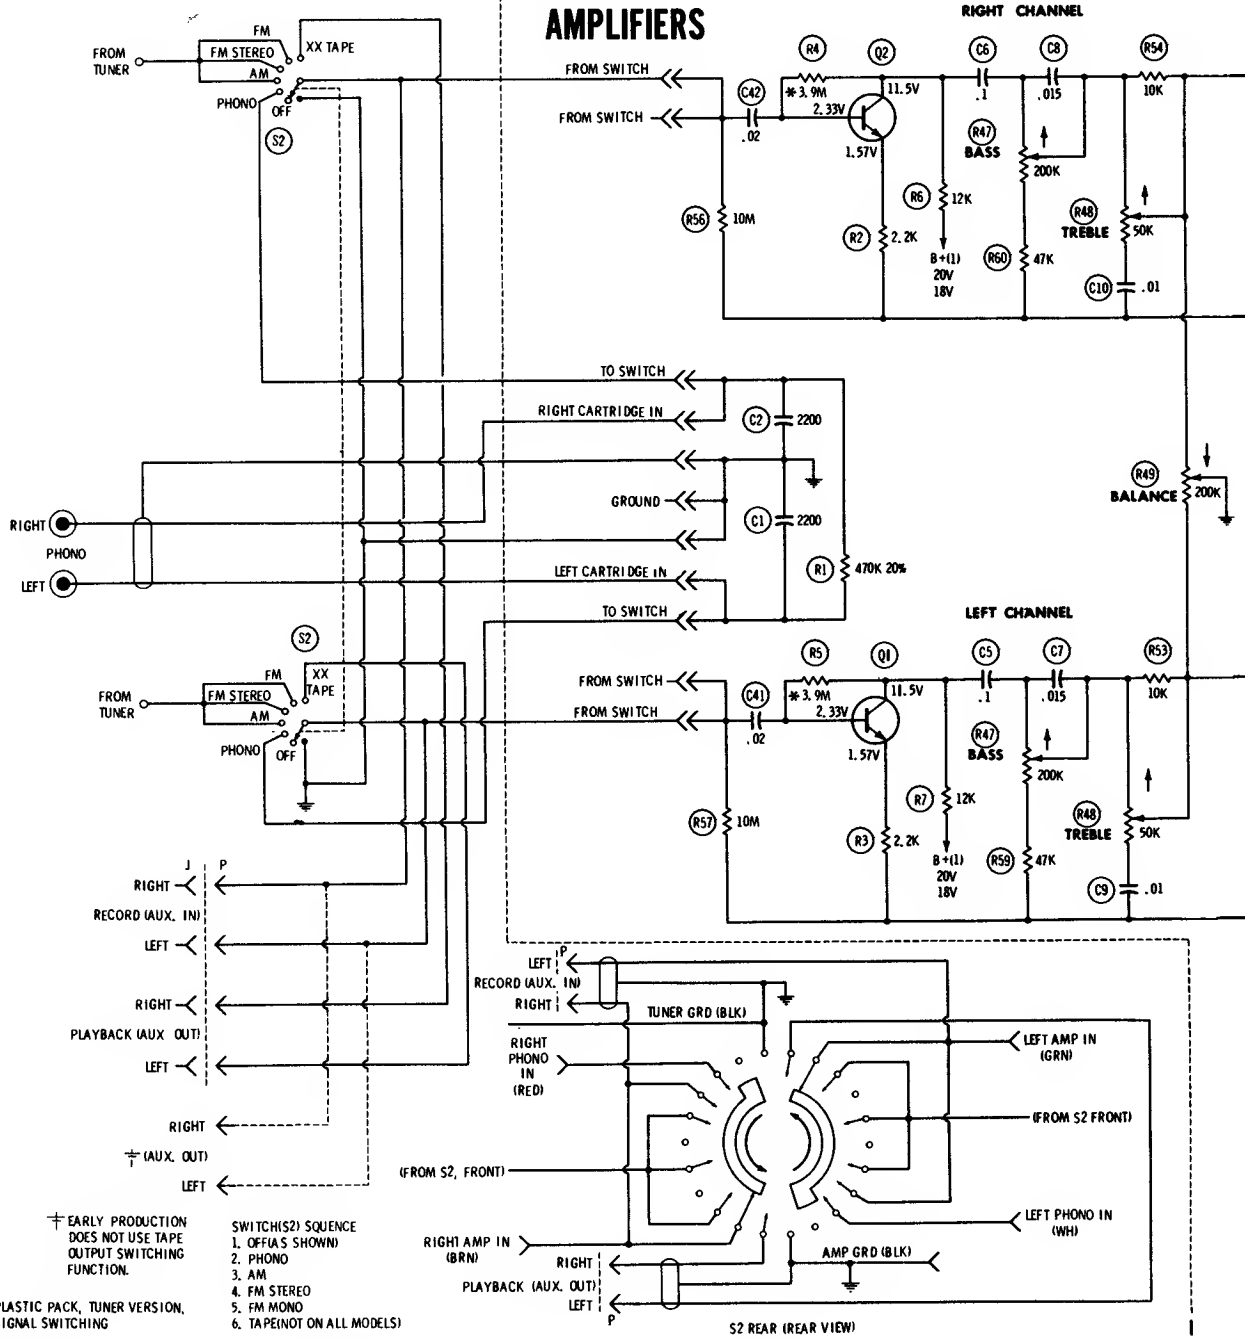

† EARLY PRODUCTION DOES NOT USE TAPE OUTPUT SWITCHING FUNCTION.
SWITCH(S2) SEQUENCE
1. OFF(A.S. SHOWN)
2. PHONO
3. AM
4. FM STEREO
5. FM MONO
6. TAPE (NOT ON ALL MODELS)

PLASTIC PACK, TUNER VERSION, SIGNAL SWITCHING

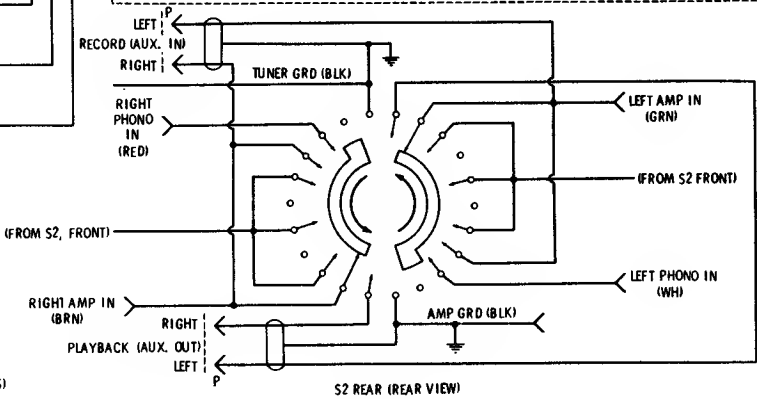


P DENOTES PLUG
J DENOTES JACK
P.J VIEWED DISCONNECTED
-> O DENOTES MALE CONNECTOR
-< O DENOTES FEMALE CONNECTOR

POWER SUPPLY CHASSIS

+ T30 - J8 PIN 2 FEMALE
-- R151 ALTERNATE POSITION

GENERAL ELECTRIC


T20E, F, G; T30G, H Amplifiers

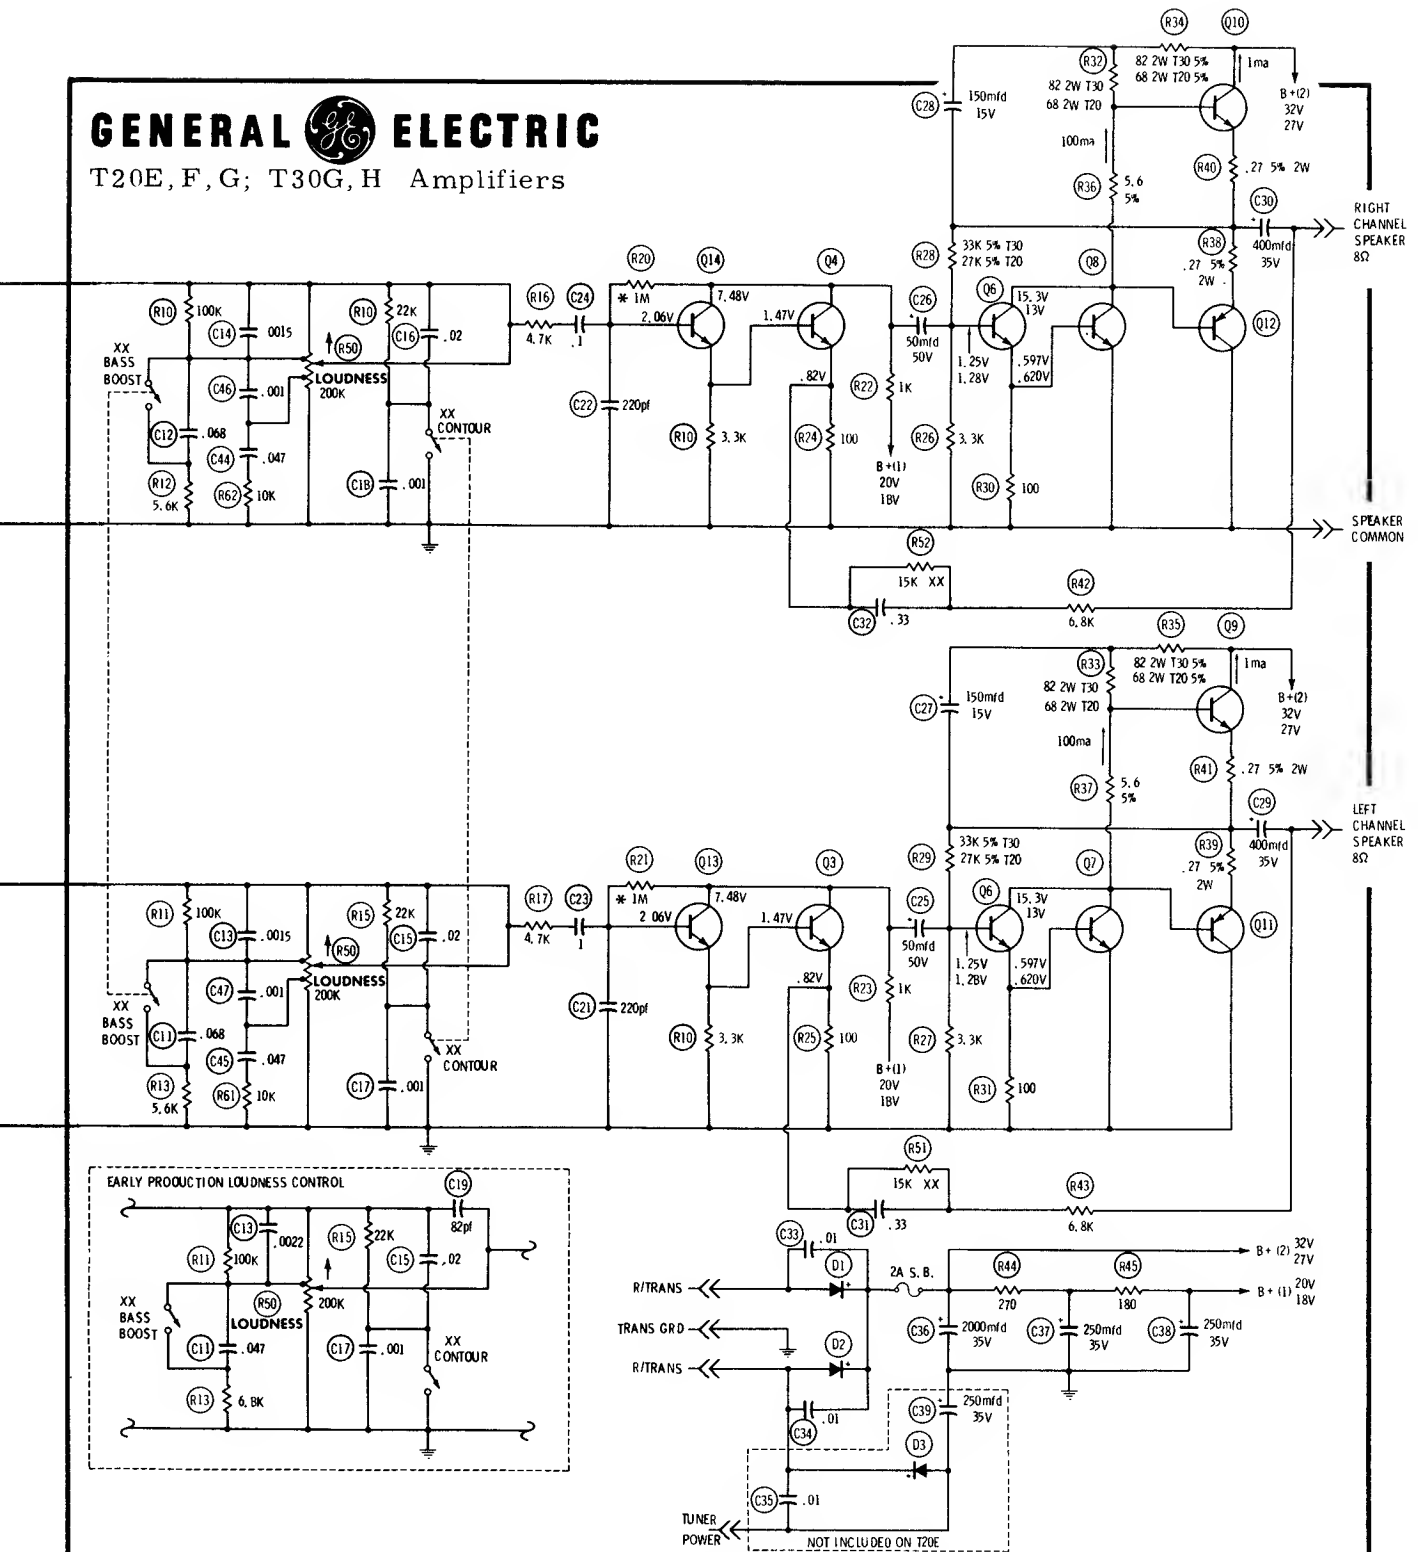

UNLESS OTHERWISE NOTED:

RESISTORS SHOWN ARE 1/2 WATT, 10%; K - 1000Ω; M - 1 MEGOHM.
 CAPACITOR VALUES LESS THAN 1 IN mfd, MORE THAN 1 IN pf.
 * DENOTES LOW NOISE TYPE RESISTOR.
 P DENOTES PLUGS.
 WHERE TWO VOLTAGES ARE SHOWN, THE UPPER READINGS ARE T30,
 LOWER READINGS ARE T20.
 J DENOTES JACKS
 MEASUREMENTS SHOWN MAY DEVIATE 10%.
 ARROWS ON POTENTIOMETERS INDICATE CLOCKWISE ROTATION.

ALL VOLTAGES AND CURRENTS SHOWN ARE TYPICAL WITH NO SIGNAL
 APPLIED TO CIRCUIT
 DC VOLTAGES MEASURED WITH 10 MEGOHM ELECTRONIC DC VOLTMETER.
 LINE VOLTAGE MAINTAINED AT 120 VAC, 60 CYCLES.
 XX DENOTES OMISSION ON SOME MODELS.
 ARROW DENOTES TYPICAL NO SIGNAL CURRENT.
 → DENOTES MALE CONNECTOR.
 ← DENOTES FEMALE CONNECTOR




Q9, Q10



Q1 THRU Q6, Q13 AND Q14



Q7, Q8



Q11, Q12

GENERAL ELECTRIC TU200, TU205 AND TU210


SENSITIVITY:

AM - 250 uv/m FM - 7 uv Antenna Voltage for 30db quieting
DESCRIPTION
Q1 FM Mixer
Q2 1st FM IF, 1st AM IF
Q3 2nd FM IF, 2nd AM IF
Q4 3rd FM IF
Q5 FM Oscillator
Q6 AM Converter
Q8 AM RF Amplifier
Q9, 10 Voltage Regulator
Q11 Stereo Indicator Amp.
Q12 38 KC Doubler
Q13 19 KC Pilot Amplifier
Q14 Composite Stereo Amp.

TRANSISTOR COMPLIANT:

SPECIFICATIONS

-22 Volts to -35 Volts @ 50ma
INPUT VOLTAGE RATING:
AM - 530 KC to 1630 KC FM - 88 MC to 108 MC
TUNING RANGE:
AM - 455 KC FM - 10.7 MC
INTERMEDIATE FREQUENCIES:
D1 - FM AGC D2, D3 - Discriminator D4 - AM Detector D5 - Voltage Regulator
DIODES:
Zener D8, D9, D10, D11 - Stereo Detector
25db Minimum @ 1 KC
FM STEREO SEPARATION:
FM STEREO FREQUENCY:
50 cps to 15 KC

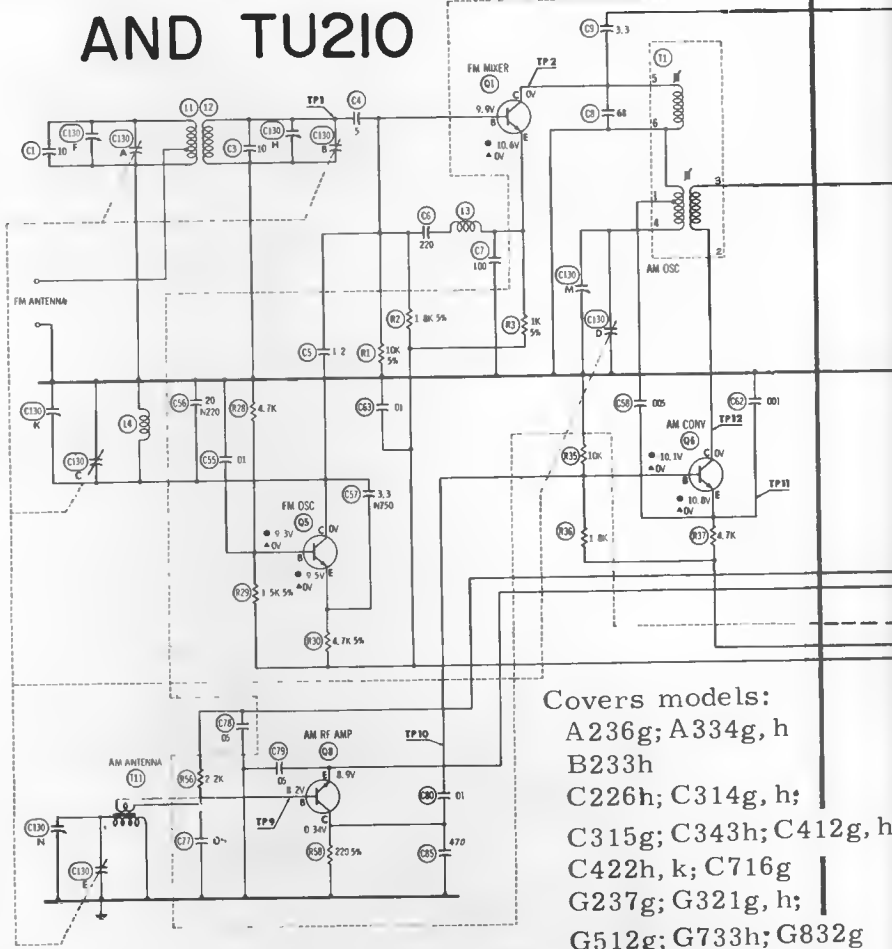


Covers models:
A236g; A334g, h
B233h
C226h; C314g, h;
C315g; C343h; C412g, h;
C422h, k; C716g
G237g; G321g, h;
G512g; G733h; G832g

TO AM ANTENNA







TO FM ANTENNA

TO AM ANTENNA

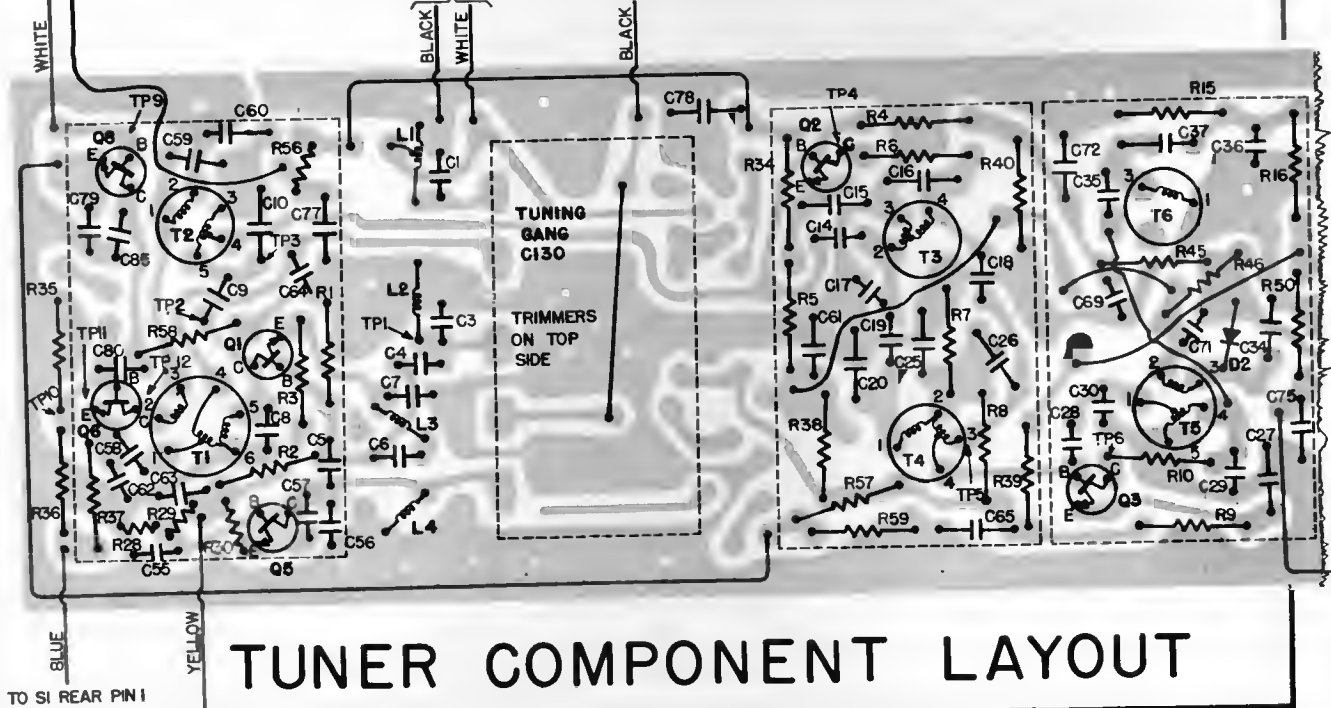


TUNER COMPONENT LAYOUT

TO SI REAR PIN 4

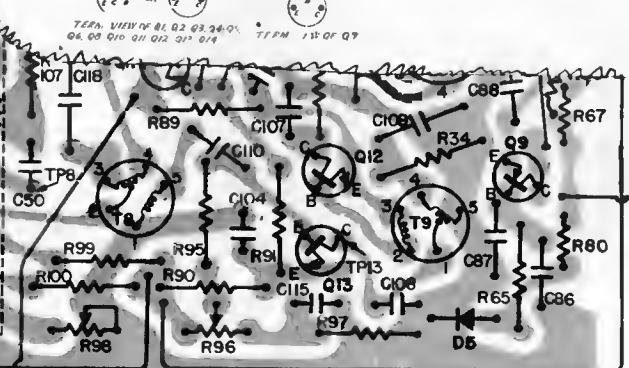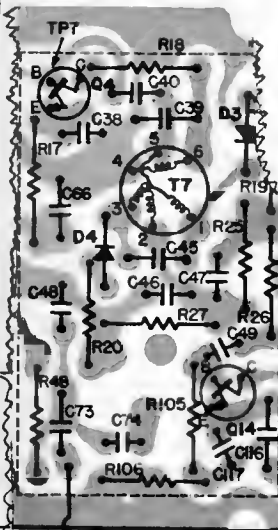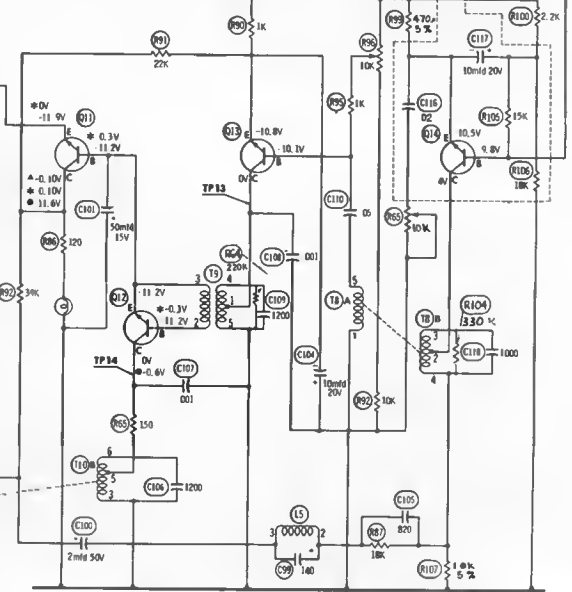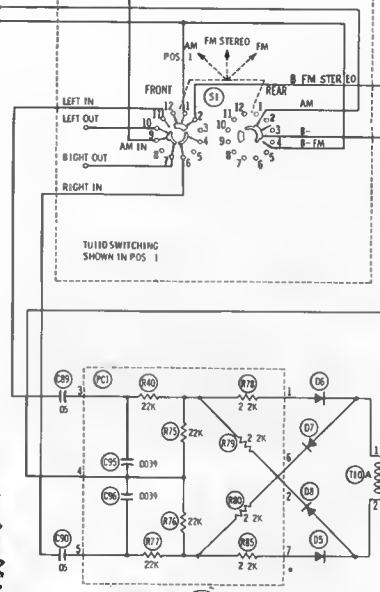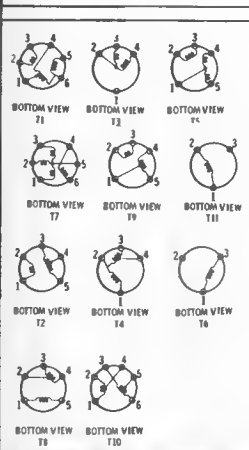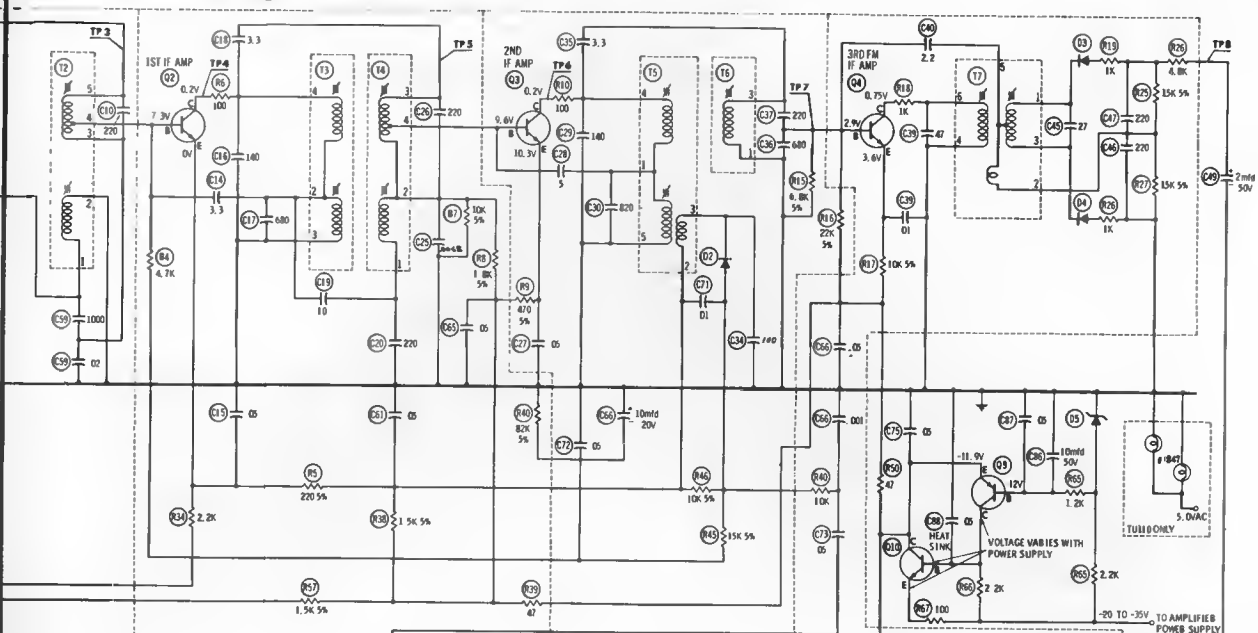

-20 TO -35V
TO AMPLIFIER
POWER SUPPLY







BOTTOM VIEW

SI FRONT PIN 9 TO SI FRONT PIN 2

TU200, TU205 AND TU210 TUNER




Gibson Electronics MODEL GA-95 RVT AMPLIFIER

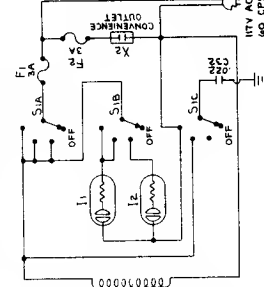

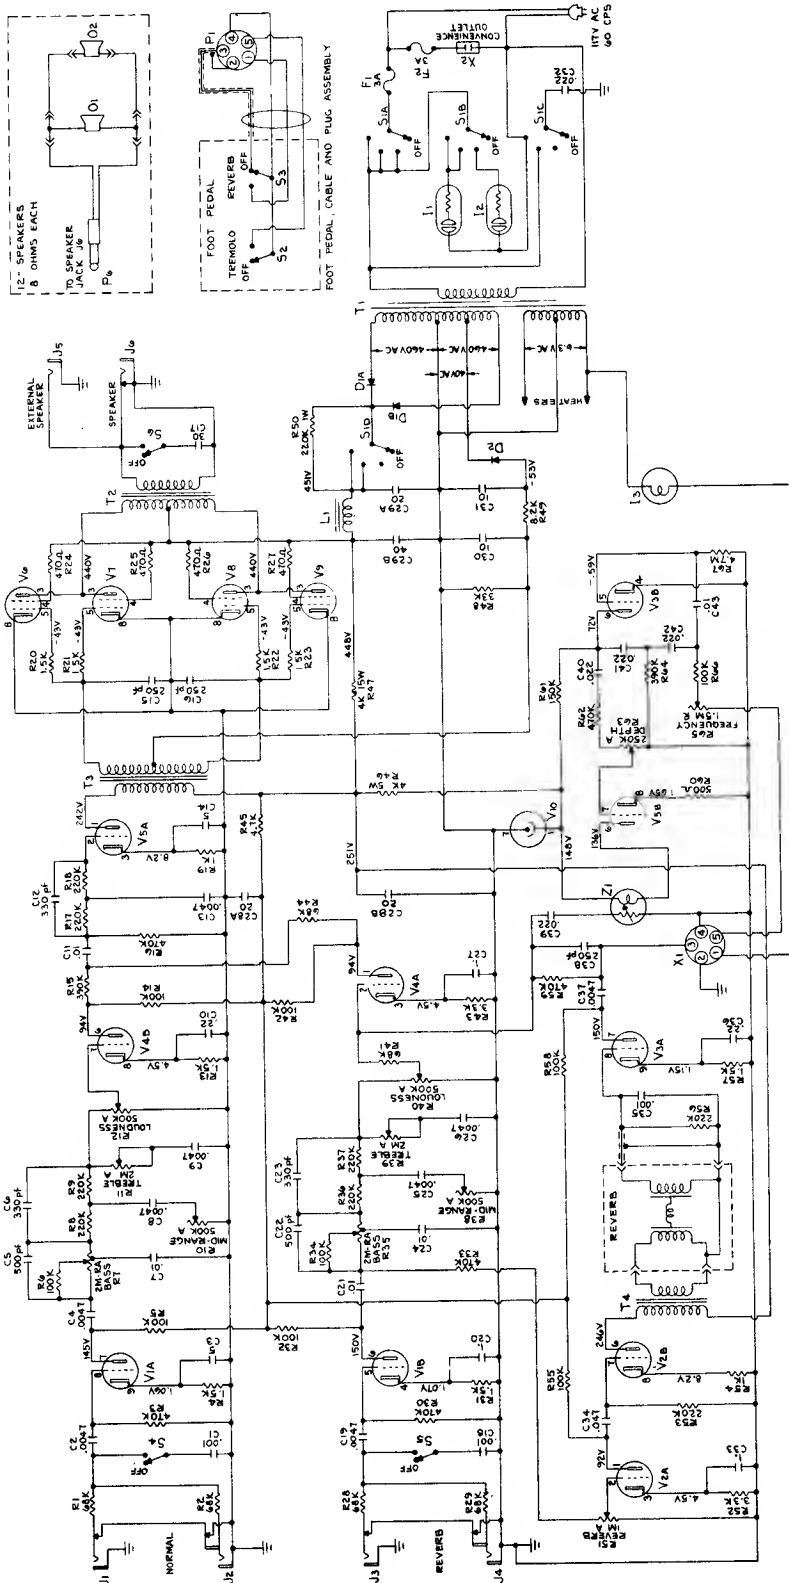


Parts list:


- | | | | | |
|-------------|--------------------------|----------|--------------------------------|---------------|
| T1 | Power Transformer | TF-102P | Diodes - 1200 PIV | D1, D2 |
| T2 | Output Transformer | TF-501-C | Diode - 200 PIV | D1, D2 |
| T3 | PP Driver Transformer | TF-100D | Foot Pedal Socket | OW-78P00-5 |
| T4 | Reverb Transformer | TF-8400 | Convenience Outlet | OW-303 |
| L1 | Filter Choke | TF-100C | Control - 2 seg audio w/switch | OW-78P00-5 |
| S1, B, C, D | Switch | SW-78A-1 | Control - 500K audio | OW-4005-1 |
| S2 | Switch SPST | SW-82A03 | Control - 250K audio | OW-4007 |
| S3 | Switch SPST | SW-82A22 | Control - 2 seg, audio | OW-4008 |
| S4, S5 | Switches DPDT Slide | SW-129 | Control - 1 meg, audio | OW-511-3702-1 |
| S6, S7 | Switches DPDT Slide | SW-129 | Control - 1 meg, audio | OW-511-3701-1 |
| S8, S9 | Switches DPDT Slide | SW-129 | Control - 1.5 meg, RA | OW-511-3701-1 |
| S10 | Pilot Light (Red) | PL-37R | Control - 2 seg, RA | OW-511-3702-1 |
| S11 | Pilot Light (Amber) | PL-38A | Control - 2 seg, RA | OW-511-3702-1 |
| S12 | Pilot Light (Red) w/clip | PL-38A | Speakers - 12" 8 ohms each | S-2001 |
| S13 | Pilot Light (Red) w/clip | PL-38A | | |

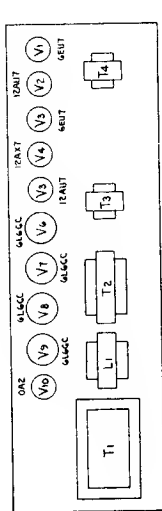

Magnavox R266 SERIES AM RADIO CHASSIS

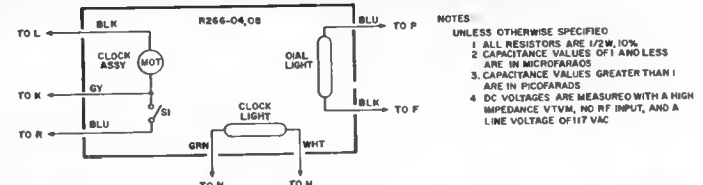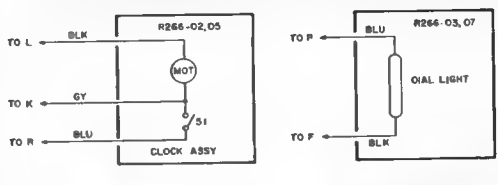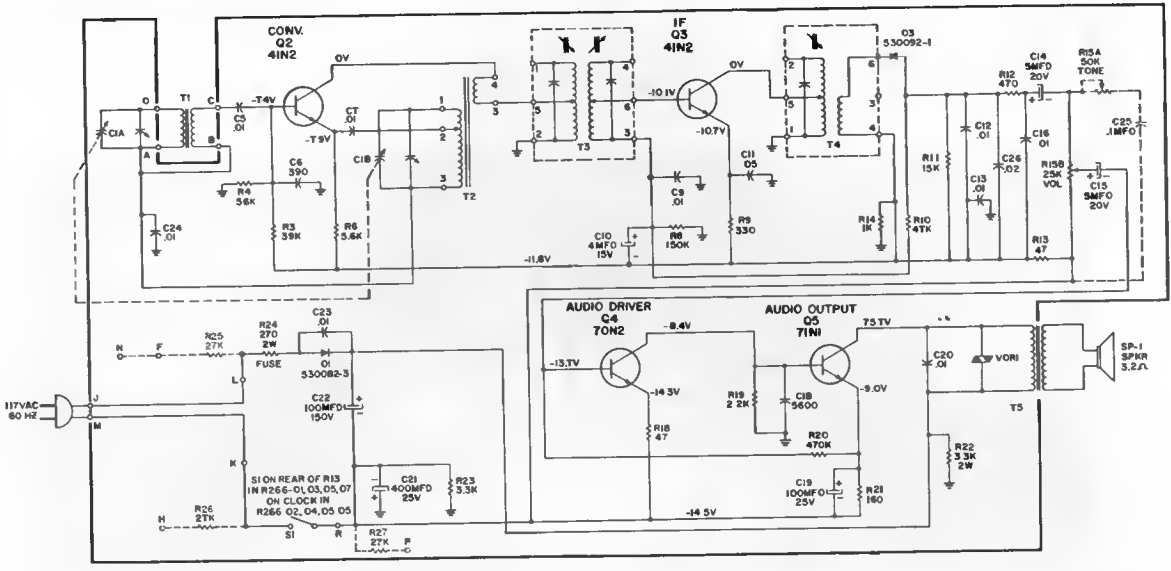


CIRCUIT BOARD LAYOUT
(VIEWED FROM COPPER SIDE)

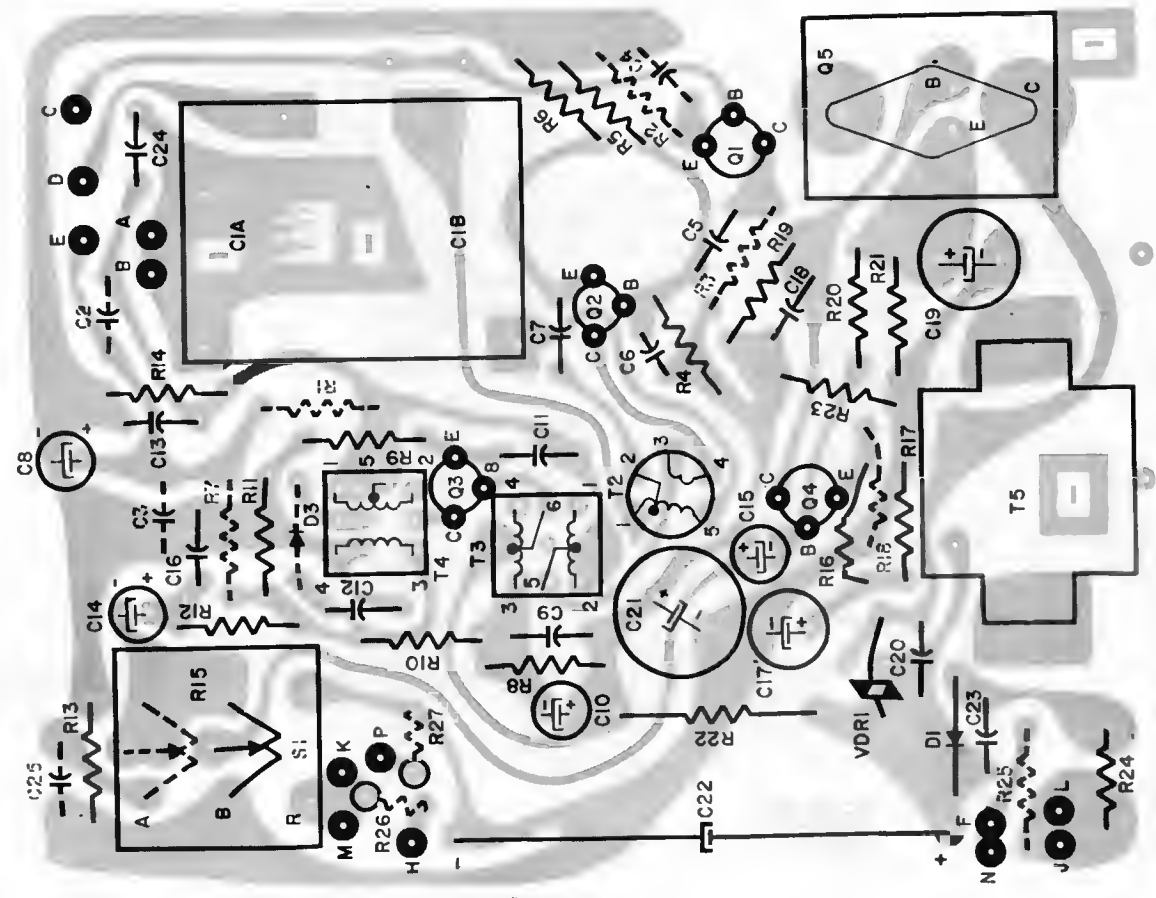


Intermediate Frequency

455 KHz

PRINTED CIRCUIT BOARD LAYOUT (VIEWED FROM COPPER SIDE)

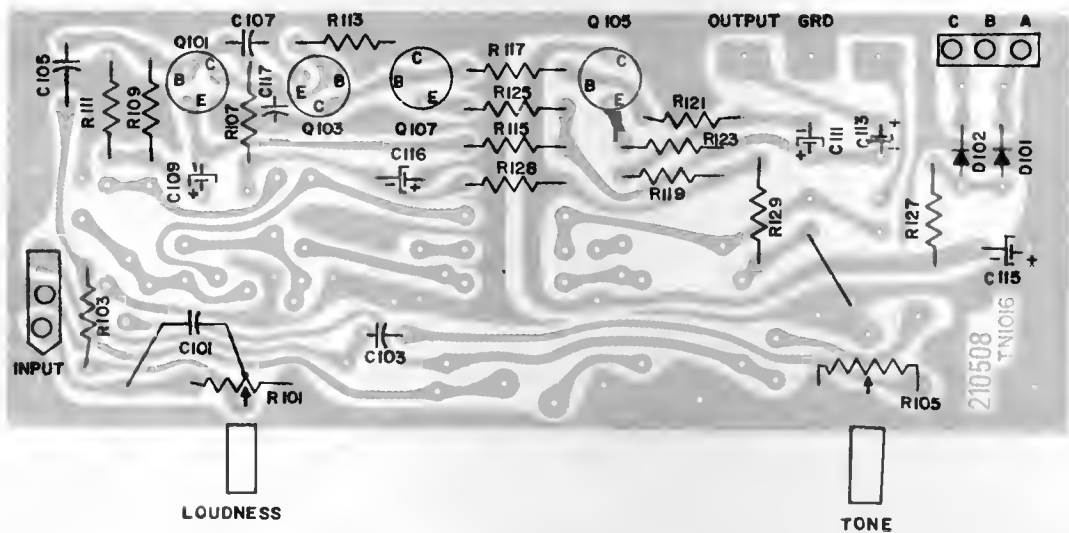


SCHEMATIC DIAGRAM

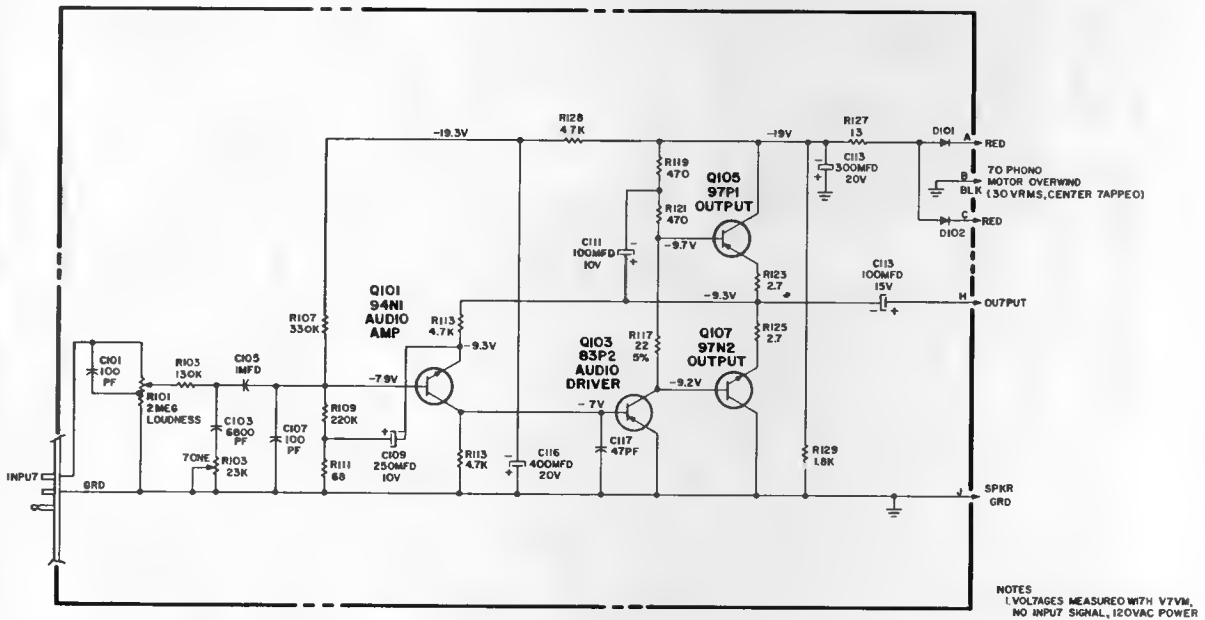

NOTES
1. VOLTAGES MEASURED WITH 177VM.
NO INPUT SIGNAL, 120VAC POWER

Magnavox



IR1000 TRANSISTOR PORTABLE RADIO

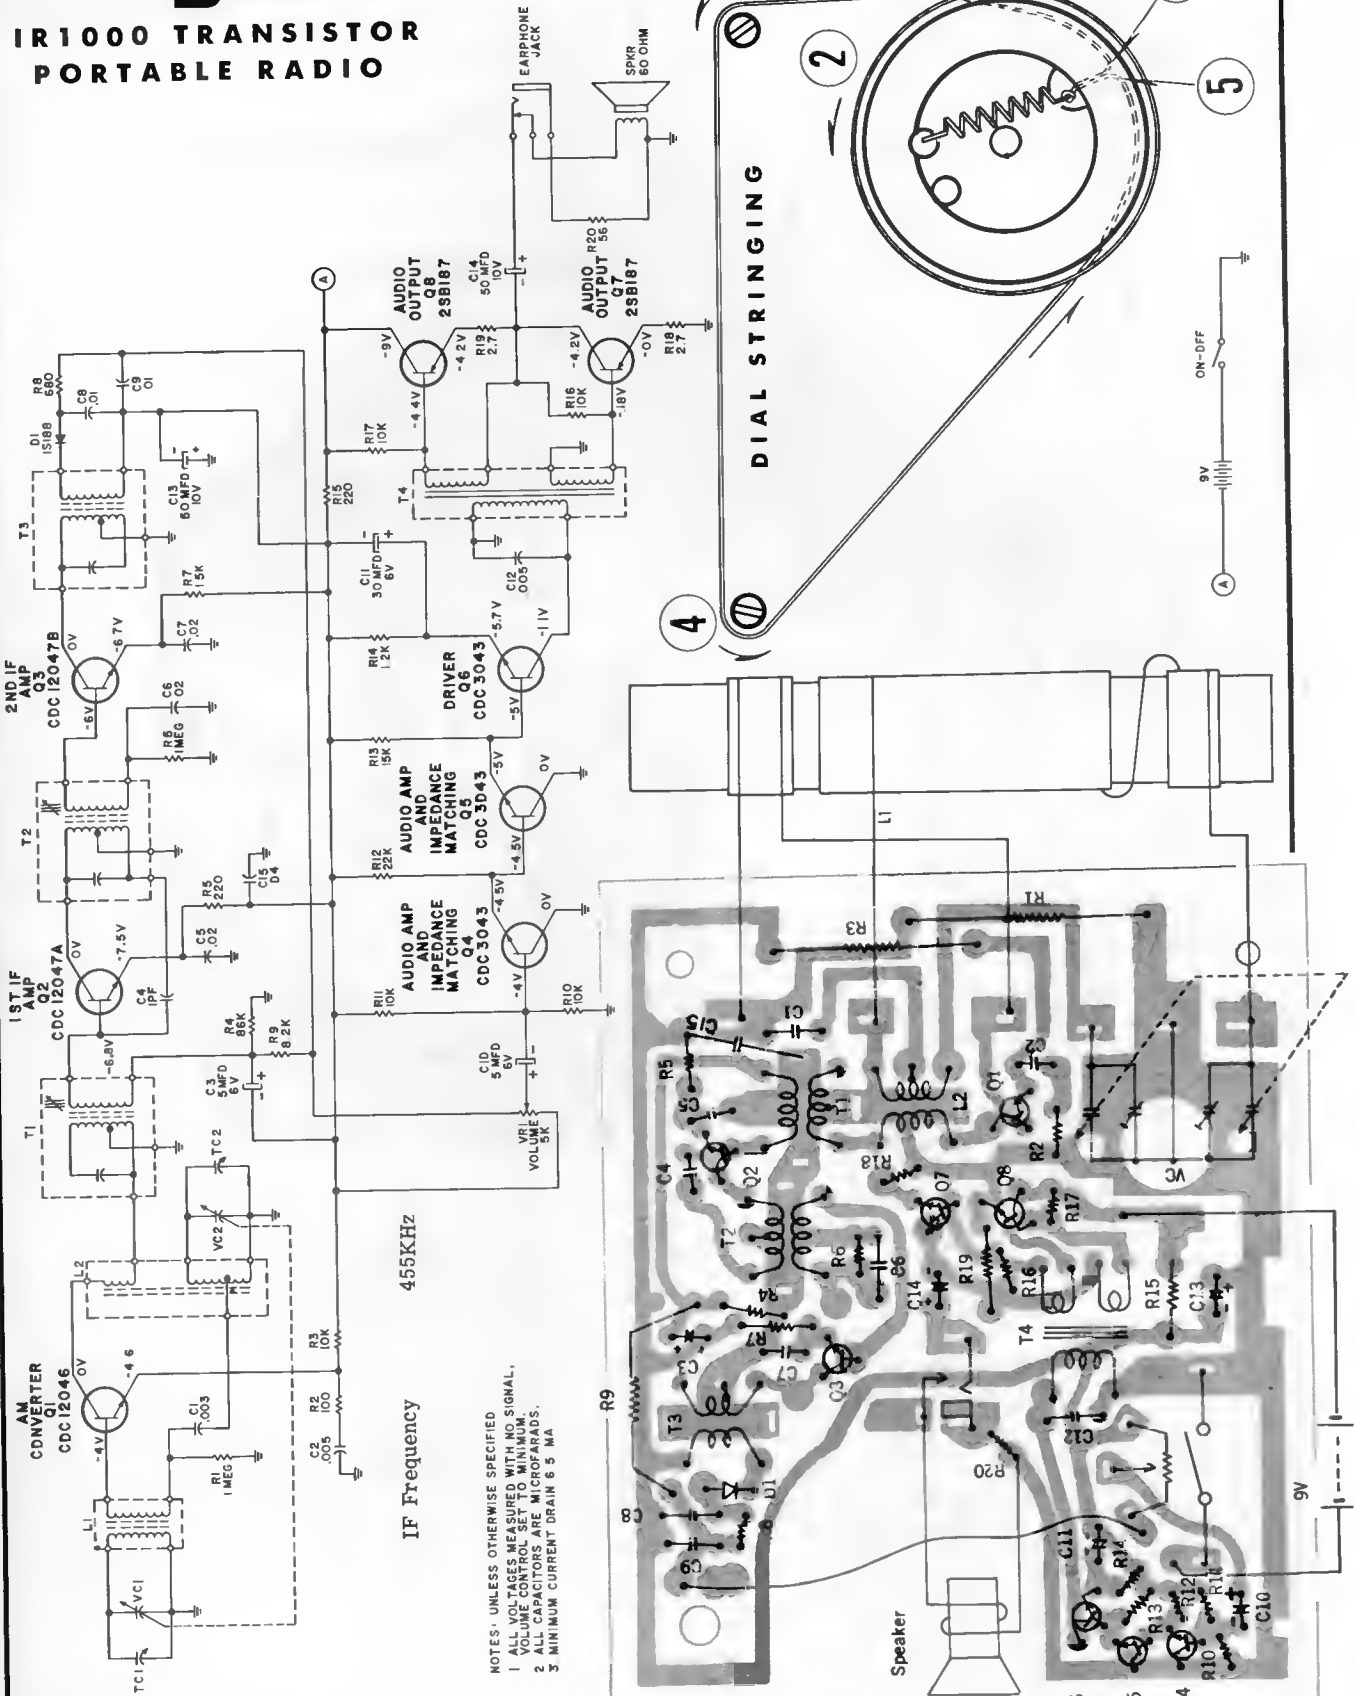

NOTES: UNLESS OTHERWISE SPECIFIED
 1 ALL VOLTAGES MEASURED WITH NO SIGNAL.
 2 VOLUME CONTROL SET TO CENTER.
 3 ALL CAPACITORS ARE MICROFARADS.
 4 MINIMUM CURRENT DRAIN 5 MA


Magnavox

1R1002 AM SOLID-STATE RADIO

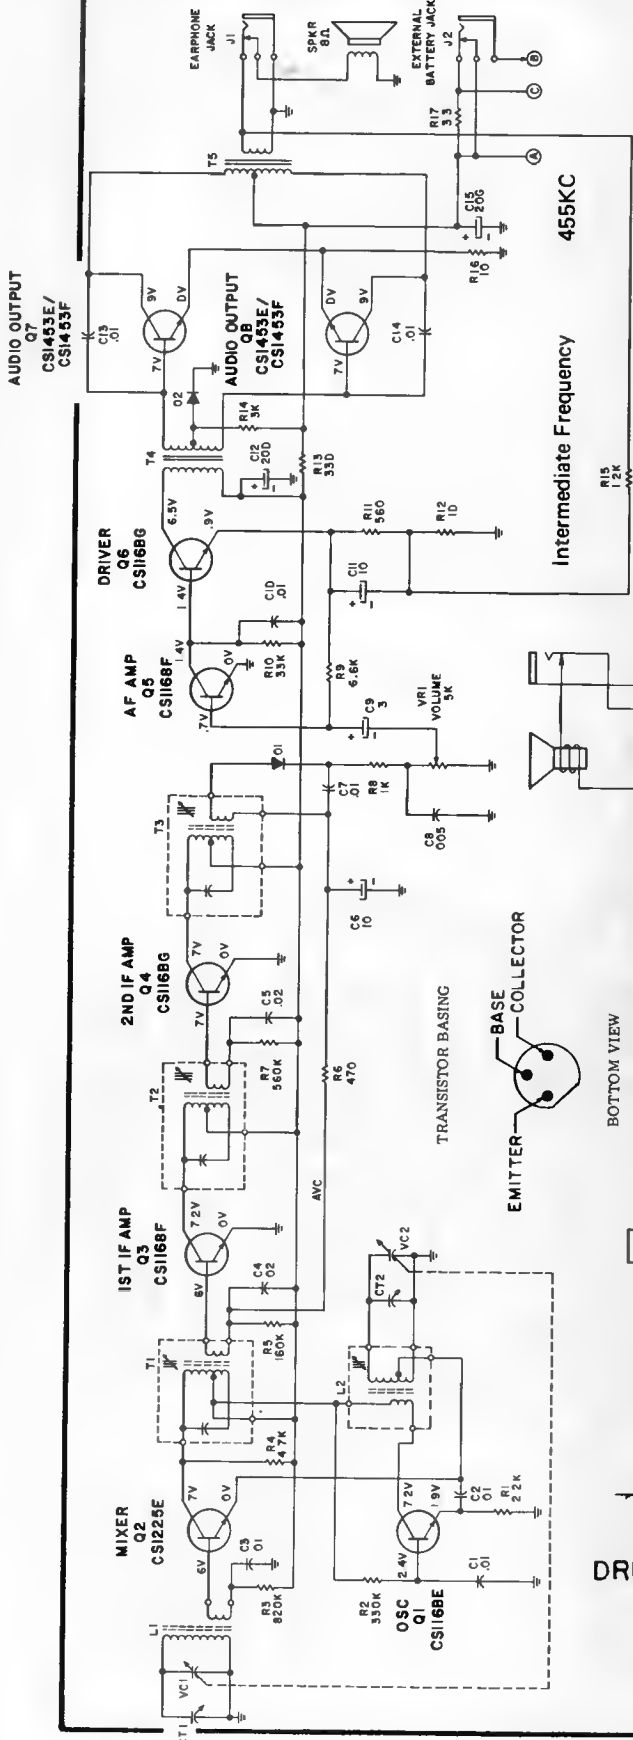

- NOTES:
 UNLESS OTHERWISE SPECIFIED
 1 ALL CAPACITANCE VALUES ARE IN MFD'S
 2 ALL VOLTAGES POSITIVE WITH RESPECT TO GROUND.
 3 MINIMUM CURRENT DRAIN IS 5MA.


CIRCUIT BOARD LAYOUT
 (VIEWED FROM COPPER SIDE)

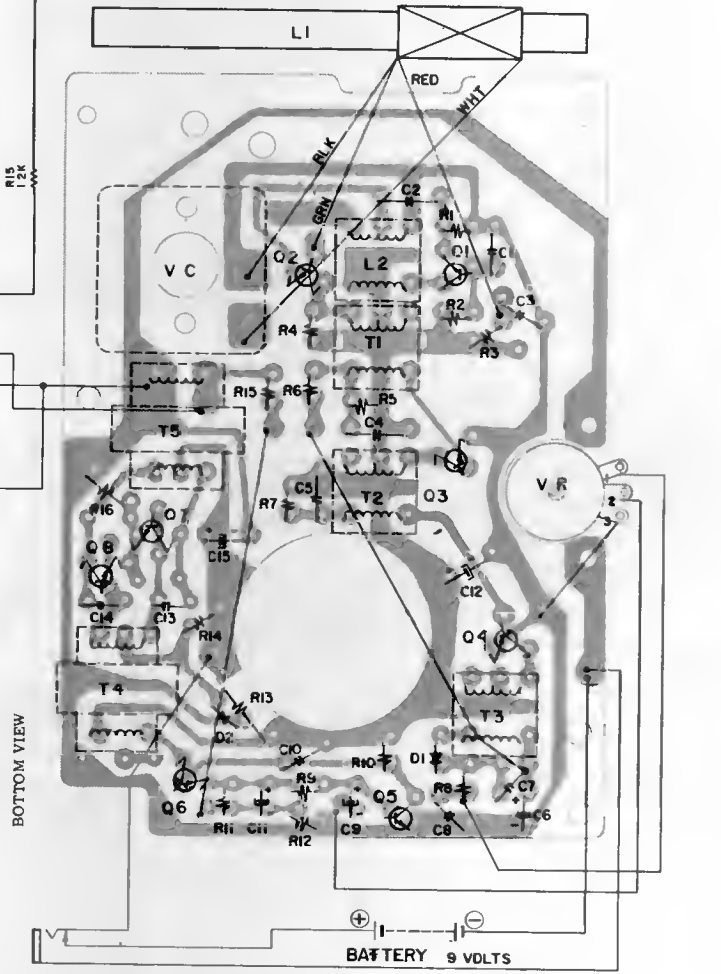

BOTTOM VIEW



TRANSISTOR BASING

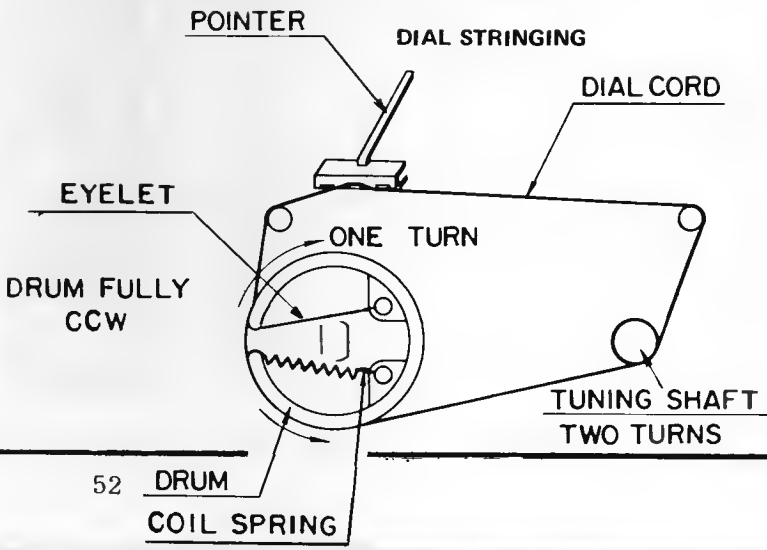

Magnavox

1R1003 AM PORTABLE RADIO

Power Source
Battery
AC

Eveready 216 or equiv.
W/External Adaptor

Frequency Range


540-1600KC

Intermediate Frequency

455KC


Current Drain


8.2MA (no signal)

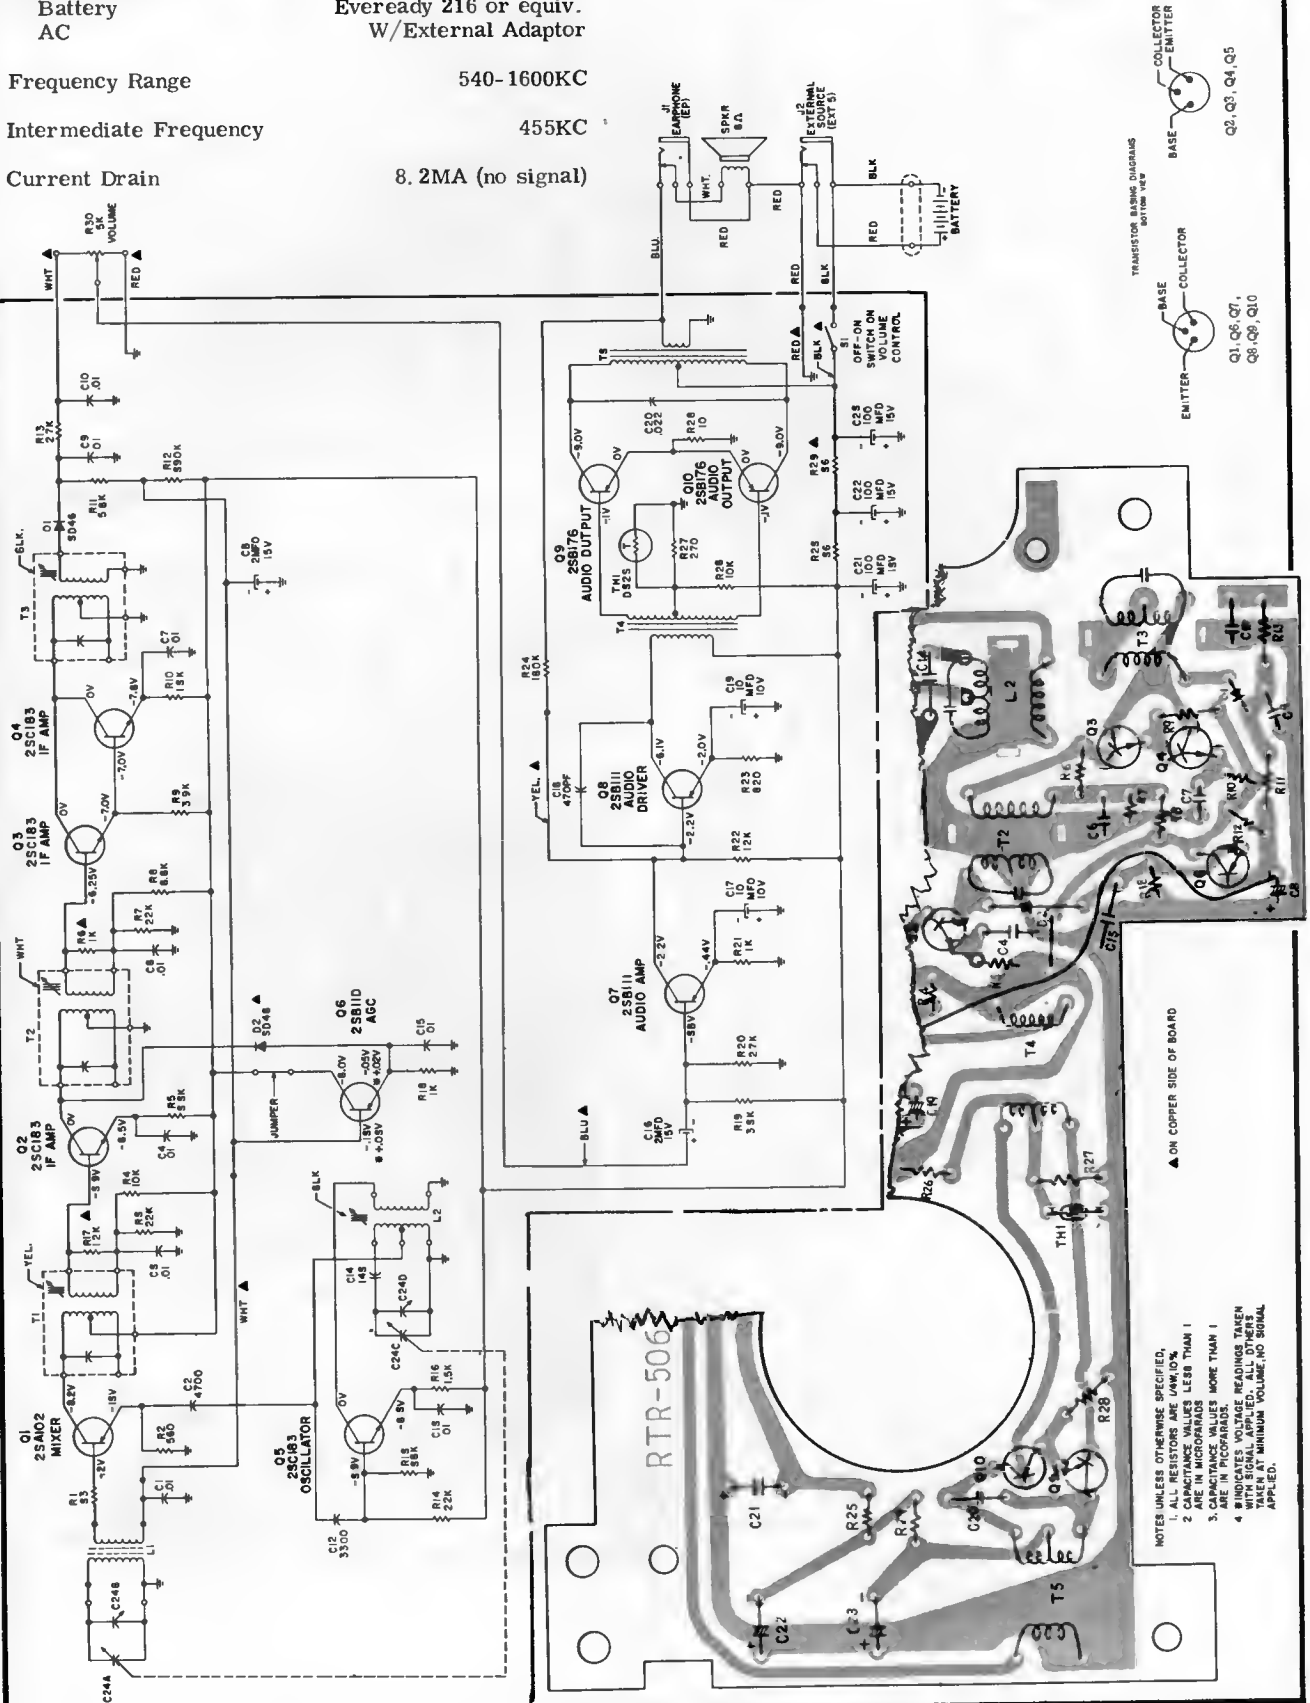

MONTGOMERY WARD GEN-1357A

Intermediate Frequency 455 KC

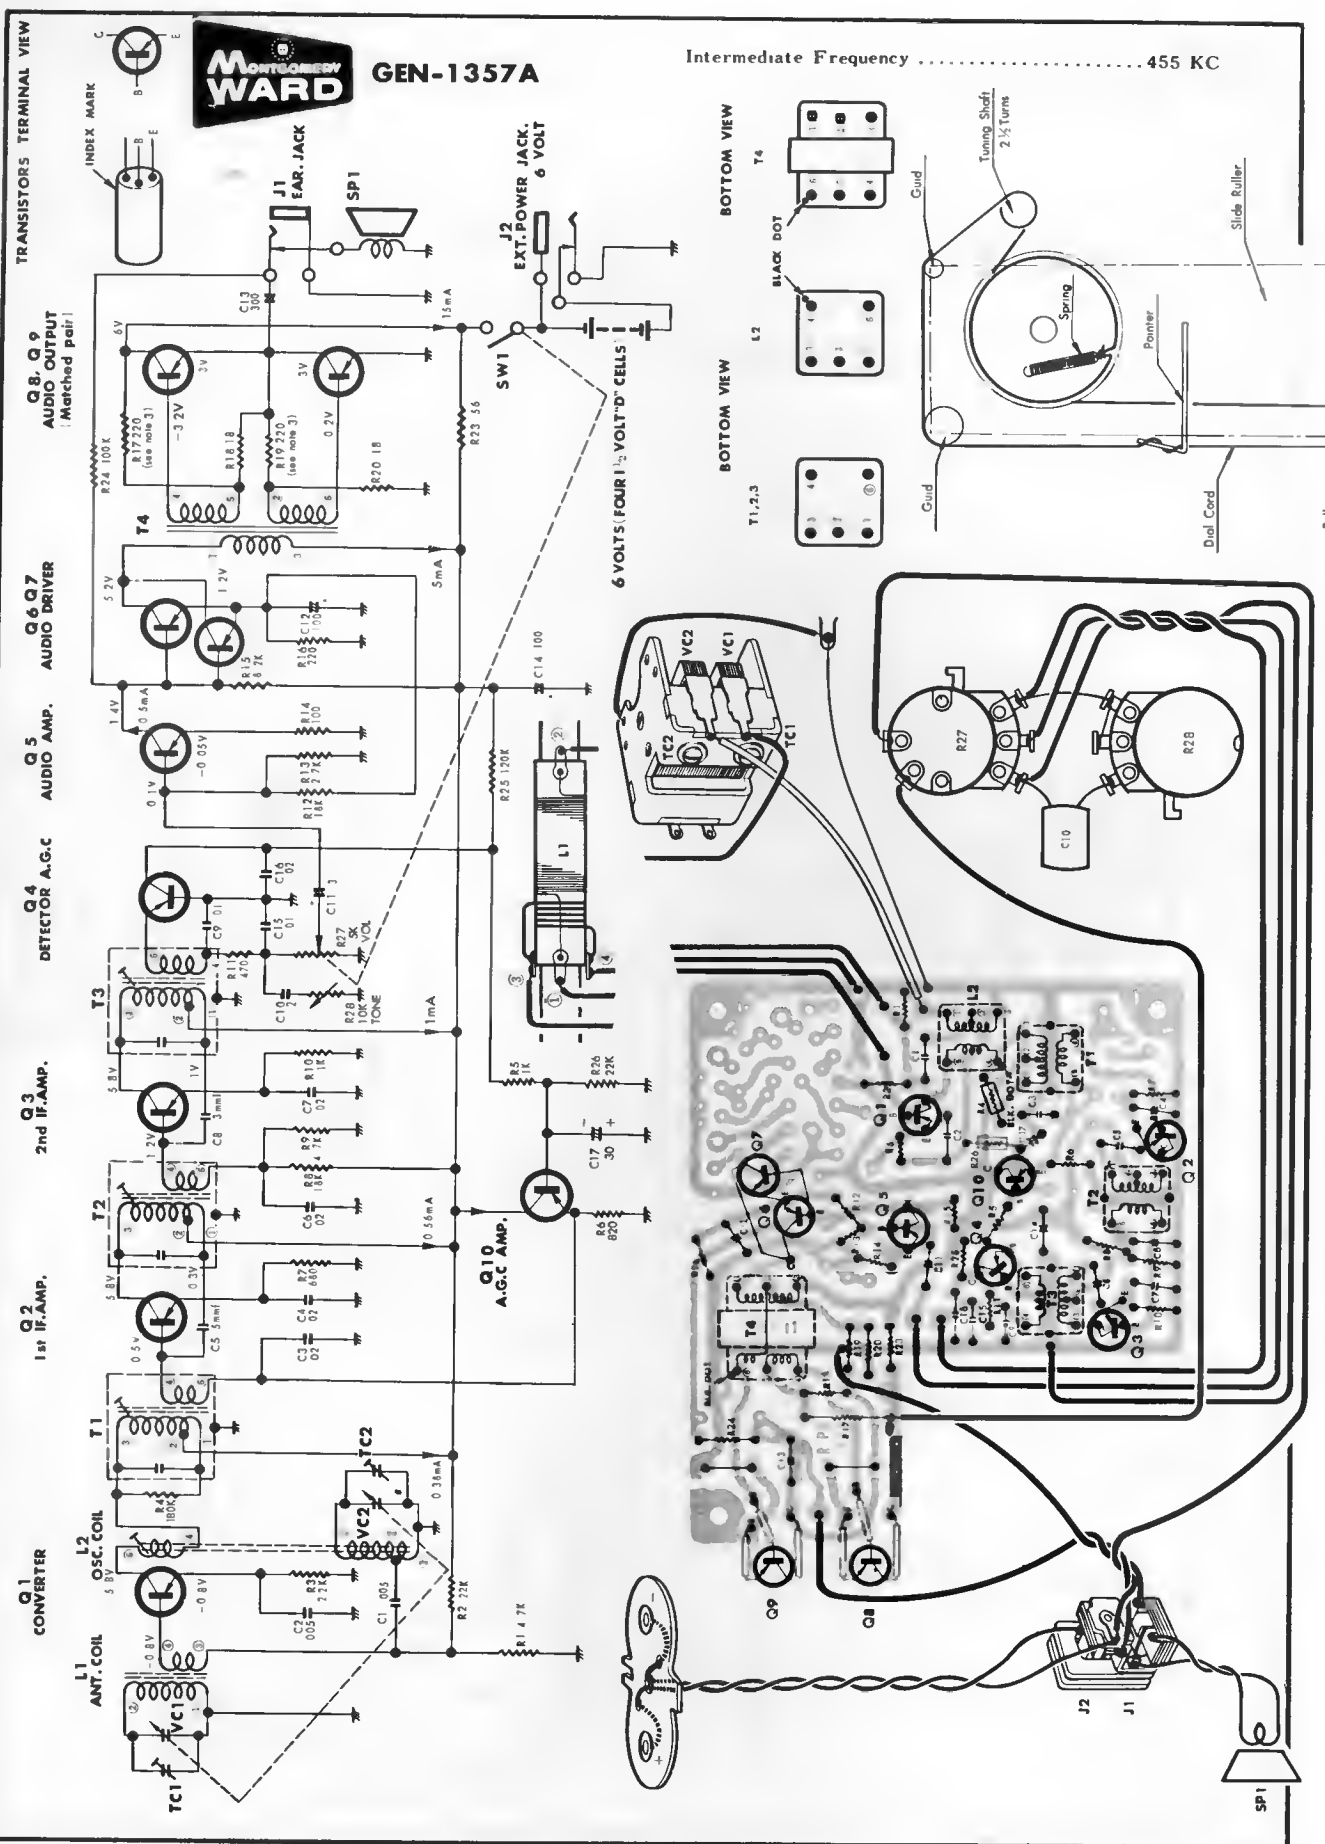


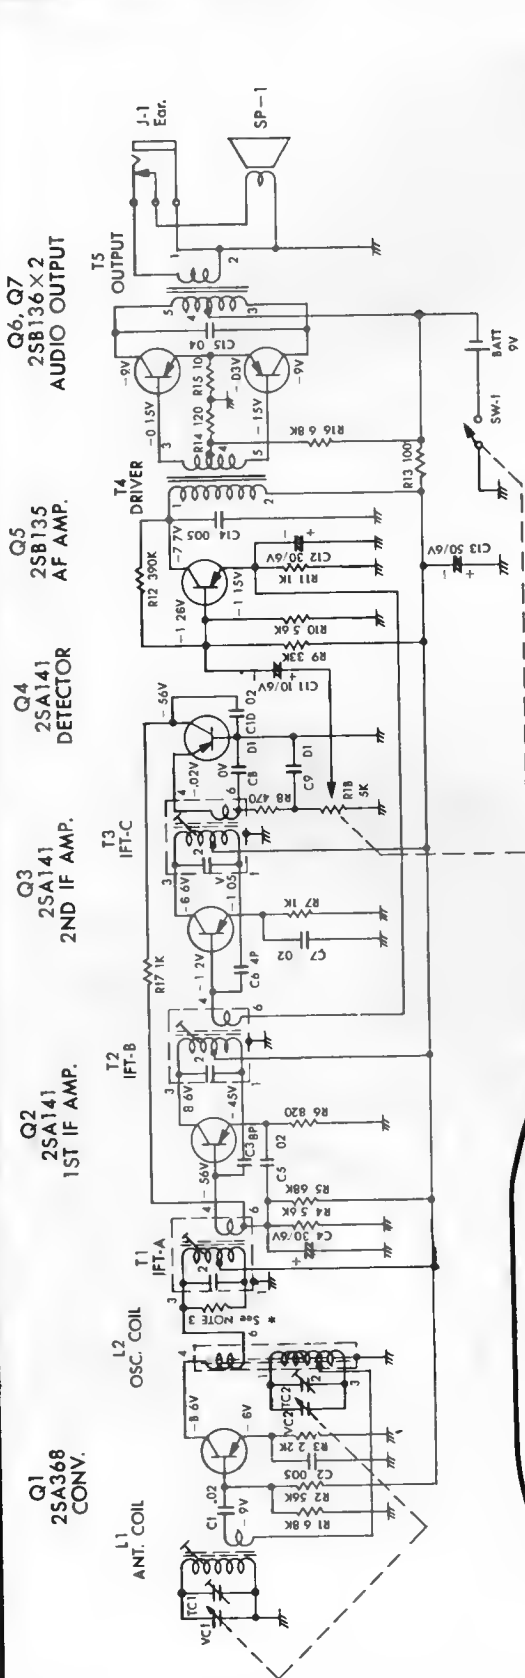


NOTE

1. All capacitance values are in μfd unless otherwise specified. P = Mmfd.
2. All resistance values are in ohms unless otherwise specified. K = 1000 ohms.
3. The following component may have alternative values within the range shown. R₀ from 100K ohm through 250K ohm.
4. Current drain: Approx 8 mA

BOTTOM VIEW

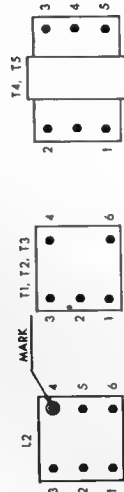


IF 455 KC

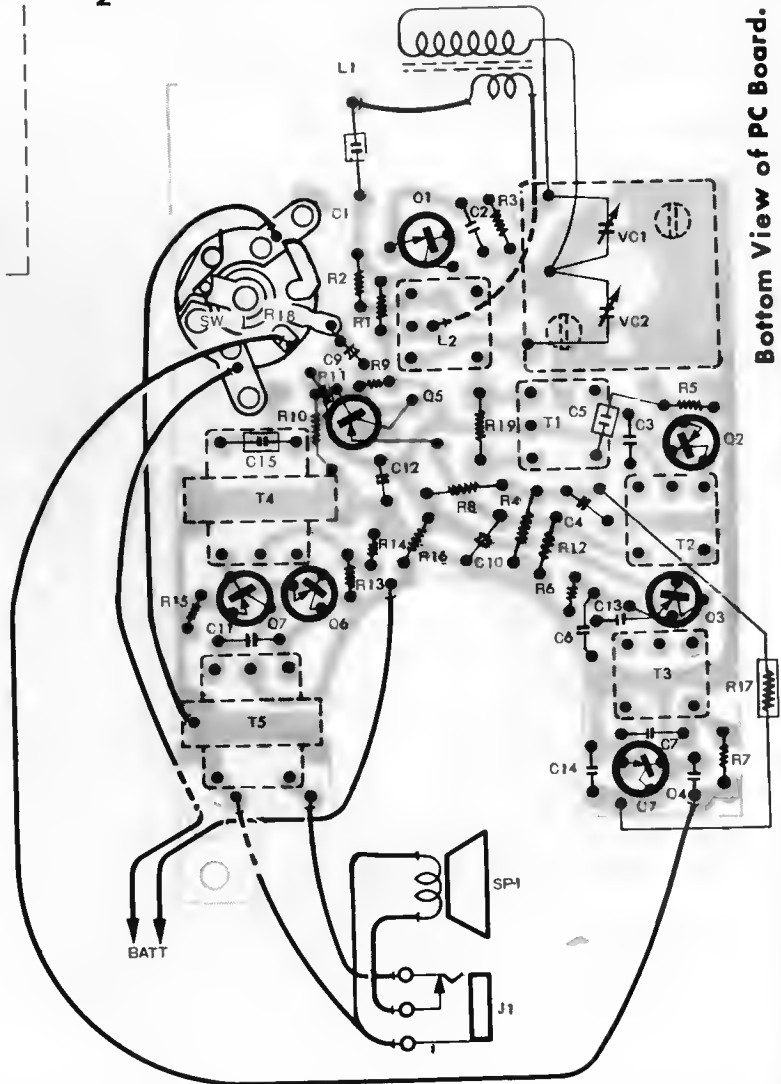


Bottom View of PC Board.

IF 455 KC

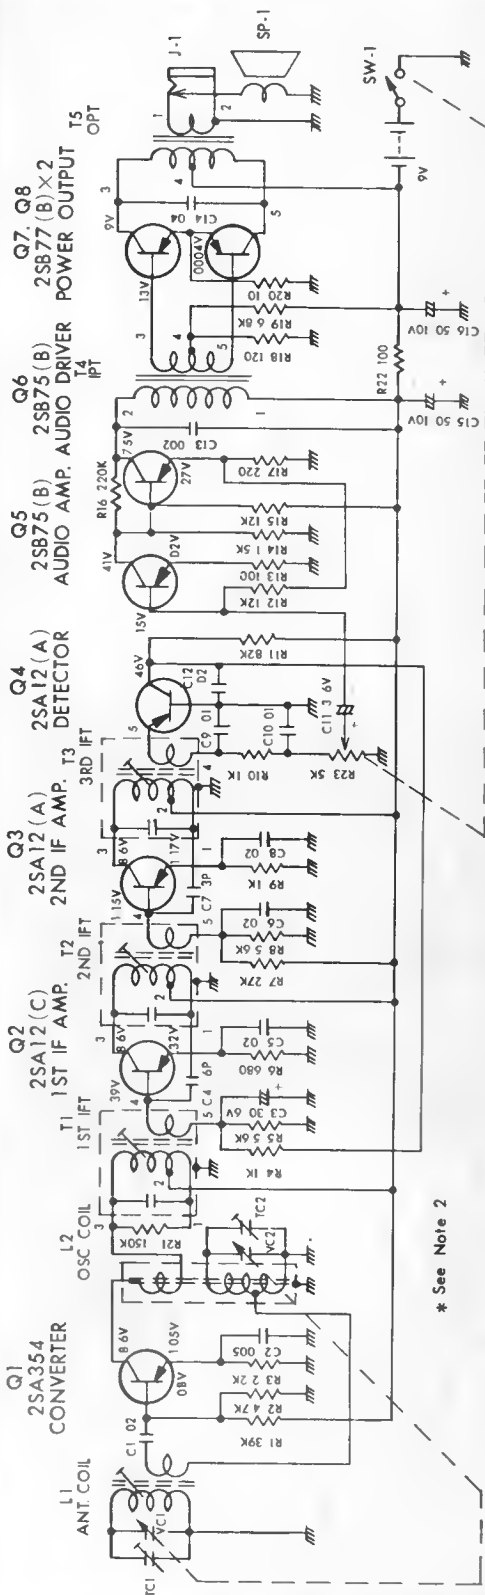


Dial Cord Stringing.

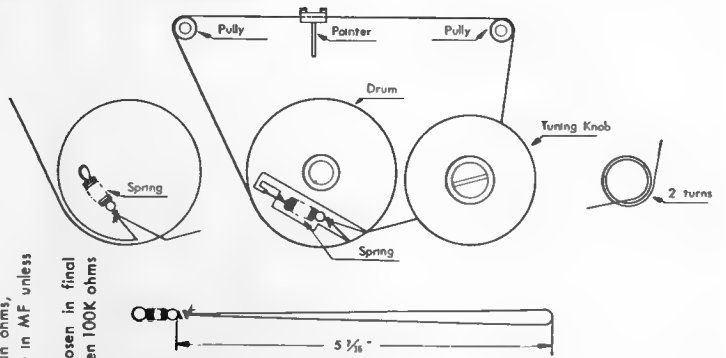


- NOTES**
- 1) All resistance values are in ohms, all capacitance values are in MF unless otherwise specified.
 - 2) The value of R21 is chosen in final test and may vary between 100K ohms and 330K ohms.


TRANSISTOR CONNECTION





BOTTOM VIEW



Bottom View of PC Board.

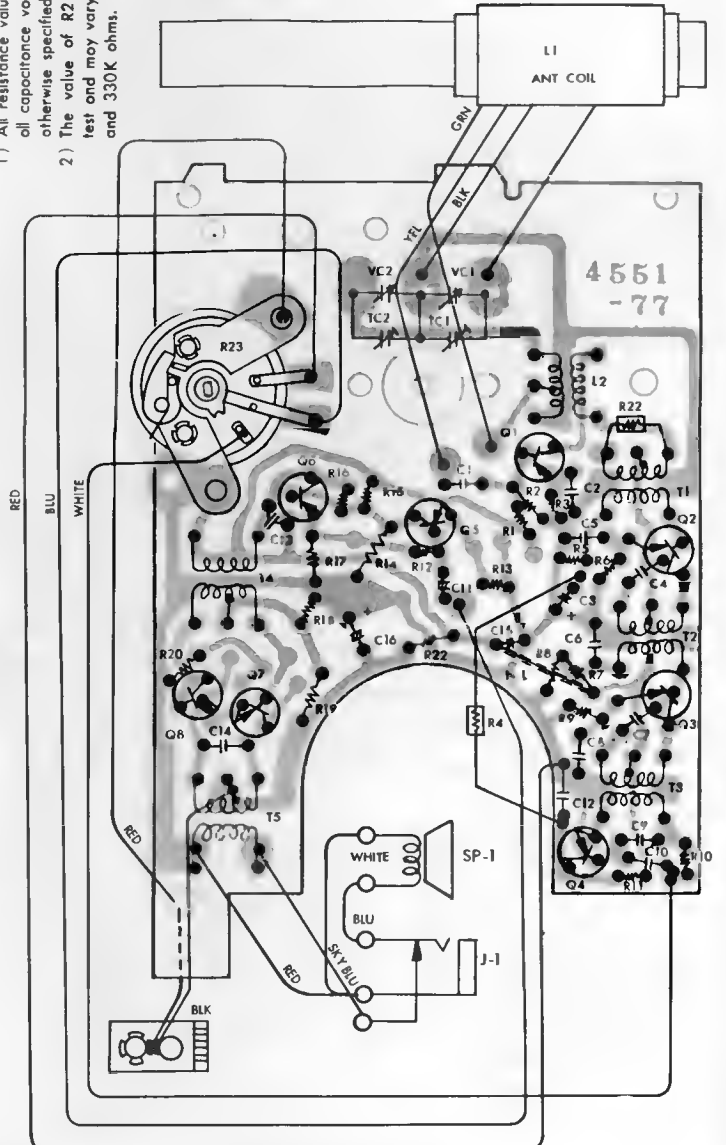


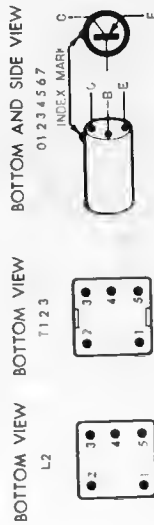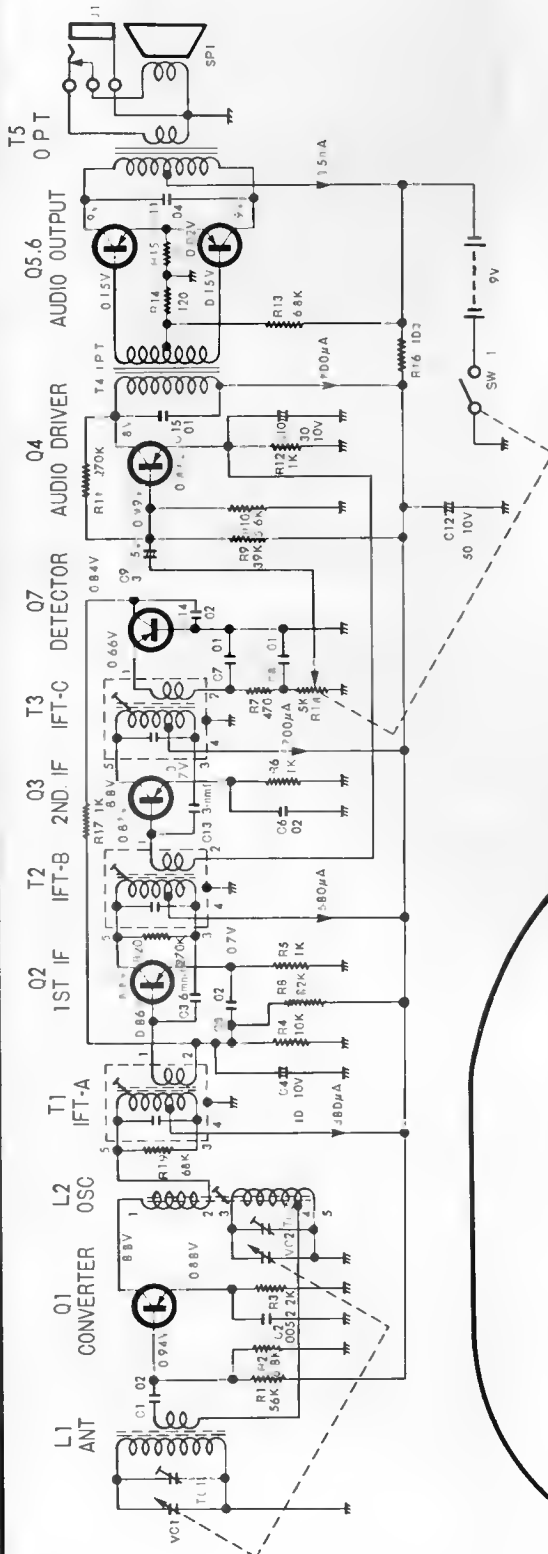

NOTES:

- 1) All resistance values are in ohms, all capacitance values are in μF unless otherwise specified.
- 2) Voltage measurements made with V.T.V.M. from indicated points to ground and with volume control at minimum, no signal input. Current measurement made at indicated points under the same conditions.
- 3) The following components may have alternate values within the ranges shown:
 - R1 from 47K ohm to 56K ohm
 - R13 from 6.8K ohm to 12K ohm
 - R19 from 82K ohm to 270K ohm
 - R20 from 180K ohm to ohm

IF 455 KC

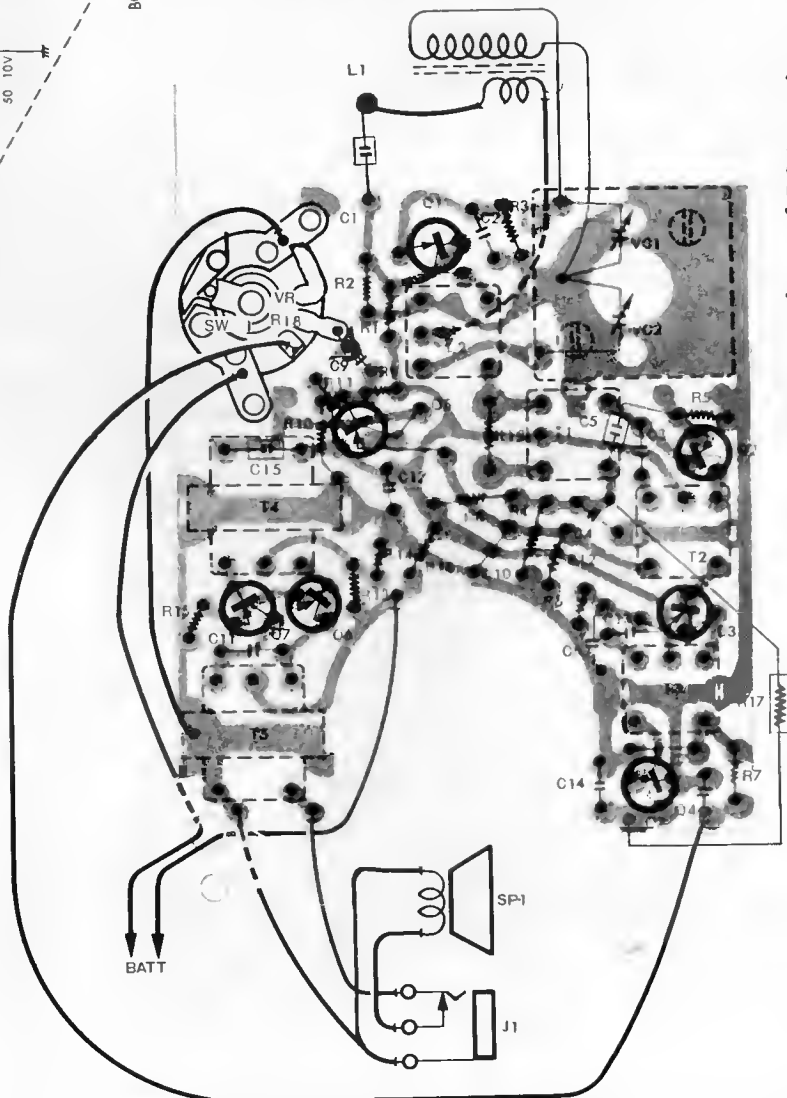



Bottom View of PC Board.

MOTOROLA MODELS PP207C, PP209C, PK403C, SK455C, SK456C, SK457C

(Continued on next two pages.)

CHASSIS HS-2334A, HS-2339F, HS-2349C


MODEL NUMBER	PP 207C	PP 209C	PK 403C	SK 455C	SK 456C	SK 457C
CHANNELS	2	2	2	2	2	2
WATTS - MUSIC POWER OUTPUT	5	5	5	5	5	5
MOTOROLA 4-SPEED AUTOMATIC RECORD CHANGER	M 113RC	M 114RC	VM 124RC	VM 124RC	VM 119RC	VM 119RC
CARTRIDGE	Cer.	Cer.	Cer.	Cer.	Cer.	Cer.
STYLII	Saph	Dia.	Dia.	Dia.	Dia	Dia
CHANGER COMPARTMENT LIGHT						
RECORD STORAGE			Yes	Yes	Yes	Yes
OUTPUT STAGE	S.E.	S.E.	S.E.	S.E.	S.E.	S.E.
LOUDNESS CONTROL	Yes	Yes	Yes	Yes	Yes	Yes
TONE CONTROL						
BASS AND TREBLE CONTROL	Yes	Yes	Yes	Yes	Yes	Yes
BALANCE CONTROL	Yes	Yes	Yes	Yes	Yes	Yes
TRANSFORMER POWER SUPPLY	Yes	Yes	Yes	Yes	Yes	Yes
ON OFF INDICATOR				Yes	Yes	Yes
STEREO HEADPHONE JACK			Yes	Yes	Yes	Yes
TAPE INPUT AND OUTPUT JACKS				Yes	Yes	Yes
NOISE FILTER				Yes	Yes	Yes
LDC/DIST SWITCH				Yes	Yes	Yes
EXTENDED BASS						
FM MUTE						
NUMBER OF TRANSISTORS	8	8	8	21	21	21
45 R.P.M. SPINDLE AND STORAGE	Yes	Yes	Yes	Yes	Yes	Yes
TUNER CHASSIS				H5 2339F	H5 2339F	H5 2339F
AMPLIFIER CHASSIS	HS 2349C	HS 2349C	HS 2334	HS 2334	HS 2334	HS 2334

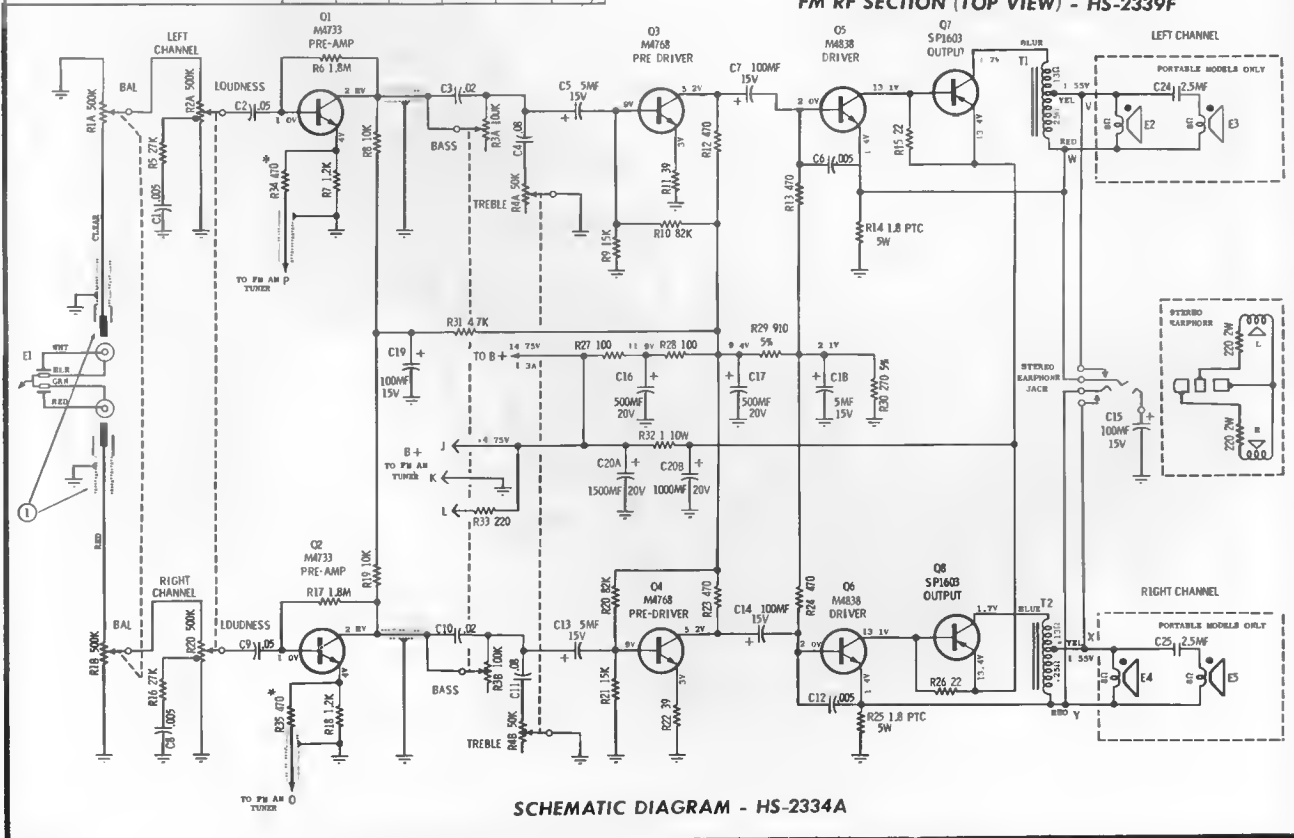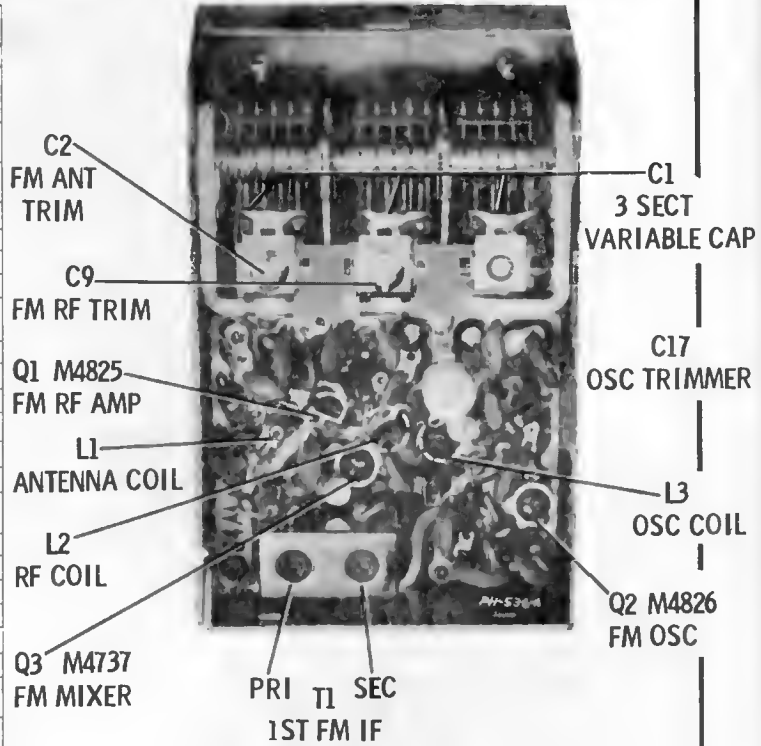

(Continued from preceding page and on next page.)

MOTOROLA

CHASSIS HS-2339F
 MODELS SK455C, SK456C, SK457C

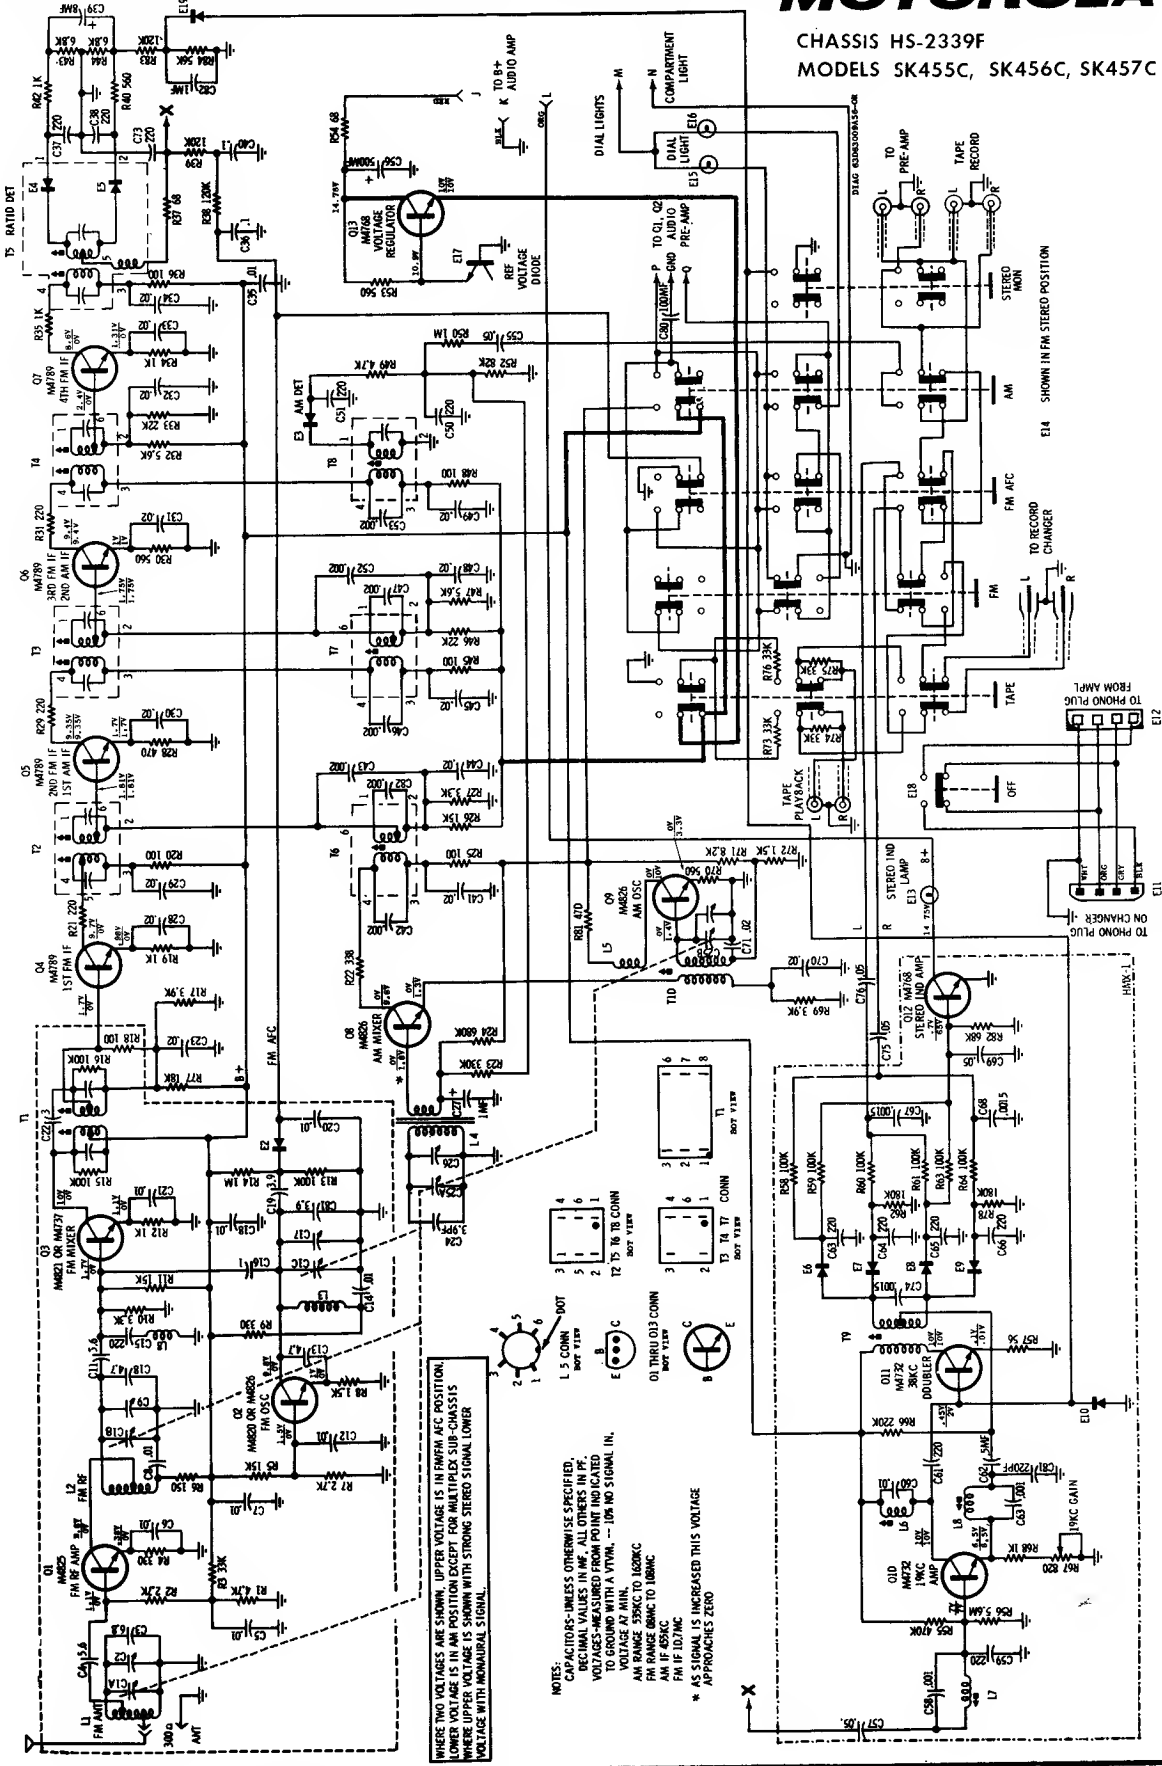

SCHEMATIC DIAGRAM - HS-2339F

WHERE TWO VOLTAGES ARE SHOWN, UPPER VOLTAGE IS IN FM/AM AFC POSITION, LOWER VOLTAGE IS IN AM POSITION EXCEPT FOR MULTIPLE SUB-CHASSIS WHERE UPPER VOLTAGE IS SHOWN WITH STRONG STEREO SIGNAL LOWER VOLTAGE WITH MONODURAL SIGNAL.


NOTES:
 CAPACITORS UNLESS OTHERWISE SPECIFIED, DECIMAL VALUES IN μ F, ALL OTHERS IN P.F.
 VOLTAGES MEASURED FROM POINT INDICATED TO GROUND WITH A VTVM. -- FOR NO SIGNAL IN.
 AM RANGE EXCEPT TO 160KHZ
 FM RANGE 80KHZ TO 100KHZ
 AM IF 450KHZ
 FM IF 107KHZ
 * AS SIGNAL IS INCREASED THIS VOLTAGE APPROACHES ZERO

MOTOROLA



MODELS PP207C, PP209C, PK403C,
SK455C, SK456C, SK457C

CHASSIS HS-2334A, HS-2339F, HS-2349 C

(Continued from the preceding
two pages.)


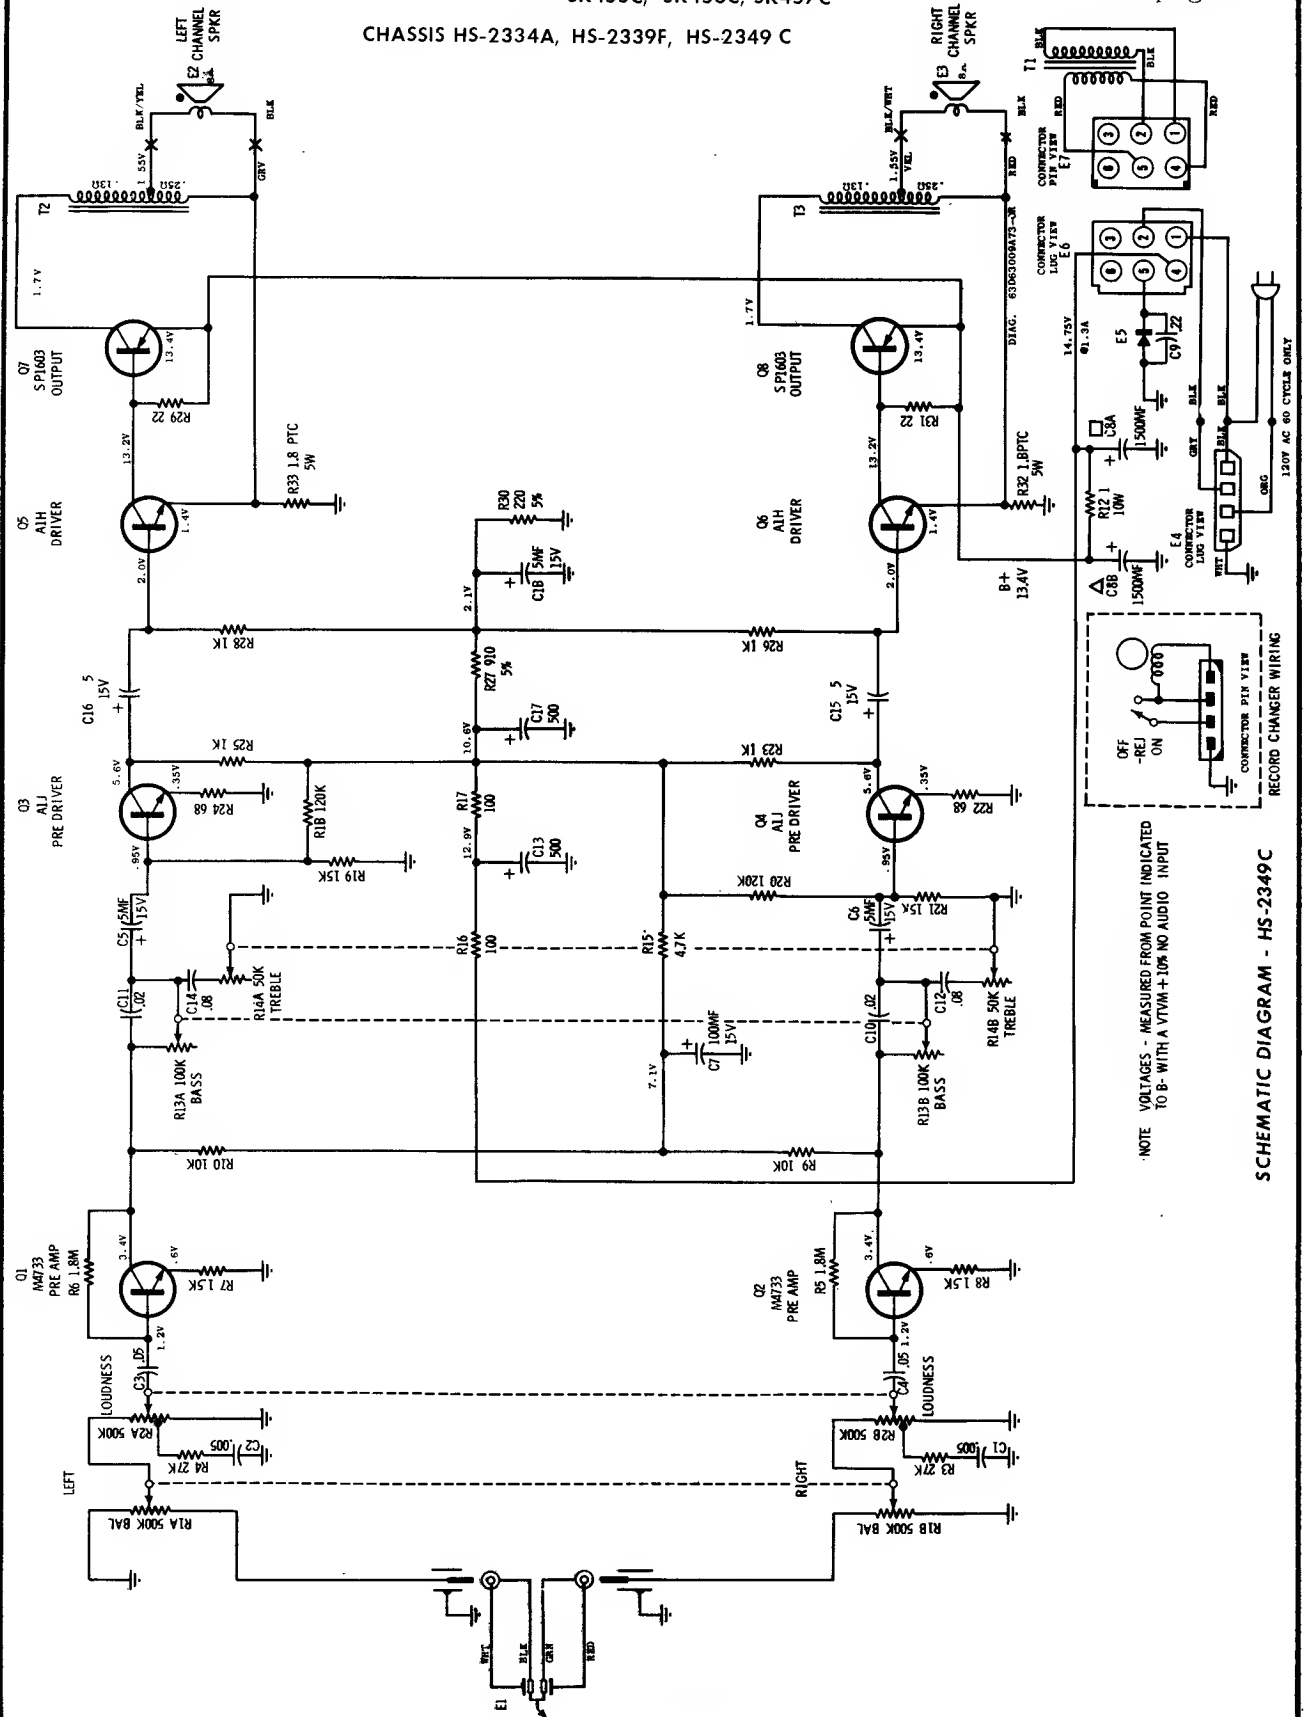


MOTOROLA CHASSIS HS-62250; MODEL PK15C

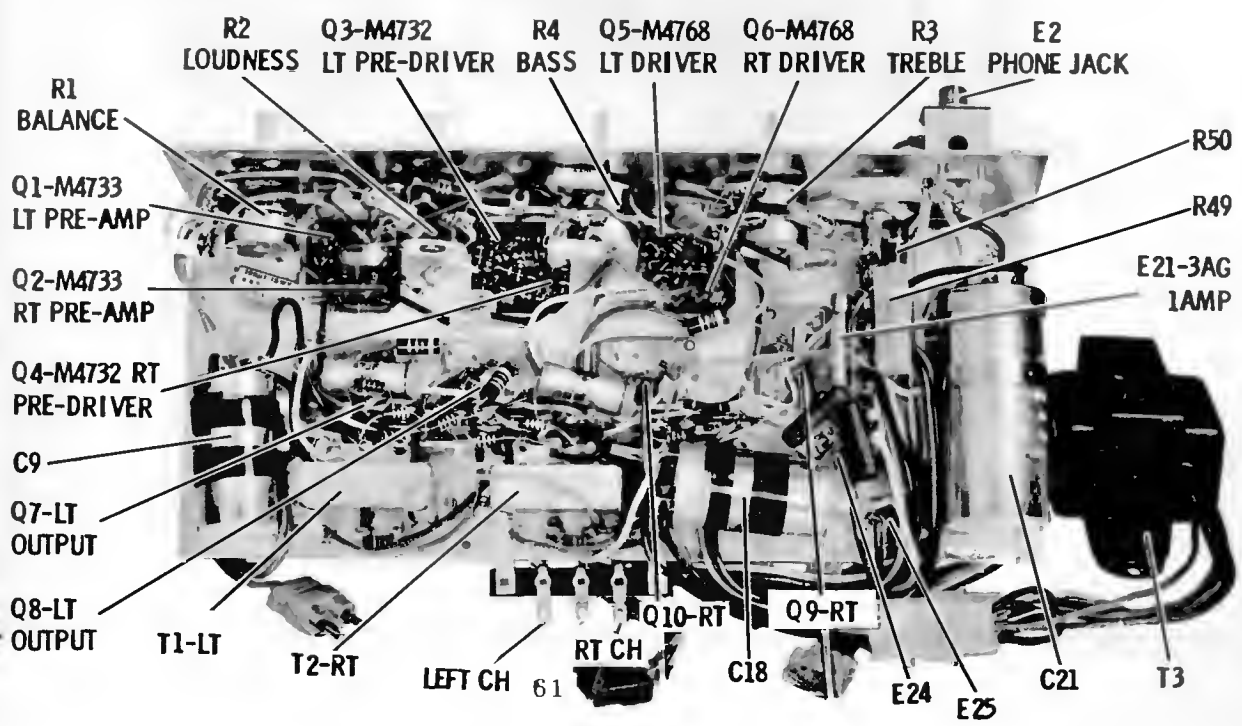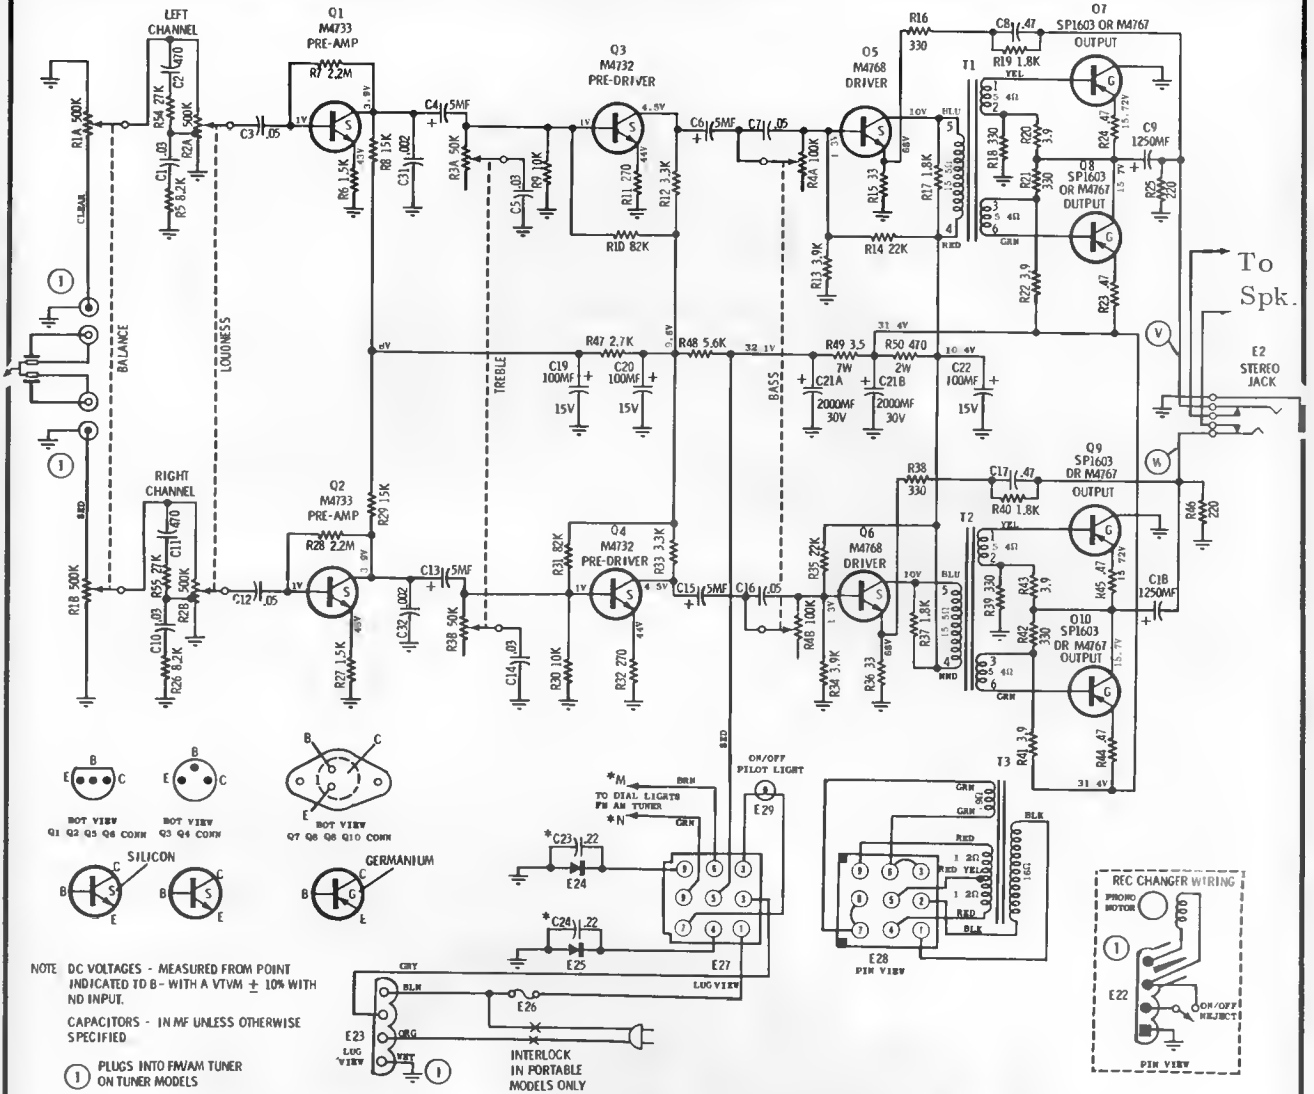

MOTOROLA


MODEL MPI0C CHASSIS HS-63213

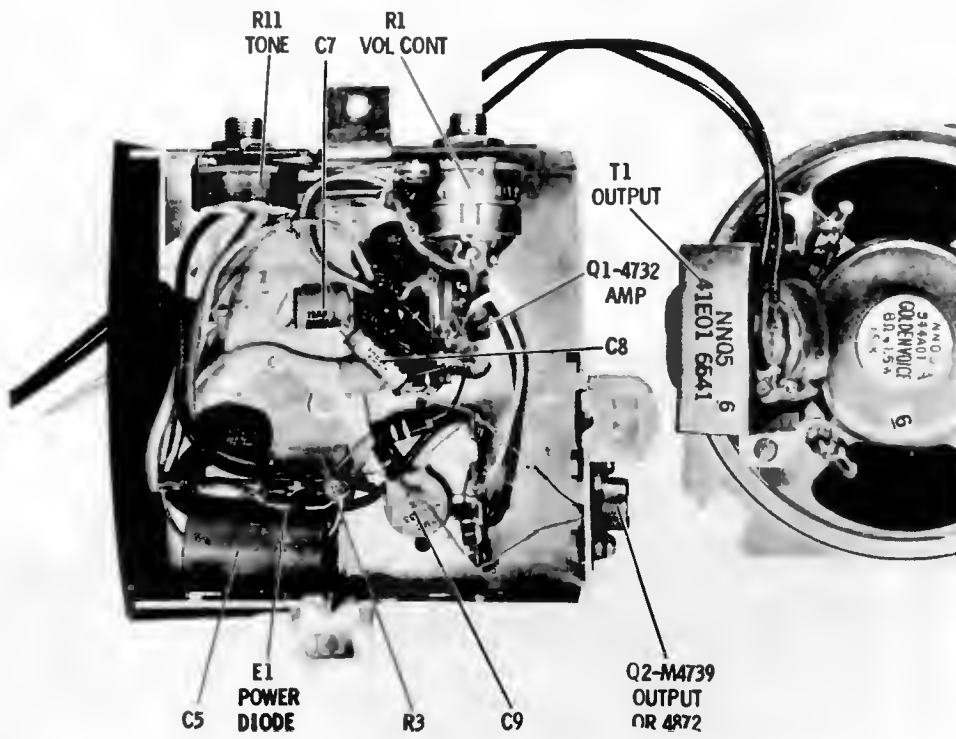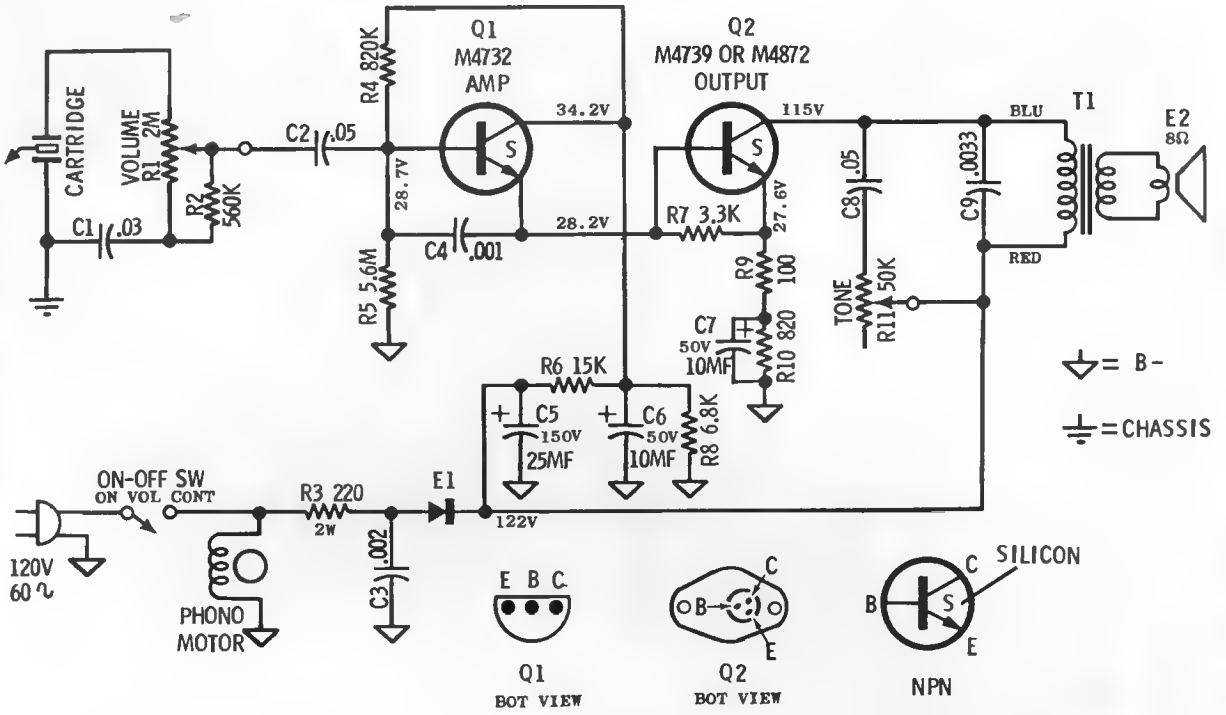

PARTS LOCATION

MOTOROLA


**MODEL MPI02C
CHASSIS HS-63226**

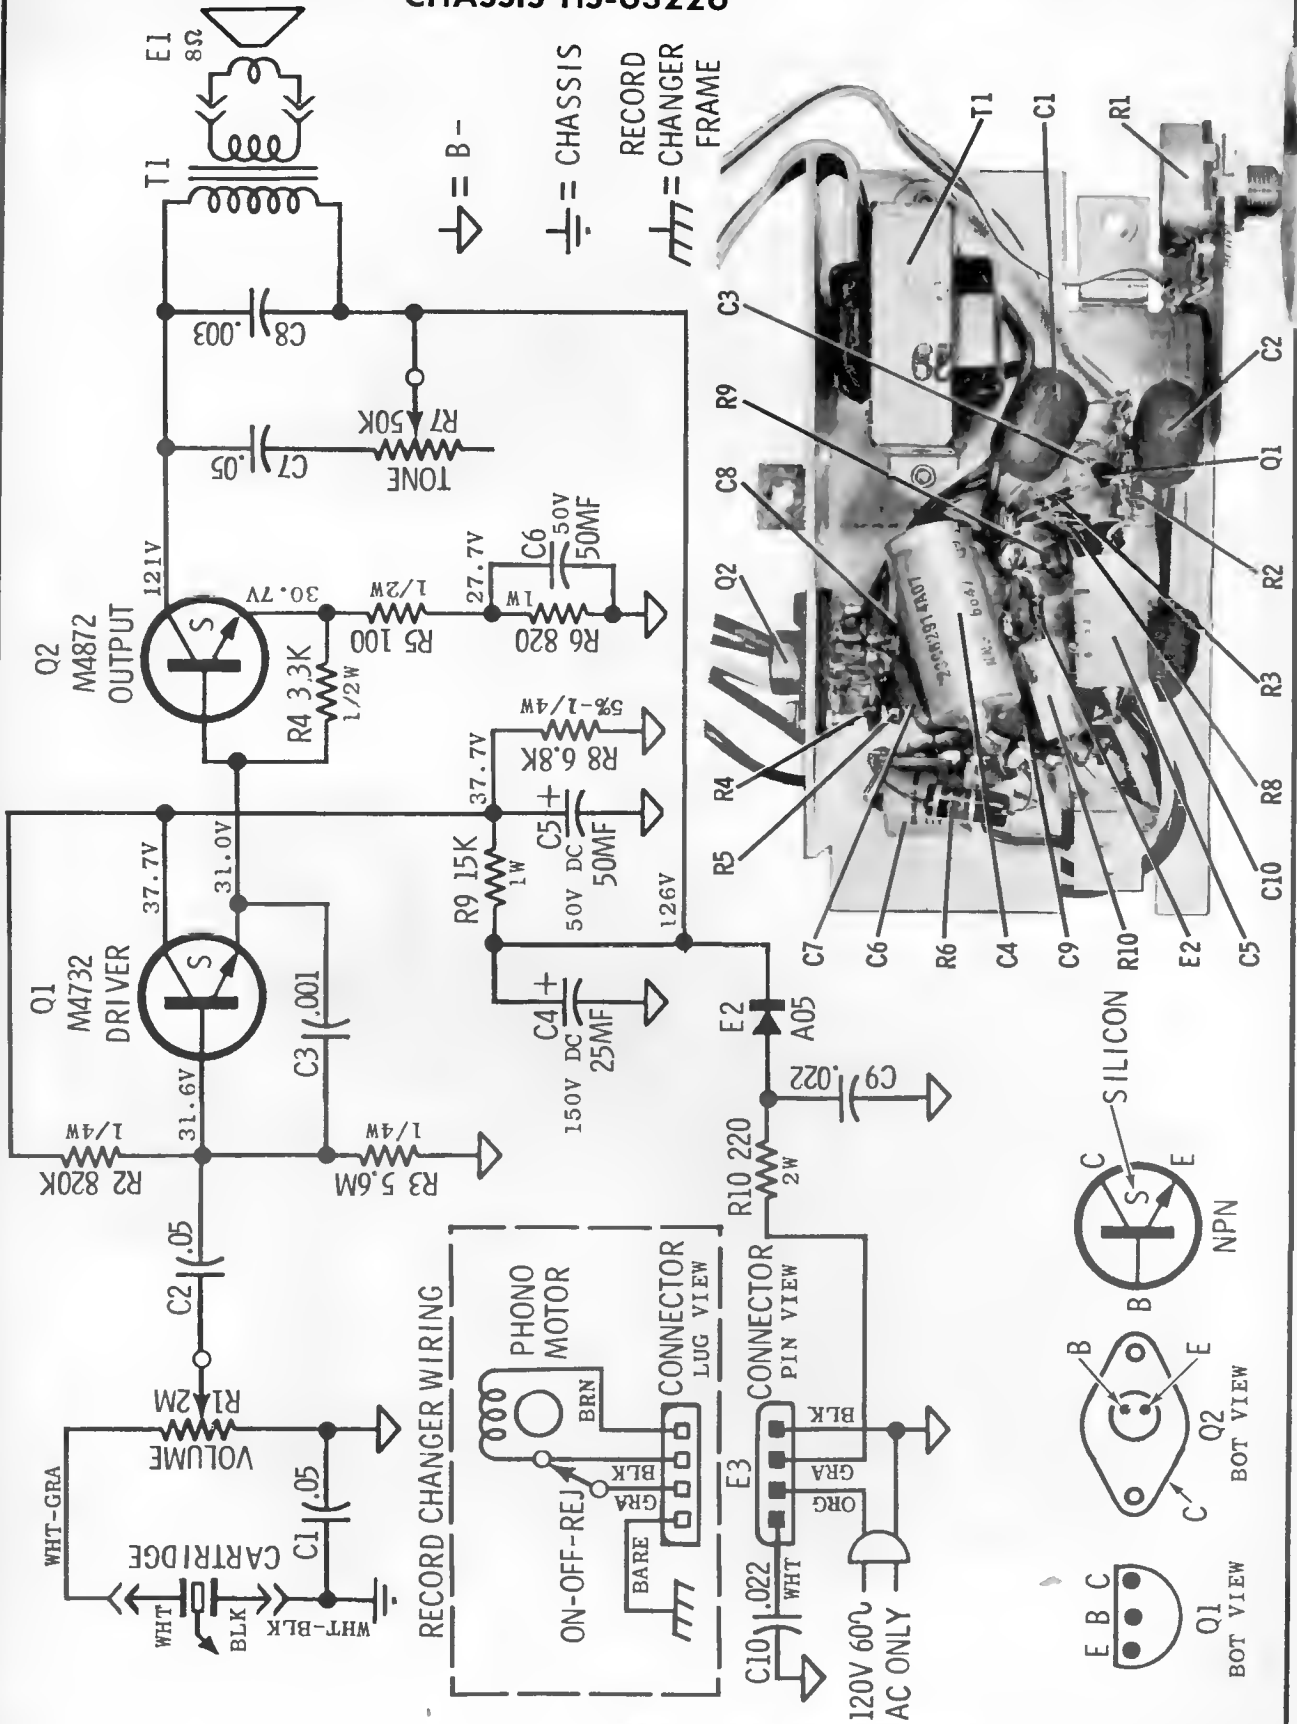


MOTOROLA

MODELS PP205C-1, PP206C-1

CHASSIS HS-63230

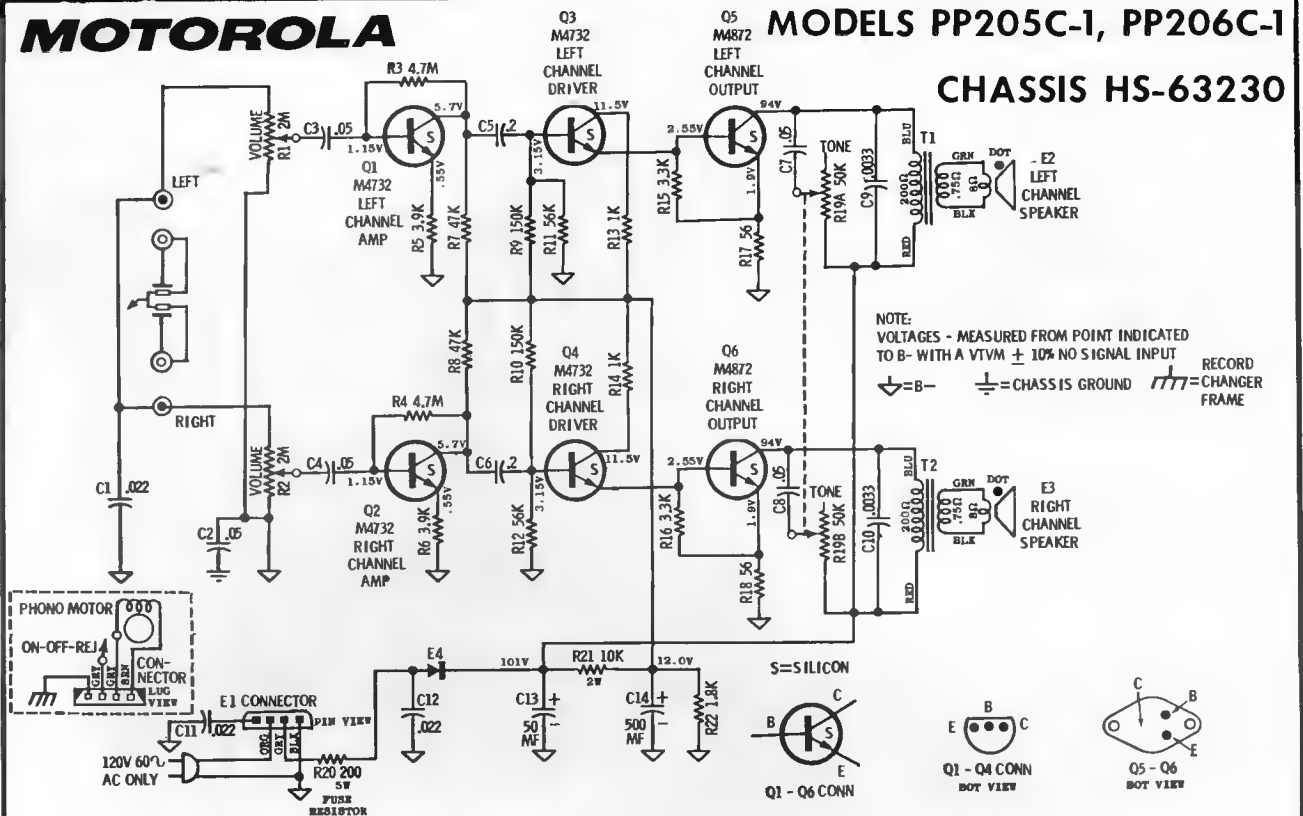

R2 RT VOLUME Q2 - M4732 RT AMP C4 R19A & B TONE Q1 - M4732 LT AMP R1 LT VOLUME C3 T1 LT OUTPUT

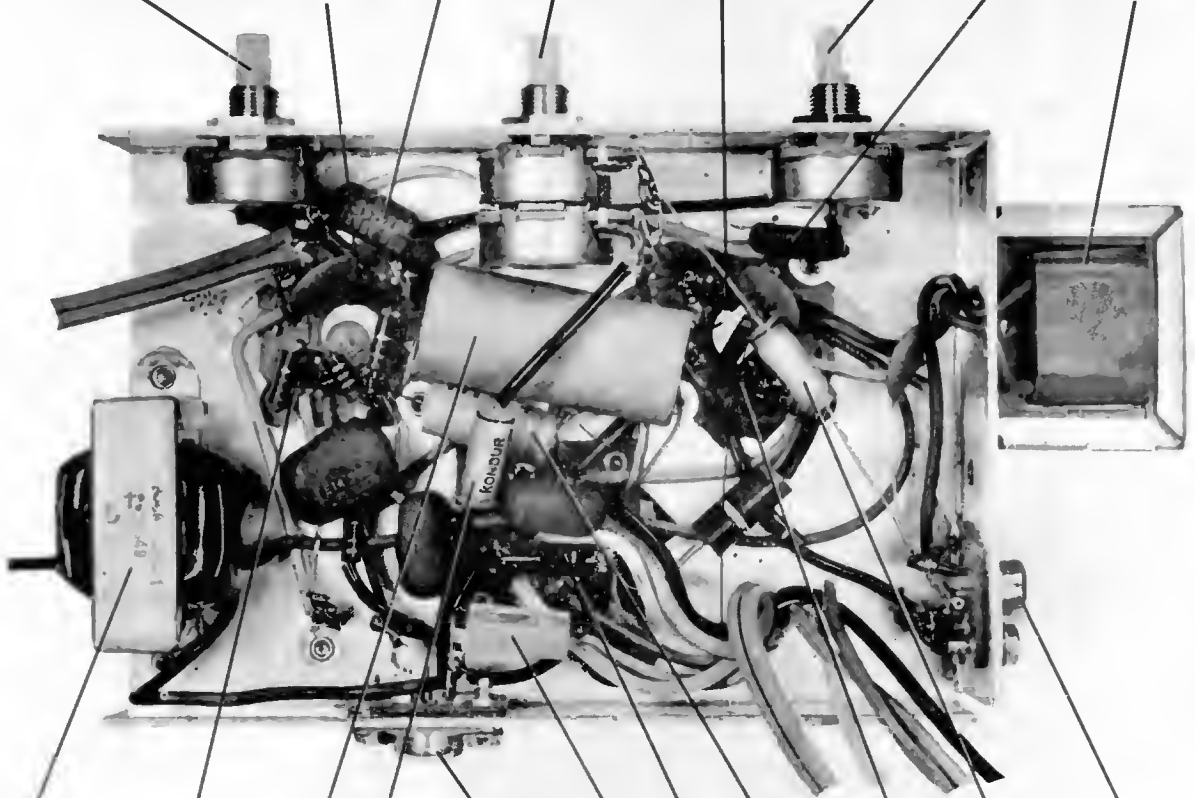


T2 RT OUTPUT Q4 - M4732 RT DRIVER C13 C8 Q6 - M4872 RT OUTPUT R20 E4 C14 Q3 - M4732 LT DRIVER C7 Q5 - M4872 LT OUTPUT

MOTOROLA


CHASSIS HS-67216

MODELS: XC15C,
XC16C, XC24D,
XC25D, XT4C,
XT10D

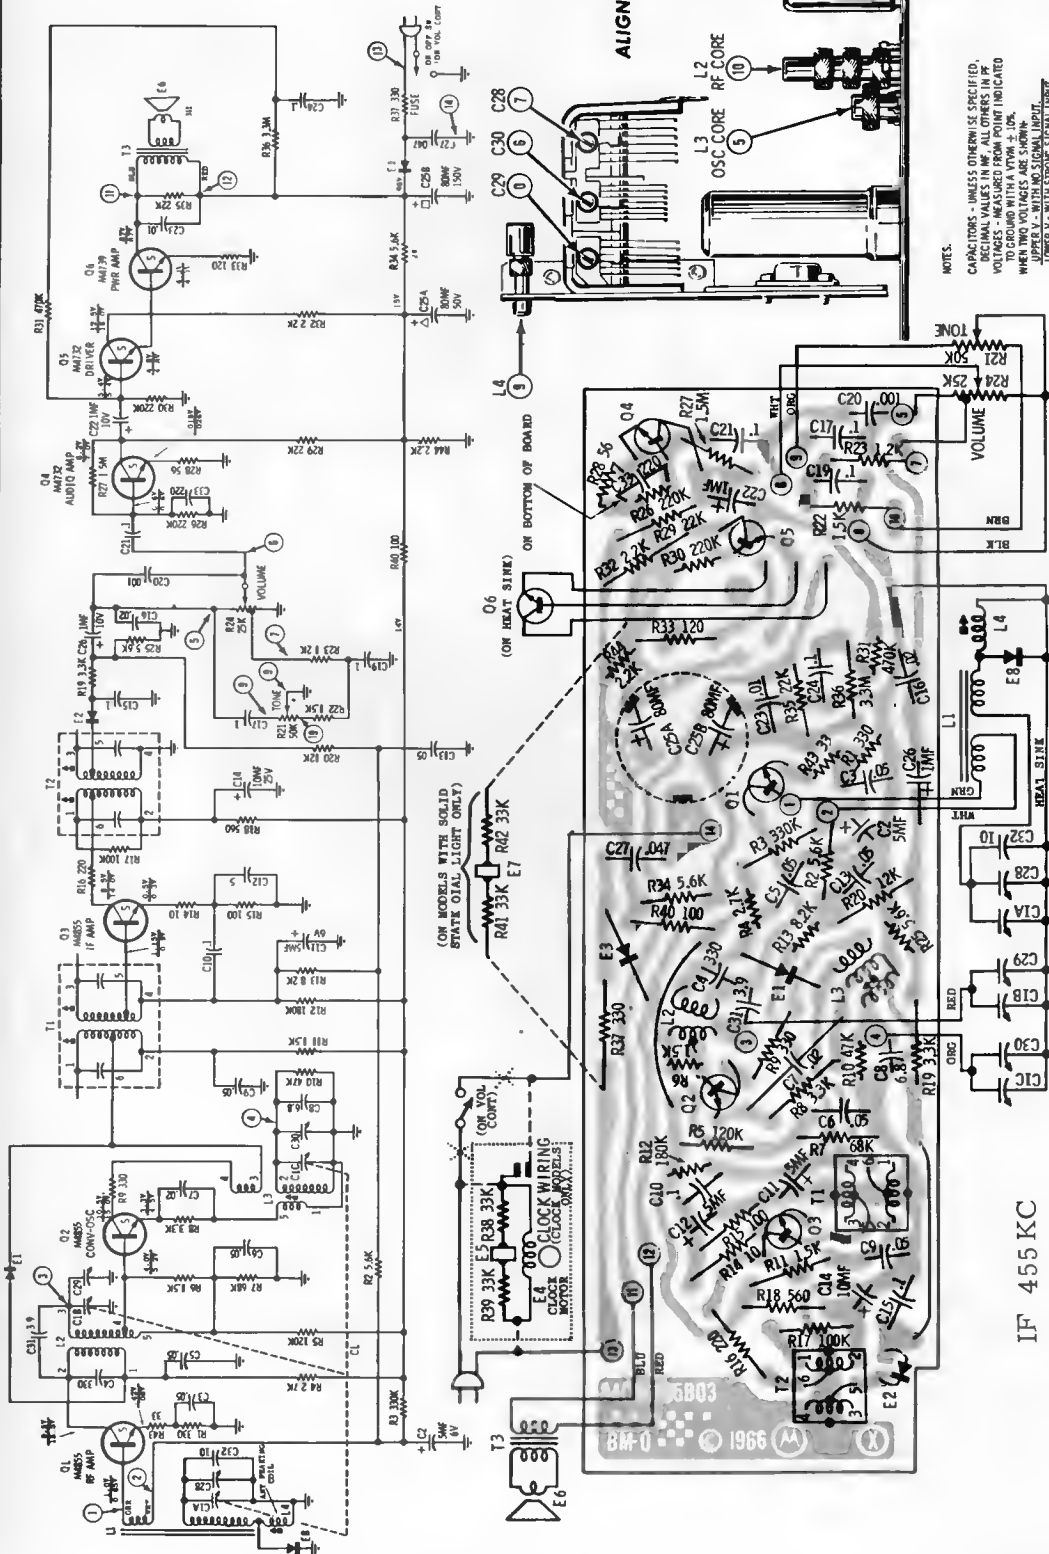

ALIGNMENT POINTS

NOTES:
CAPACITORS - UNLESS OTHERWISE SPECIFIED,
DECIMAL VALUES IN MF. ALL OTHERS IN PF.
RESISTORS - UNLESS OTHERWISE SPECIFIED,
VALUES IN OHMS. ALL OTHERS IN KΩ.
WHEN TWO VOLTAGES ARE SHOWN,
UPPER V. - WITH NO SIGNAL INPUT.
LOWER V. - WITH STRONG SIGNAL INPUT.
VOLUME RANGE - 150μV TO 100mV. AM IF 455KC.
AM RANGE - 150μV TO 100mV. AM IF 455KC.

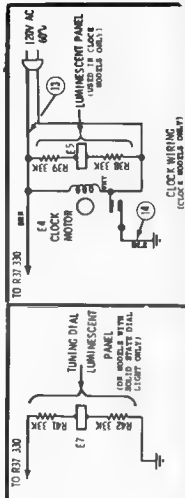

BOTTOM VIEW


PLATED CHASSIS REFERENCE POINTS AND PARTS LOCATION (VIEW FROM WIRING SIDE OF BOARD)



IF 455 KC


MODELS TP11C & TP12C CHASSIS HS-66212, HS-66209

(Continued on next page.)

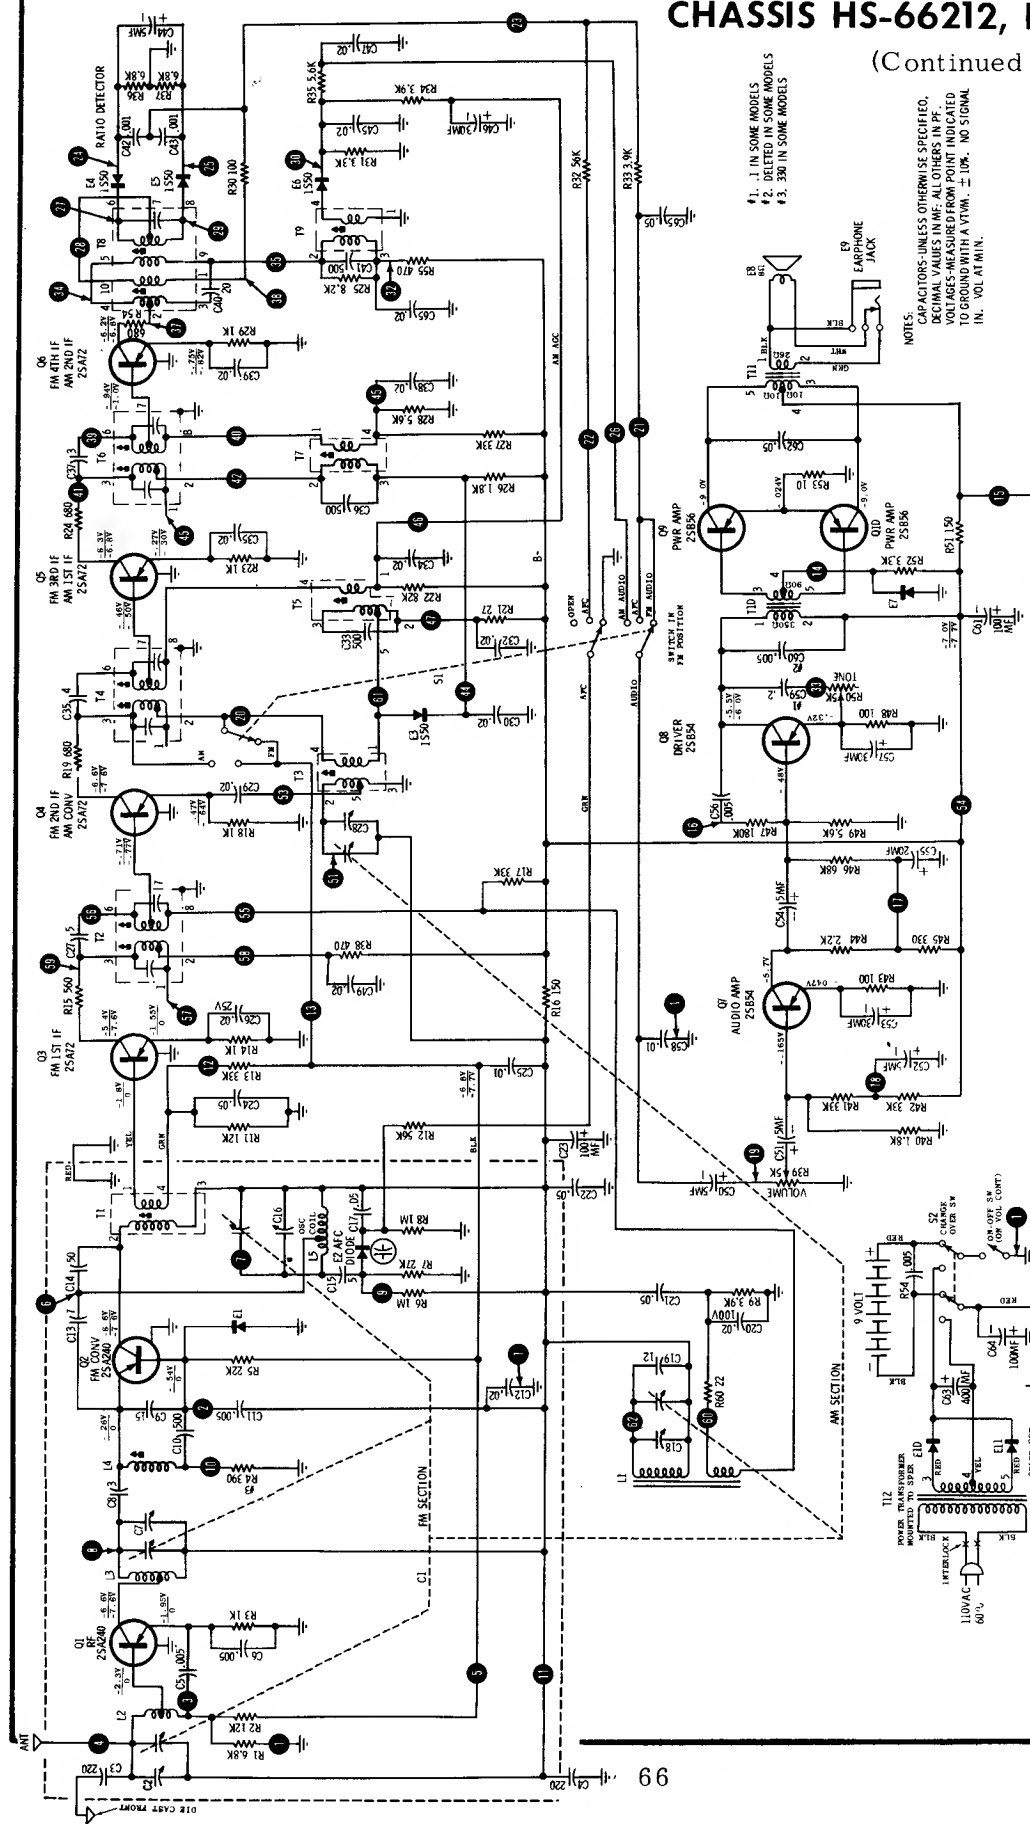



- 1. .1 IN SOME MODELS
- 2. DELETED IN SOME MODELS
- 3. .330 IN SOME MODELS

NOTES:
CAPACITORS—UNLESS OTHERWISE SPECIFIED,
DECIMAL VALUES IN MF; ALL OTHERS IN PF.
VOLTAGES—MEASURED FROM POINT INDICATED
TO GROUND WITH A VTVM, ± 10%. NO SIGNAL
IN VOL. AT MIN.

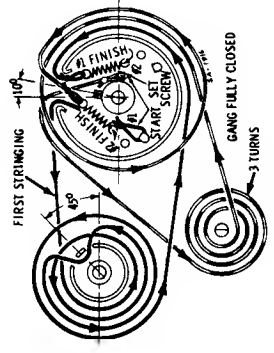

DIAL STRINGING DETAIL


LINE UP EDGE OF POINTER SLIDER WITH LINE IN DIAL BACKGROUND—THEN CEMENT TO DIAL CORR.

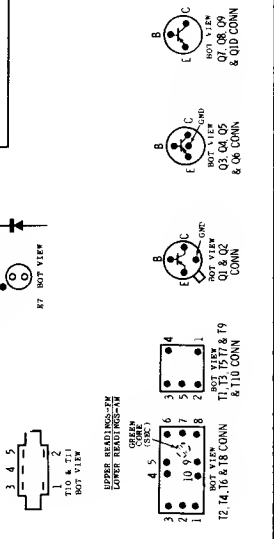

MOTOROLA CHASSIS HS-66212, HS-66209 (Continued from preceding page.)

MODELS TP11C & TP12C


BOTTOM VIEW
PLATED CHASSIS REFERENCE POINTS AND PARTS LOCATION (VIEW FROM WIRING SIDE OF BOARD)

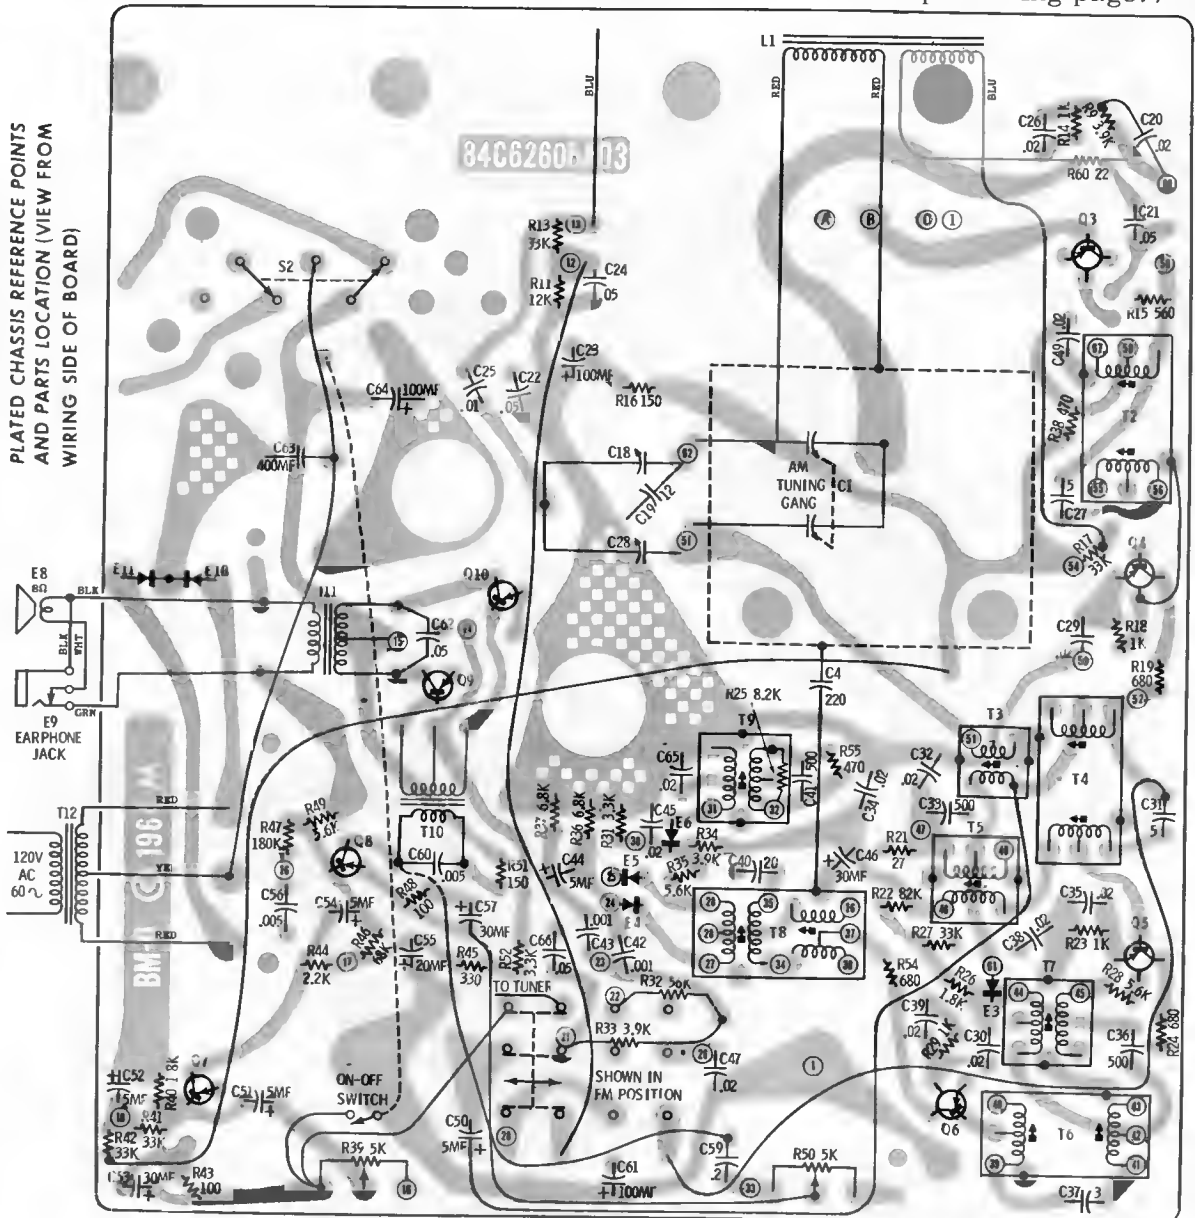

ALIGNMENT POINTS

- | | |
|--------------------|----------------------|
| ① RATIO DET | ⑬ ANT TRIM 106MC |
| ② 10.7MC | ⑭ RF COIL (PRI) 90MC |
| ③ IF 10.7MC | ⑮ ANT COIL 90MC |
| ④ | ⑯ RF CORE (SEC) 98MC |
| ⑤ IF | ⑰ IF 455KC |
| ⑥ 10.7MC | ⑱ IF 455KC |
| ⑦ IF | ⑲ IF 455KC |
| ⑧ 10.7MC | ⑳ OSC TRIM 1620KC |
| ⑨ IF 10.7MC | ㉑ ANT TRIM 1400KC |
| ⑩ OSC TRIM 108.5MC | ㉒ OSC CORE 532KC |
| ⑪ OSC COIL 87.5MC | |
| ⑫ RF TRIM 106MC | |

FM TUNER BOARD REFERENCE POINTS BOTTOM VIEW

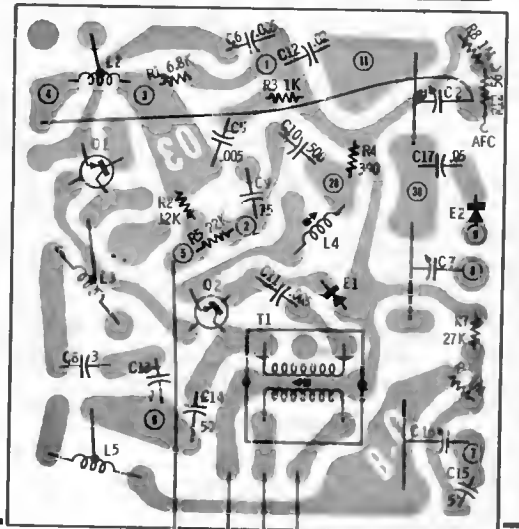


TO MAIN CHASSIS BOARD

MOTOROLA MODEL TP10D

CHASSIS HS-66227

(Continued on next page.)

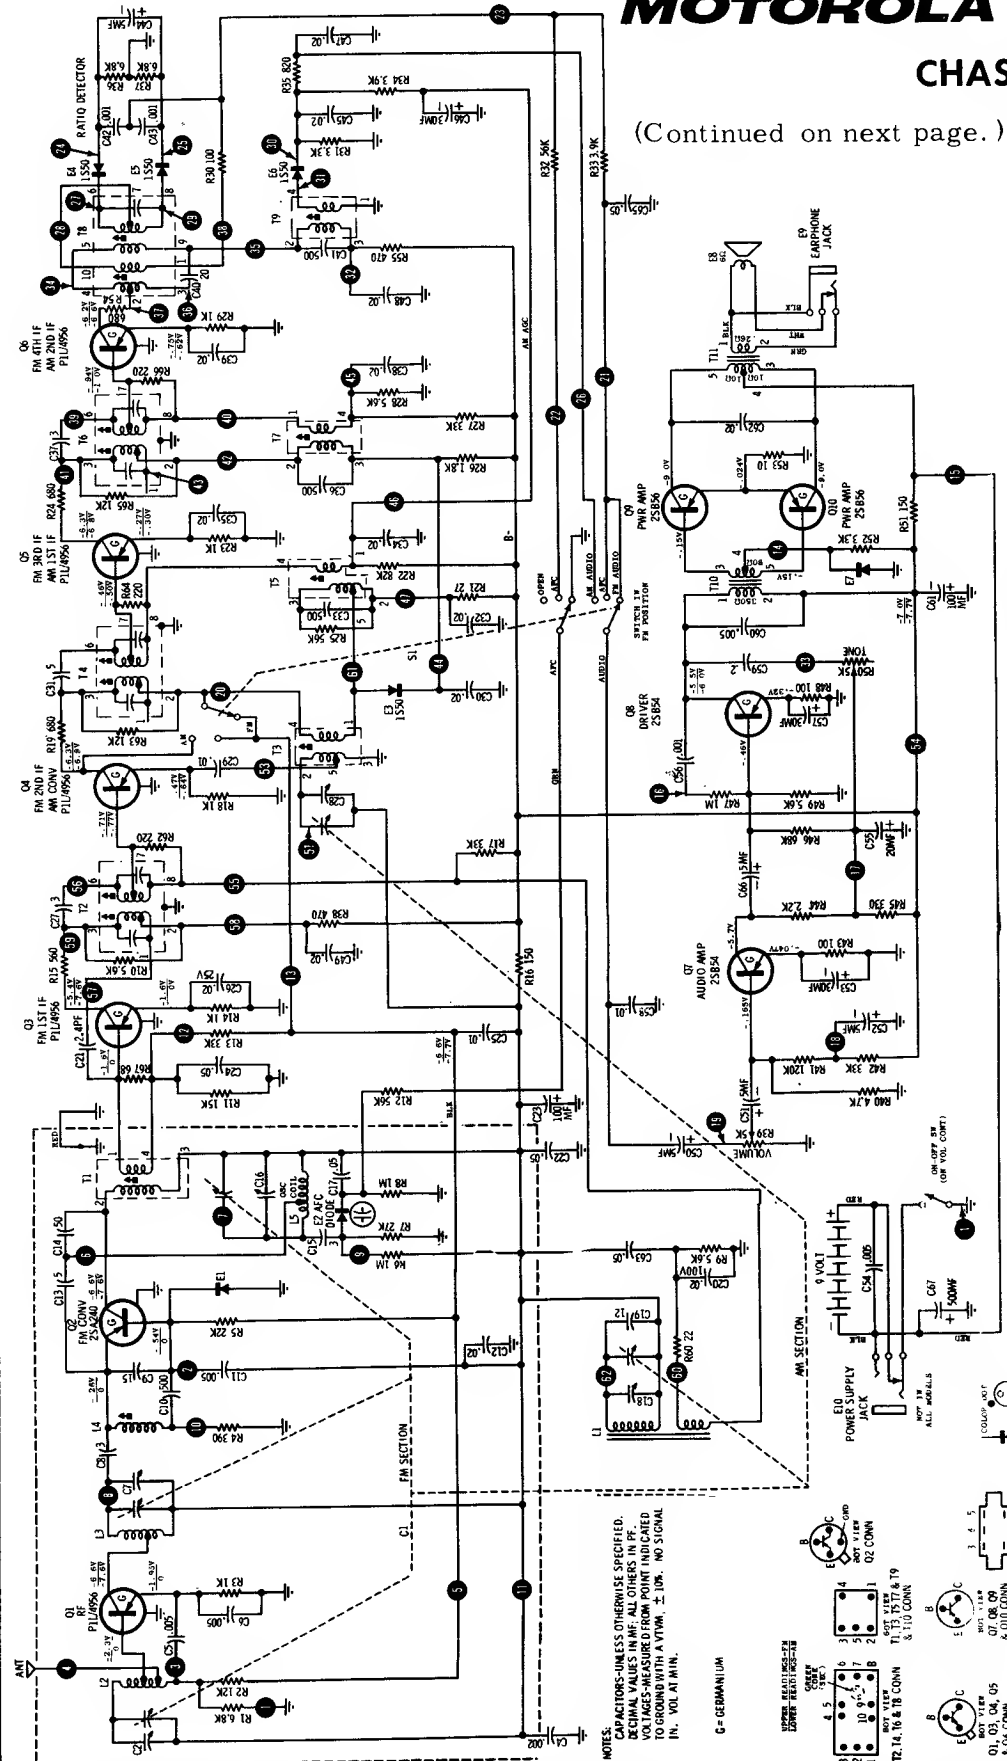

- CHASSIS REMOVAL**
1. Remove 3 cabinet back mounting screws; 2 are located at top of cabinet (under carrying handle), the other screw is located on bottom of cabinet.
 2. Remove the earphone jack mounting nut (a special tool is available - order Part Number 66A646211).
 3. Separate cabinet back from front escutcheon far enough to gain access to chassis, then unsolder yellow lead from monopole FM antenna.
 4. To remove chassis completely, first remove control knobs from front of radio.
 5. Remove 6 chassis and 1 dial background mounting screws.
 6. If necessary, unsolder speaker leads, then remove chassis from escutcheon.


TUNING RANGE

FM - 88 to 108Mc (FM IF - 10.7Mc).


AM - 535 to 1620Kc (AM IF - 455Kc).

NOTES:
CAPACITORS UNLESS OTHERWISE SPECIFIED, IN DECIMAL VALUES IN MICROFARADS. ALL OTHERS ARE IN FARADS.
RESISTORS UNLESS OTHERWISE SPECIFIED, IN OHMS. ALL OTHERS ARE IN KILOHMS OR MEGOHMS.
IN. VOL. AT MIN.

G = GERMANIUM




BOTTOM VIEW
PLATED CHASSIS REFERENCE POINTS AND PARTS LOCATION

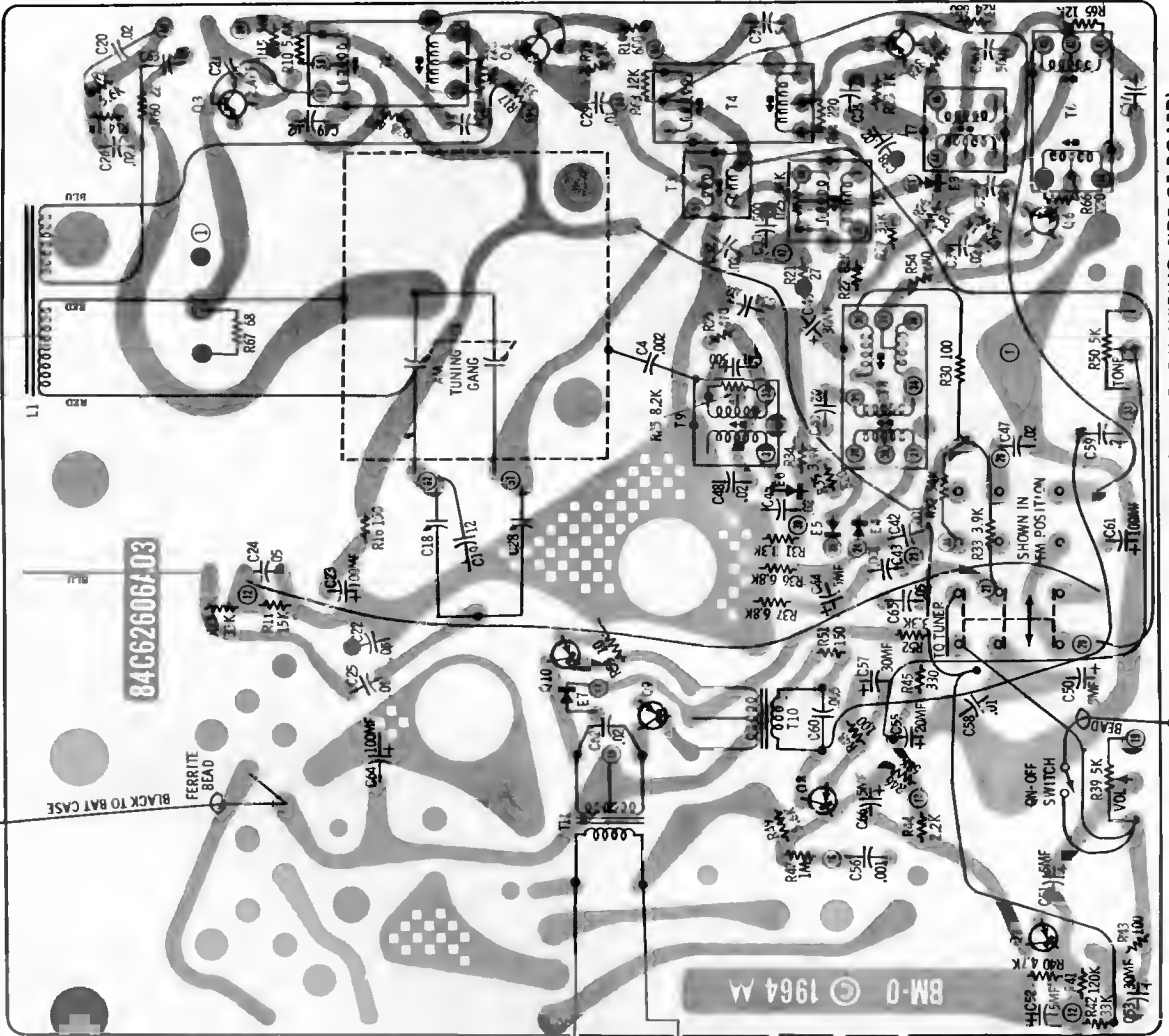


(VIEW FROM WIRING SIDE OF BOARD)

RED TO BAT CASE

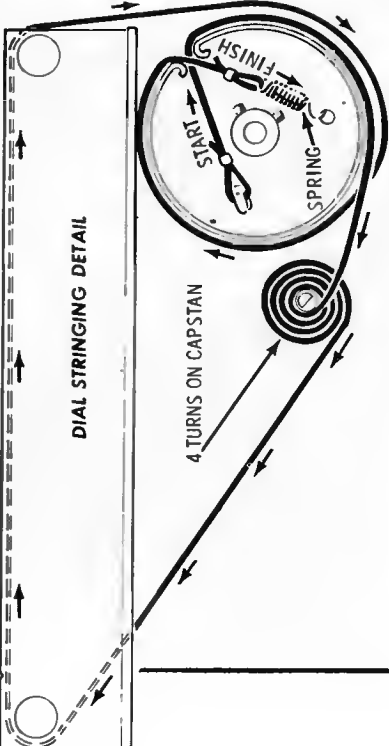

1. GANG FULLY OPEN (LARGE PULLEY CW). INSTALL STRING.
2. CLOSE GANG (LARGE PULLEY CCW) AND FASTEN POINTER SLIDE TO STRING WITH POINTER DIRECTLY OVER ZERO (0) ON LOG SCALE.

BOTTOM VIEW
PARTS LOCATION - FM TUNER

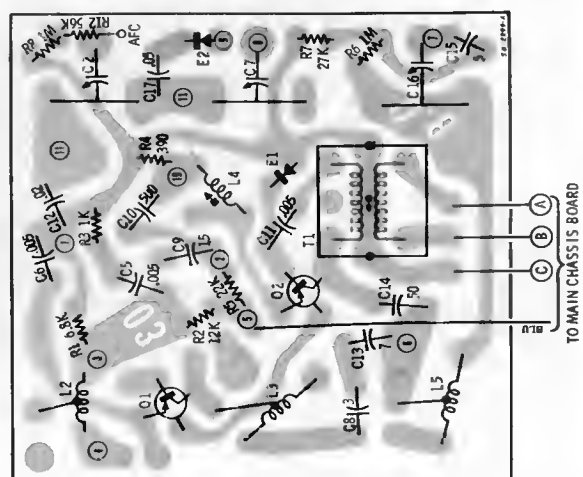


TO MAIN CHASSIS BOARD

MOTOROLA




MODEL TT22C CHASSIS HS-67206

(Continued on next page.)

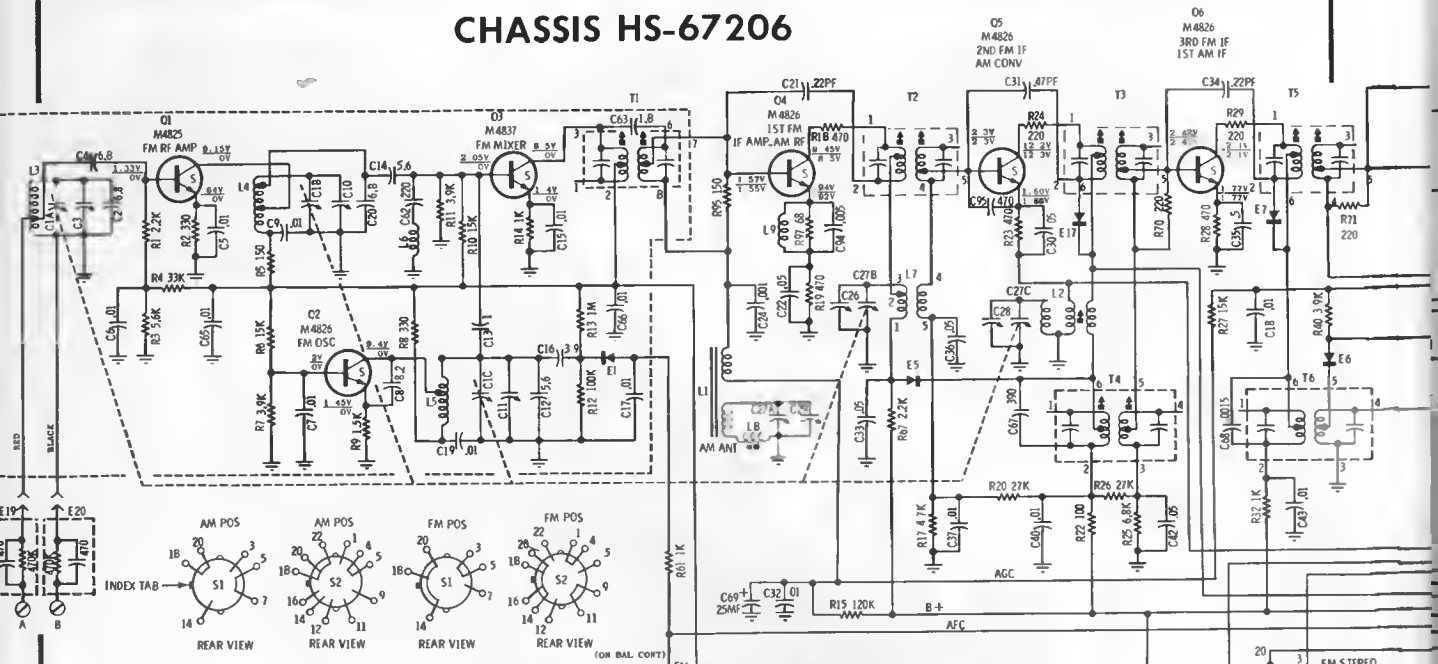

BOTTOM VIEW

FM-RF PLATED BOARD (PART OF CHASSIS HS-67206)

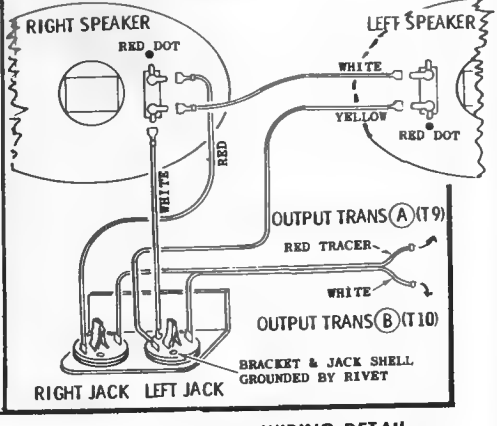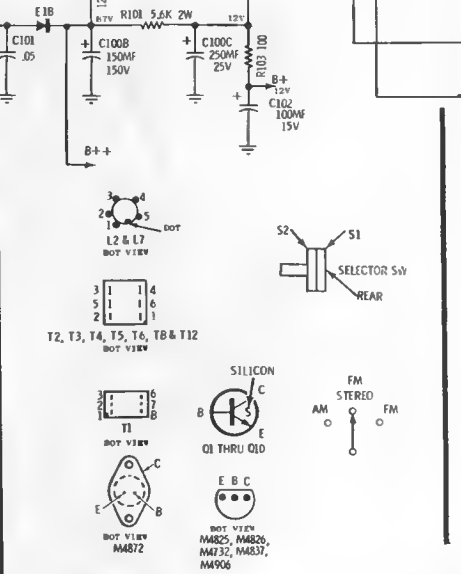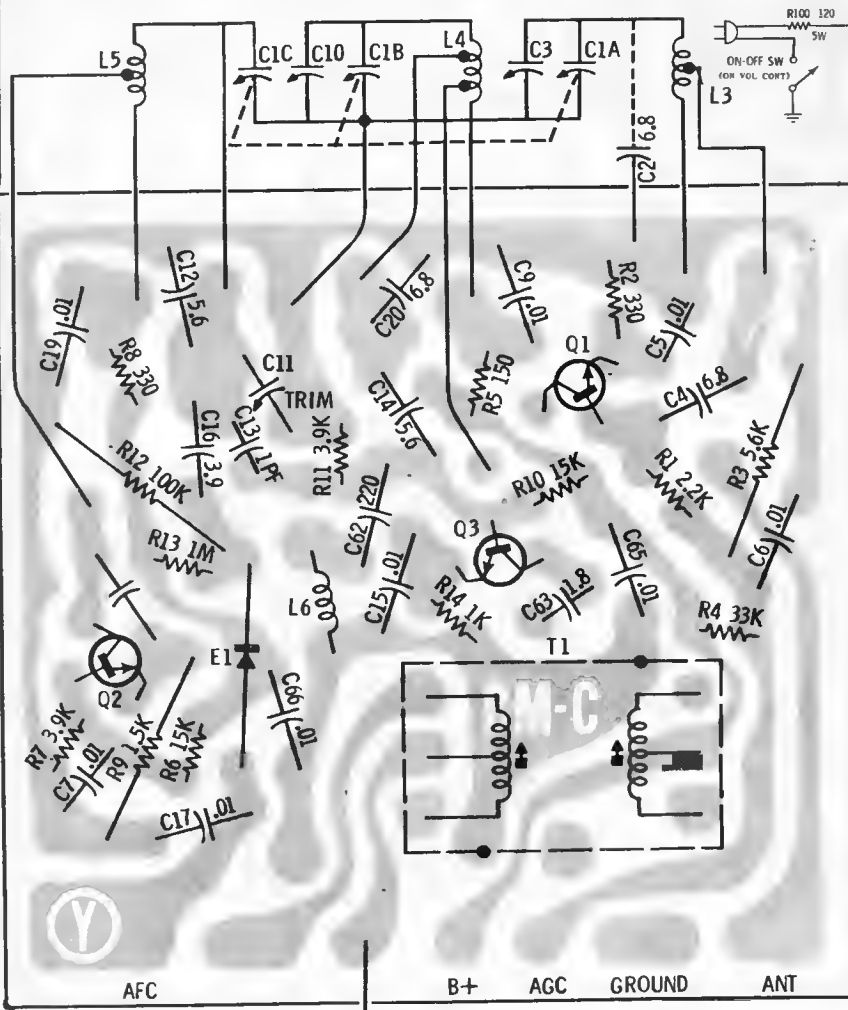

TO IF



SPEAKER WIRING DETAIL

MOTOROLA

MODEL TT22C CHASSIS HS-67206

(Continued from preceding page.)

07
M4826
4TH FM IF

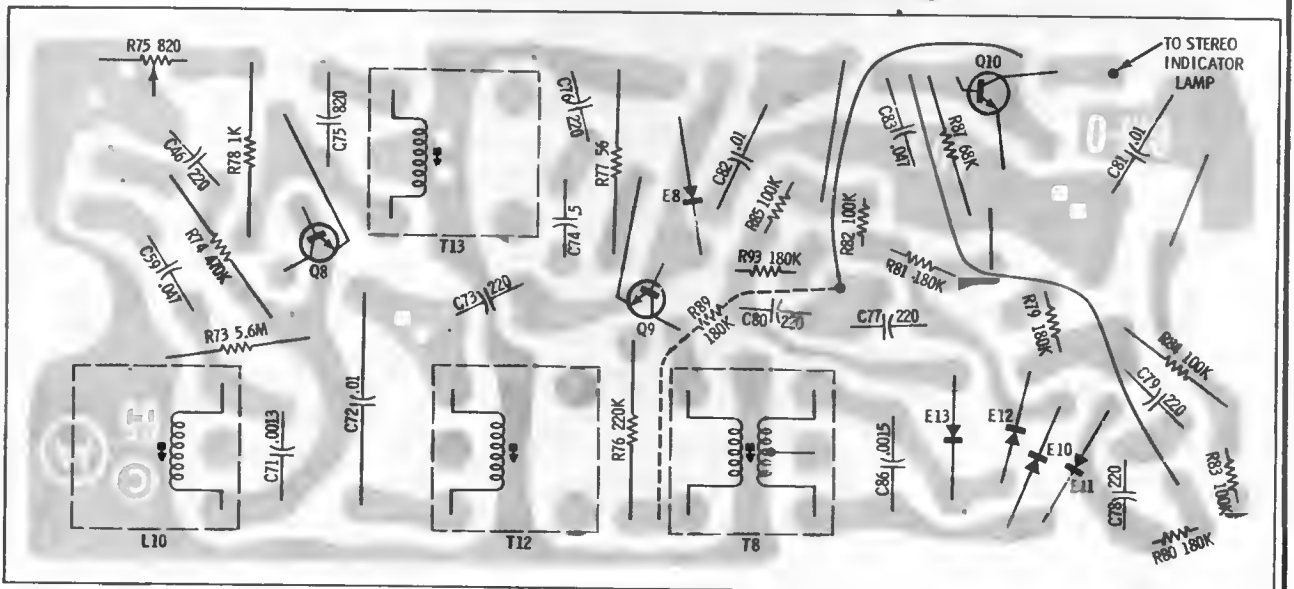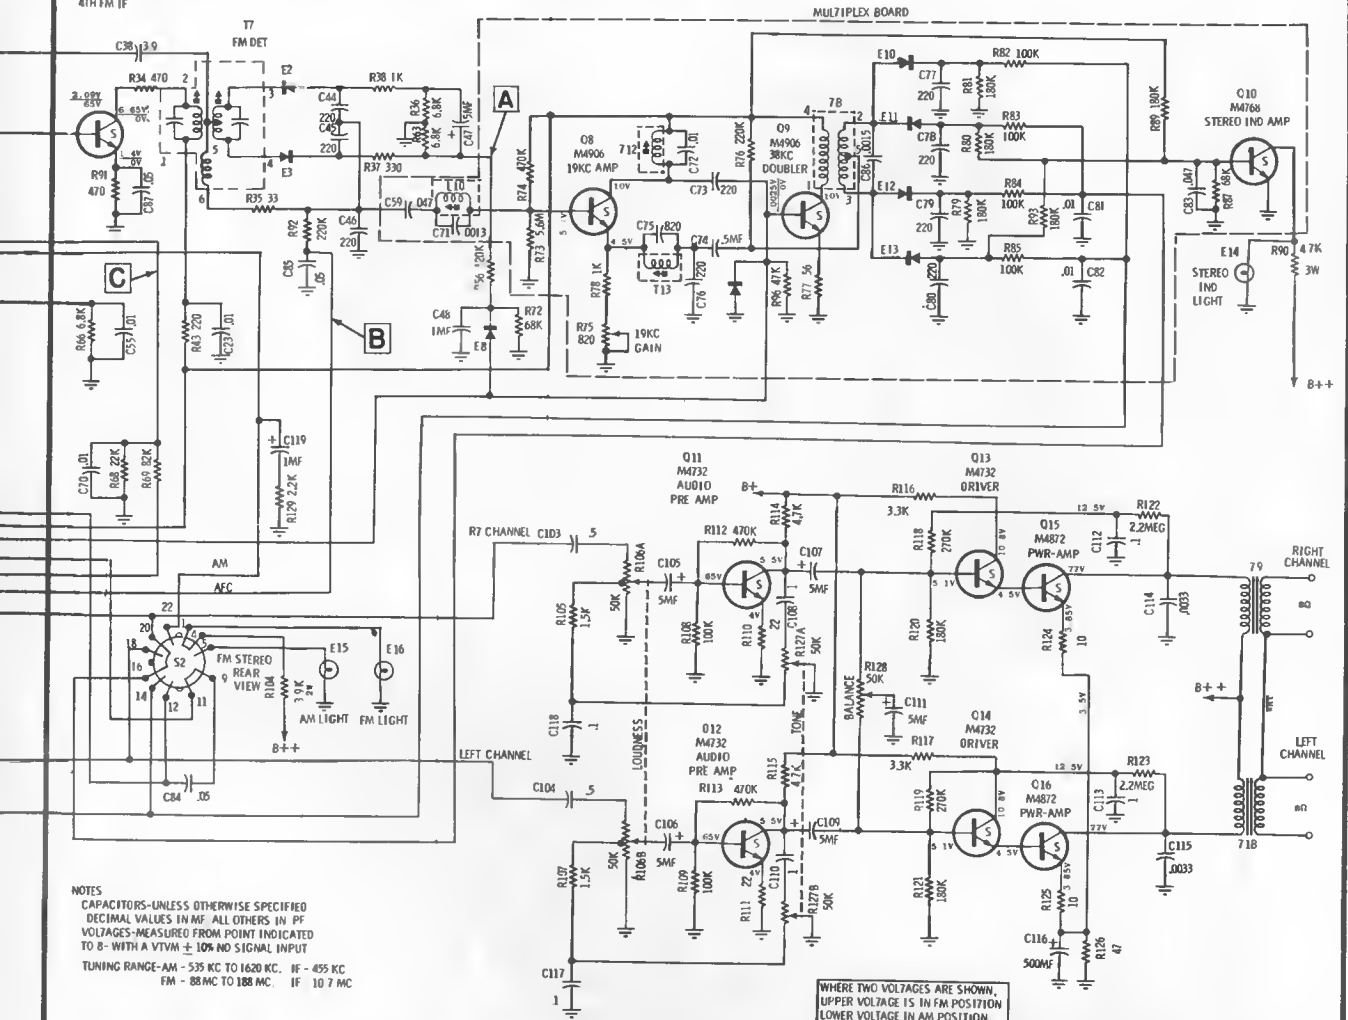



BOTTOM VIEW
MULTIPLY CIRCUIT BOARD (PART OF HS-67206)

MOTOROLA

(Continued on next page.)

MODELS TC11C, 13C TT18C, 20C


CHASSIS HS-68212 HS-67211

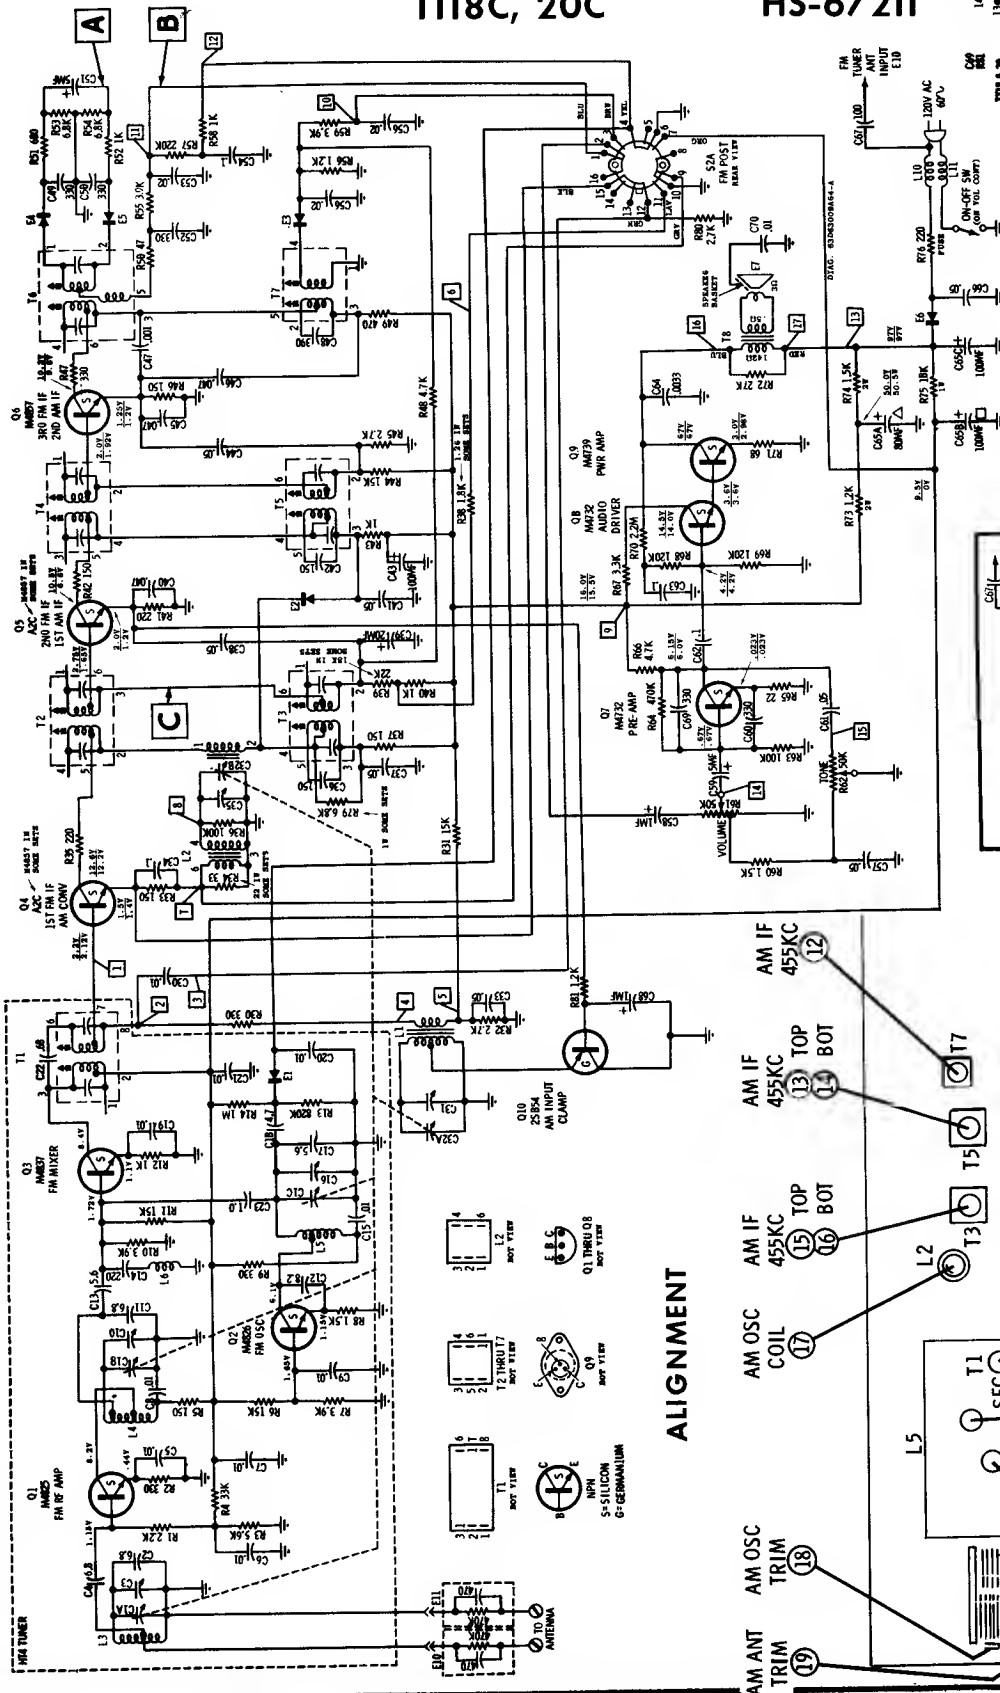


NUMBERS IN SQUARES REFER TO WIRES COMING OUT OF P.C.B.

NOTES:
CAPACITORS - UNLESS OTHERWISE SPECIFIED, DECIMAL VALUES IN μ F; ALL OTHERS IN P.F.
VOLTAGE VALUES WITH \pm SIGN INDICATE TUNING RANGE.
AM - 455KC TO 1600KC. IF - 455KC
FM - 88MC TO 108MC. IF - 10.7MC

WHERE TWO VOLTAGES ARE SHOWN, UPPER VOLTAGE IS IN PAIR POSITION, LOWER VOLTAGE IS IN AM POSITION



ALIGNMENT

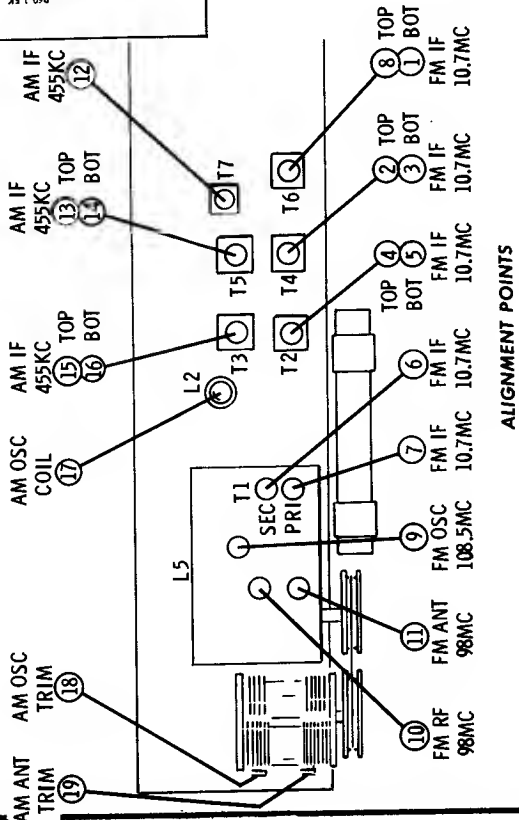


MOTOROLA


MODELS TC11C, 13C TT18C, 20C

CHASSIS HS-68212 HS-67211

(Continued from preceding page.)


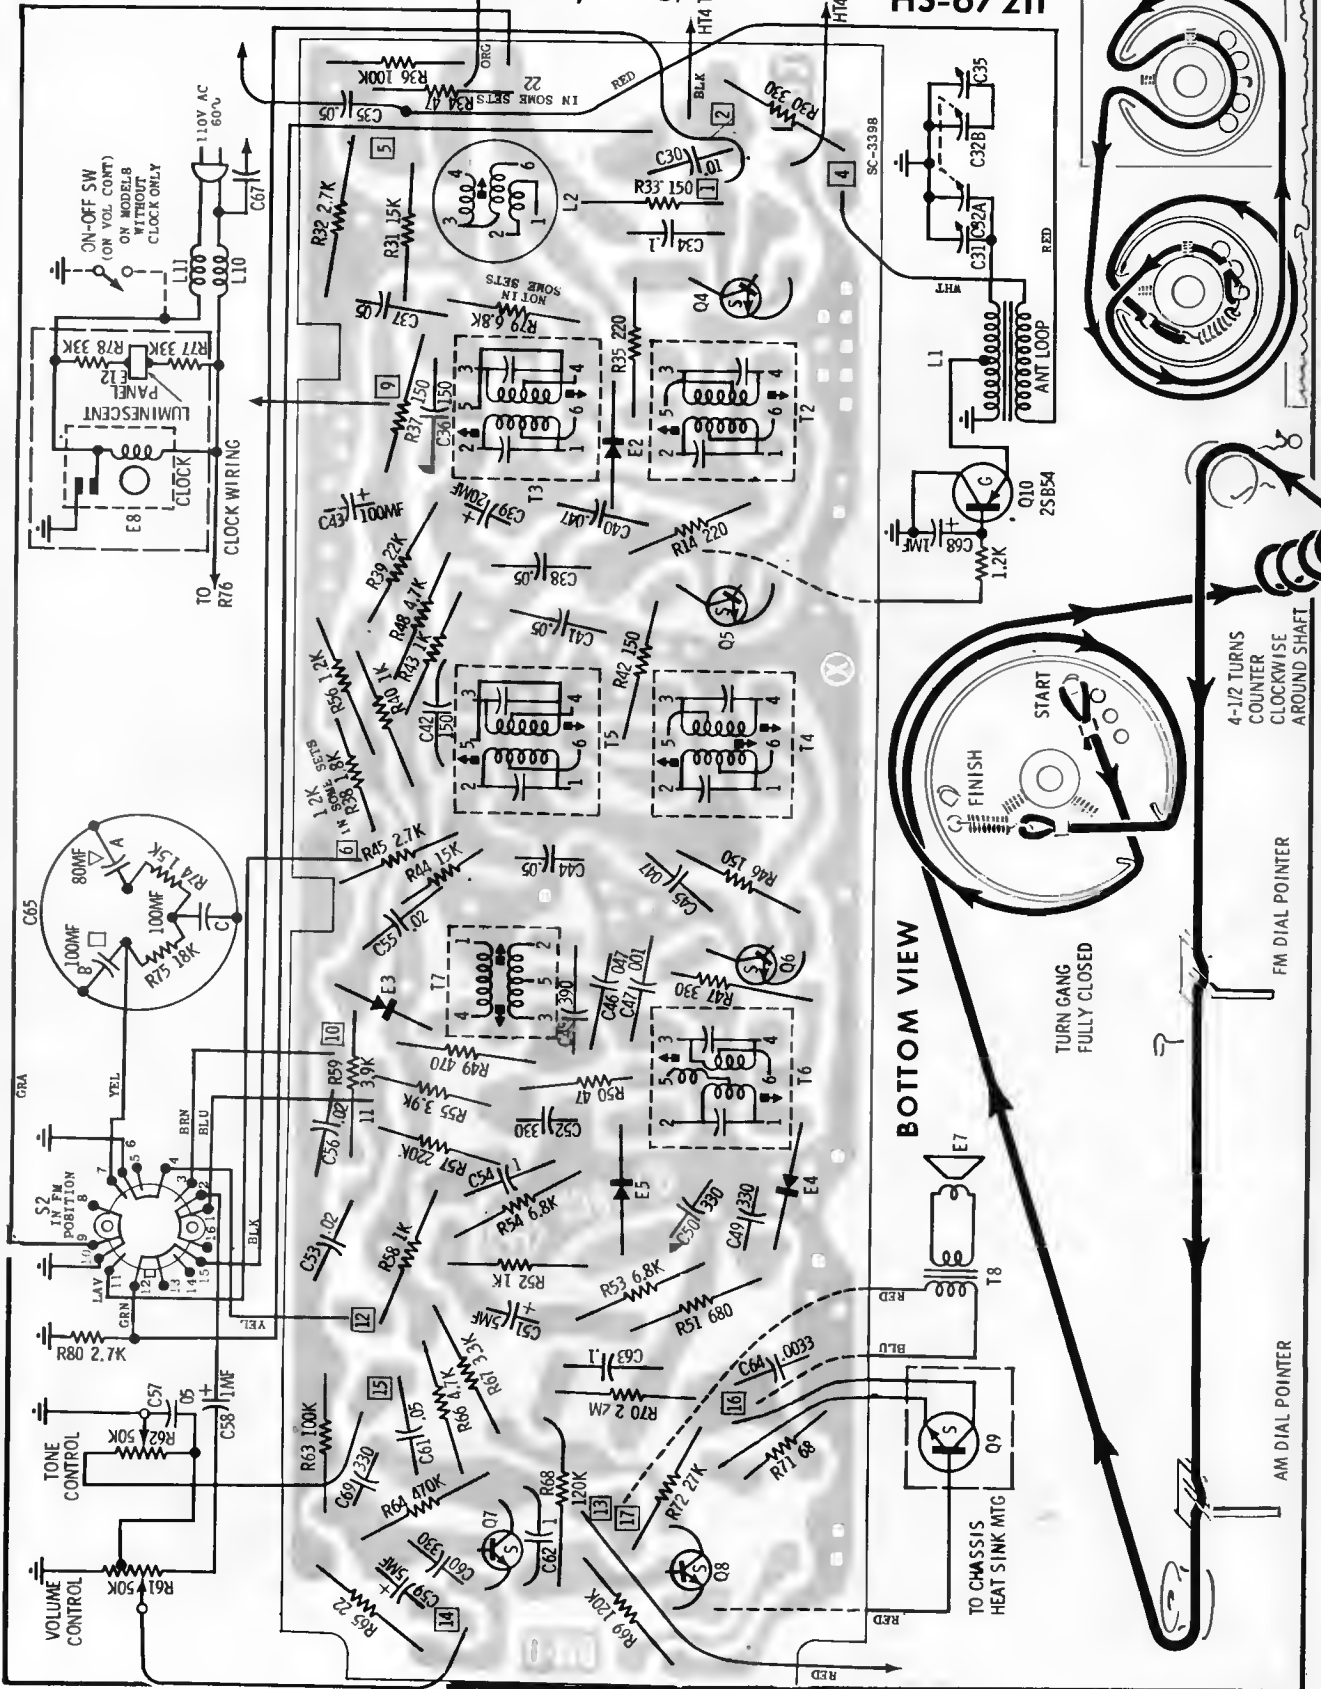


MOTOROLA Chassis HS-68214, HS-67214; Models TC12C, TC14C, TT19C, TT21C


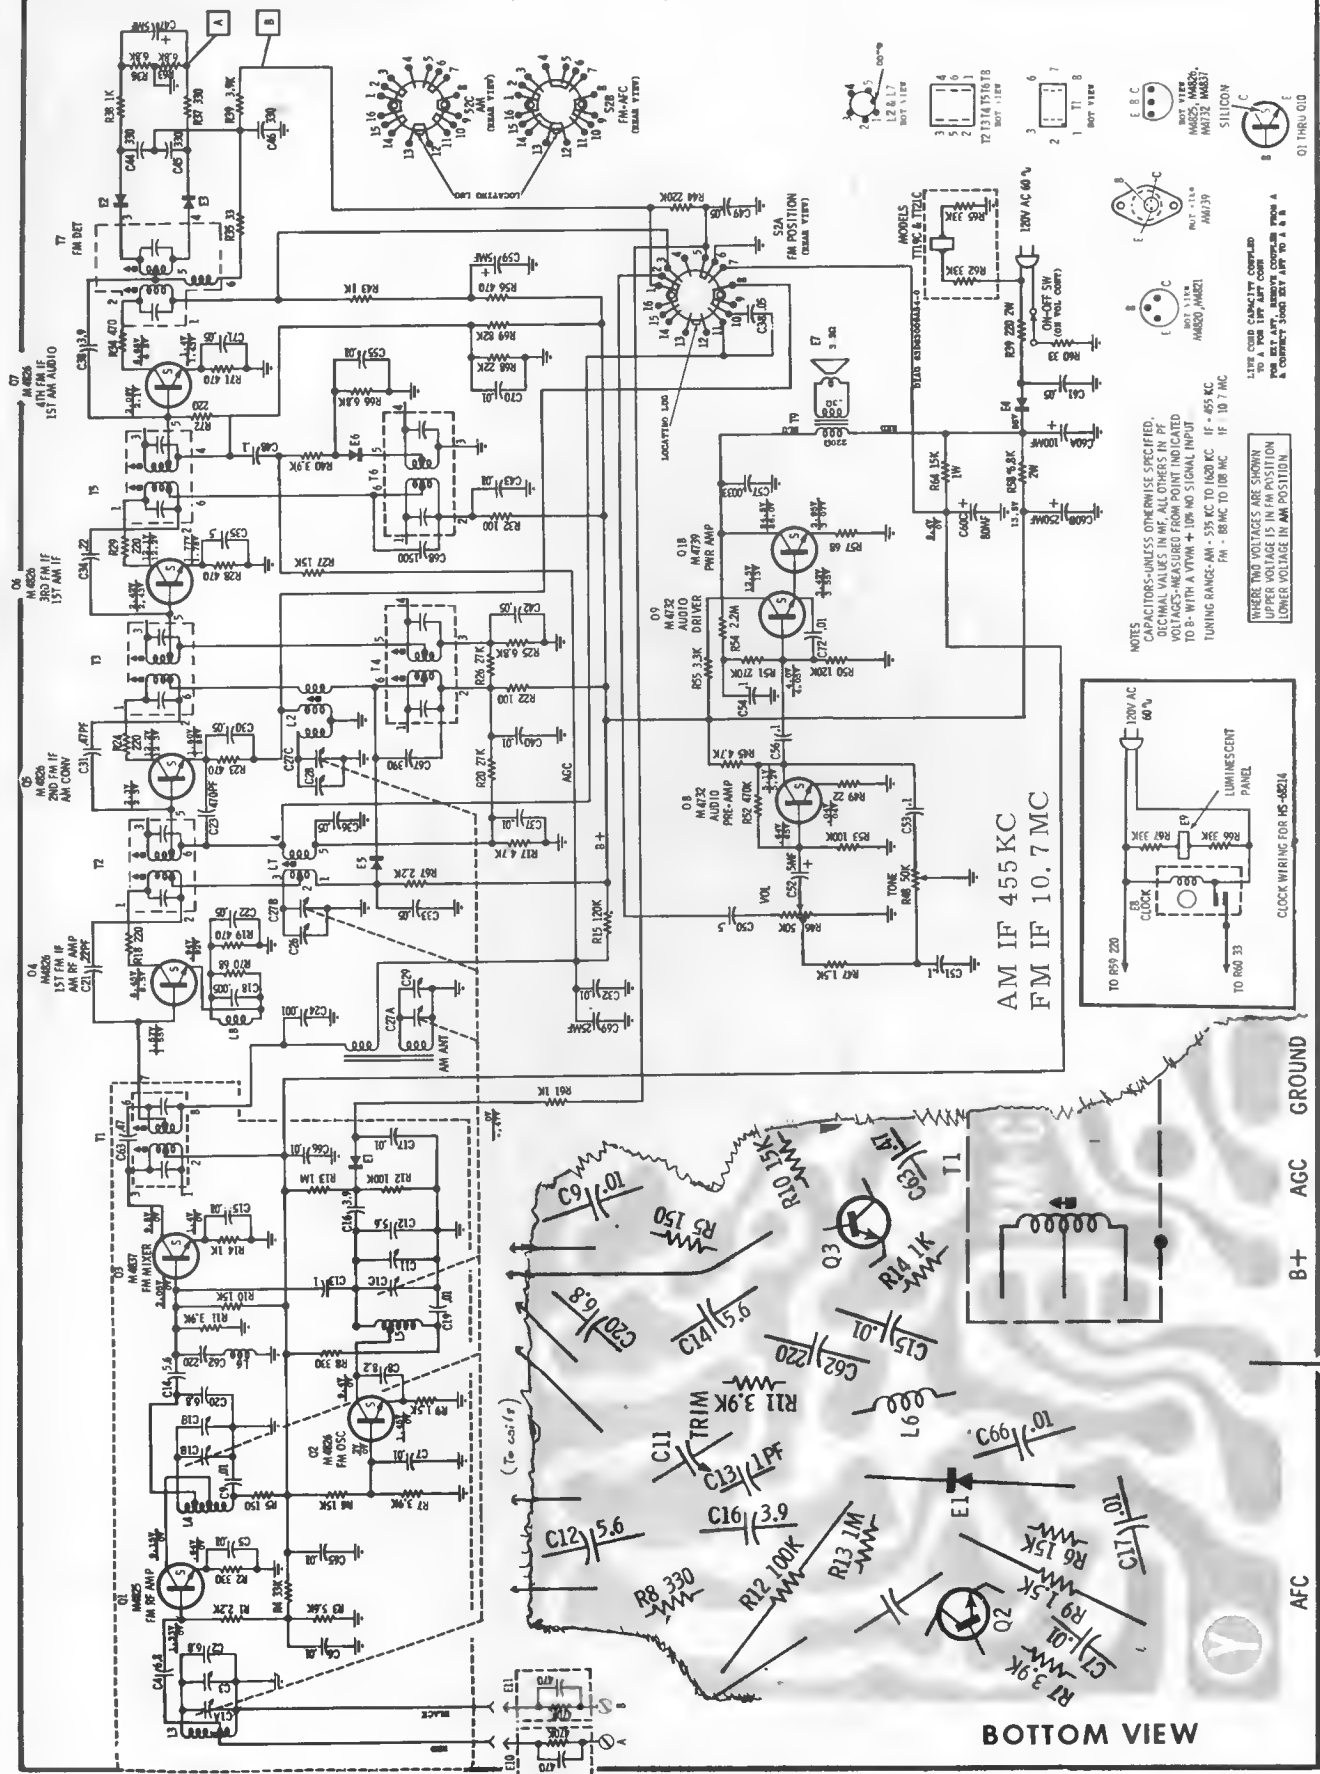


MOTOROLA MODEL TP1D

AM IF 455KC
FM IF 10.7MC

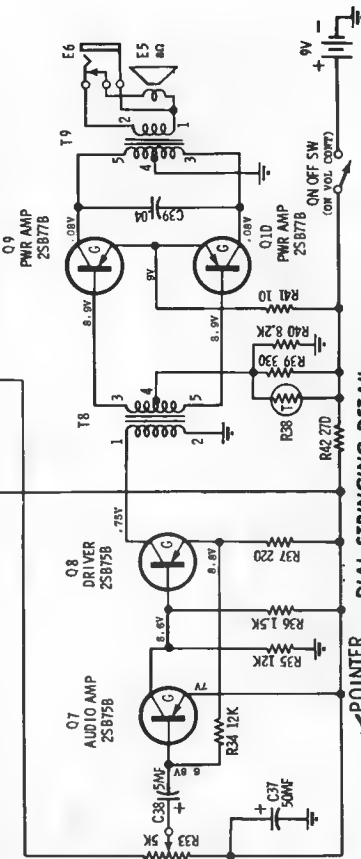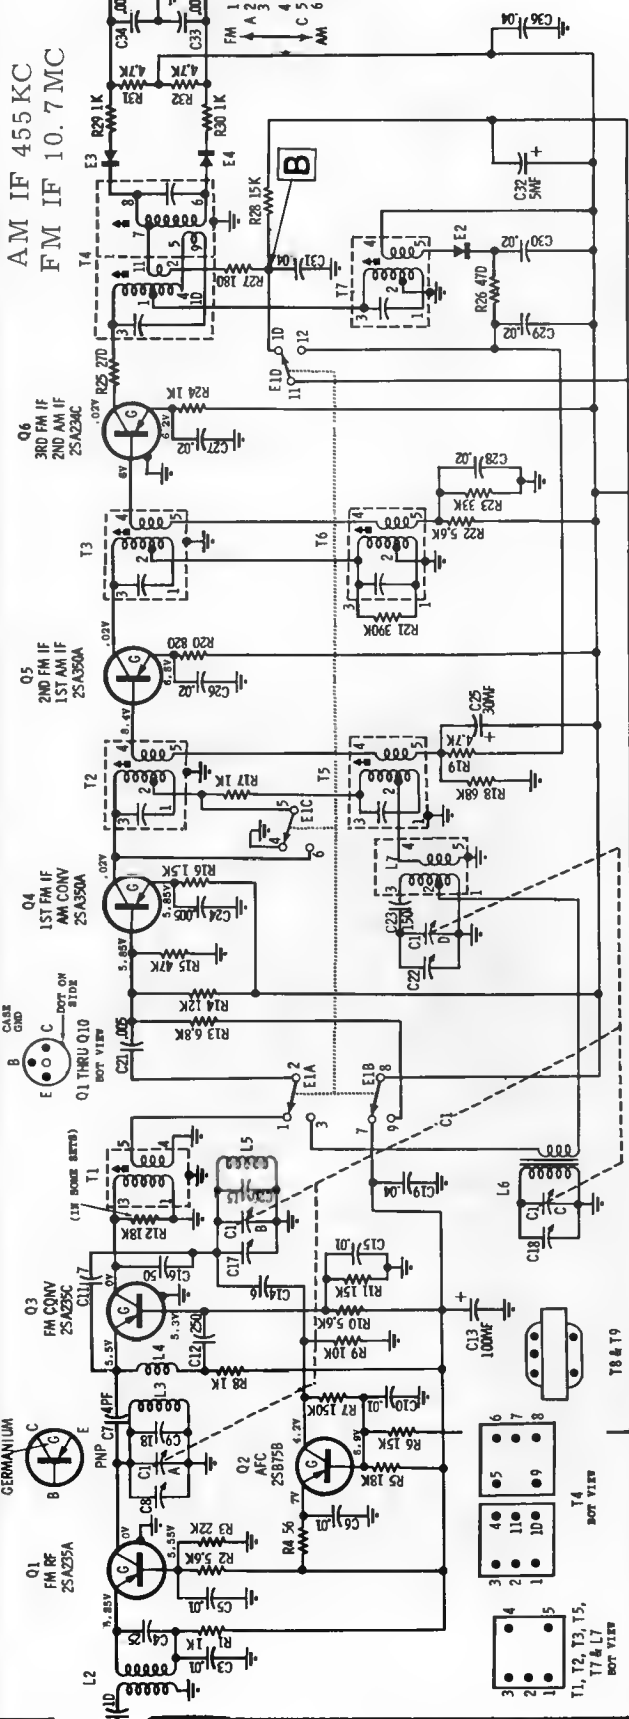


NOTES:
CAPACITORS-UNLESS OTHERWISE SPECIFIED
DECIMAL VALUES IN MF, ALL OTHER IN PF.
VOLTAGES-MEASURED FROM POINT INDICATED
TO GROUND WITH VTVM±10% NO SIGNAL IN.
INPUT VOLTAGE- 9V
TUNING RANGE-
FM 88MC TO 108MC IF 10.7MC
AM 540KC TO 1600KC IF 455KC
ZERO SIGNAL CURRENT-APPROX. 11MA
EI SHOWN IN FM POSITION

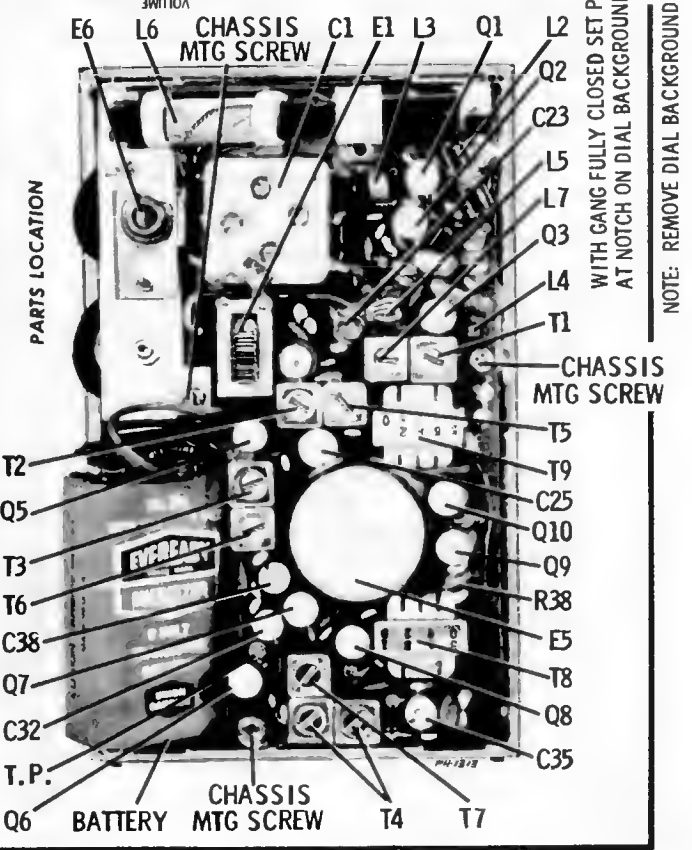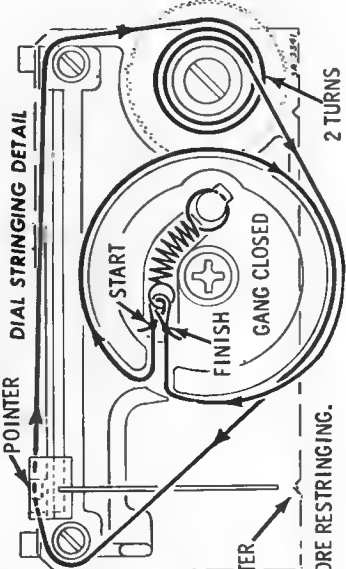


NOTE: REMOVE DIAL BACKGROUND BEFORE RESTRINGING.


MOTOROLA MODEL TM318M

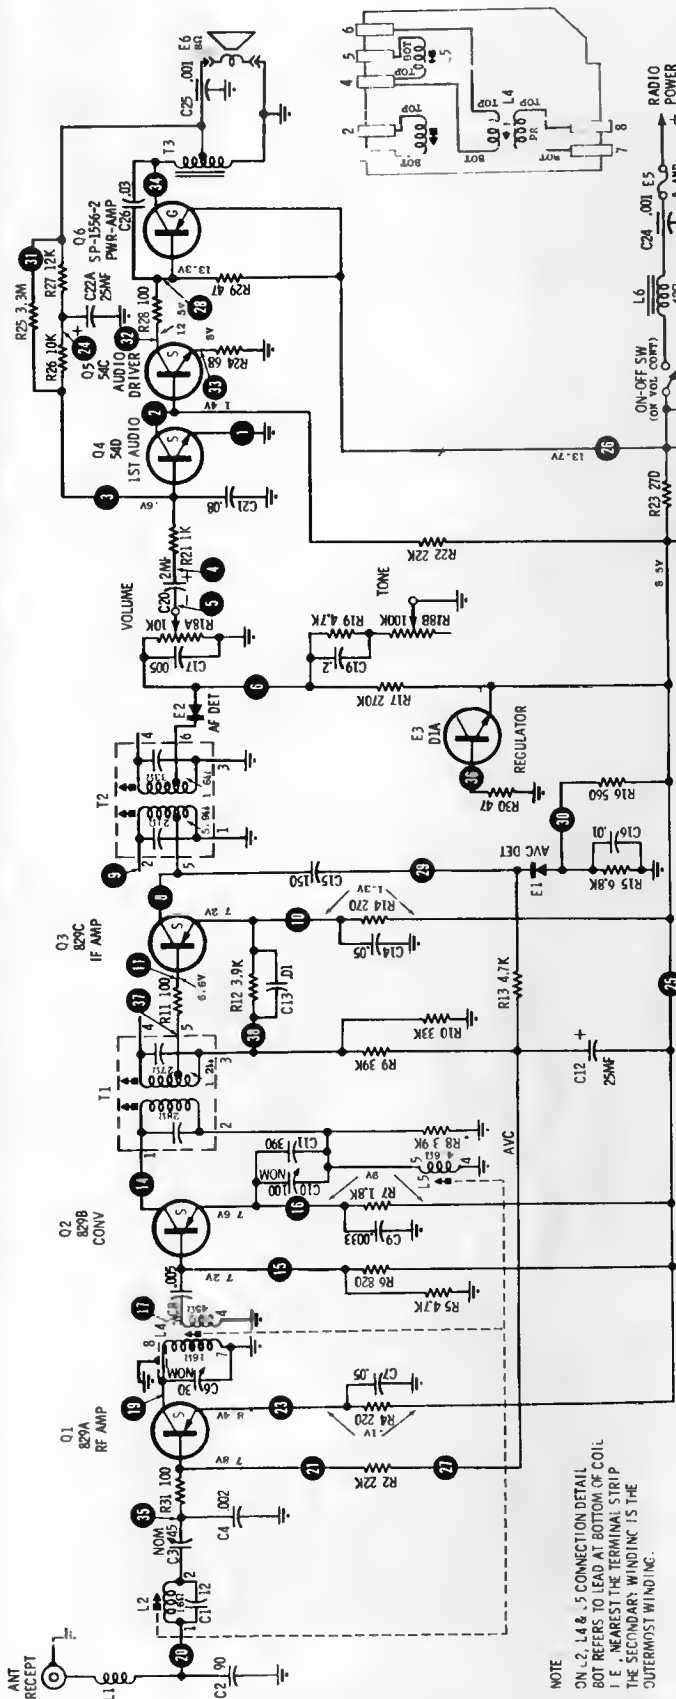

NOTE
ON L2, L4 & L5 CONNECTION DETAIL
BOT REFERS TO LEAD AT BOTTOM OF COIL
I.E. NEAREST THE TERMINAL STRIP
THE SECONDARY WINDING IS THE
OUTERMOST WINDING.

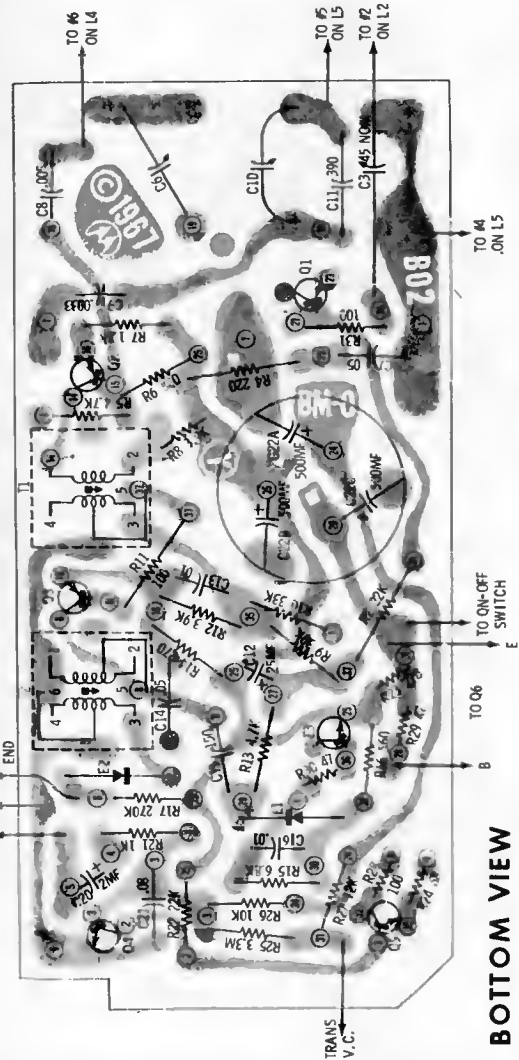


BOTTOM VIEW

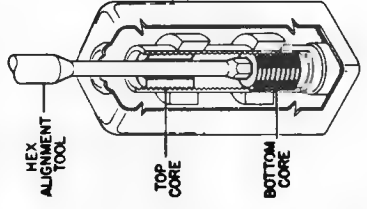


IF ALIGNMENT DETAIL

NOTES:
CAPACITORS - UNLESS OTHERWISE SPECIFIED,
VALUES LESS THAN 1 IN MF. ALL OTHERS IN PF.
VOLTAGES - MEASURED FROM POINT INDICATED
TO GND WITH VTVM ± 10%, NO SIGNAL IN
INPUT VOLTAGE - 14V DC.
TUNING RANGE - 540KC TO 1610KC
IF FREQ - 262.5KC

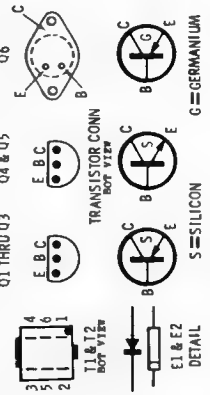




Q1 THRU Q6
E, B, C
TRANSISTOR CONN
BOT VIEW
S = SILICON
G = GERMANIUM
E1 & E2
DETAIL

MOTOROLA MODEL TM327M

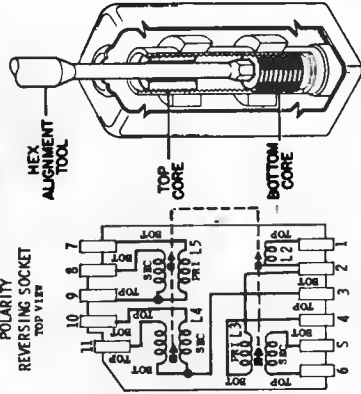

IF ALIGNMENT DETAIL
NOTE: ON L2, L3, L4 & L5 CONNECTION DETAIL, BOT REFERS TO LEAD AT BOTTOM OF COIL I.E. NEAREST THE TERMINAL STRIP. THE SECONDARY WINDING IS THE OUTERMOST WINDING.


BOTTOM VIEW

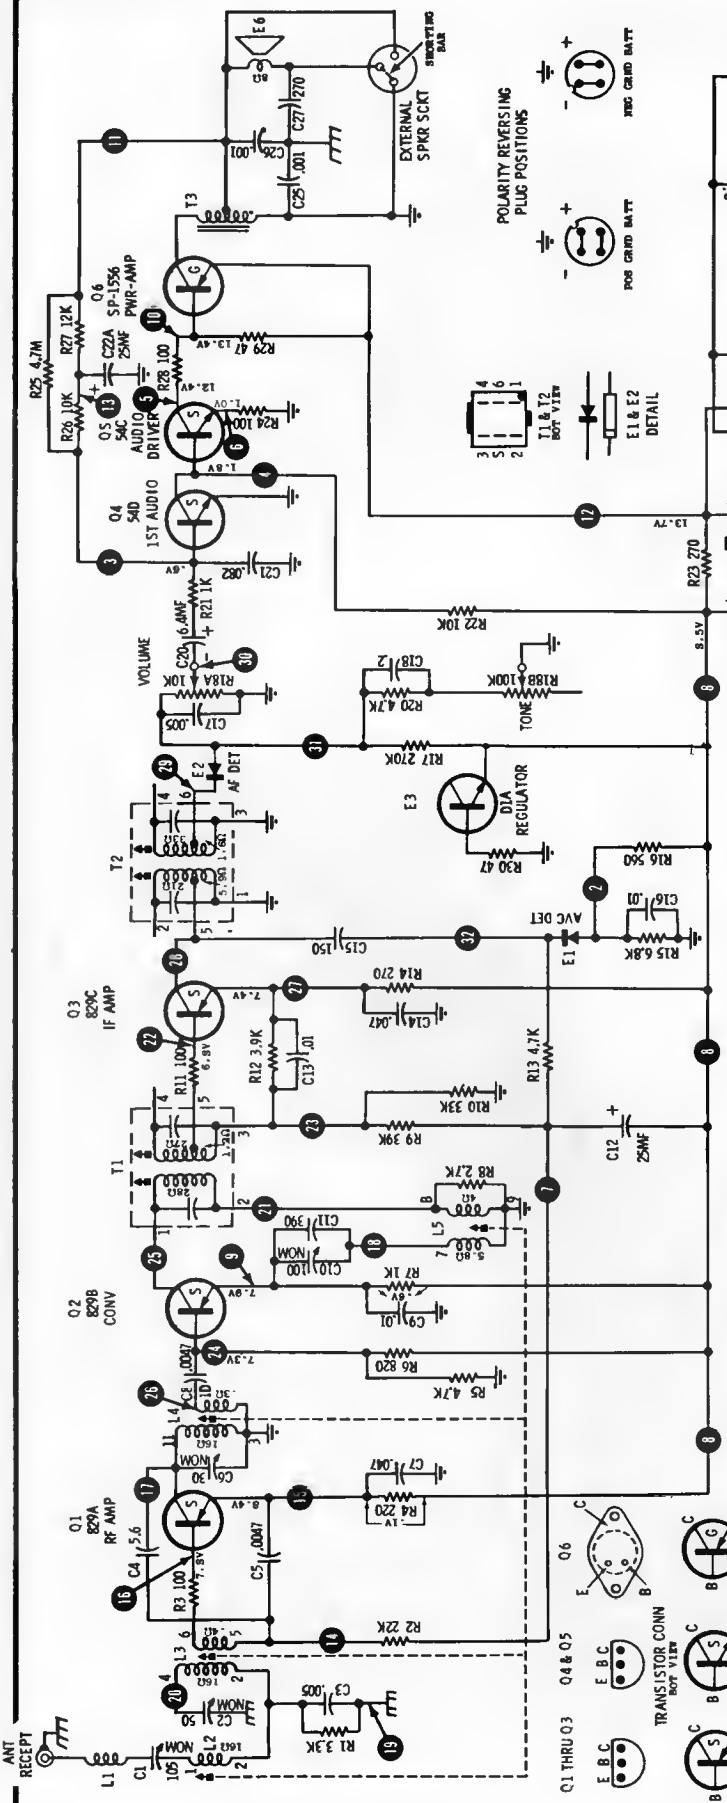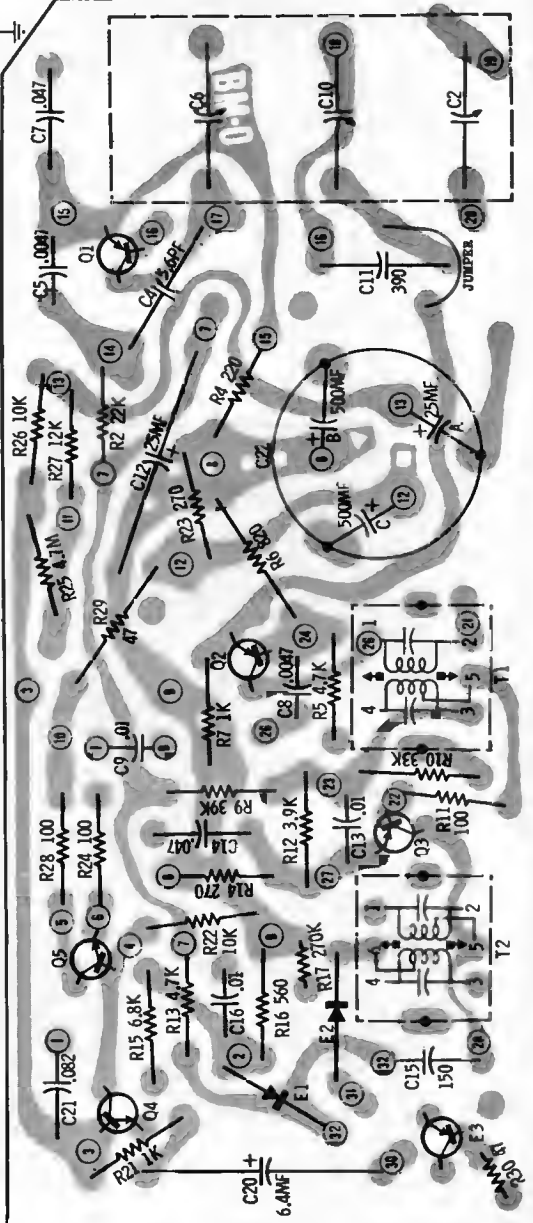



Q1 THRU Q3 Q4 & Q5
E, B, C
S = SILICON G = GERMANIUM
TRANSISTOR CONN DETAIL

ANT RECEPT


MOTOROLA MODEL TM527A

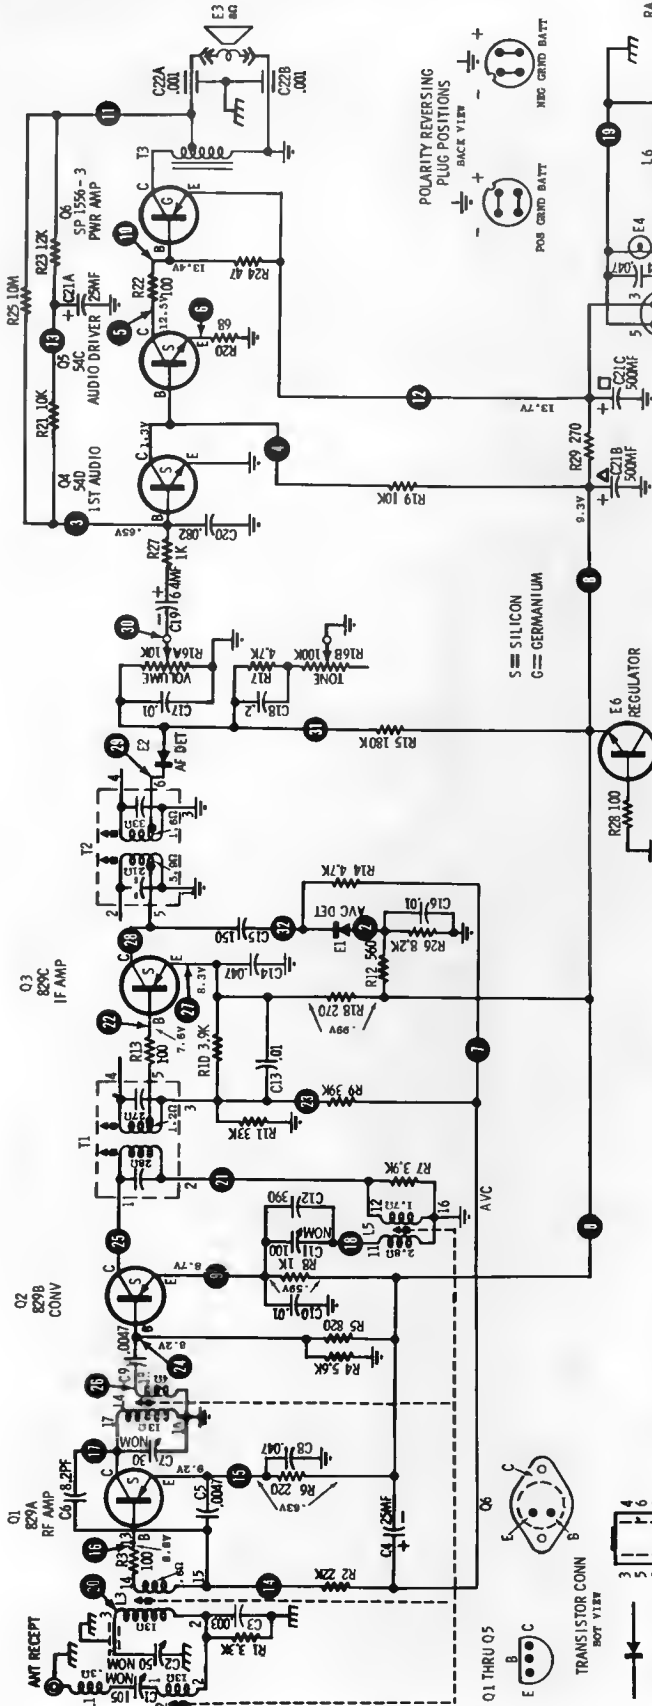

BOTTOM VIEW

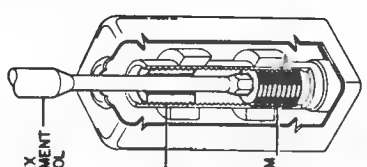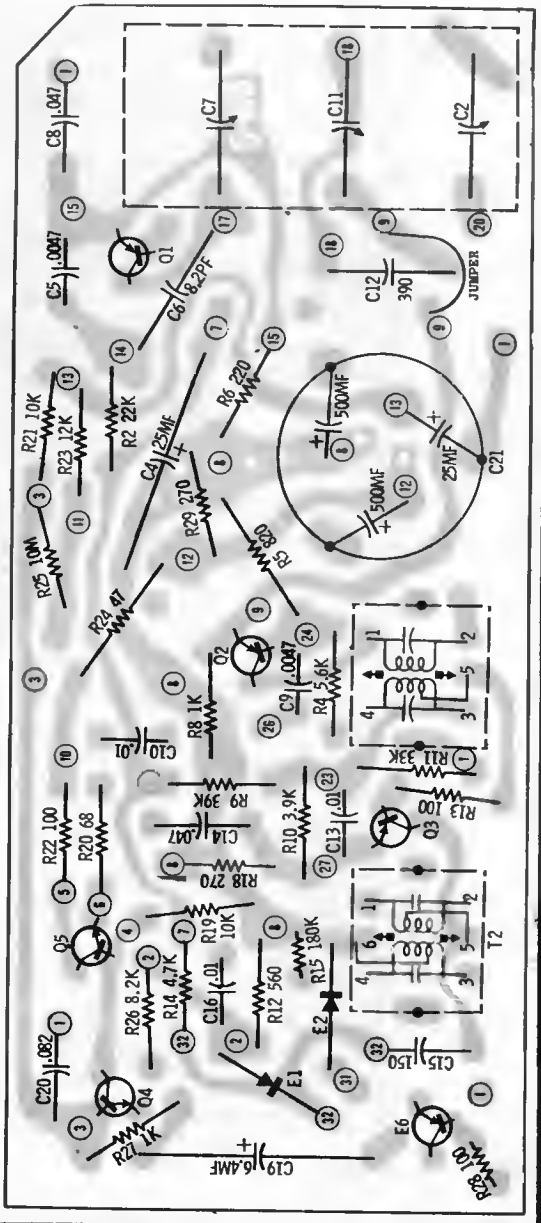



NOTE:
ON L2, L3, L4 & L5 CONNECTION DETAIL, BOT REFERS TO LEAD AT BOTTOM OF COIL I.E., NEAREST THE TERMINAL STRIP. THE SECONDARY WINDING IS THE OUTERMOST WINDING.

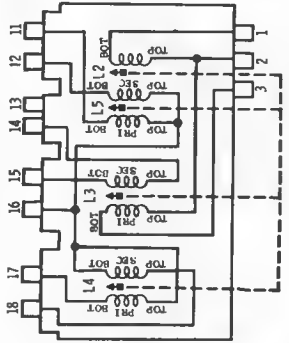

IF ALIGNMENT DETAIL

L2, L3, L4 & L5 CONN DETAIL

MOTOROLA MODEL TM826A

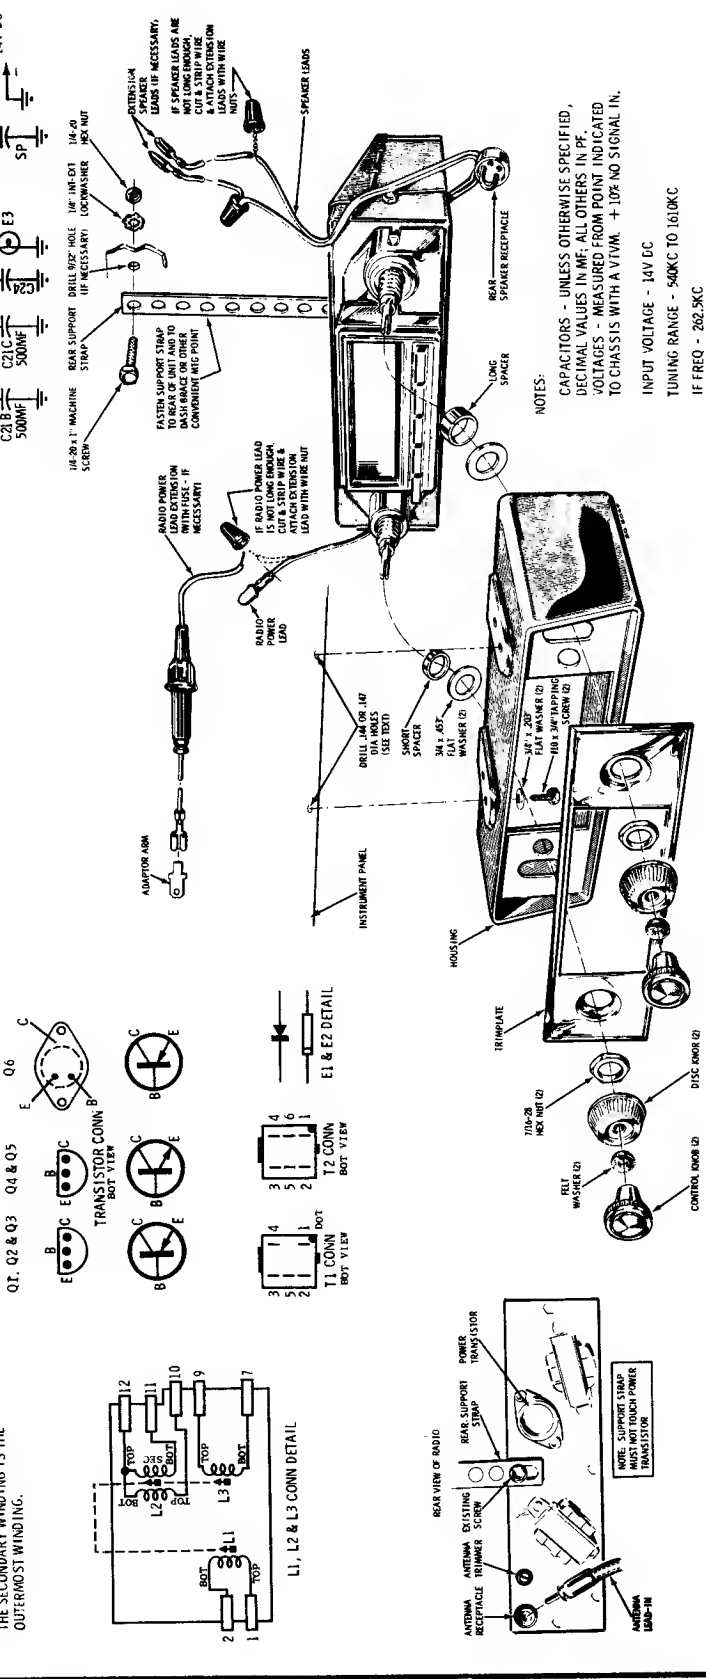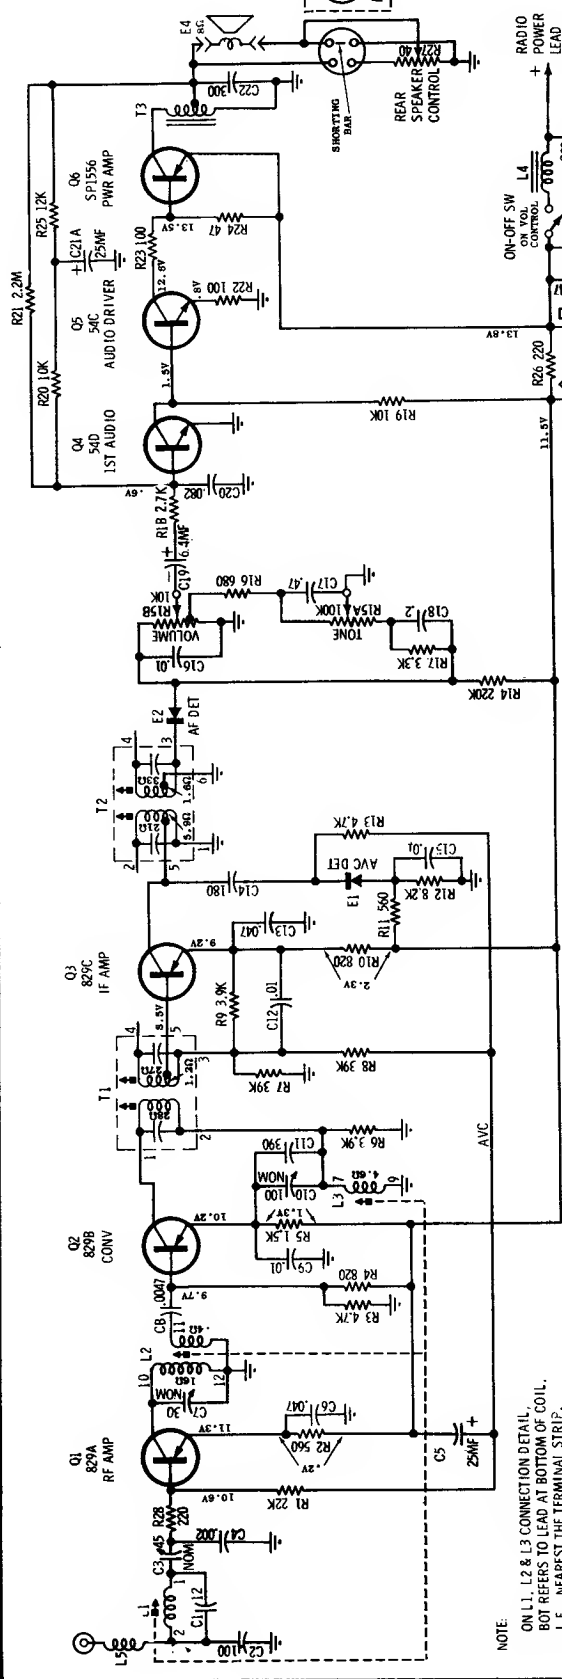


NOTES:
 CAPACITORS - UNLESS OTHERWISE SPECIFIED, DECIMAL VALUES IN MF; ALL OTHERS IN PF.
 VOLTAGES - MEASURED FROM POINT INDICATED TO CHASSIS WITH A VTVM. +10% NO SIGNAL IN.
 INPUT VOLTAGE - 14V DC
 TUNING RANGE - 540KC TO 1610KC
 IF FREQ - 282.5KC



NOTE:
 ON L1, L2 & L3 CONNECTION DETAIL, BOT REFERS TO LEAD AT BOTTOM OF COIL, I. E., NEAREST THE TERMINAL STRIP. THE SECONDARY WINDING IS THE OUTERMOST WINDING.

MOTOROLA

MODELS XP19D, XP20D

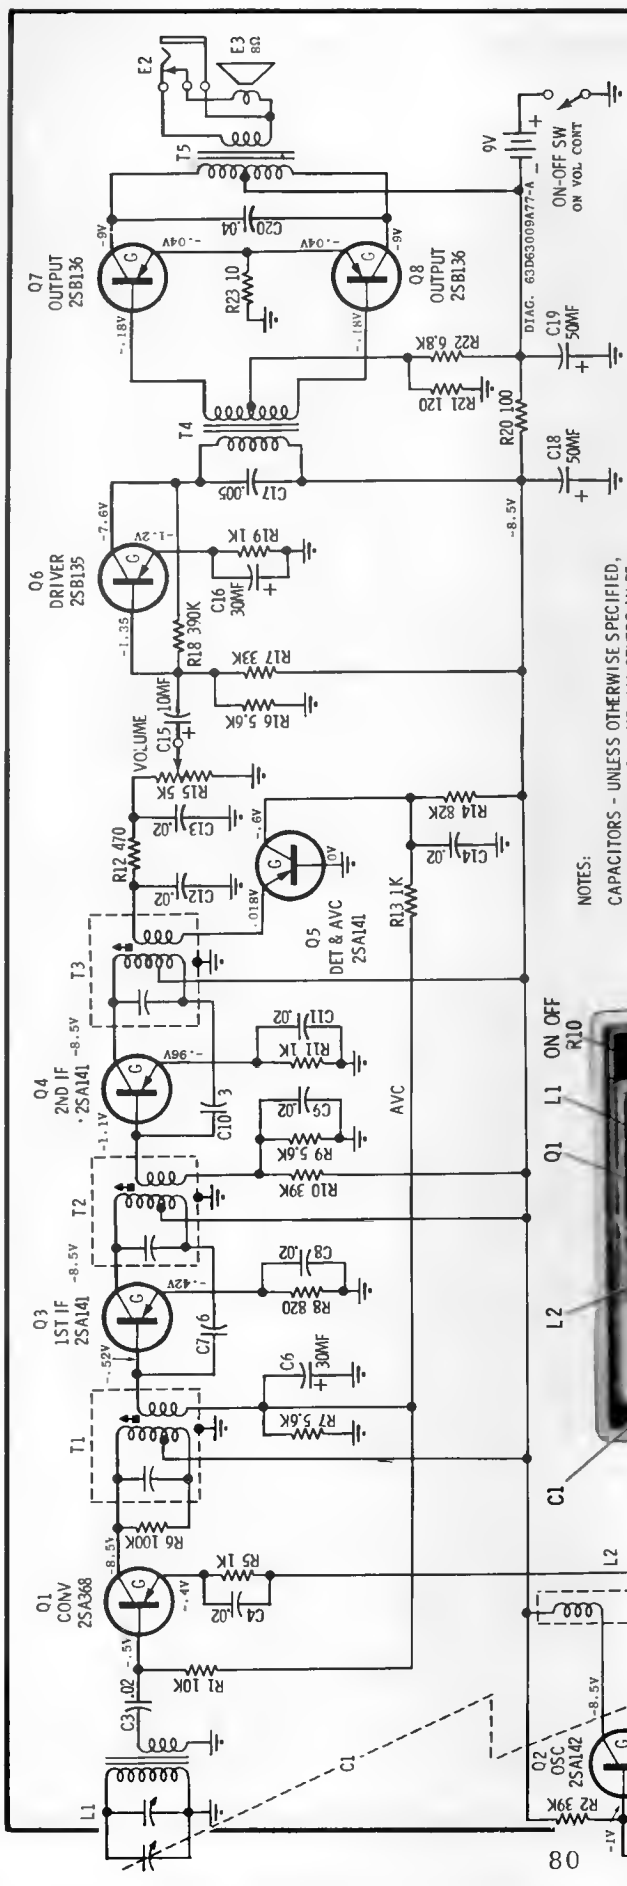


NOTES:
 CAPACITORS - UNLESS OTHERWISE SPECIFIED, DECIMAL VALUES IN MF, ALL OTHERS IN PF.
 VOLTAGES - MEASURED FROM POINT INDICATED TO GROUND WITH VTVM \pm 10%. NO SIGNAL IN INPUT VOLTAGE - 9V
 TUNING RANGE - 540KC TO 1600KC
 ZERO SIGNAL CURRENT - APPROX 9.5MA

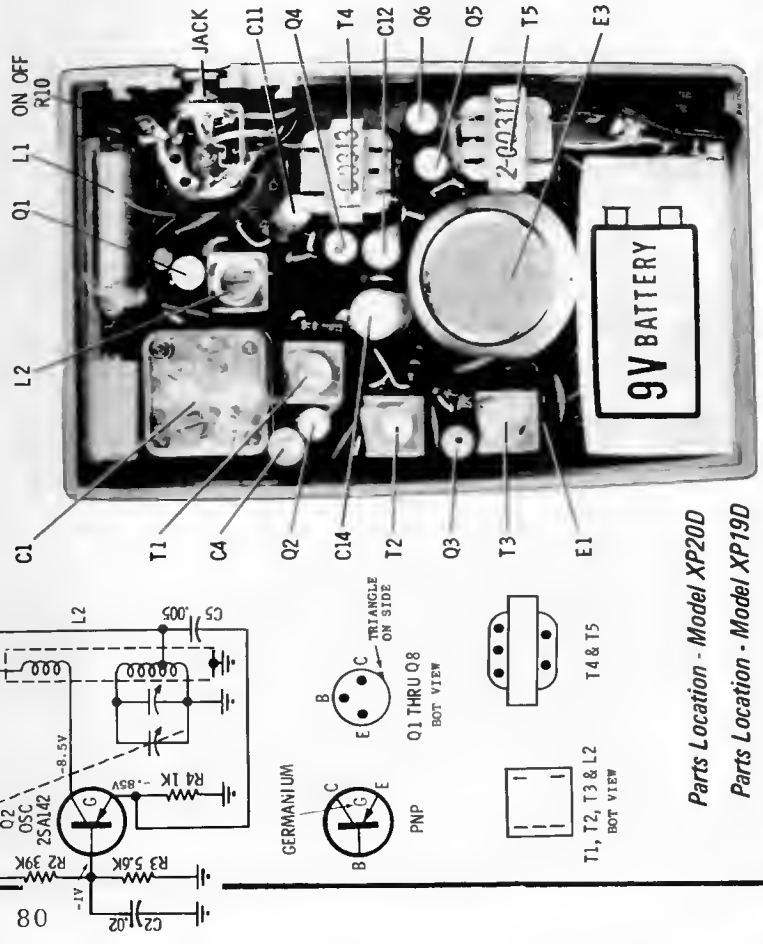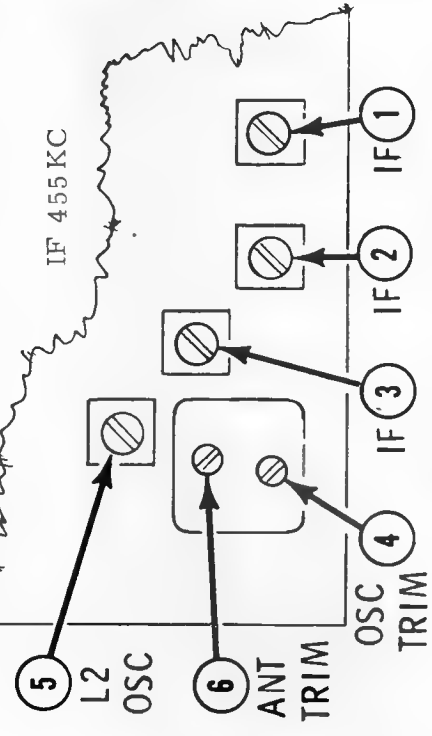


Parts Location - Model XP20D
 Parts Location - Model XP19D

Alignment Points - Models XP19D & XP20D


MOTOROLA MODELS XP22D, XP23D

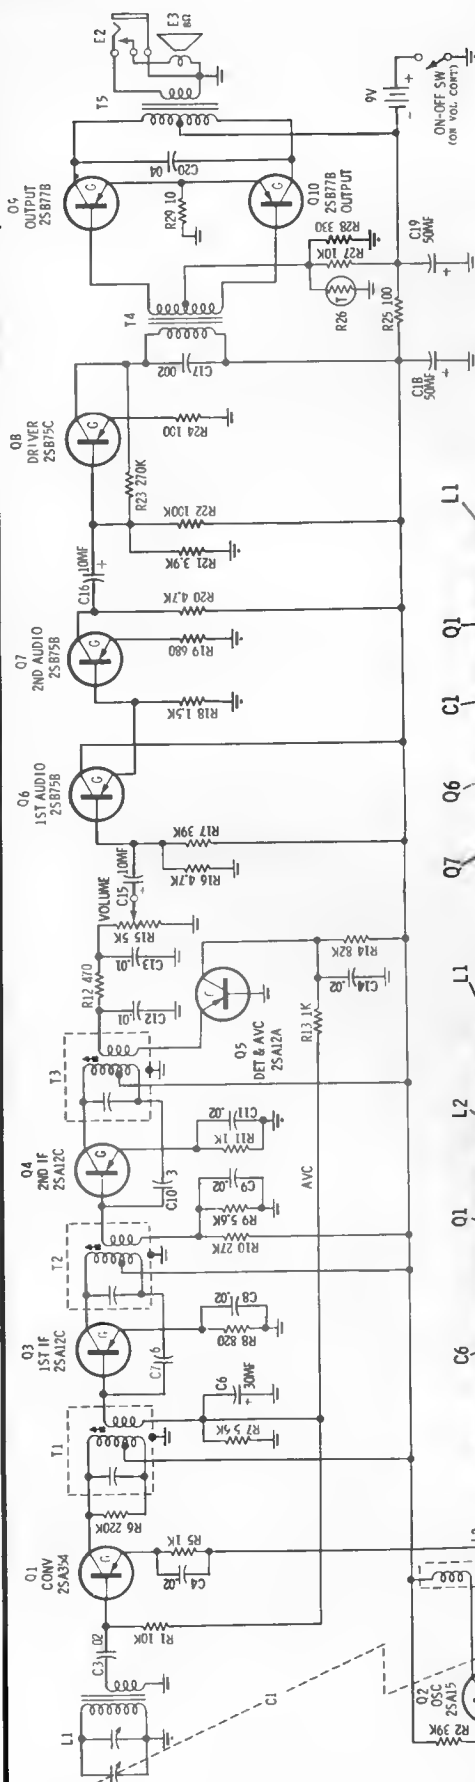


Alignment Points - Model XP22D

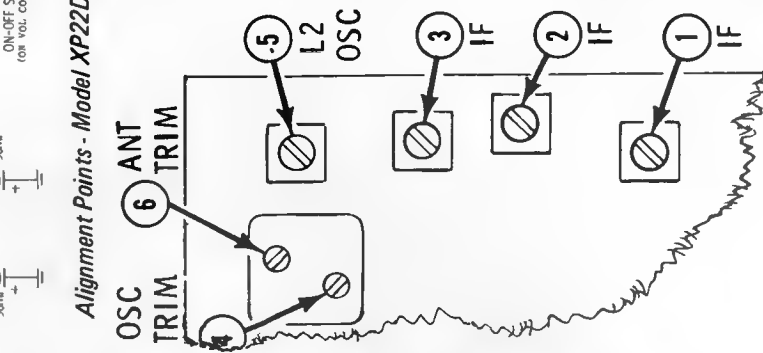


IF 455 KC

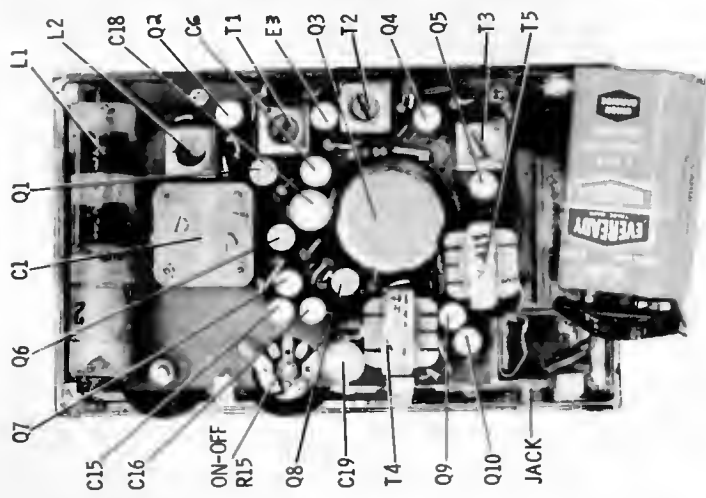

Parts Location - Model XP22D

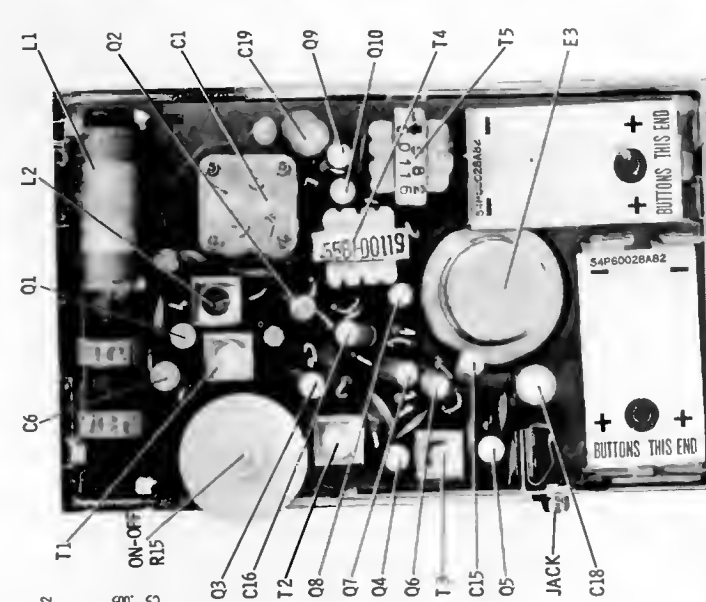

Parts Location - Model XP23D

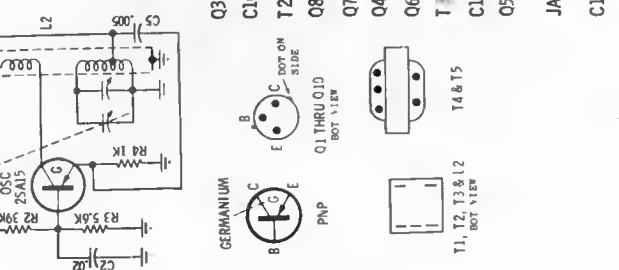


NOTES:
CAPACITORS - UNLESS OTHERWISE SPECIFIED, DECIMAL VALUES IN MF, ALL OTHERS IN PF. VOLTAGES - MEASURED FROM POINT INDICATED TO GROUND WITH VTVM $\pm 10\%$ NO SIGNAL IN INPUT VOLTAGE - 9V TUNING RANGE - 50KC TO 1600KC ZERO SIGNAL CURRENT - APPROX. 9.3MA





Olympic

Models:
AFM 32, 33
CF 34, 35

AM IF 455 KC
FM IF 10.7 MC

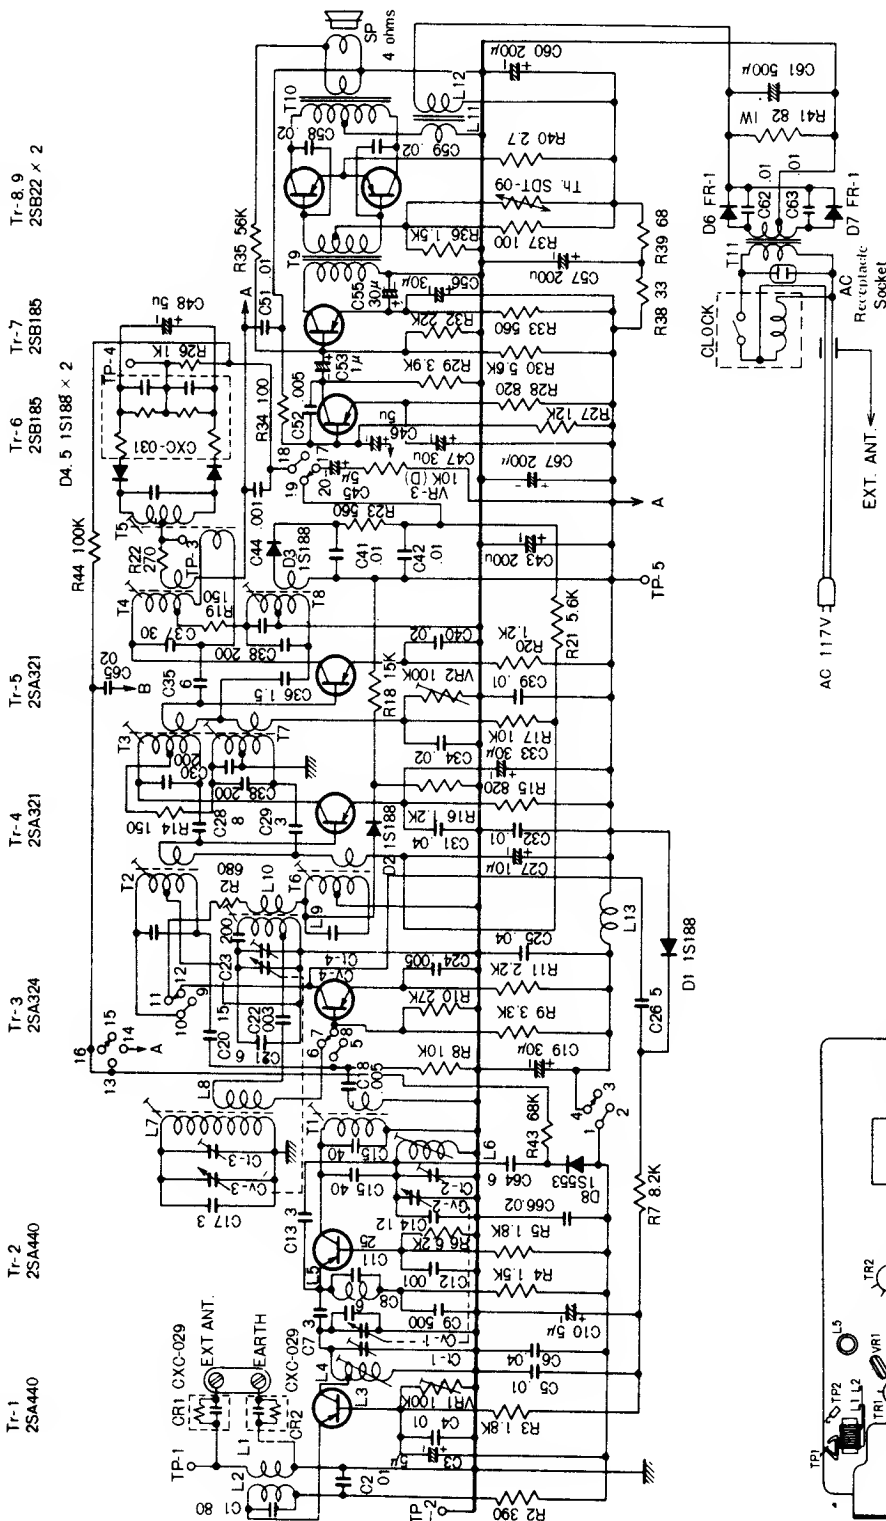


NOTE:
1 All capacitors with decimal values are in μF .
2 All capacitors with whole number values are in μuF (pF) unless otherwise specified.
3 All resistance values in ohms K = 1,000 ohms.

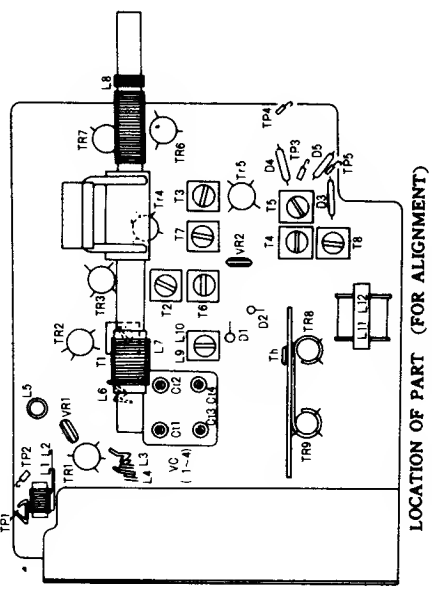



Olympic MODEL AFM 26

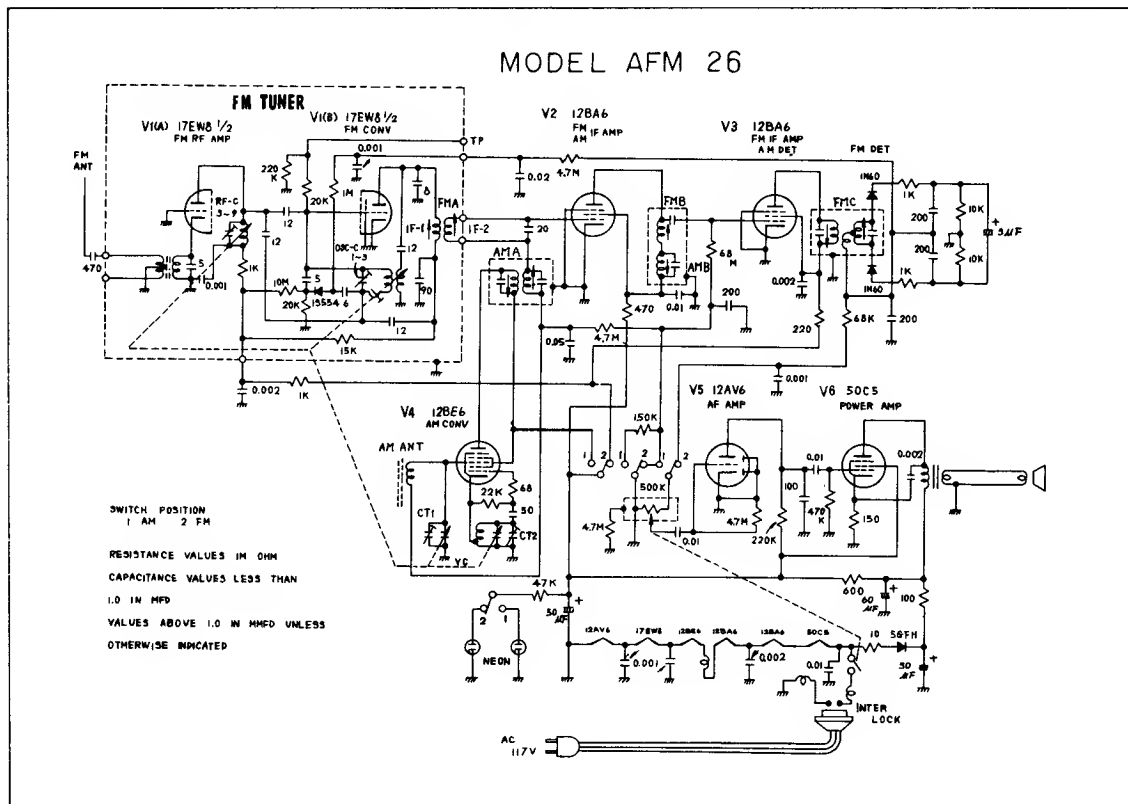


STEP.	Connect high side signal generator to	Set signal generator to	Turn pointer to	Read output on	Adjust the following (keep signal from signal generator as low as possible)	
Before aligning close variable condenser fully counter-clockwise (plates fully closed) and adjust pointer to coincide with the beginning of dial scale						
AM	1	455 KC	Extreme right hand position (condenser fully open)	Output meter across speaker voice-coil	AMA (Slug on top of chassis. Slug on underside of chassis for maximum reading)	
	2				AMB (Slug on underside of chassis for maximum reading)	
	3	1400 KC	1400 KC on dial		CT2 (Oscillator trimmer for maximum output)	
	4				CT1 (Antenna trimmer for maximum output)	
	5				600 KC	600 KC on dial
FM	1	10.7 MC	Extreme right hand position (condenser fully open)	Connect oscilloscope across condenser (200MMFD) of FM DET maximum view of S curve	FMA (Slug on IF-1 of tuner. Slug on IF-2 of tuner for maximum)	
	2				FMB (Slug on top of chassis for maximum)	
	3				FMC (Slug on top of chassis. Slug on underside of chassis for maximum reading)	
	4	108 MC	108 MC		OSC-C (oscillator trimmer for maximum output)	
	5	98 MC	98 MC		Output meter across speaker voice-coil	RF-C (FM.RF. Amp trimmer for maximum output)
	6					90 MC

NOTE: This Chassis is connected to one side of the power line. On AC operation an isolation transformer should be used to prevent shock hazard. To protect the signal generator, if no isolation transformer available or if the radio is operated on DC, connect a 0.1 μ F capacitor between the high side of the signal generator and the radio. The output of the signal generator be no higher than necessary to obtain a usable output reading. Connect signal generator ground to chassis.

Olympic


MODEL SA 501

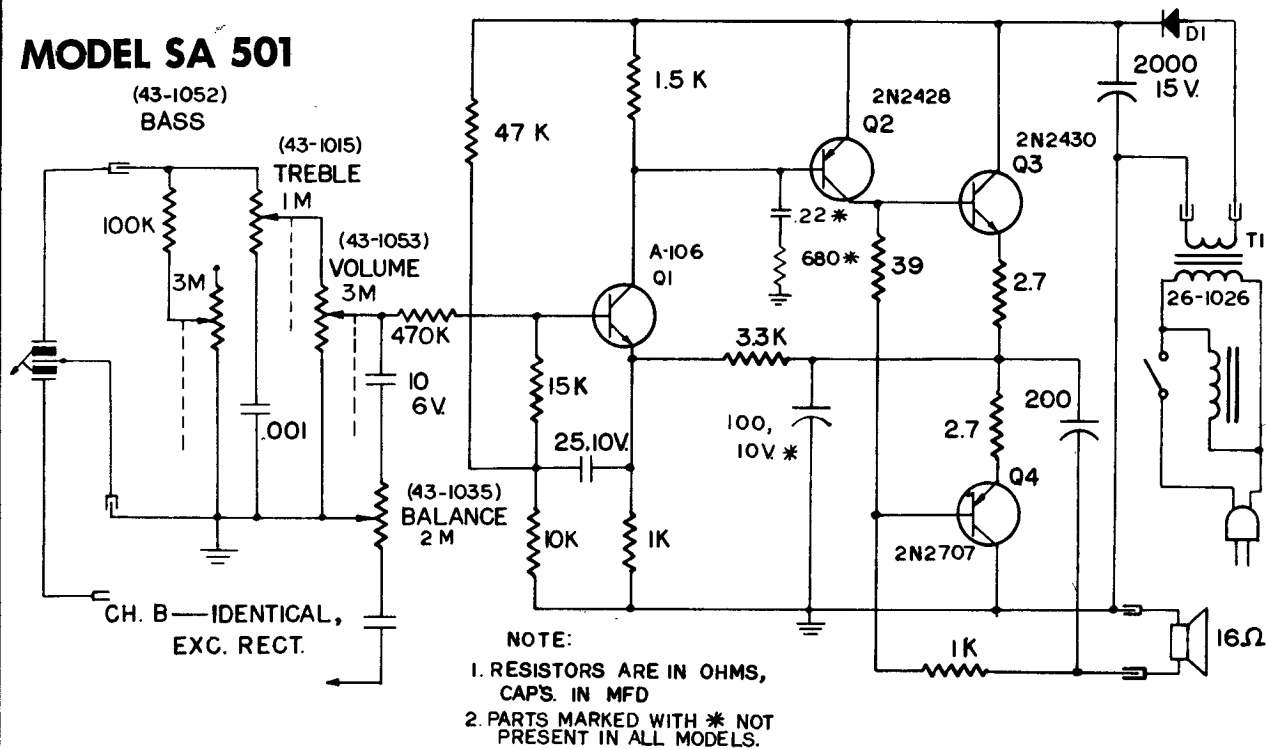

MODEL MA 100


NOTES

1. RESISTORS ARE IN OHMS, CAPACITORS IN MFD.
2. PART NO'S:
 Q1 - A1567-1, Q2 - 2N2430, Q3 - 2N2706,
 DI - 48-1005, T1 - 26-1025, R1 - 43-1050,
 R2 - 43-1048

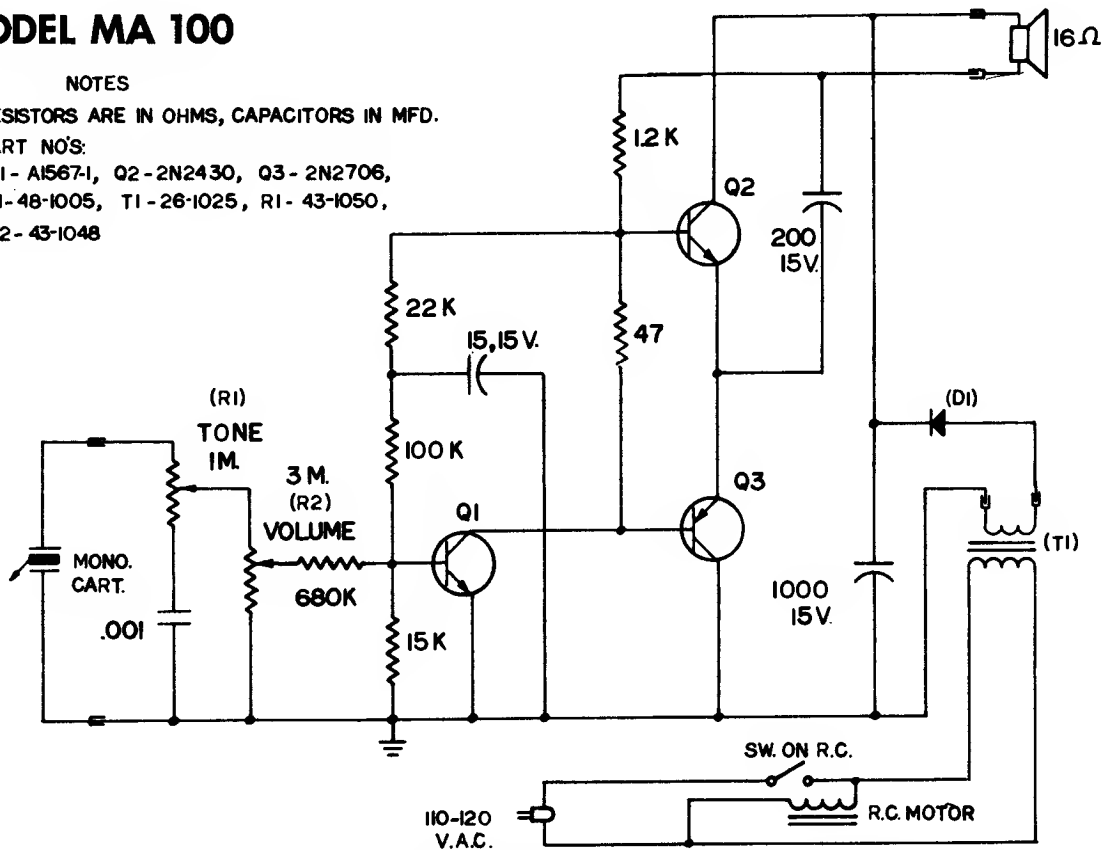

PHILCO

MODEL P670TBE

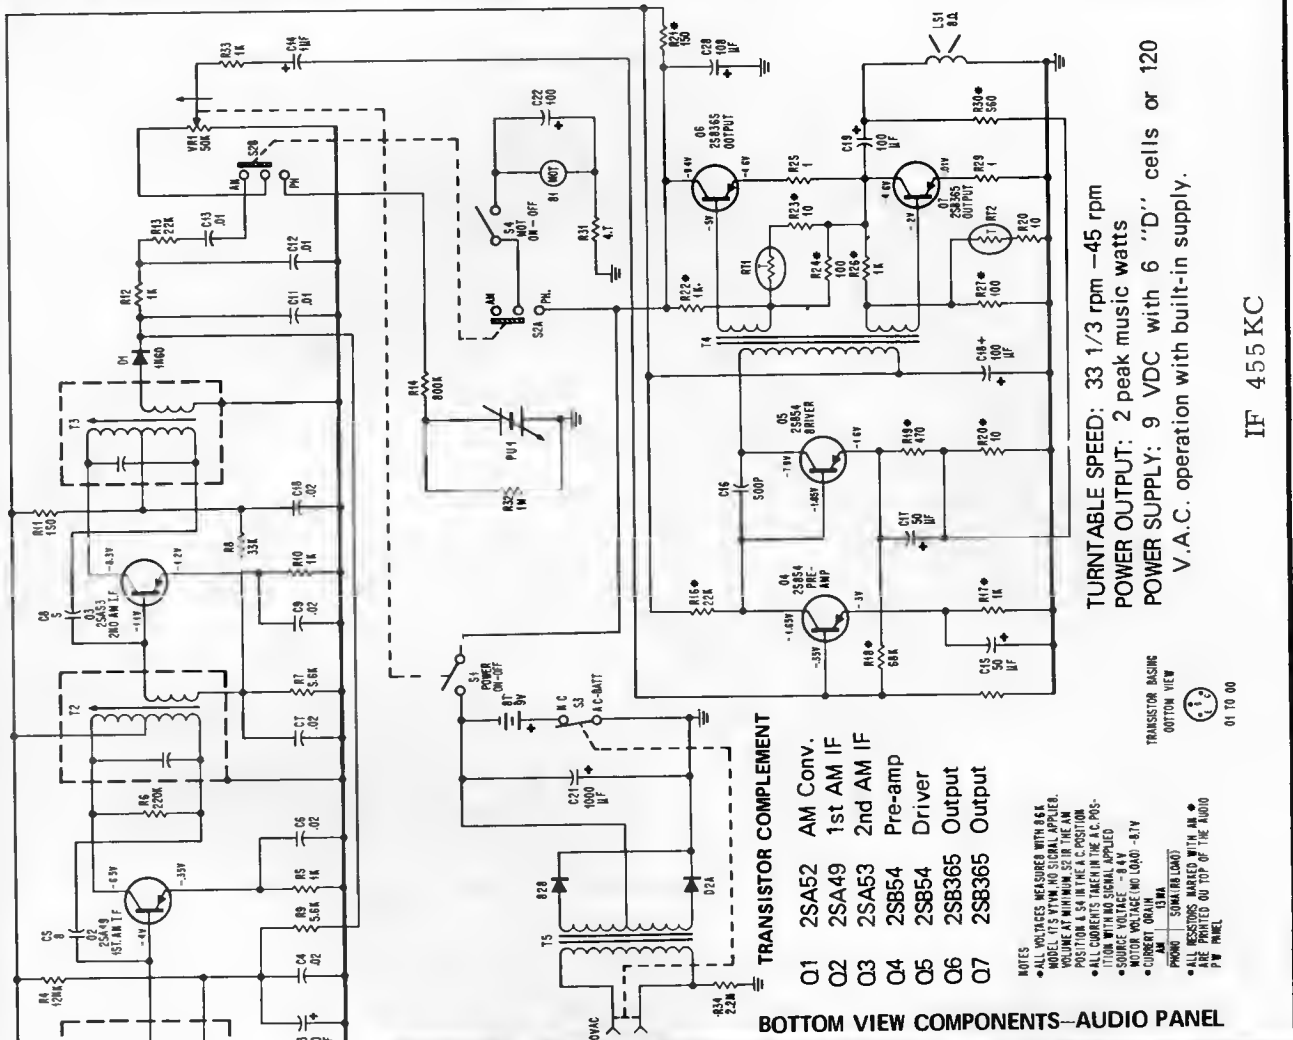


TURNABLE SPEED: 33 1/3 rpm - 45 rpm
 POWER OUTPUT: 2 peak music watts
 POWER SUPPLY: 9 VDC with 6 "D" cells or 120 V.A.C. operation with built-in supply.

IF 455 KC

- TRANSISTOR COMPLEMENT**
- O1 2SA52 AM Conv.
 - O2 2SA49 1st AM IF
 - O3 2SA53 2nd AM IF
 - O4 2SB54 Pre-amp
 - O5 2SB54 Driver
 - O6 2SB365 Output

NOTES:
 • ALL VOLTAGES MEASURED WITH RESK MODEL 175 WITH 10 SIGNAL APPLIERS.
 • VOLUME AT MINIMUM, S2 IN THE AM POSITION & S4 IN THE A.C. POSITION.
 • ALL CURRENTS TAKEN IN THE A.C. POSITION WITH 80 SIGNAL APPLIED.
 • COTON WINDING, NO LOAD - 81V
 • CURRENT 0.01VA - 81V
 PHONO | SIGNAL LOAD:
 AM | 15 BA
 • ALL RESISTORS MARKED WITH AN * ARE PRINTED ON TOP OF THE AUDIO P.W. PANEL.

BOTTOM VIEW COMPONENTS-AUDIO PANEL

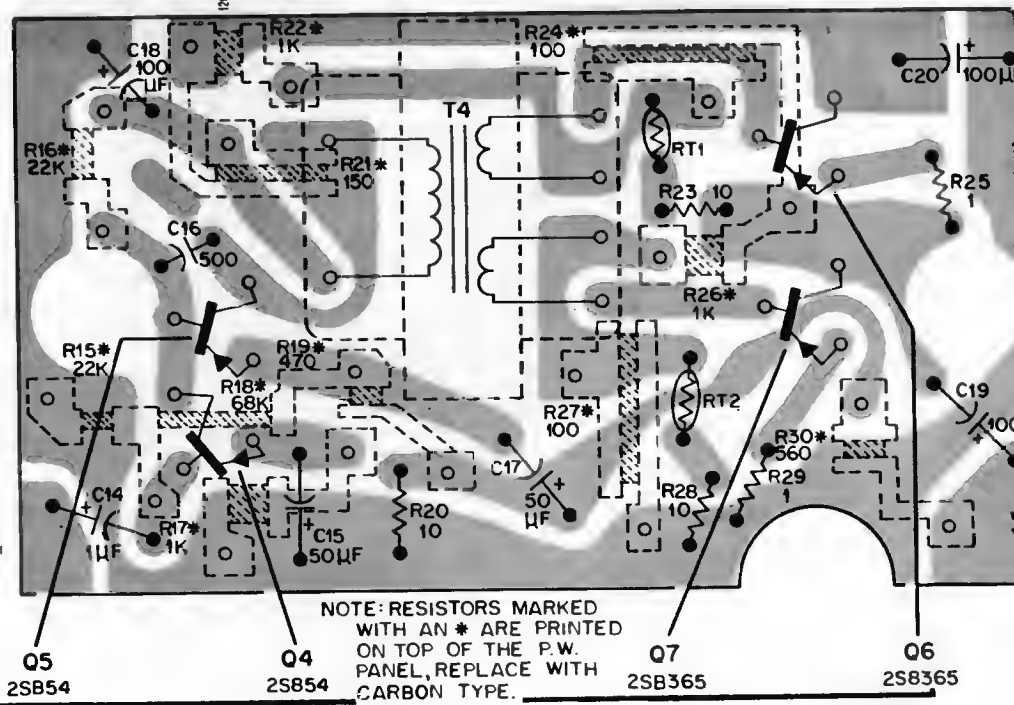


NOTE: RESISTORS MARKED WITH AN * ARE PRINTED ON TOP OF THE P.W. PANEL, REPLACE WITH CARBON TYPE.

PHILCO

AM-FM TRANSISTOR RADIO MODELS
S771WH, S772WH, S773CB, S774WA,
S953WA & S980WH

(Continued on next page.)

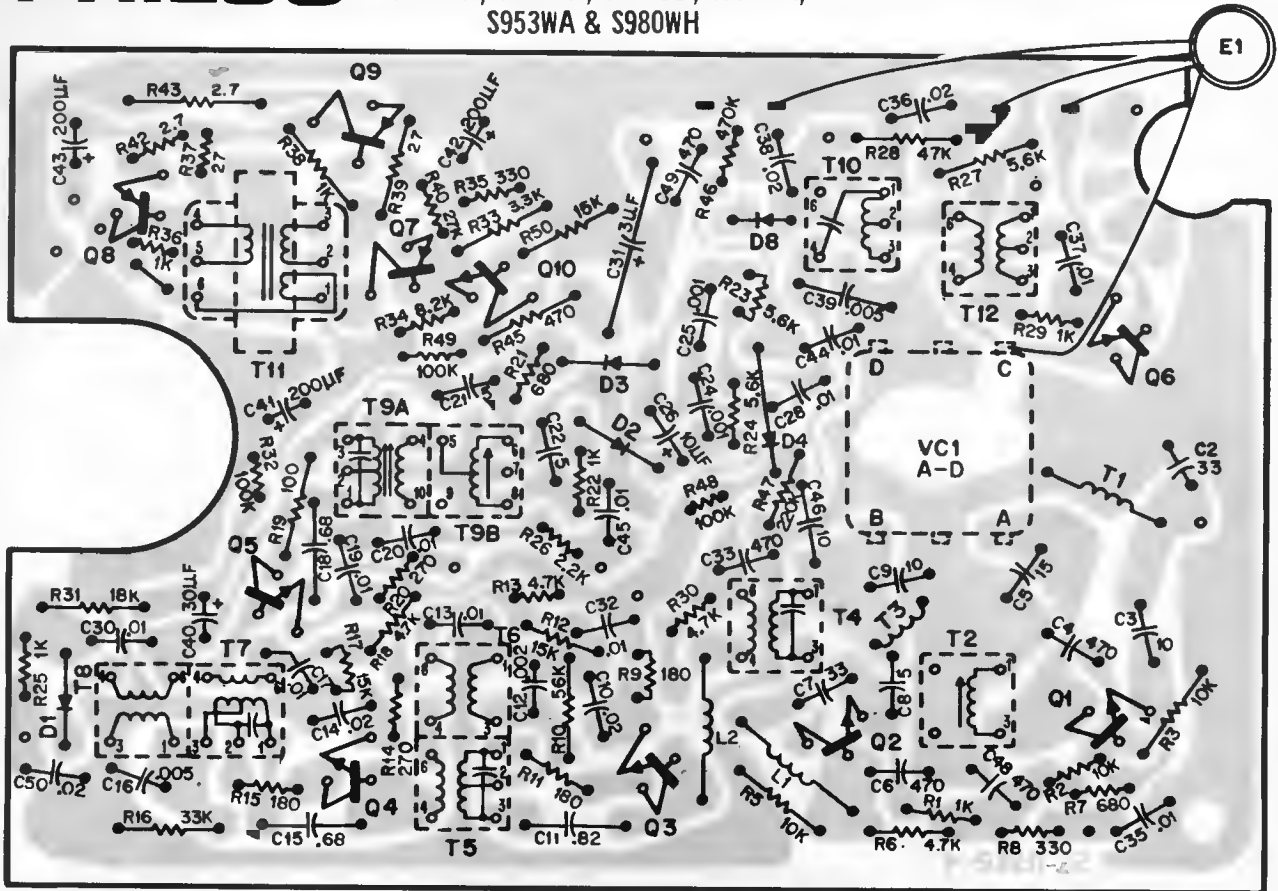


AM ALIGNMENT SIGNAL GENERATOR			RADIO		
STEP	CONNECTION TO RADIO	DIAL SETTING	DIAL SETTING	SPECIAL INSTRUCTIONS	ADJUST
1	RADIATING LOOP (SEE NOTE 1)	455 KHZ	TUNING GANG FULLY OPEN	ADJUST FOR MAX. OUTPUT IN ORDER GIVEN.	T8, T6 & T10
2	SAME AS STEP 1	1650 KHZ	TUNING GANG FULLY OPEN	ADJUST FOR MAX. OUTPUT.	C1D AM OSC.
3	SAME AS STEP 1	1400 KHZ	1400 KHZ	ADJUST FOR MAX. OUTPUT.	C1C ANT. TRIM.
4	SAME AS STEP 1	600 KHZ	600 KHZ	ADJUST FOR MAX. OUTPUT. ROCK TUNING GANG DURING ADJUSTMENT.	T12 AM OSC.
5	REPEAT STEPS 2, 3 & 4 UNTIL NO FURTHER IMPROVEMENT IS OBTAINED.				

FM ALIGNMENT SIGNAL GENERATOR			RADIO		
STEP	CONNECTION TO RADIO	DIAL SETTING	DIAL SETTING	SPECIAL INSTRUCTIONS	ADJUST
1	COLLECTOR OF Q1 THRU .01 MF CAPACITOR	10.7 MHZ ±75 KHZ SWEEP	TUNING GANG FULLY OPEN	ADJUST FOR MAXIMUM OUTPUT IN ORDER GIVEN. REDUCE GENERATOR OUTPUT AS NECESS.	T9A, T7, T5 & T4
2	SAME AS STEP 1	10.7 MHZ 30% AM	TUNING GANG FULLY OPEN	ADJUST FOR MINIMUM OUTPUT (A NULL BETWEEN TWO PEAKS)	T9B
3	REPEAT STEPS 1 AND 2 UNTIL NO FURTHER IMPROVEMENT IS OBTAINED.				
4	CONNECT TO ANTENNA TERMINAL THRU 47 OHM RESISTOR	87.5 MHZ ±75 KHZ	TUNING GANG FULLY CLOSED	ADJUST FOR MAX. OUTPUT.	T3 (SEE NOTE "A") FM OSC.
5	SAME AS STEP 4	108.5 MHZ ±75 KHZ	TUNING GANG FULLY OPEN	ADJUST FOR MAX. OUTPUT.	C1B FM OSC.

(FM Alignment continued.)

6	REPEAT STEPS 4 AND 5 UNTIL NO FURTHER IMPROVEMENT IS OBTAINED.			
7	SAME AS STEP 4	90 MHZ ±75 KHZ	90 MHZ	ADJUST FOR MAX. OUTPUT. T2
8	SAME AS STEP 4	105 MHZ ±75 KHZ	105 MHZ	ADJUST FOR MAX. OUTPUT. C1A
9	REPEAT STEPS 7 AND 8 UNTIL NO FURTHER IMPROVEMENT IS OBTAINED.			

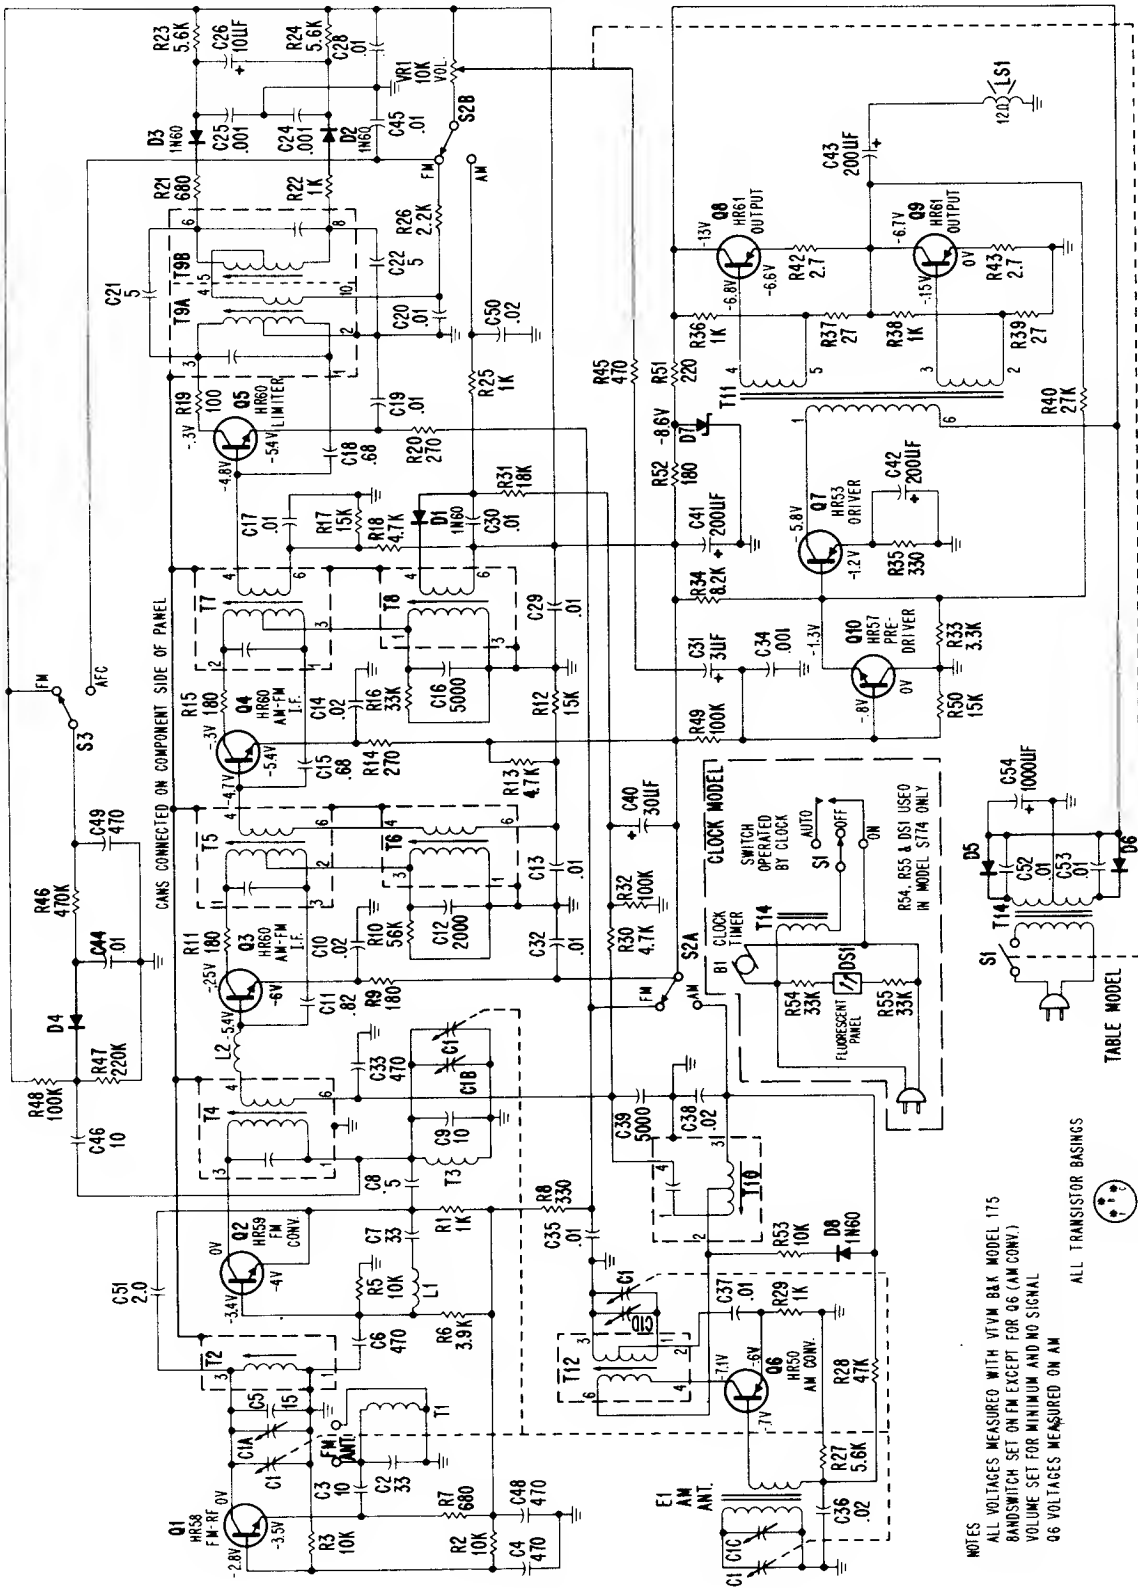


NOTES
 ALL VOLTAGES MEASURED WITH VTVM 84K MODEL 175
 BANDSWITCH SET ON FM EXCEPT FOR Q6 (AM CONV.)
 VOLUME SET FOR MINIMUM AND NO SIGNAL
 Q6 VOLTAGES MEASURED ON AM

AM-FM TRANSISTOR RADIO MODELS
 S771WH, S772WH, S773CB, S774WA,
 S953WA & S980WH

PHILCO

(Continued from preceding page.)

Bottom View Perma Circuit for Components—Model ST-919

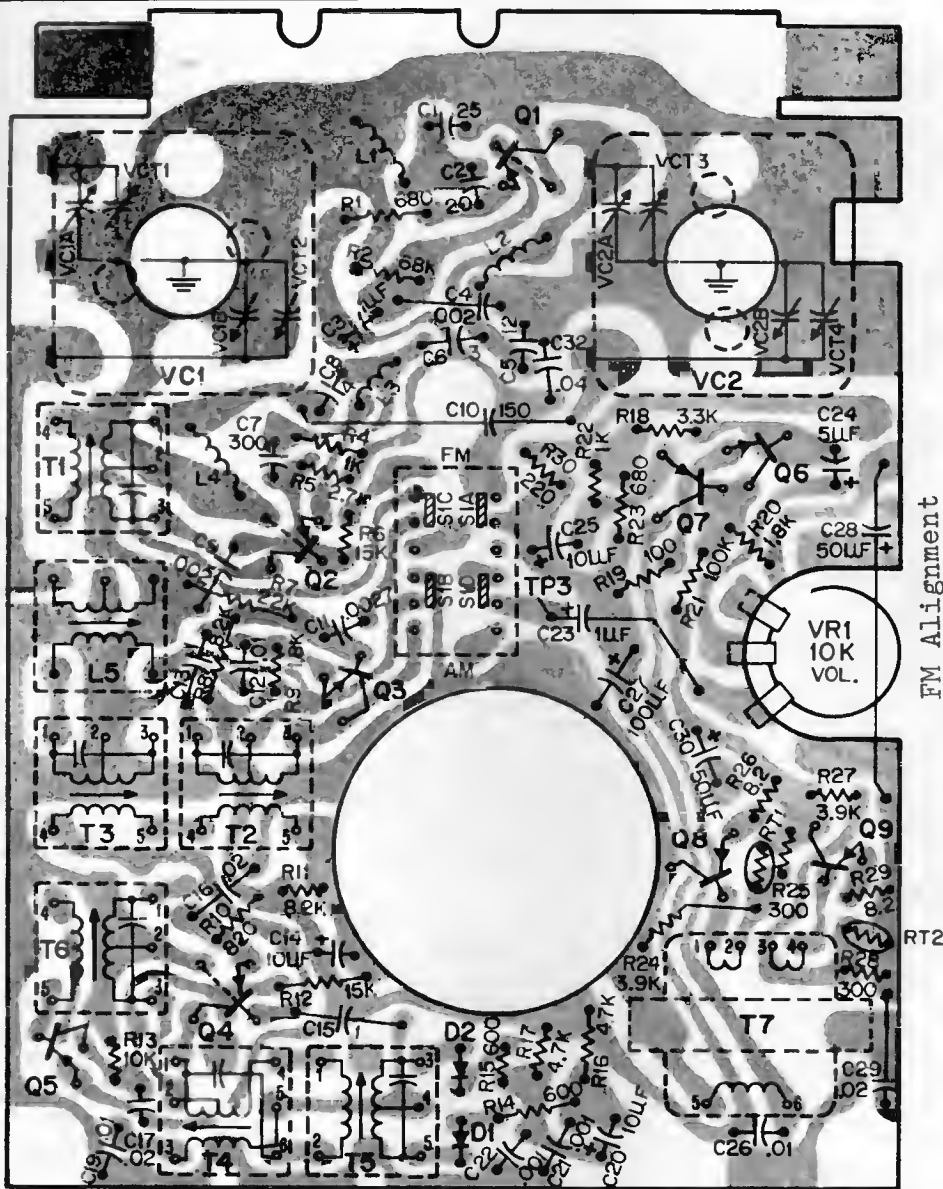


FM Alignment

SIGNAL GENERATOR		RADIO			
STEP	CONNECTION TO RADIO	DIAL SETTING	DIAL SETTING	SPECIAL INSTRUCTIONS	ADJUST
1	TP1 (RF INPUT) INPUT IMP. 75Ω	10.7MHz ± 75KHz SWEEP	TUNING GANG FULLY OPEN	ADJUST FOR MAX. OUTPUT AND BEST SYMMETRY IN ORDER GIVEN	T1, T2, T4, T5
2	SAME AS STEP 1	86MHz 400Hz @ 75KHz DEV	TUNING GANG FULLY CLOSED	ADJUST FOR MAX OUTPUT	L4
3	SAME AS STEP 1	110MHz 400Hz @ 75KHz DEV	TUNING GANG FULLY OPEN	ADJUST FOR MAX OUTPUT	VCT4

AM ALIGNMENT

SIGNAL GENERATOR			RADIO		
STEP	CONNECTION TO RADIO	DIAL SETTING	DIAL SETTING	SPECIAL INSTRUCTIONS	ADJUST
1	TEST LOOP - LOOSE COUPLED	455KHZ 400HZ @ 30% MOD.	TUNING GANG FULLY OPEN	ADJUST FOR MAX. OUTPUT IN ORDER GIVEN.	T3-1ST IF T6-2ND IF
2	SAME AS STEP 1	525KHZ 400HZ @ 30% MOD.	TUNING GANG FULLY CLOSED	ADJUST FOR MAX OUTPUT	L5-OSC. COIL
3	SAME AS STEP 1	1650KHZ 400HZ @ 30% MOD.	TUNING GANG FULLY OPEN	ADJUST FOR MAX OUTPUT.	VCT2
4	SAME AS STEP 1	600KHZ 400HZ @ 30% MOD.	600KHZ	ADJUST FOR MAX OUTPUT (MOVE COIL ON CORE)	E1-ANT. COIL
5	SAME AS STEP 1		1400KHZ	ADJUST FOR MAX. OUTPUT	VCT1

FM Alignment continued

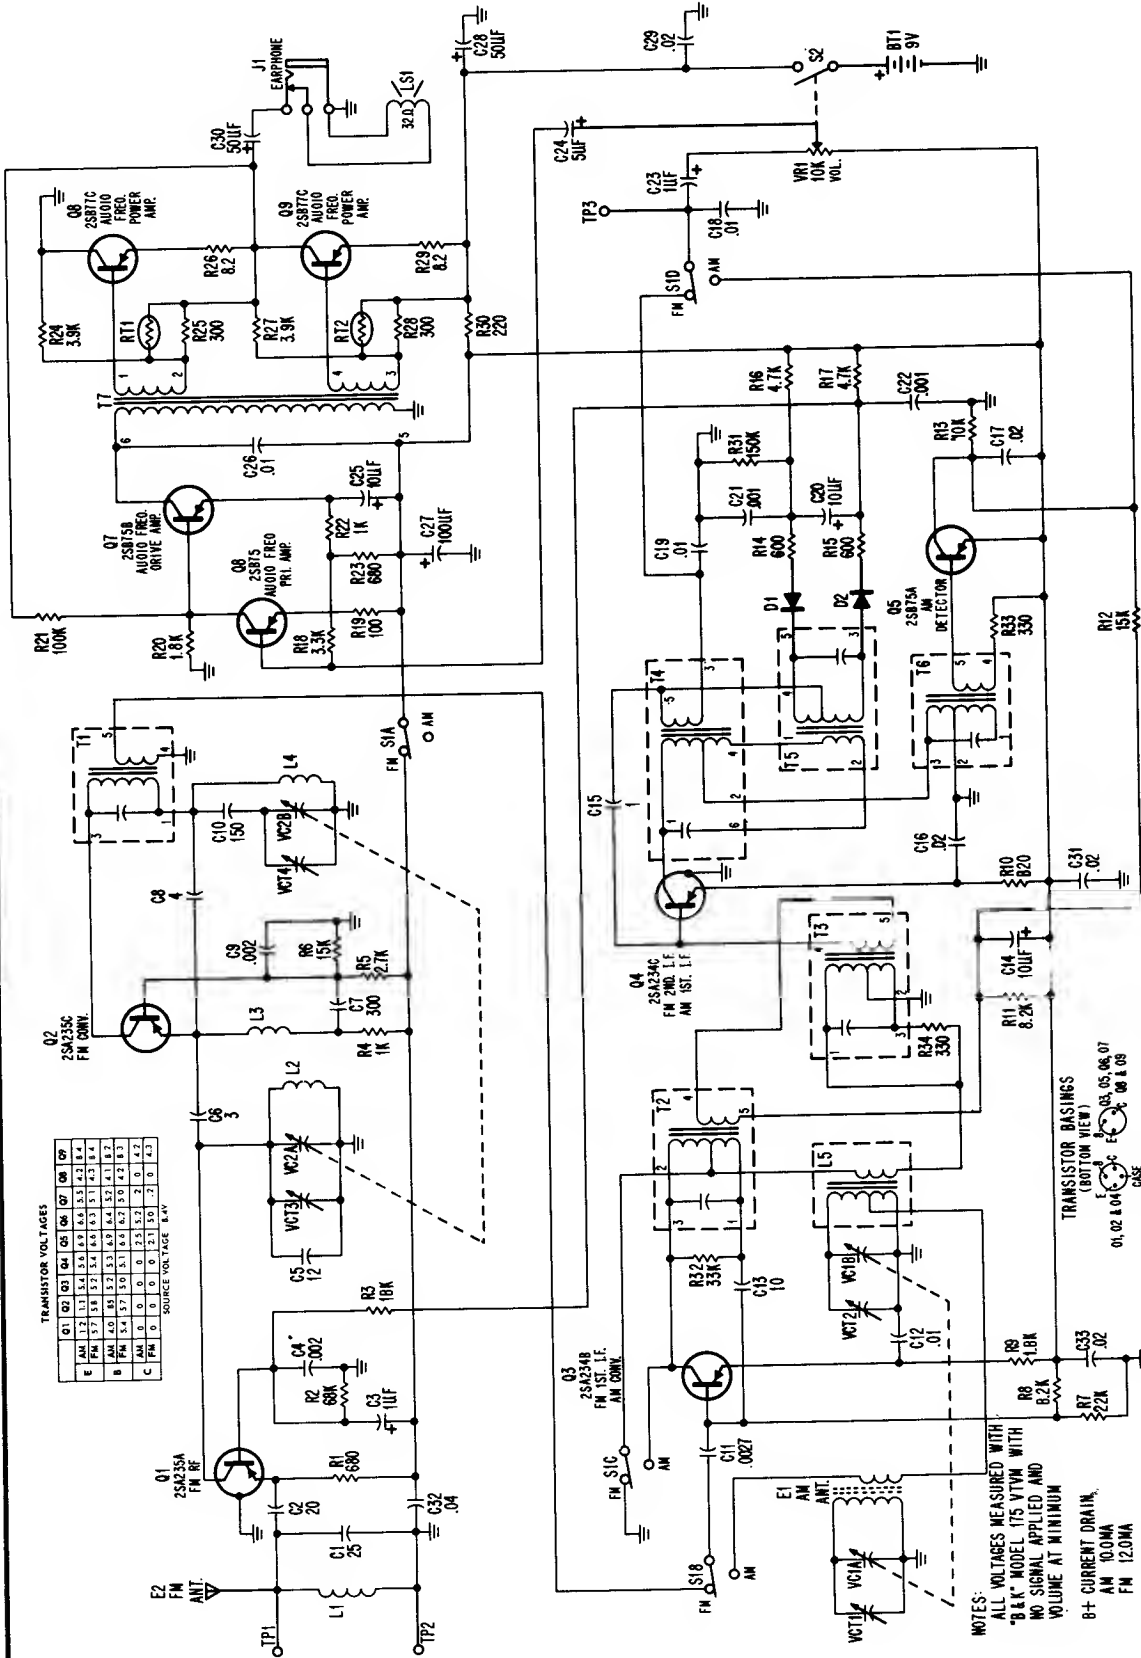

TRANSISTOR VOLTAGES

	Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9
E	AM	1.2	1.1	5.4	5.8	6.0	6.6	5.5	4.2
F	FM	1.7	1.8	5.7	5.4	6.0	6.5	5.1	4.5
B	AM	4.0	4.8	5.7	5.3	6.7	6.4	5.2	4.1
C	FM	5.4	5.7	5.1	5.1	6.1	6.4	5.2	4.1
D	FM	0	0	0	0	1.9	1.9	0	0
F	FM	0	0	0	0	2.1	1.6	-7	0
G	FM	0	0	0	0	2.1	1.6	-7	0

SOURCE VOLTAGE: 9.4V






NOTES:
 ALL VOLTAGES MEASURED WITH "B & K" MODEL 475 VTVM WITH NO SIGNAL APPLIED AND VOLUME AT MINIMUM
 B+ CURRENT DRAIN:
 AM 10.0MA
 FM 12.0MA

4 REPEAT 2 & 3 UNTIL NO FURTHER IMPROVEMENT IS OBTAINED.

		90MHZ	106MHZ
5	SAME AS STEP 1	90MHZ @ 400HZ @ 75KHZ DEV.	106MHZ
6	SAME AS STEP 1	ADJUST FOR MAX. OUTPUT.	ADJUST FOR MAX. OUTPUT.

← FM Alignment Cont.

PHILCO MODELS ST958 & ST959 (Continued on next two pages.)

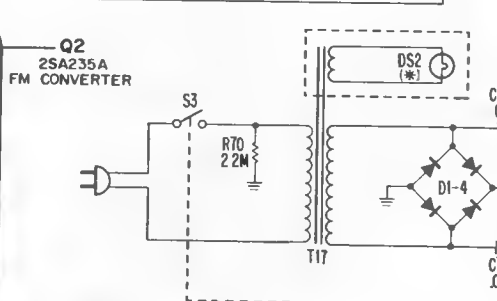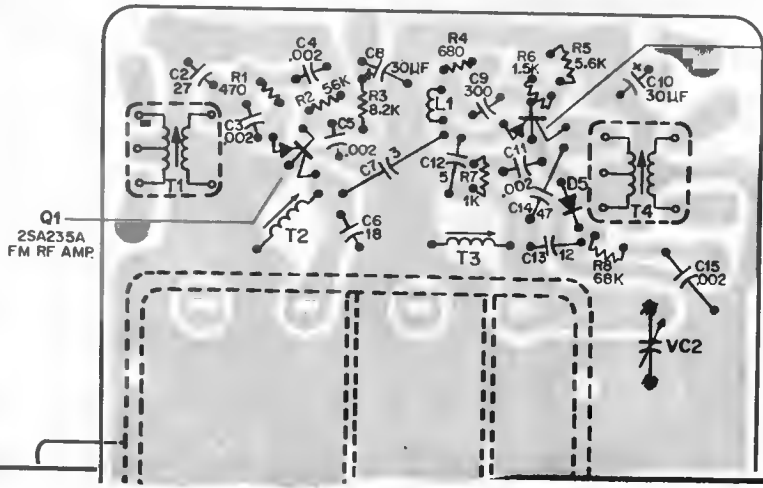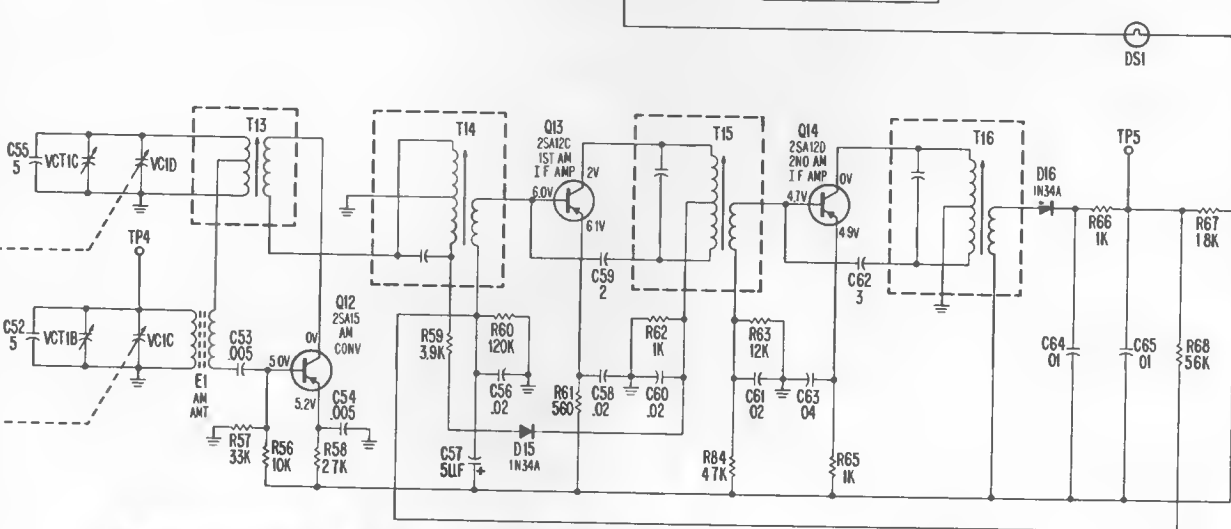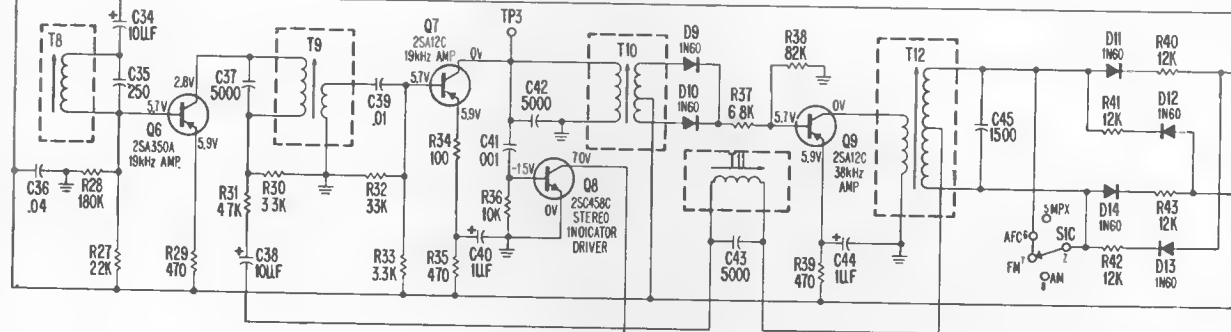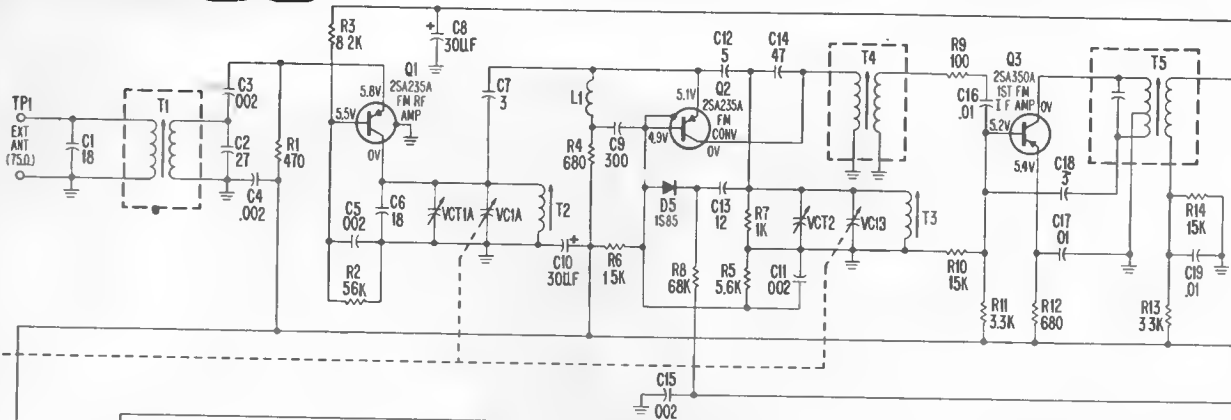


- NOTES
- ALL MEASUREMENTS TAKEN IN FM STEREO POSITION EXCEPT Q12, Q13, Q14 TAKEN IN AM POSITION
 - Q8 VOLTAGE TAKEN WITH FM STEREO SIGNAL APPLIED
 - (*) S959 ONLY.

(Continued on next page and from preceding page.)

PHILCO

MODELS ST958 & ST959

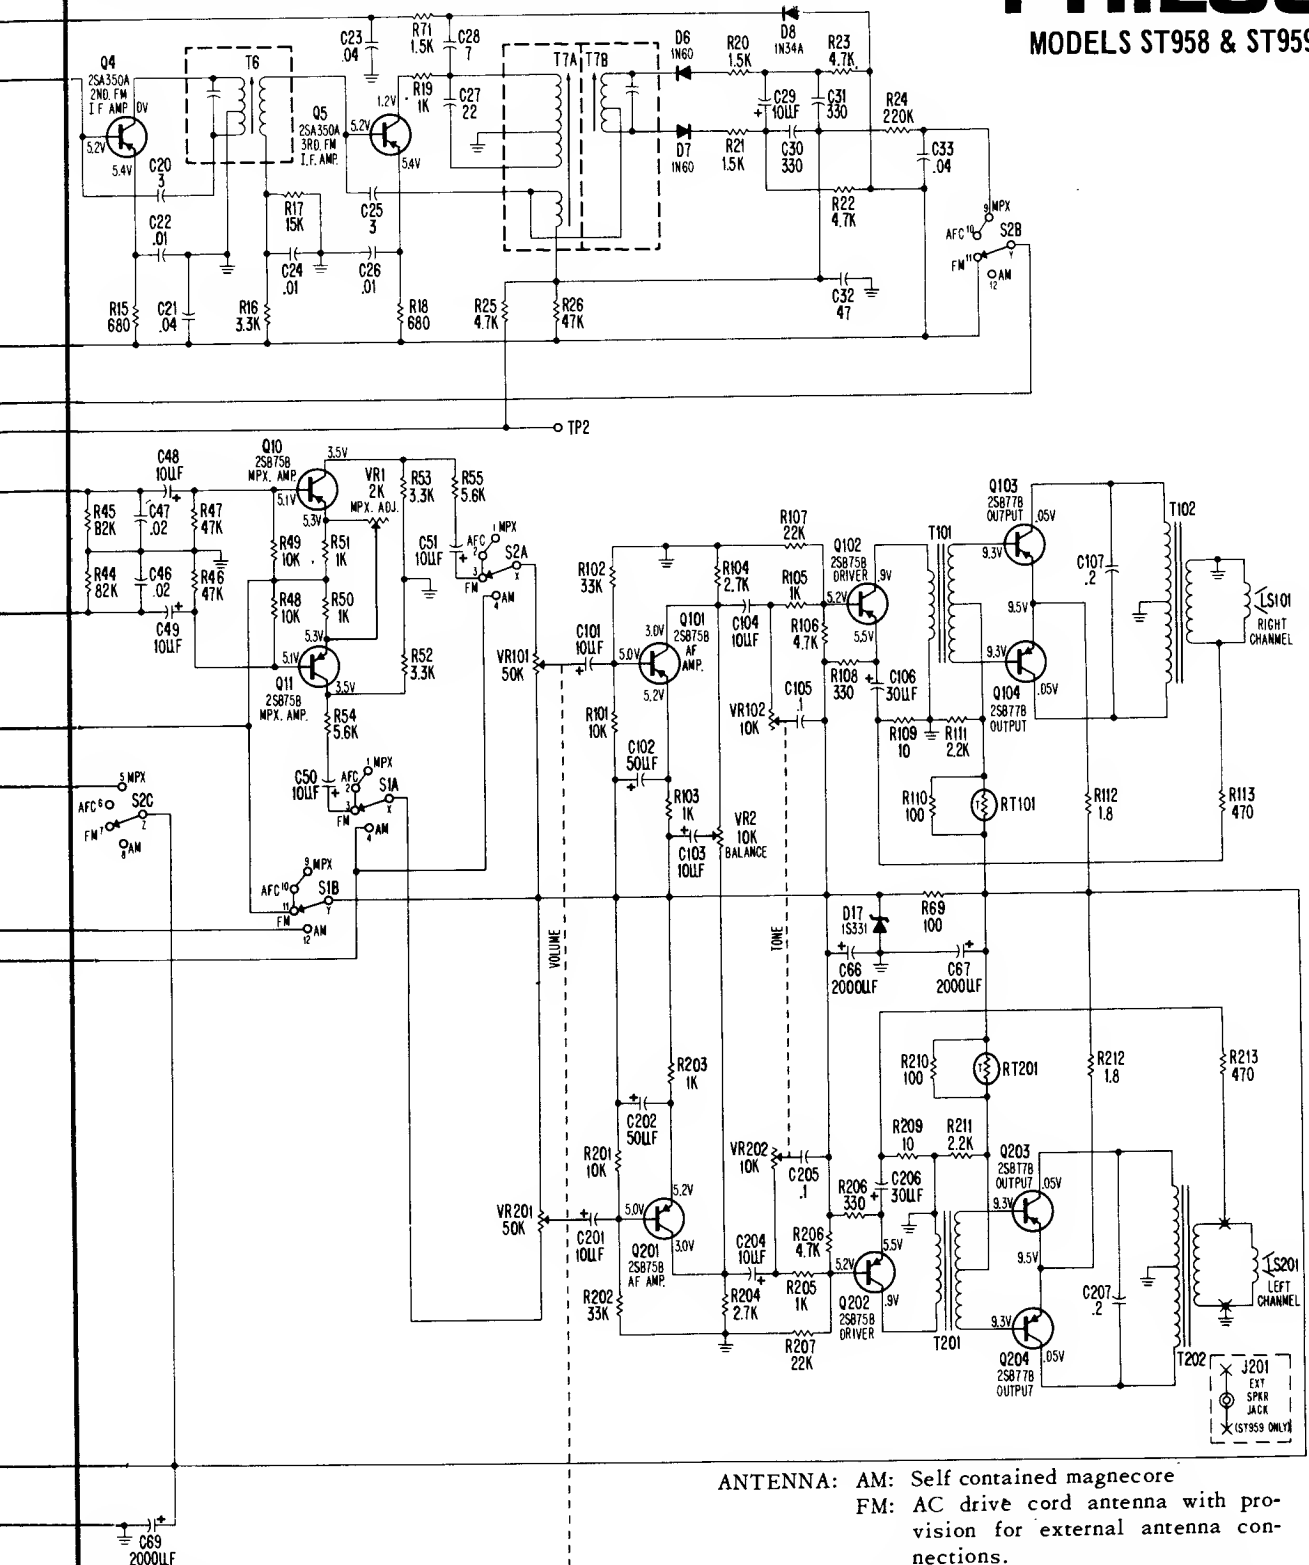

ANTENNA: AM: Self contained magnecore
 FM: AC drive cord antenna with provision for external antenna connections.

CIRCUIT: 22 transistors, 13 diodes and 2 thermistors in a superheterodyne FM-AM receiver.

FREQUENCY COVERAGE: FM-88MHz to 108MHz
 AM-540MHz to 1620MHz
 LW-150kHz to 350kHz

INTERMEDIATE FREQUENCY: AM - 455kHz
 FM - 10.7MHz

SPEAKERS:


ST958: Two 4" round, 8 ohms, contained in cabinet.

ST959: Two 4 x 6, 8 ohms, one in cabinet, one extension speaker


POWER: 120 volts alternating current (AC) only.

PHILCO Models ST958 & ST959 (Continued from preceding two pages.)

Bottom View—Multiplex Panel—ST958 and ST959

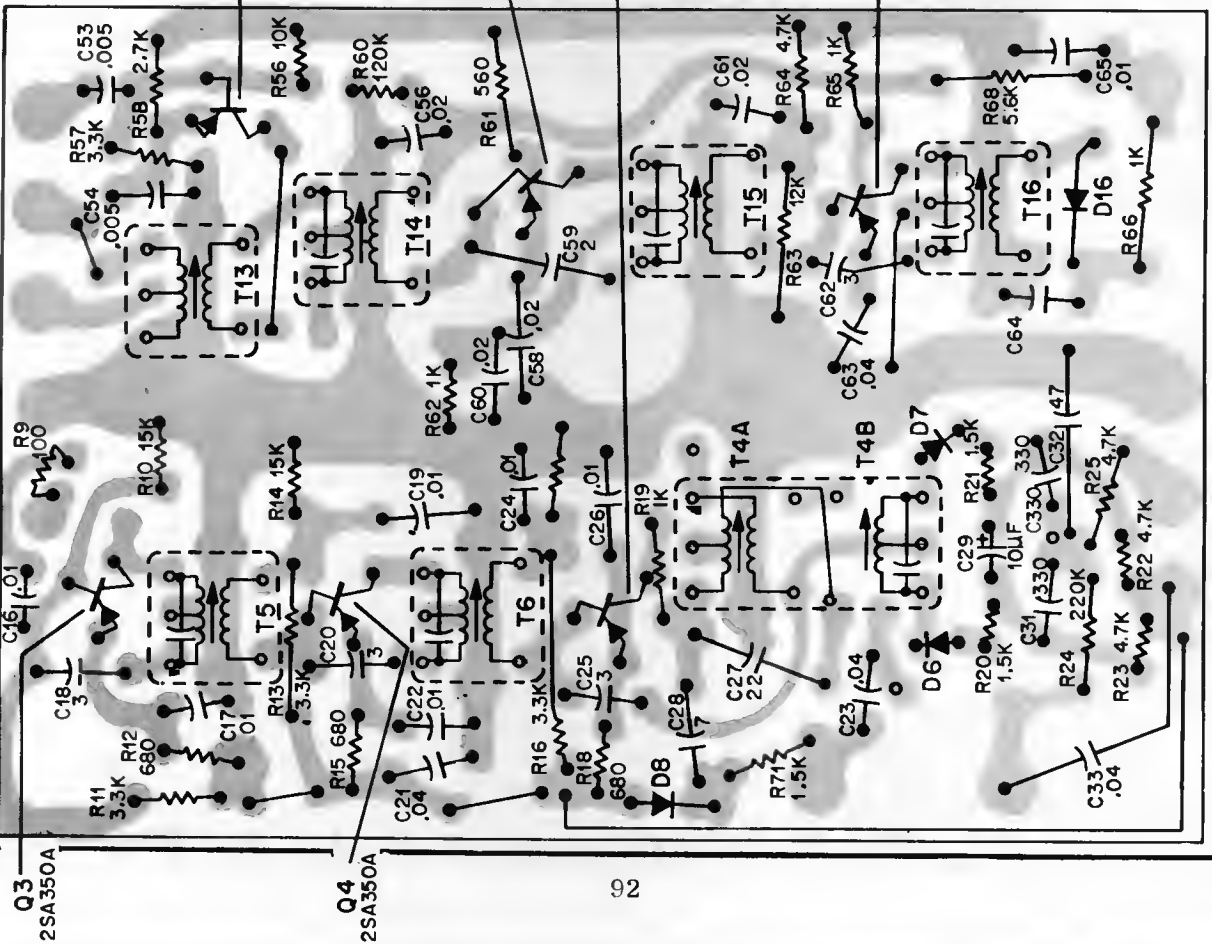


Bottom View—IF Panel—ST958 and ST959


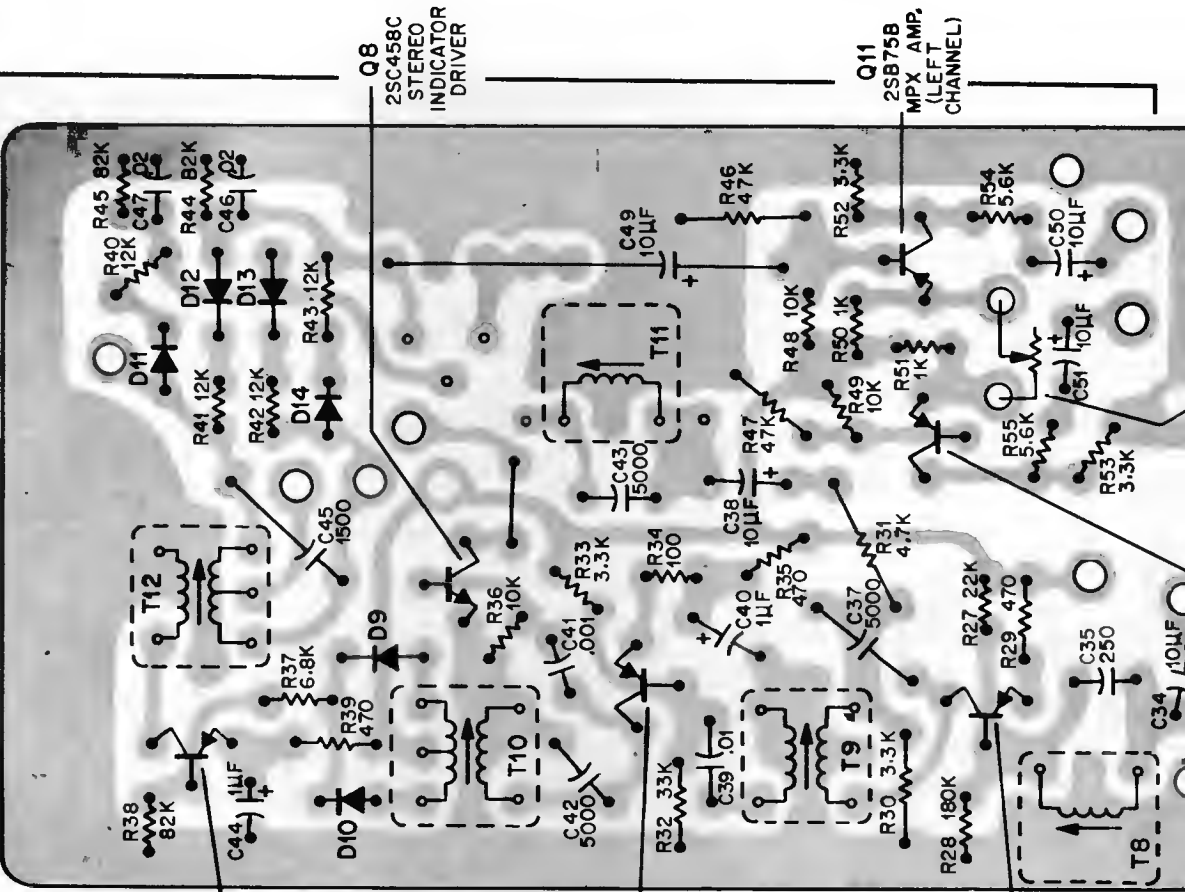


PHILCO


CLOCK/TABLE AM TRANSISTOR RADIO MODELS S521, S522, S759, S760, S761, S762, & S764

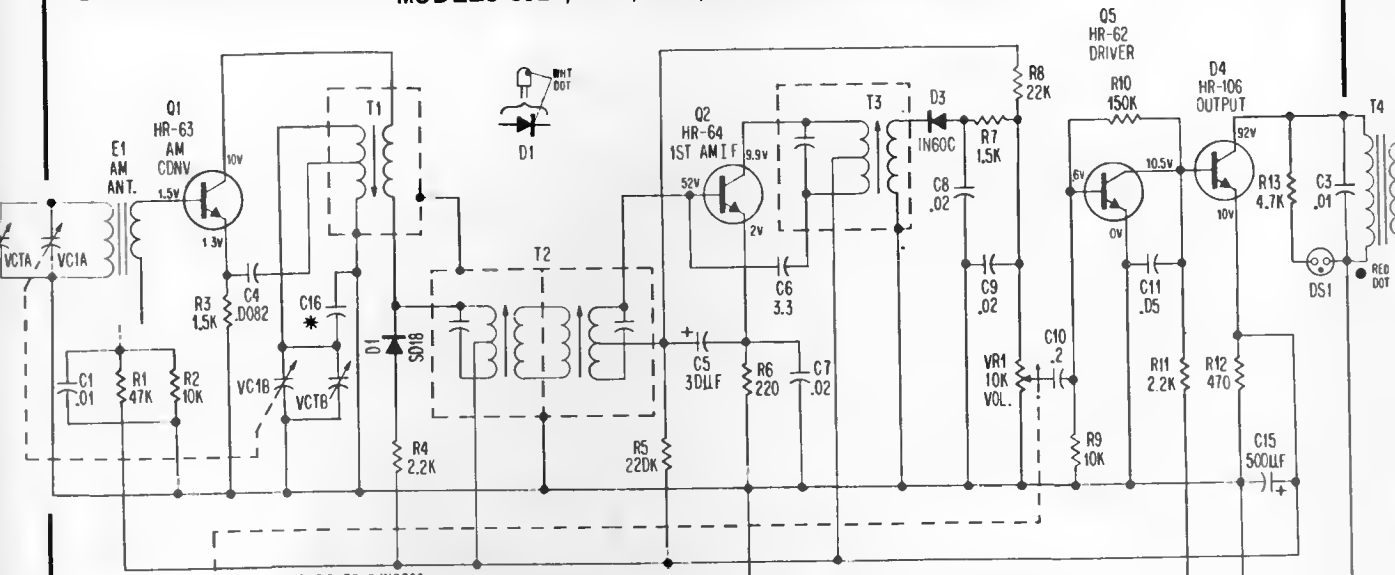


* 33 DR 5/N2200

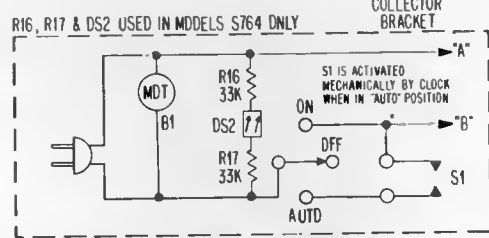

To Q4 COLLECTOR BRACKET




- NOTES:
- ALL VOLTAGES MEASURED WITH B & K MODEL 175 VTVM, VOLUME AT MINIMUM & NO SIGNAL APPLIED.
 - CURRENT DRAIN: 29 MA
 - B+ : 102V

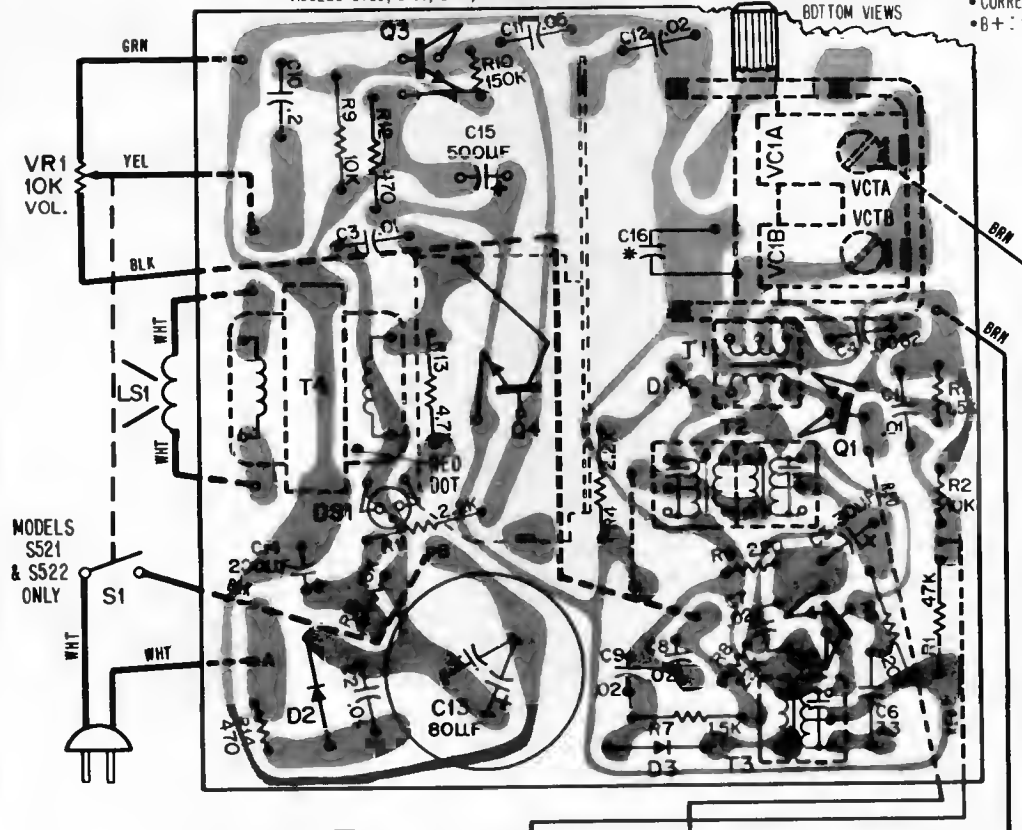

MODELS S521 & S522 ONLY

* 3.3 OR 5/N2200


CIRCUIT: Four transistor superheterodyne.
 FREQUENCY COVERAGE: 535 KC to 1605 KC
 INTERMEDIATE FREQUENCY: 455 KC
 ANTENNA: Self contained magnecore.
 POWER OUTPUT: 1.4 watts max.
 SPEAKER: 4 inches, 8 ohms
 POWER: 120 Volts alternating current (AC) only.

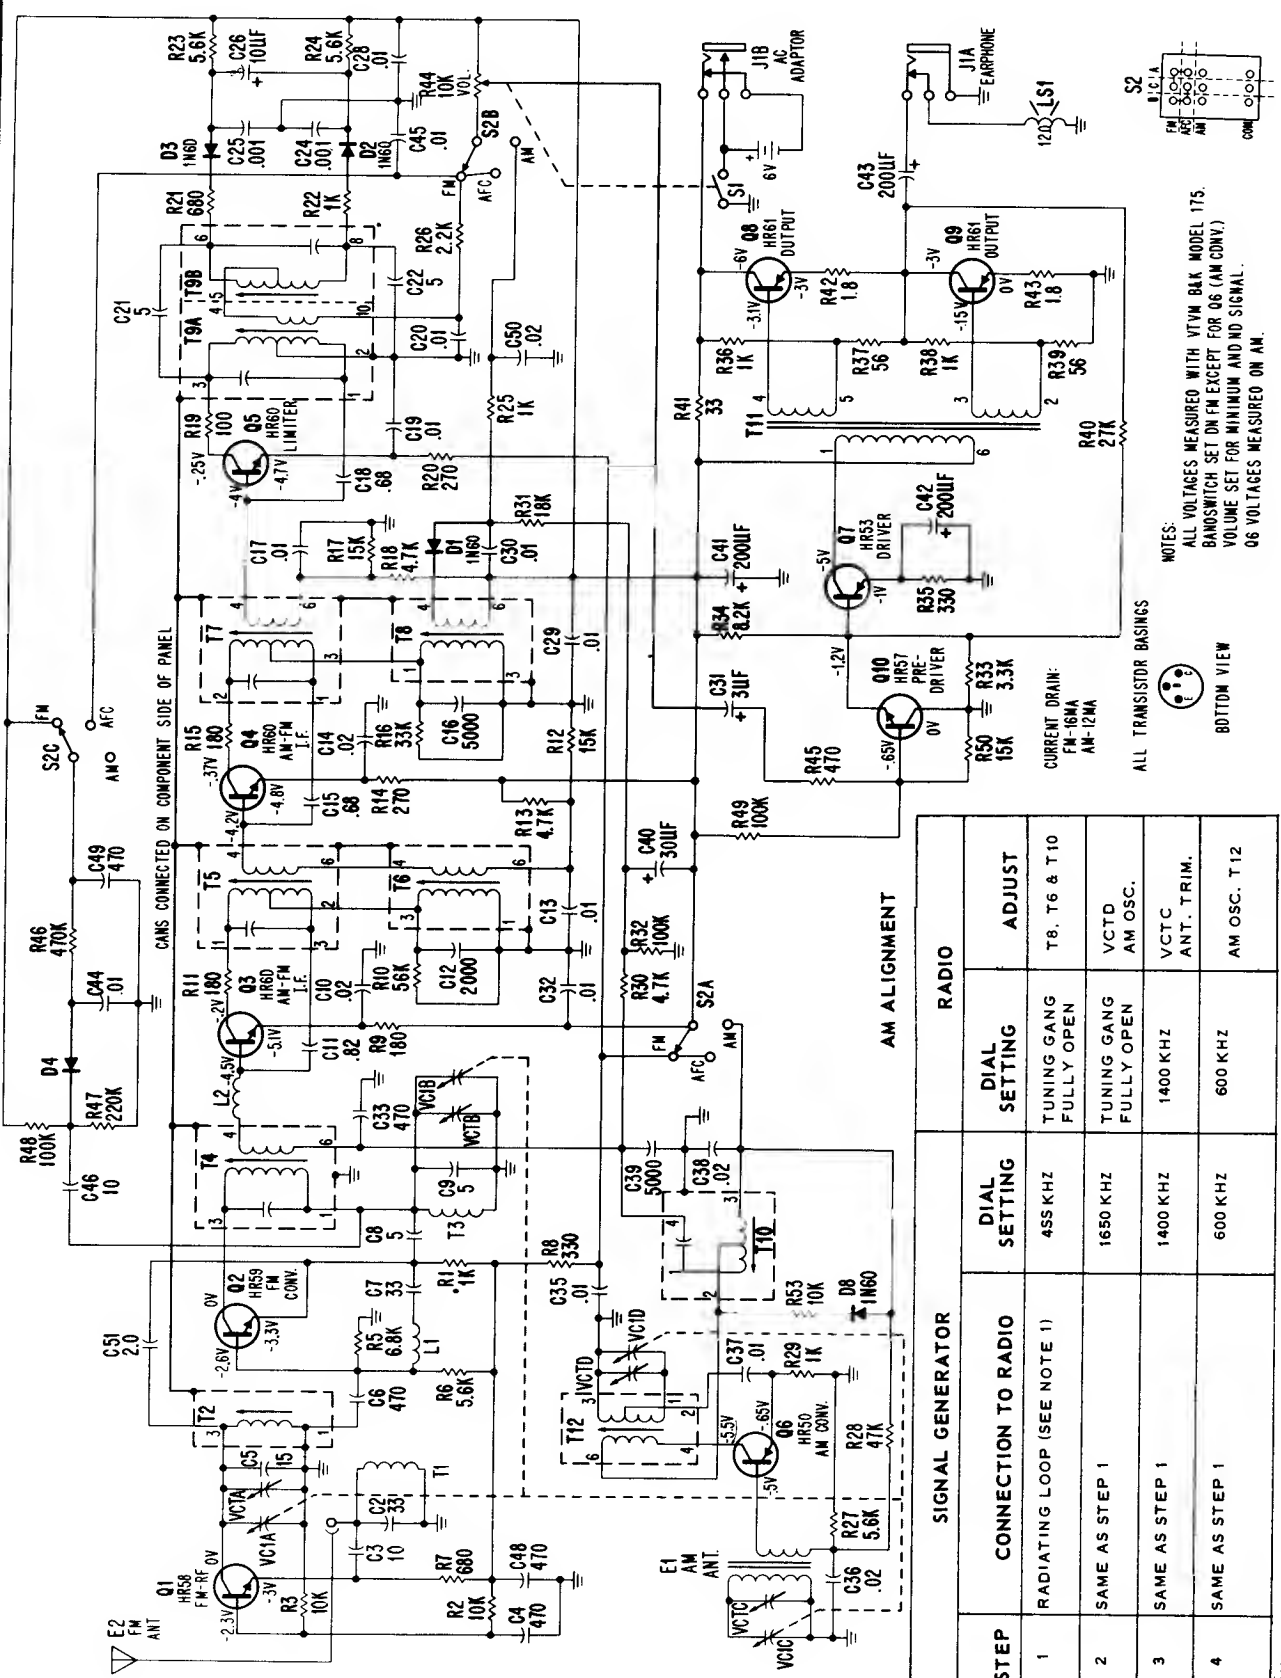

NOTES:
 ALL VOLTAGES MEASURED WITH VTVM BAK MODEL 175.
 BANGSWITCH SET ON FM EXCEPT FOR Q6 (AM CONV).
 VOLUME SET FOR MINIMUM AND NO SIGNAL.
 Q6 VOLTAGES MEASURED ON AM.



STEP	SIGNAL GENERATOR		RADIO	
	CONNECTION TO RADIO	DIAL SETTING	DIAL SETTING	ADJUST
1	RADIATING LOOP (SEE NOTE 1)	485 KHZ	TUNING GANG FULLY OPEN	T8, T6 & T10
2	SAME AS STEP 1	1650 KHZ	TUNING GANG FULLY OPEN	VCTD AM OSC.
3	SAME AS STEP 1	1400 KHZ	1400 KHZ	VCTC ANT. TRIM.
4	SAME AS STEP 1	600 KHZ	600 KHZ	AM OSC. T12

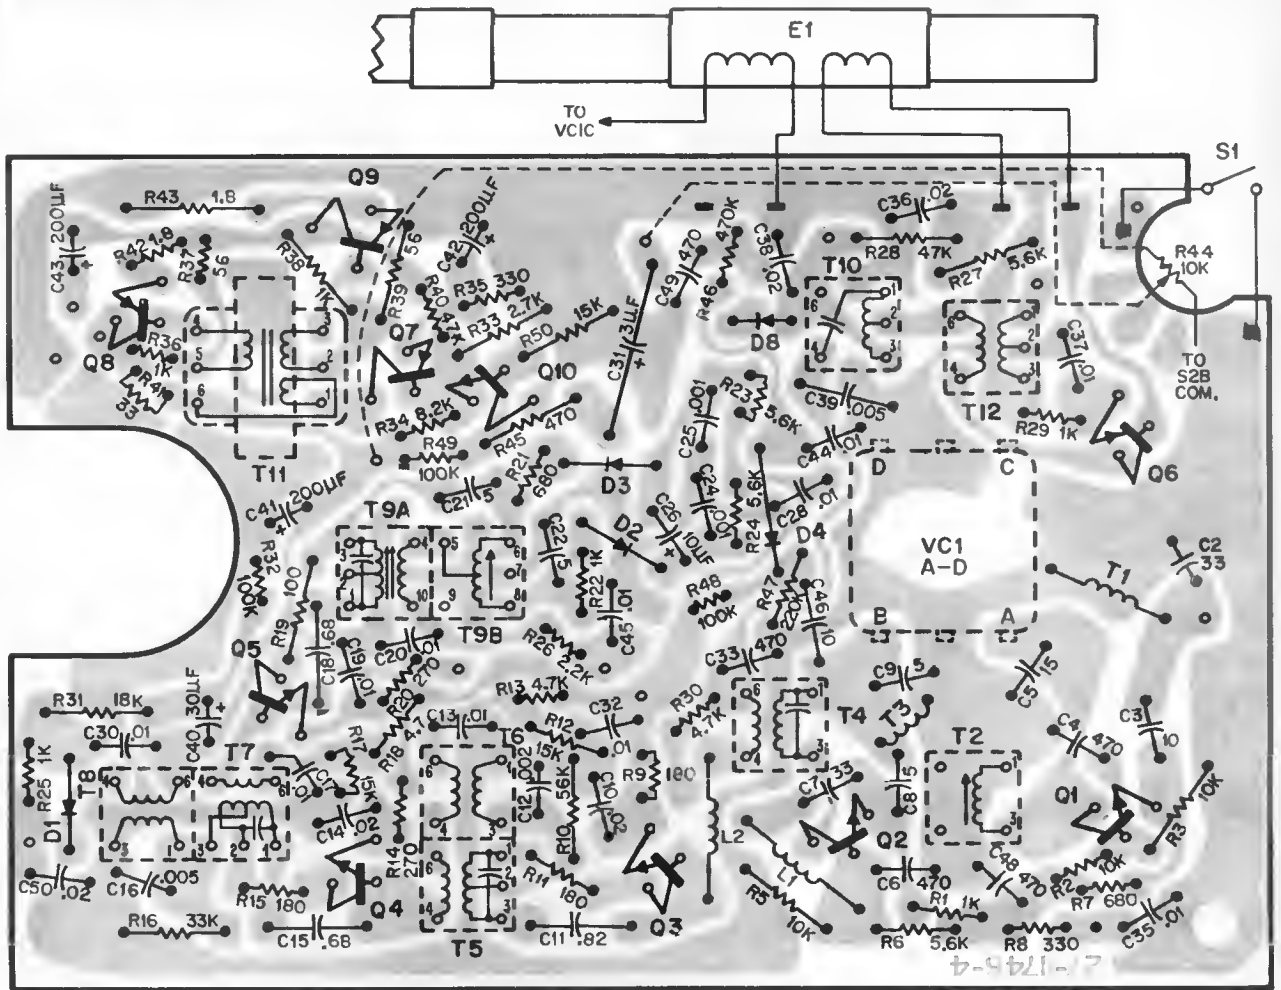

Bottom View-Perma Circuit Panel Component Layout-Model ST984

INTERMEDIATE FREQUENCY: AM, 455 KHZ
FM, 10.7 MHz

FM ALIGNMENT



SIGNAL GENERATOR			RADIO		
STEP	CONNECTION TO RADIO	DIAL SETTING	DIAL SETTING	SPECIAL INSTRUCTIONS	ADJUST
1	COLLECTOR OF Q1 THRU 01 MF CAPACITOR	10.7 MHZ ±75 KHZ SWEEP	TUNING GANG FULLY OPEN	ADJUST FOR MAXIMUM OUTPUT IN ORDER GIVEN. REDUCE GENERATOR OUTPUT AS NECESS.	T9A, T7, T5 & T4
2	SAME AS STEP 1	10.7 MHZ 30% AM	TUNING GANG FULLY OPEN	ADJUST FOR MINIMUM OUTPUT (A NULL BETWEEN TWO PEAKS)	T9B
3	REPEAT STEPS 1 AND 2 UNTIL NO FURTHER IMPROVEMENT IS OBTAINED.				
4	CONNECT TO ANTENNA TERMINAL THRU 47 OHM RESISTOR	87.5 MHZ ±75 KHZ	TUNING GANG FULLY CLOSED	ADJUST FOR MAX. OUTPUT.	T3 (SEE NOTE "A") FM OSC.
5	SAME AS STEP 4	108.5 MHZ ±75 KHZ	TUNING GANG FULLY OPEN	ADJUST FOR MAX. OUTPUT.	VCTB FC OSC.
6	REPEAT STEPS 4 AND 5 UNTIL NO FURTHER IMPROVEMENT IS OBTAINED.				
7	SAME AS STEP 4	90 MHZ ±75 KHZ	90 MHZ	ADJUST FOR MAX. OUTPUT.	T2
8	SAME AS STEP 4	105 MHZ ±75 KHZ	105 MHZ	ADJUST FOR MAX. OUTPUT.	VCTA
9	REPEAT STEPS 7 AND 8 UNTIL NO FURTHER IMPROVEMENT IS OBTAINED.				

PHILCO


- Q1, Q2 VOLTAGES TAKEN IN FM POSITION ONLY ALL OTHERS TAKEN IN AM POSITION.
- ⊗ IF REQUIRED, USE SAME VALUE AS WIRED IN UNIT
- * LATE PRODUCTION ONLY

TRANSISTOR BASINGS

Model ST-986BK

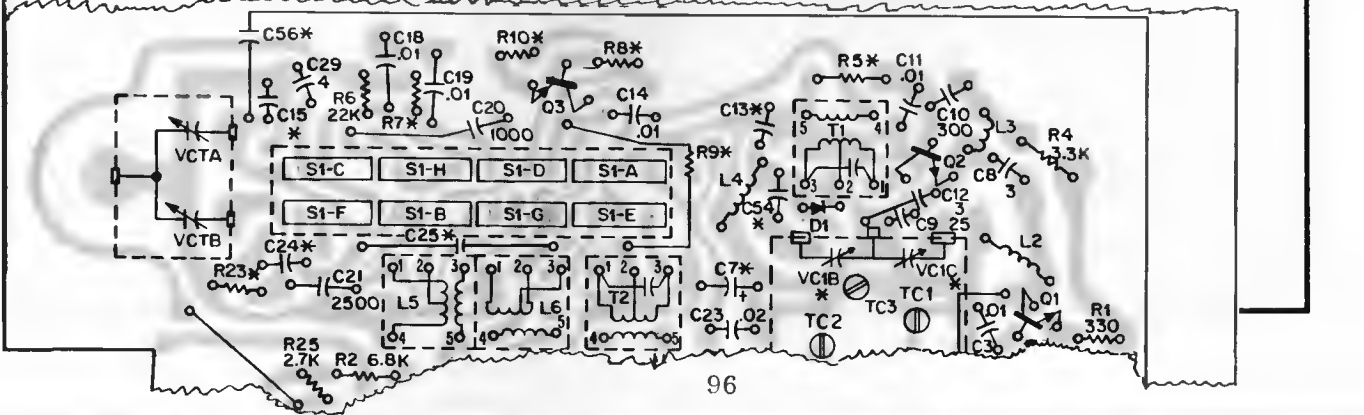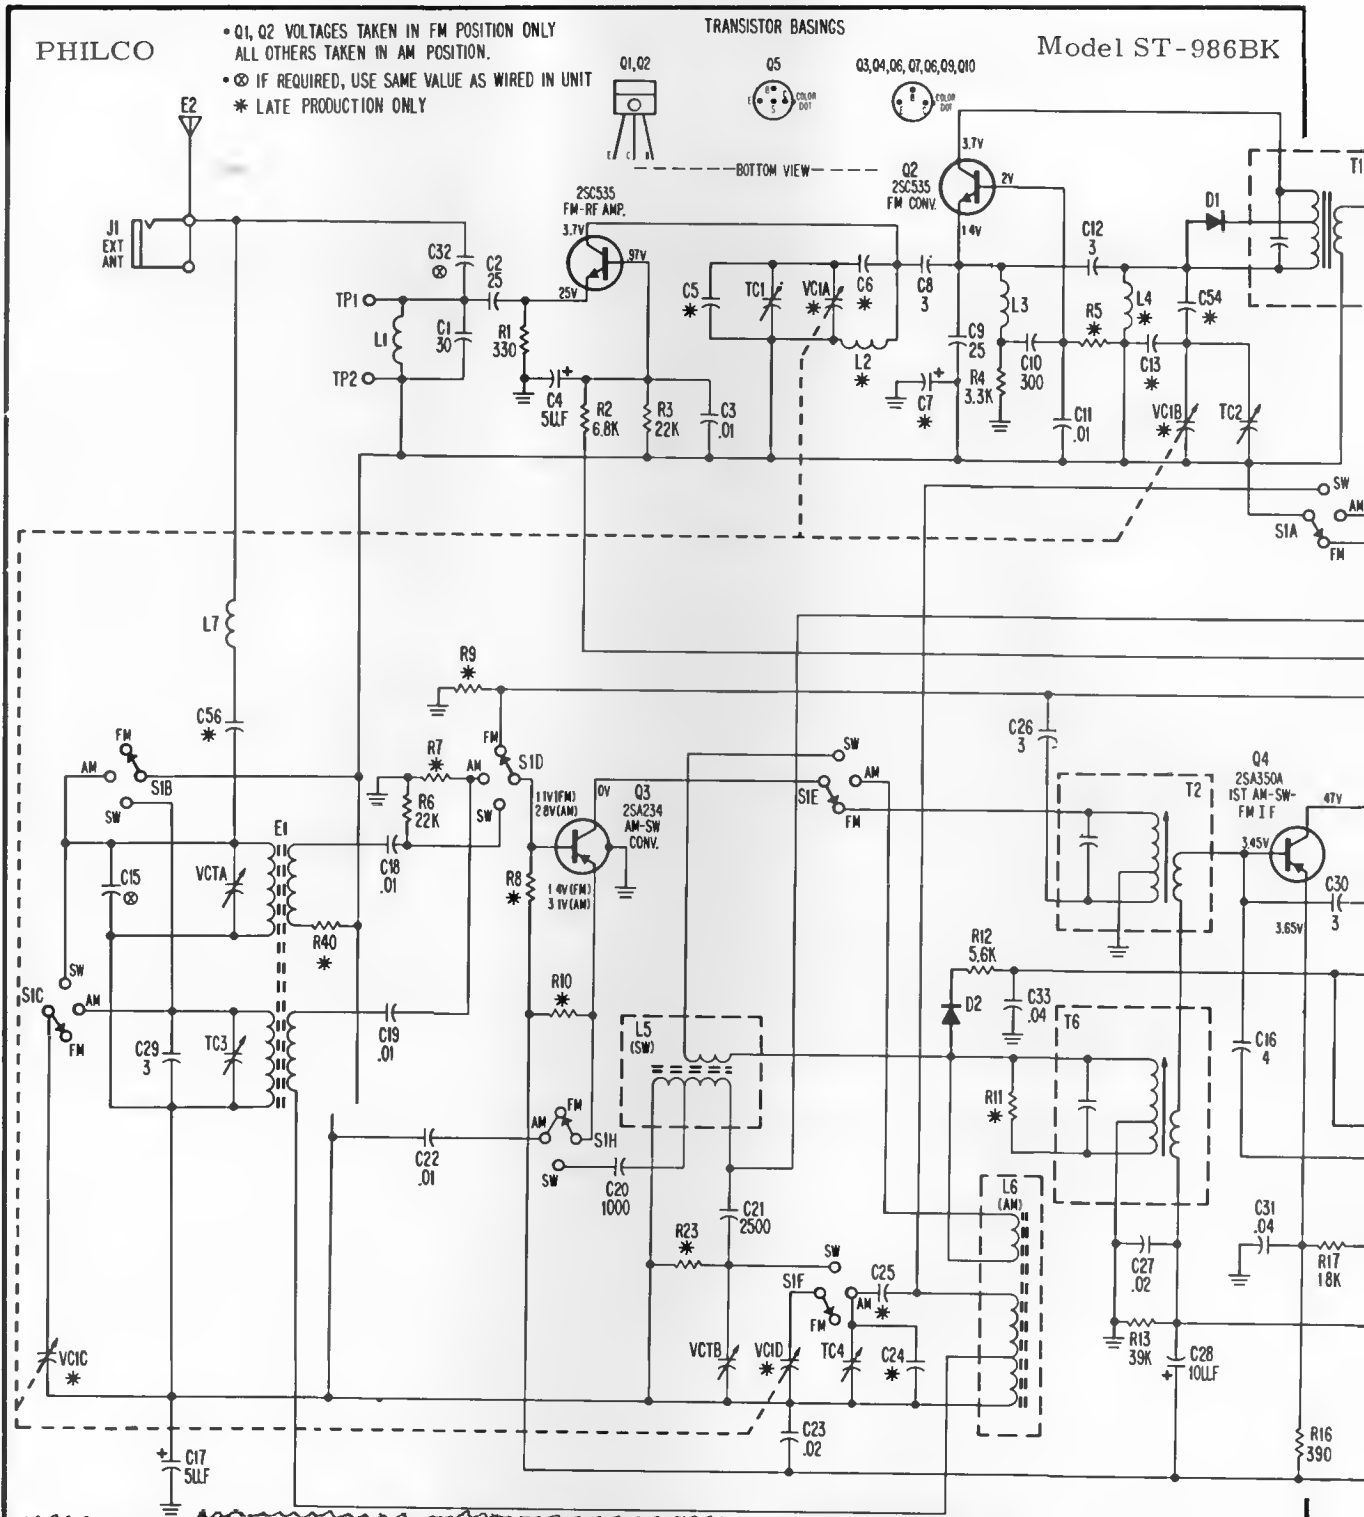


PHILCO MODEL ST-986BK (Continued from preceding page.)

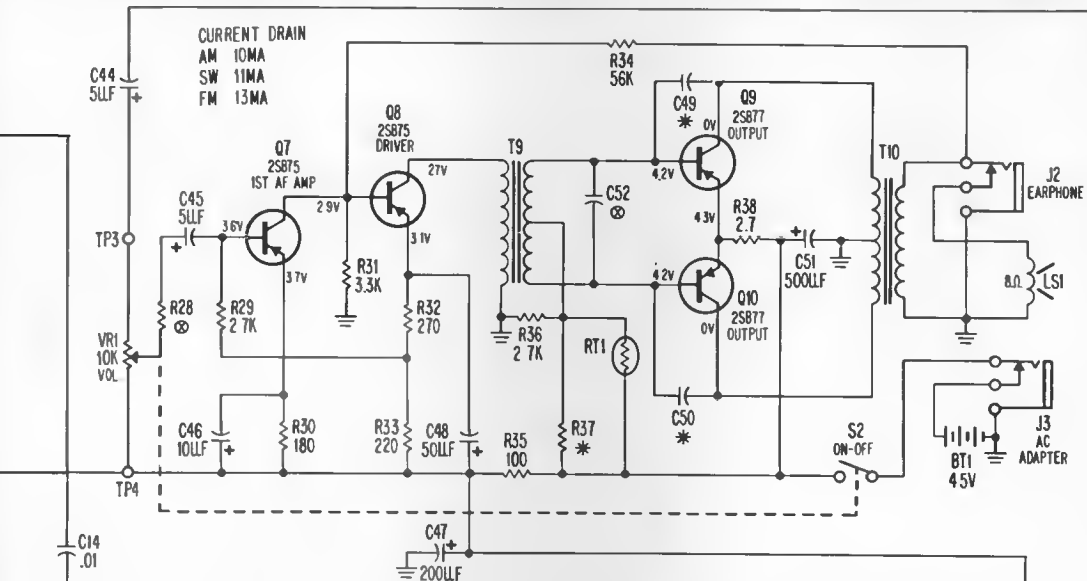


CIRCUIT: 10 transistors, 5 diodes and 1 thermistor in a superheterodyne FM-AM-SW receiver covering 3 bands.

SPEAKER: 3/2 inch 8 ohms voice coil, jack provided for optional private listening unit (Part number 429-0919-19).

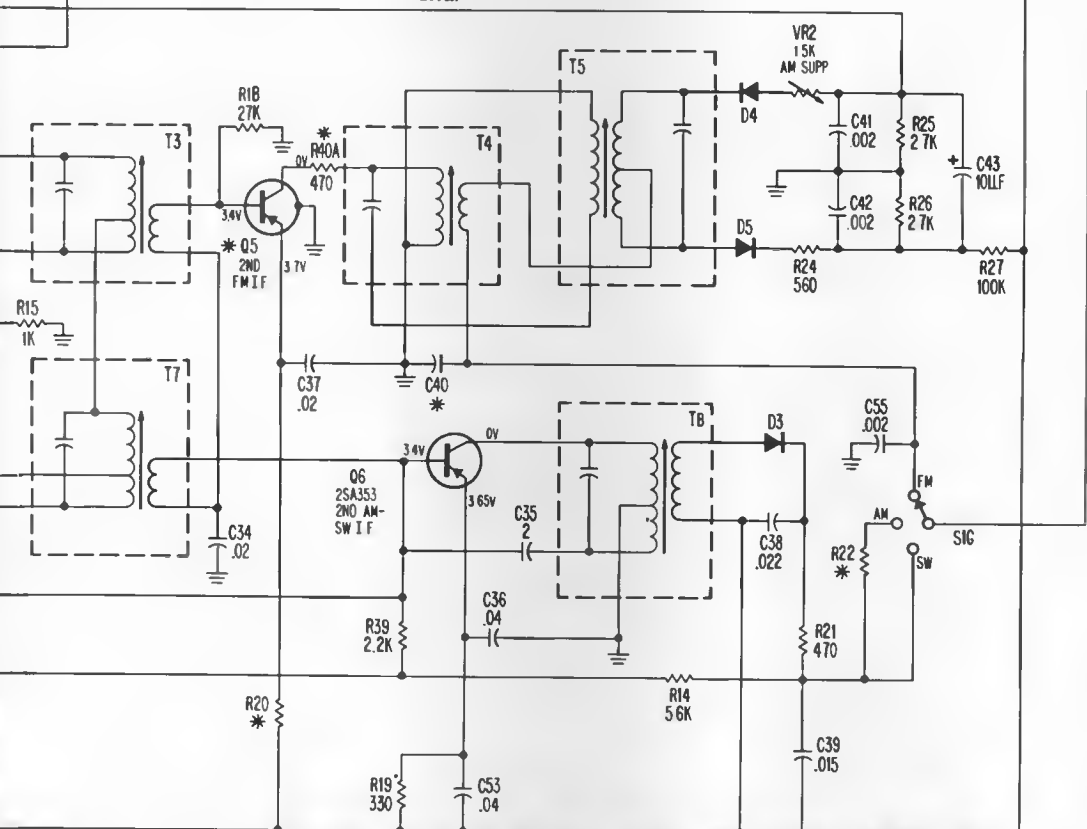

ANTENNA: AM-SW, self-contained magnecore. FM-SW, telescopic adjustable monophone. External antenna jack provided for use with an antenna other than the monophone.

BATTERY: 3 "D" cells provide a 4.5-volt supply with a jack provided for optional external power supply (Philco part no. 423-1009-4).

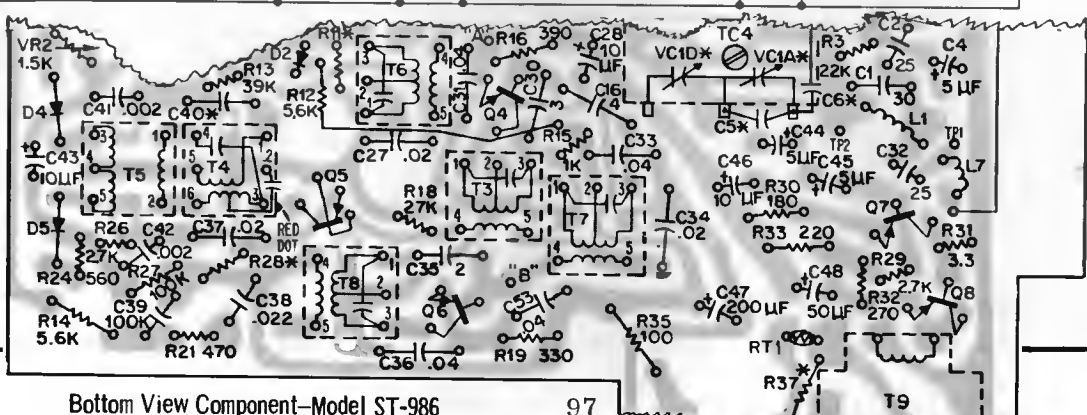


FREQUENCY RANGE: FM, 88MHz to 108MHz
SW, 4.5MHz to 12MHz
AM, 540KHz to 1600KHz

INTERMEDIATE FREQUENCY: FM, 10.7MHz
SW, 460KHz
AM, 460KHz

Bottom View Component-Model ST-986

PHILCO MODEL ST-988BK

(Continued on next page.)

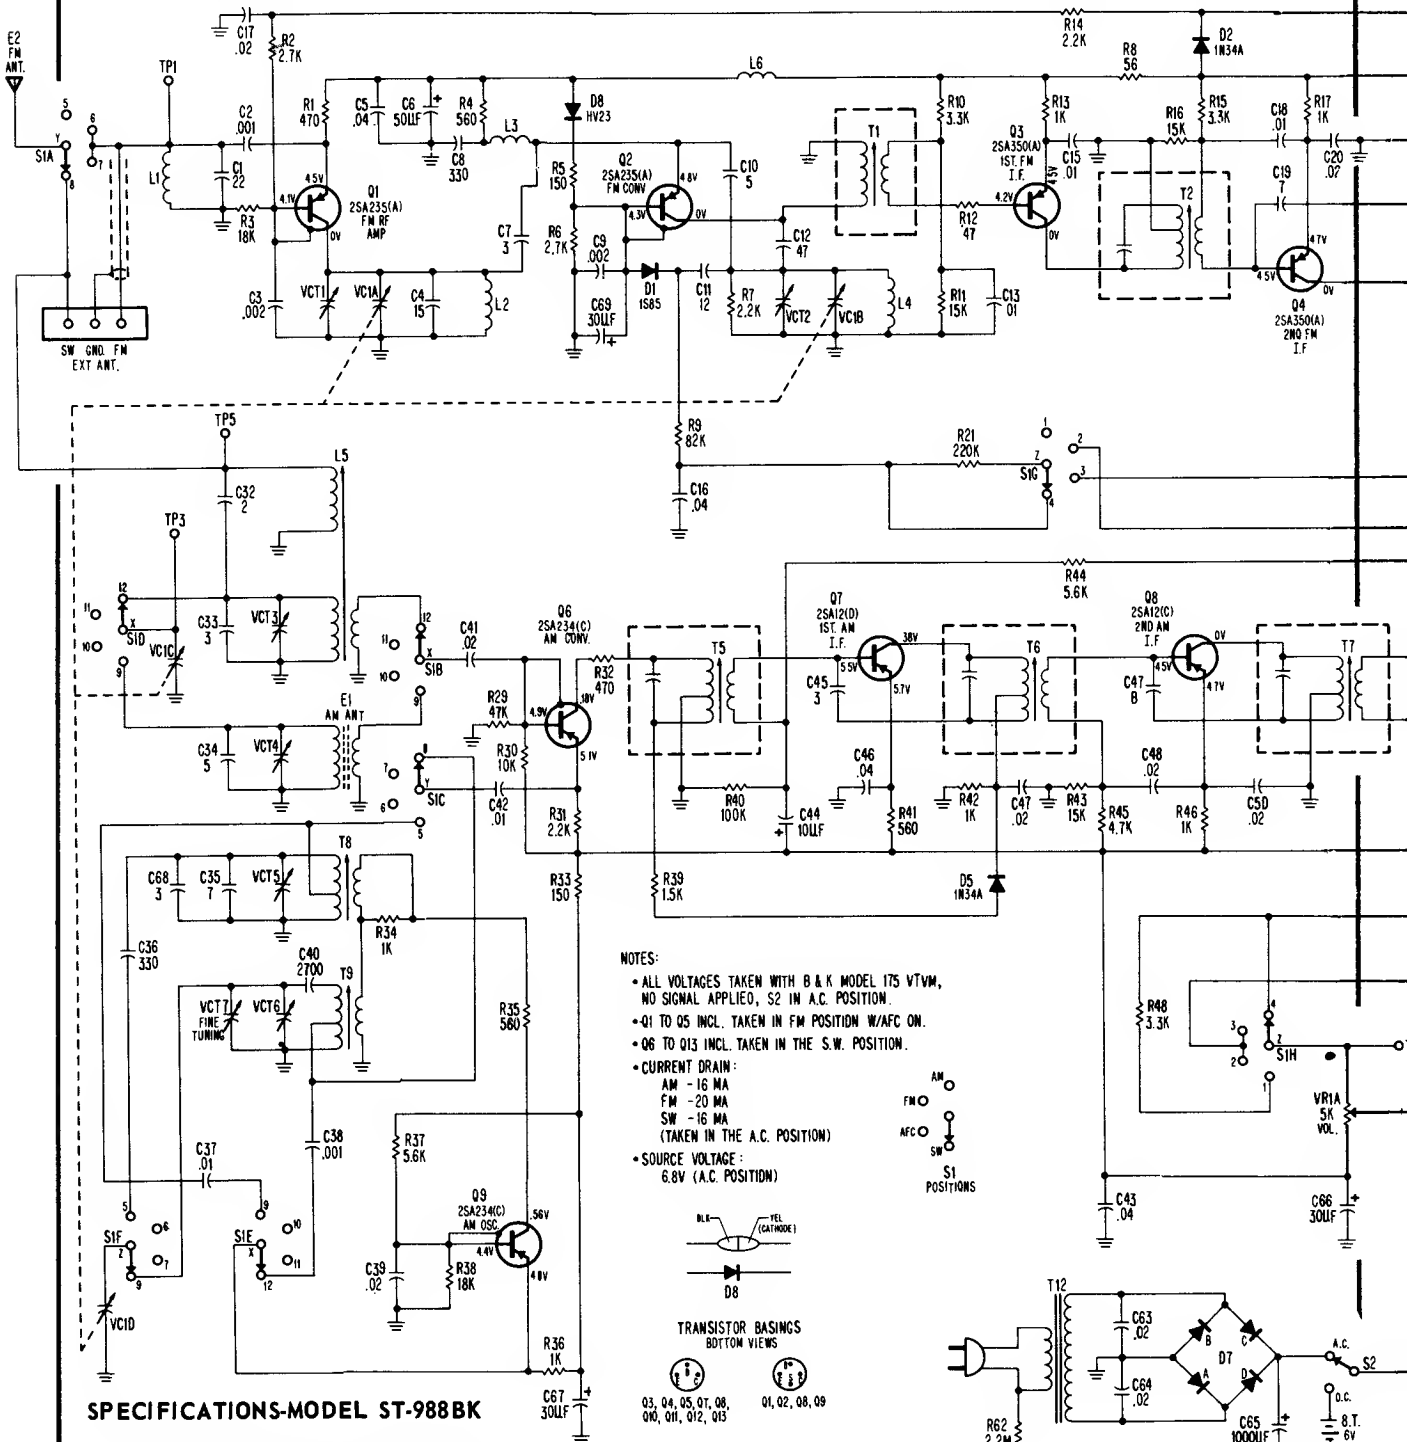


SPECIFICATIONS-MODEL ST-988BK

ANTENNA: AM-self-contained magnecore.
FM, SW-telescopic adjustable monopole.
Terminal panel provided for FM and SW antennas.
CIRCUIT: 13 transistors, 8 diodes and 1 thermistor in a superheterodyne FM-AM-SW receiver.
FREQUENCY COVERAGE: FM-88MHz to 108MHz
AM-540KHz to 1620KHz
SW-6MHz to 18MHz
INTERMEDIATE FREQUENCY: AM-455KHz
FM-10.7MHz

POWER SUPPLY: 4 "C" cells in a 6 volt supply with a built-in A.C. power supply for optional A.C. operation.
SPEAKER: 4 inches, 8 ohms, jack provided for optional private listening unit (Philco Part No. 326-8007-1).


PHILCO MODEL ST-988BK

(Continued from preceding page.)

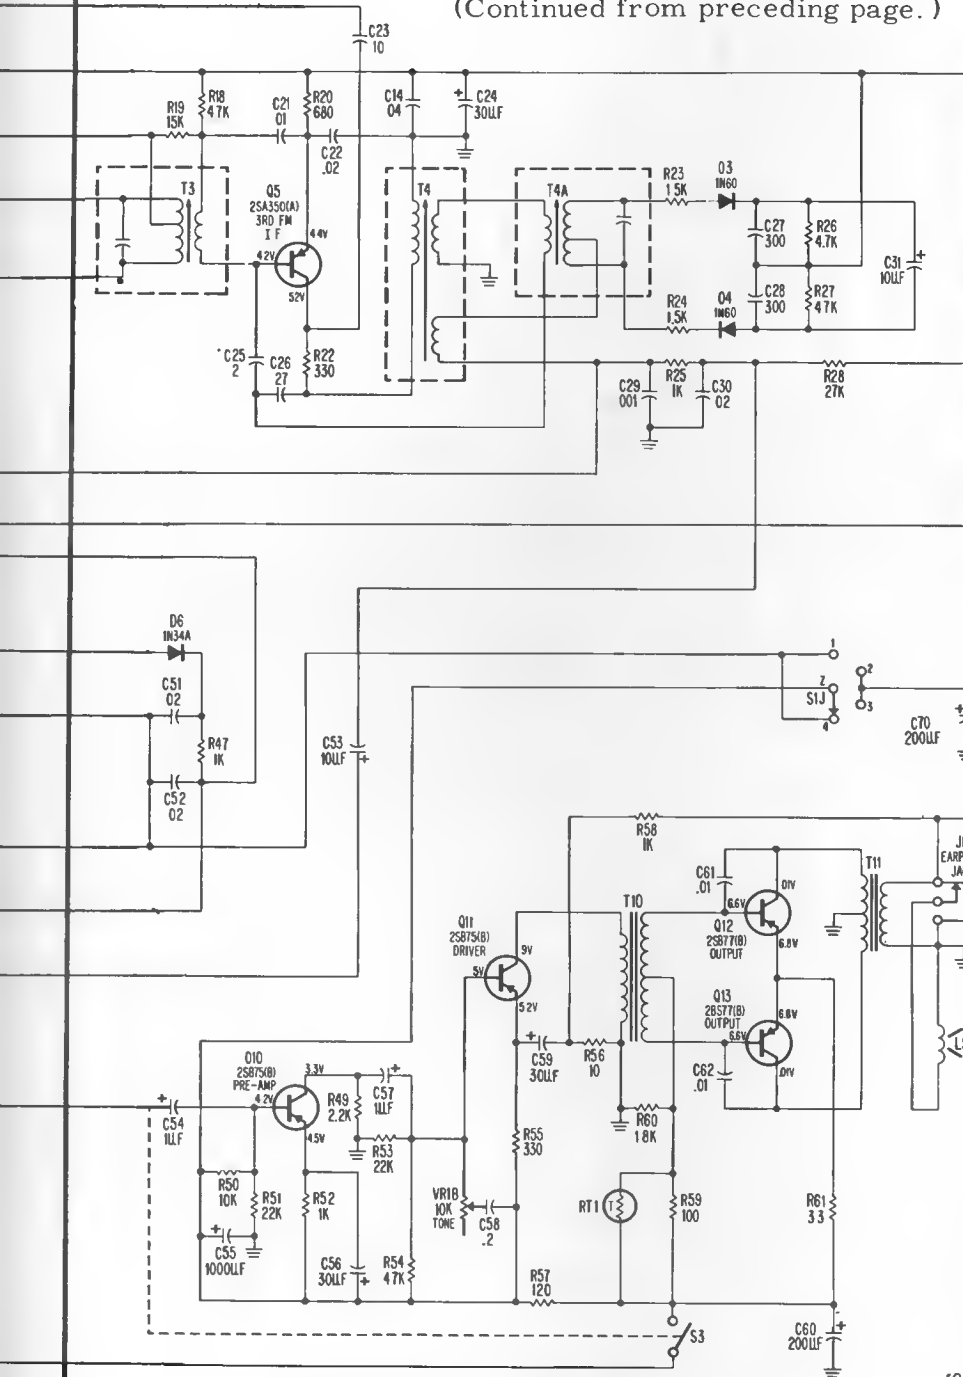


ALL VOLTAGES TAKEN WITH B & K MODEL 175 VTVM,
NO SIGNAL APPLIED AND VOLUME AT MINIMUM.

Bottom View Components

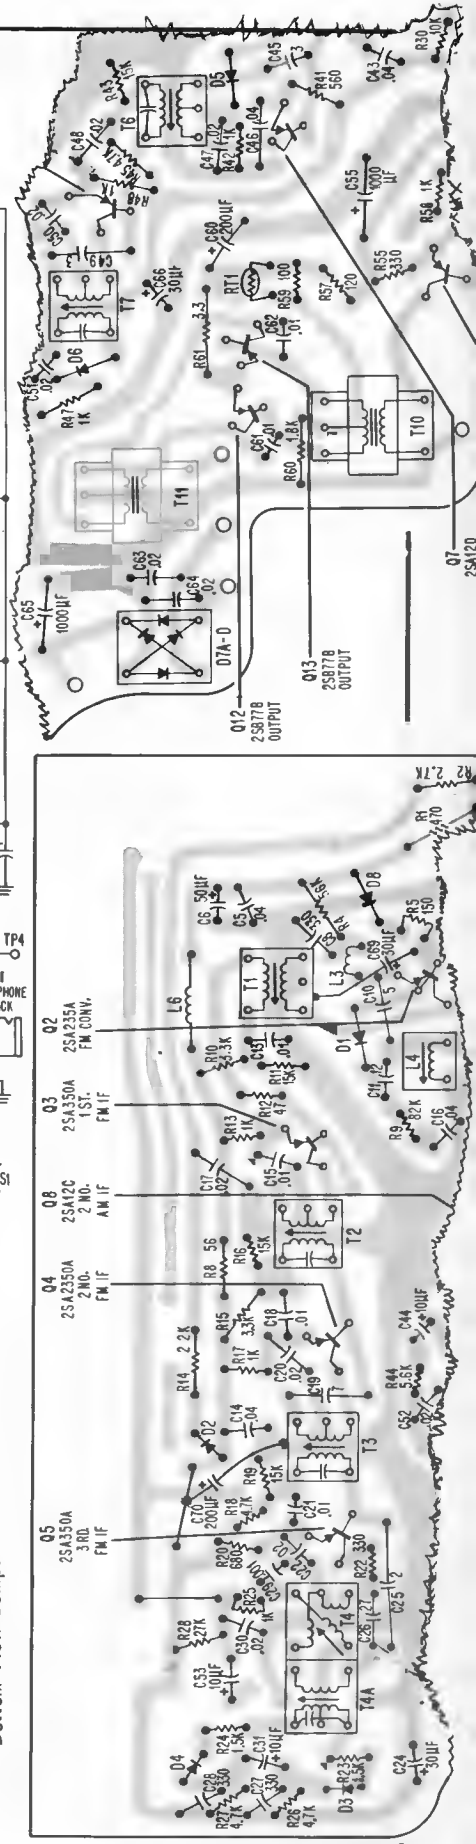

PHILCO MODEL ST989BK

(Continued on next two pages.)

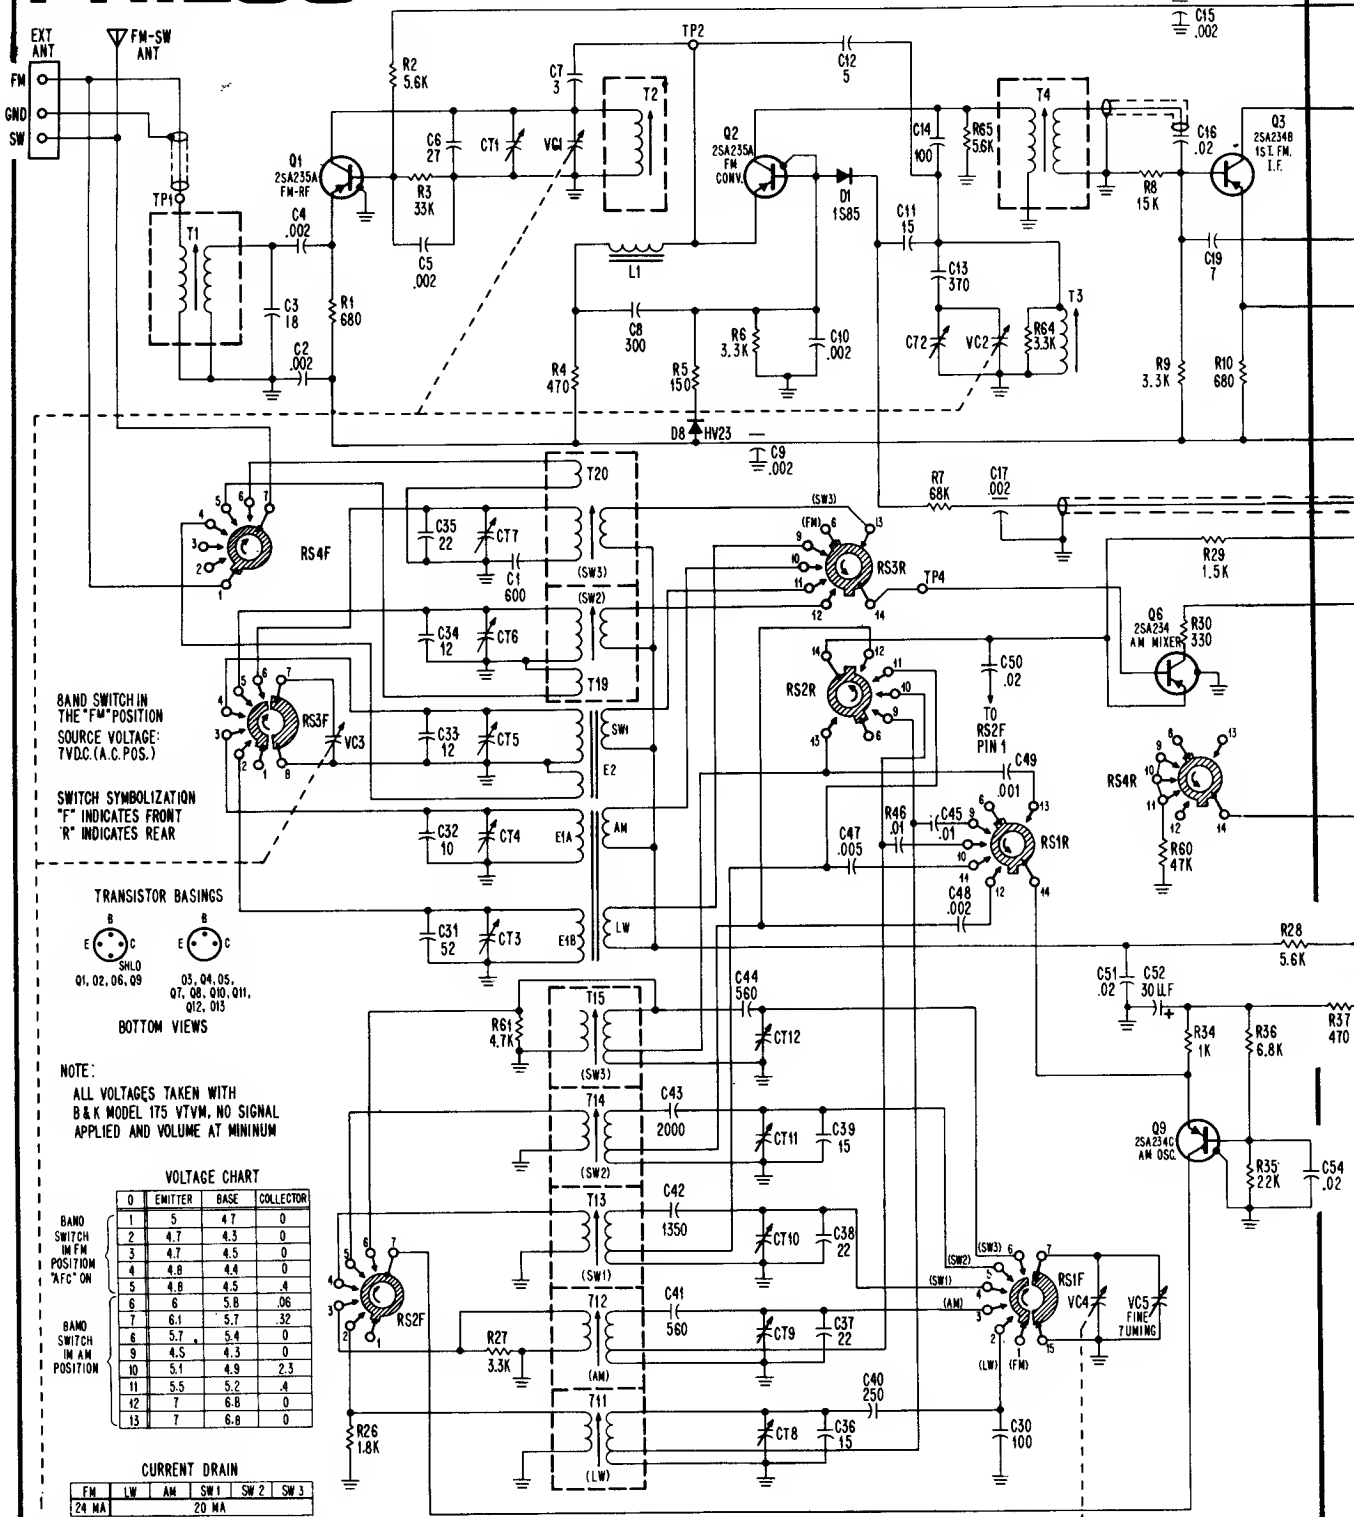

FREQUENCY COVERAGE: FM-88MHz to 108MHz
AM-540KHz to 1620KHz
LW-150KHz to 350KHz
SW1-1.5MHz to 4.5MHz
SW2-3MHz to 9MHz
SW3-9MHz to 22MHz


INTERMEDIATE FREQUENCY: AM - 455KHz
FM - 10.7MHz

DISASSEMBLY INSTRUCTIONS

1. Remove 2 cross-recess screws from the rear of the cabinet and unsnap the battery compartment lid.
2. Carefully pull the line cord box out of the unit. Also remove the battery case.

PHILCO MODEL ST989BK

Continued on next page and from preceding page

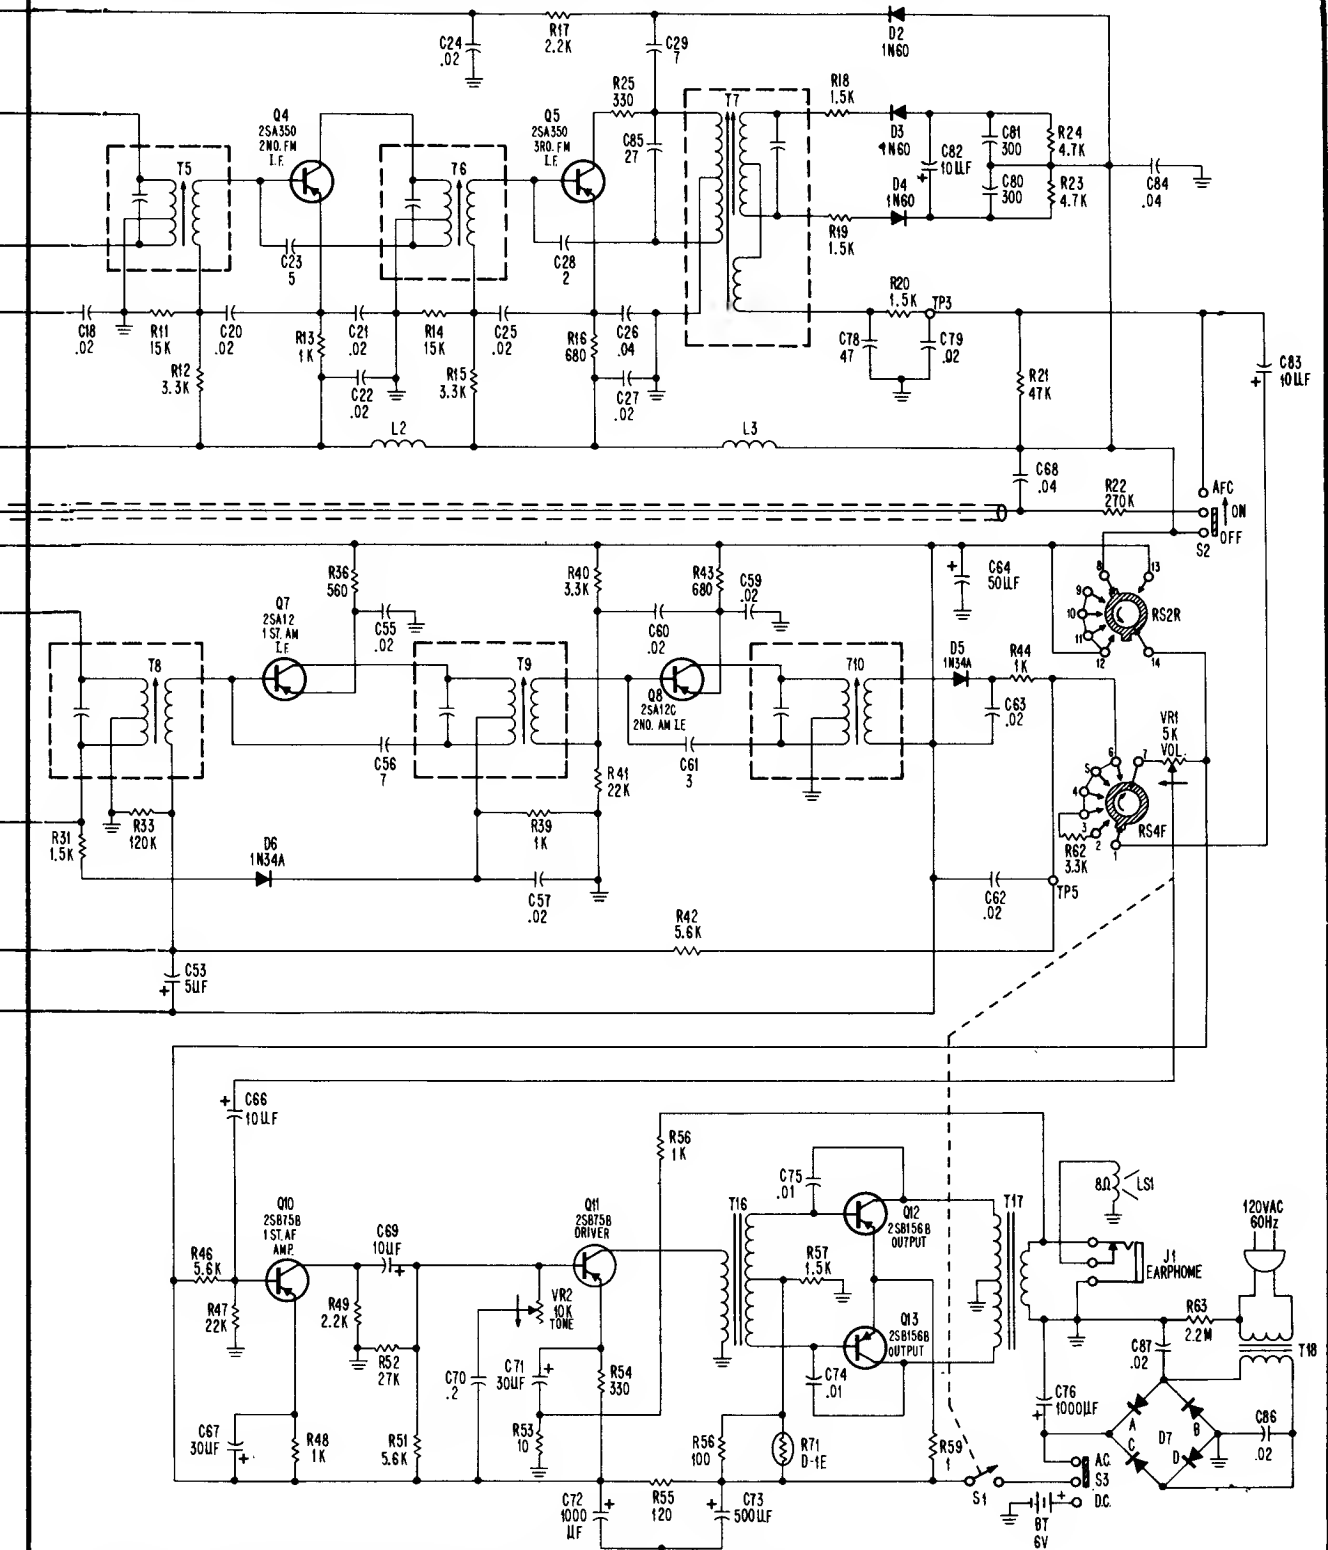


3. Remove 1 cross-recess screw from the chassis next to the power transformer and 1 cross-recess screw from the front of the tuner mounting bracket.
4. Remove 3 nuts, 2 on the left hand side of the chassis and 1 between the rotary switch bracket and the P.W. Panel.
5. Loosen the screw on the AFC knob and pull the knob off.
6. Remove J1 and S3 from the jack panel on the right-hand side. Do not remove the panel itself.
7. Lift the chassis on the right side slightly and pull to the right to clear the rotary switch shaft from the side of cabinet. Lift the chassis straight up to clear cabinet.

PHILCO

MODEL ST989BK

Bottom View Components—FM Tuner

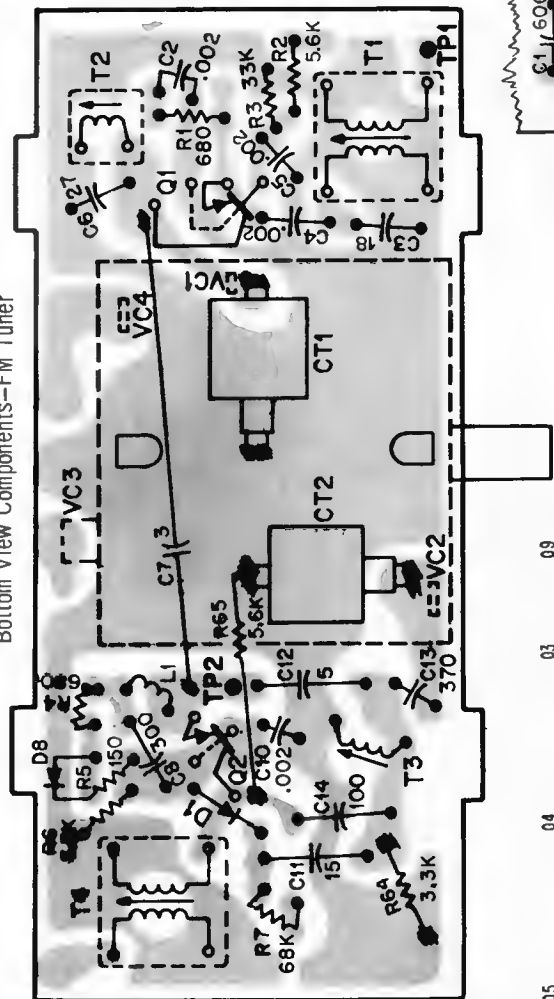


ANTENNA: AM-LW-SW1, self contained magnecore SW2, SW3, FM, telescopic adjustable monopole Terminal panel provided for external FM and SW antennas


FREQUENCY COVERAGE: FM-88MHz to 108MHz
 AM-540KHz to 1620KHz
 LW-150KHz to 350KHz
 SW1-1.5MHz to 4.5MHz
 SW2-3MHz to 9MHz
 SW3-9MHz to 22MHz

INTERMEDIATE FREQUENCY: AM - 455KHz
 FM - 10.7MHz

Q11 25B758 DRIVER
 Q10 25B758 PRE-AMP
 Q12 25B156 OUTPUT

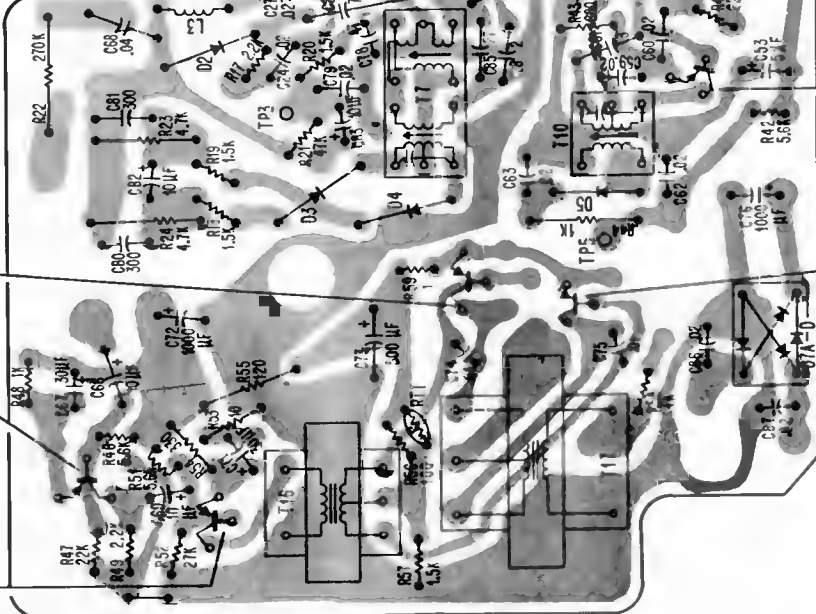

Q13 25B156 OUTPUT
 Q8 25A12C 2ND. AM IF
 Q7 25A12D 1ST. AM IF
 Q6 25A234C 1ST. AM IF

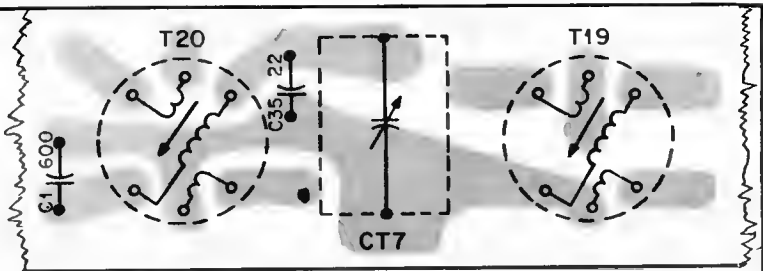


Bottom View Components—IF & Audio Panel

PHILCO


TABLE/CLOCK AM RADIO MODEL S-790BR

- NOTES:
 1. ALL VOLTAGES MEASURED WITH 0-K MODEL 175
 VTVM, VOLUME AT MINIMUM AND NO SIGNAL APPLIED.
 2. CURRENT DRAIN 0.5 MA.
 3. 0+ 0.2 VDC
 * USED AS DESIRED

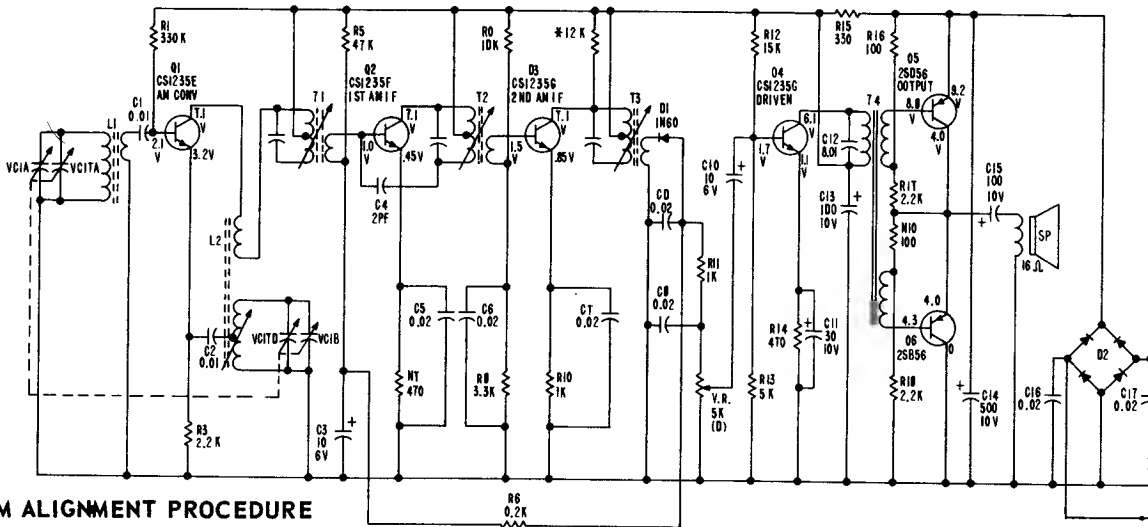


AM ALIGNMENT PROCEDURE

SIGNAL GENERATOR		RADIO			
STEP	CONNECTION TO RADIO	DIAL SETTING	DIAL SETTING	SPECIAL INSTRUCTIONS	ADJUST
1	USE RADIATING LOOP (SEE NOTE BELOW)	455KHz	GANG FULLY OPEN	ADJUST FOR MAX. OUTPUT IN ORDER GIVEN.	T1 1ST IF T2 2ND IF T3 3RD IF
2	SAME AS STEP 1	1620KHz	GANG OPEN	ADJUST FOR MAX. OUTPUT.	VCITB OSC. TRIMMER
3	SAME AS STEP 1	1400KHz	1400KHz	ADJUST FOR MAX. OUTPUT.	VCITA ANT. TRIMMER
4	SAME AS STEP 1	580KHz	580KHz	ADJUST FOR MAX. OUTPUT. ROCK GANG WHILE MAKING ADJUSTMENT	L2 OSC. COIL

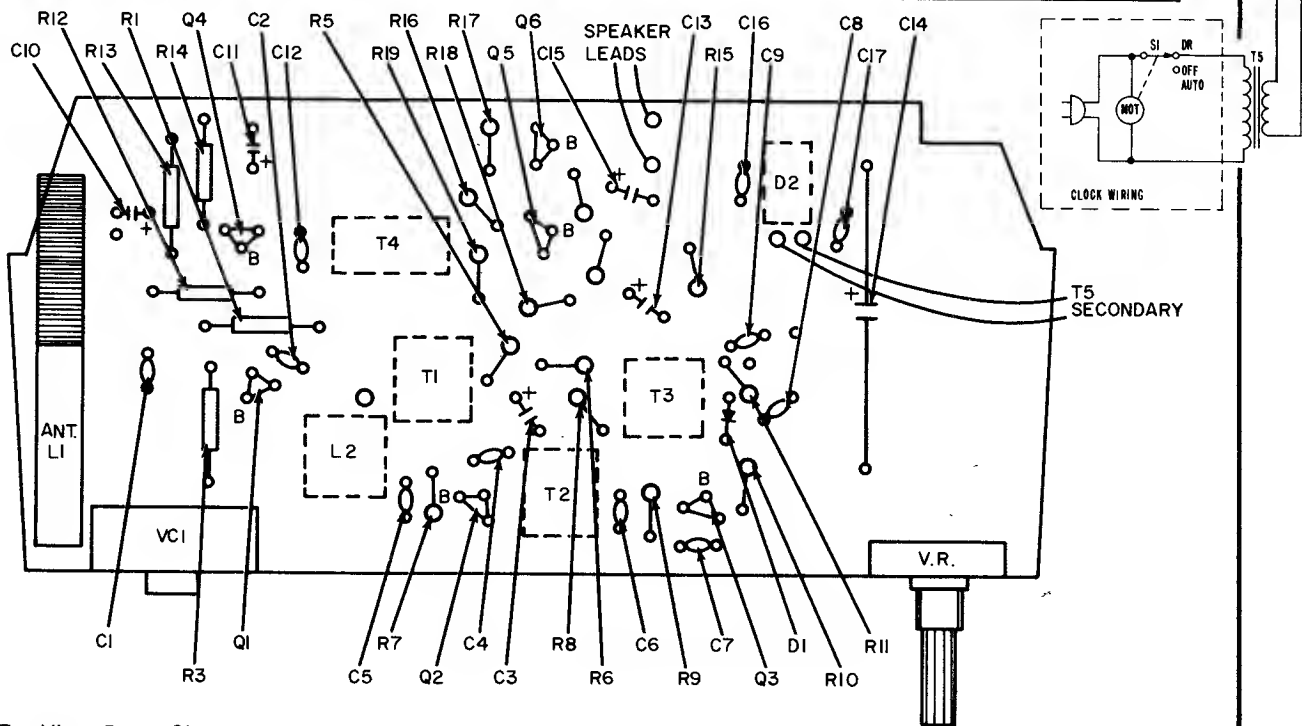

Top View-Perma Circuit Panel Components

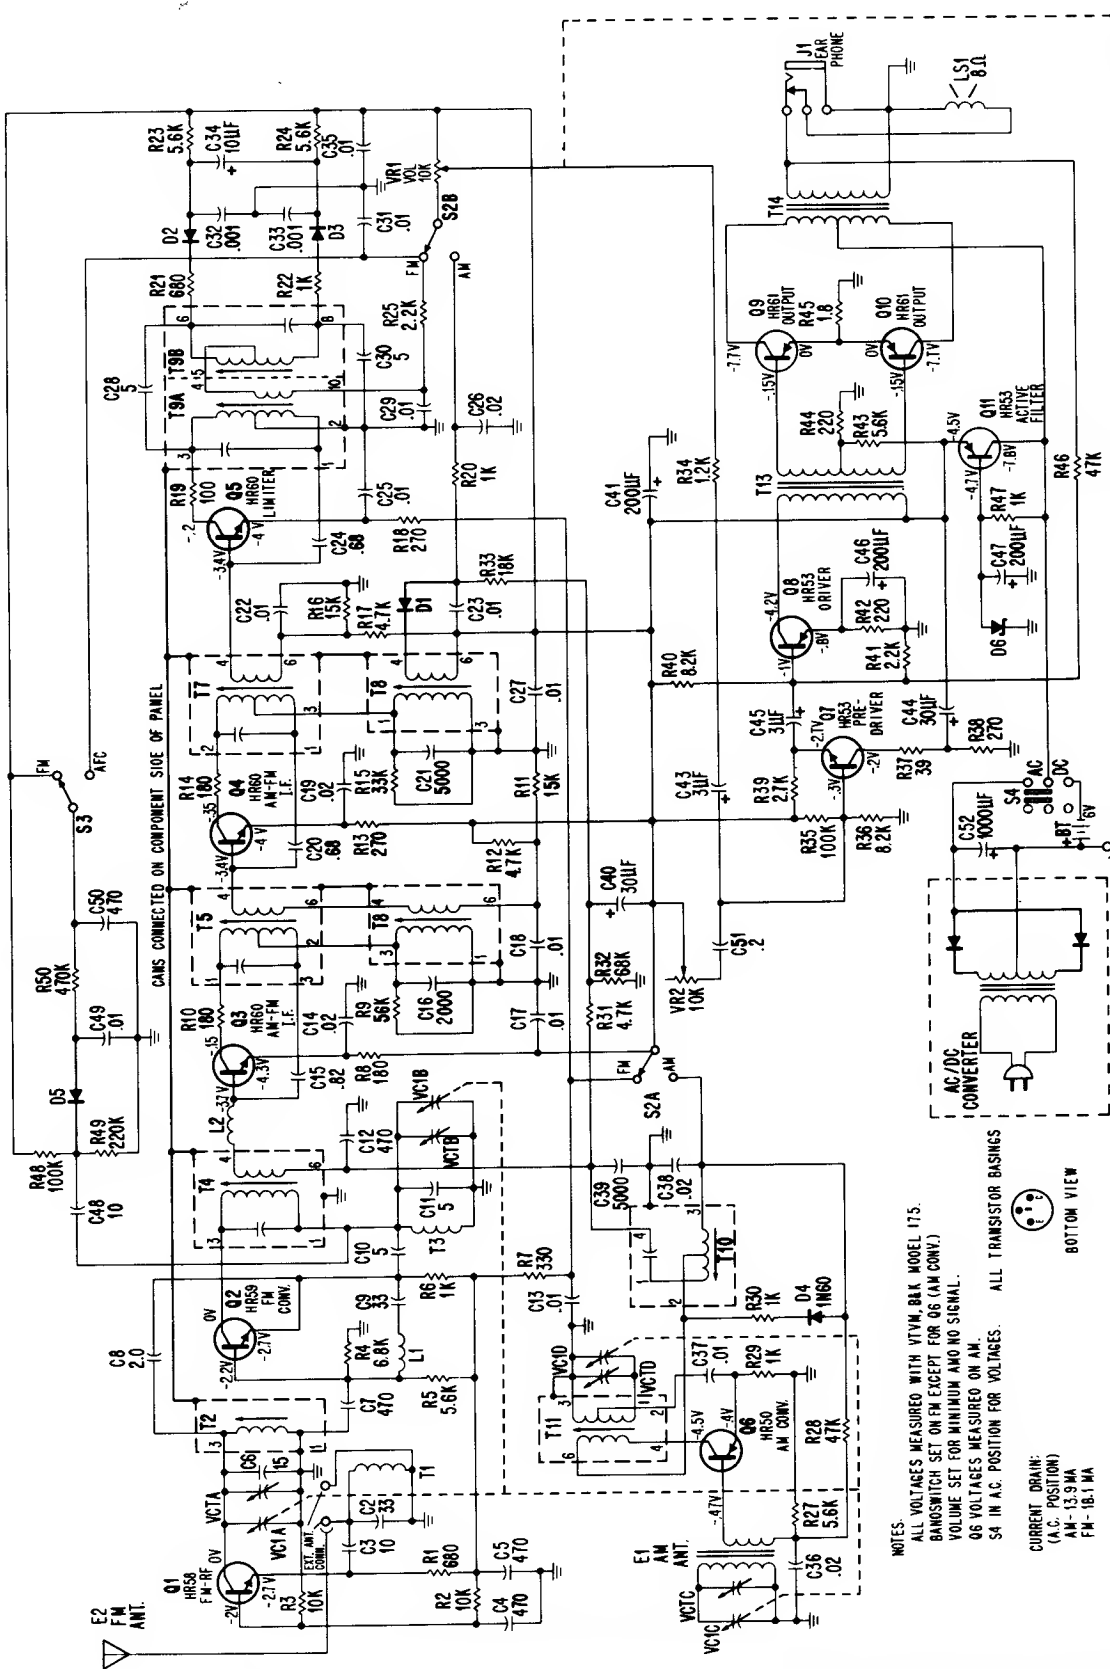


NOTES:
ALL VOLTAGES MEASURED WITH VTVM, RAY MODEL 175.
BANDSWITCH SET ON FM EXCEPT FOR Q6 (AM CONV.).
VOLUME SET FOR MINIMUM AUDIO SIGNAL.
Q6 VOLTAGES MEASURED ON AM.
S4 IN A.C. POSITION FOR VOLTAGES.

ALL TRANSISTOR BASINGS
CURRENT DRAIN:
(A.C. POSITION)
AM - 13.9 MA
FM - 18.1 MA

CIRCUIT: 11 transistors, 6 diodes in an AM-FM super-heterodyne circuit.
FREQUENCY COVERAGE: AM, 520 KHz to 1620 KHz
FM, 88 MHz to 108 MHz
INTERMEDIATE FREQUENCY: AM, 455 KHz
FM, 10.7 MHz

POWER: AC, 117 volts, 60Hz through AC/DC converter, part no. 76-14128-1.

DC, ST998-4 type "D" cells (Eveready types 920 or 1050) in a 6-volt supply.
ST997-4 type "C" cells (Eveready type 1035) in a 6-volt supply

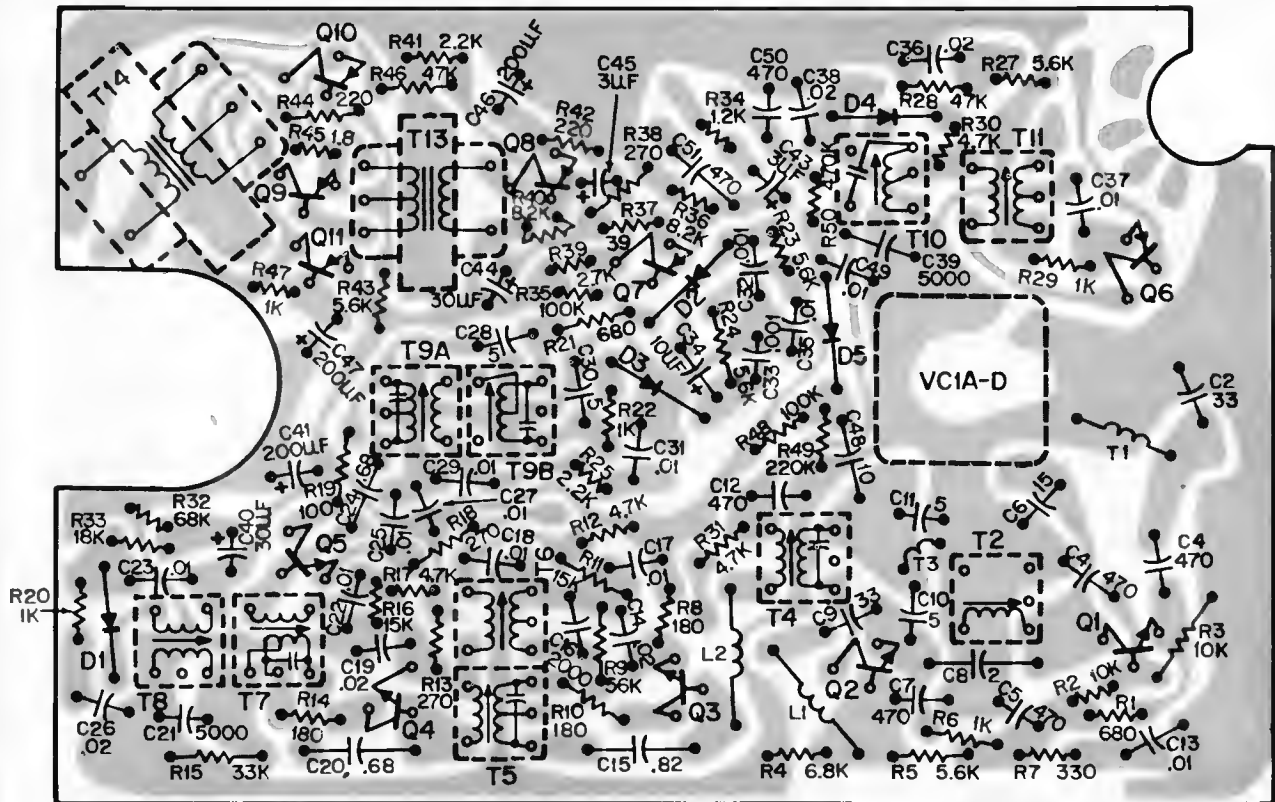


		SIGNAL GENERATOR		RADIO				
		STEP	CONNECTION TO RADIO	DIAL SETTING	DIAL SETTING	SPECIAL INSTRUCTIONS	ADJUST	
AM ALIGNMENT	1	1	RADIATING LOOP (SEE NOTE 1)	455 KHZ	TUNING GANG FULLY OPEN	ADJUST FOR MAX. OUTPUT IN ORDER GIVEN.	T8, T6 & T10	
	2	2	SAME AS STEP 1	1650 KHZ	TUNING GANG FULLY OPEN	ADJUST FOR MAX. OUTPUT.	VCTD AM OSC.	
	3	3	SAME AS STEP 1	1400 KHZ	1400 KHZ	ADJUST FOR MAX. OUTPUT.	VCTC ANT. TRIM.	
	4	4	SAME AS STEP 1	600 KHZ	600 KHZ	ADJUST FOR MAX. OUTPUT. RDCK TUNING GANG DURING ADJUSTMENT.	T11 AM OSC.	
FM ALIGNMENT	1	1	COLLECTOR OF Q1 THRU .01 MF CAPACITOR	10.7 MHZ ±75 KHZ SWEEP	TUNING GANG FULLY OPEN	ADJUST FOR MAXIMUM OUTPUT IN ORDER GIVEN. REDUCE GENERATOR OUTPUT AS NECESS.	T9A, T7, TS & T4	
	2	2	SAME AS STEP 1	10.7 MHZ 30% AM	TUNING GANG FULLY OPEN	ADJUST FOR MINIMUM OUTPUT (A NULL BETWEEN TWO PEAKS)	T9B	
	3	REPEAT STEPS 1 AND 2 UNTIL NO FURTHER IMPROVEMENT IS OBTAINED.						
	4	4	CONNECT TO ANTENNA TERMINAL THRU 47 OHM RESISTOR	87.5 MHZ ±75 KHZ	TUNING GANG FULLY CLOSED	ADJUST FOR MAX. OUTPUT.	T3 (SEE NOTE "A") FM OSC.	
	5	5	SAME AS STEP 4	108.5 MHZ ±75 KHZ	TUNING GANG FULLY OPEN	ADJUST FOR MAX. OUTPUT.	VCTB FM OSC.	
	6	REPEAT STEPS 4 AND 5 UNTIL NO FURTHER IMPROVEMENT IS OBTAINED.						
	7	7	SAME AS STEP 4	90 MHZ ±75 KHZ	90 MHZ	ADJUST FOR MAX. OUTPUT.	T2	
	8	8	SAME AS STEP 4	105 MHZ ±75 KHZ	105 MHZ	ADJUST FOR MAX. OUTPUT.	VCTA	

RCA VICTOR



RJA 35
Chassis RC-1224C

RJD 39
Chassis RC-1224D

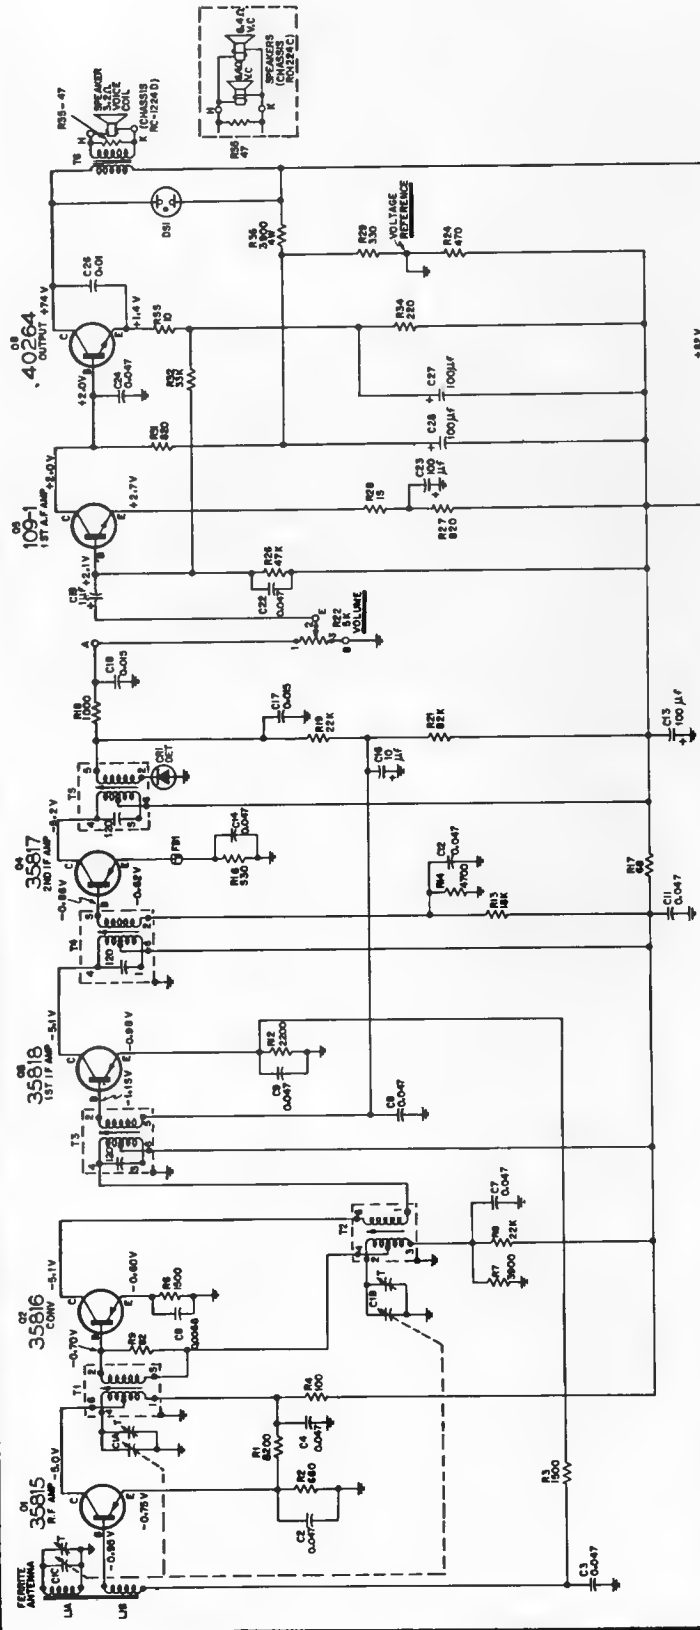

1. ALL RESISTANCE VALUES ARE IN OHMS R = 1000
2. CAPACITANCE VALUES LESS THAN 10 ARE IN μ A VALUES
3. 1.0 & ABOVE ARE IN P.F. DECIMALS
4. LETTERS SHOWN TO INDICATE CONNECTIONS TO CHASSIS GROUND (FUNCTION OF R24 & R23)
5. LETTERS SHOWN ON LINES INDICATE CONNECTIONS ON PRINTED BOARDS:

IF 455 KC

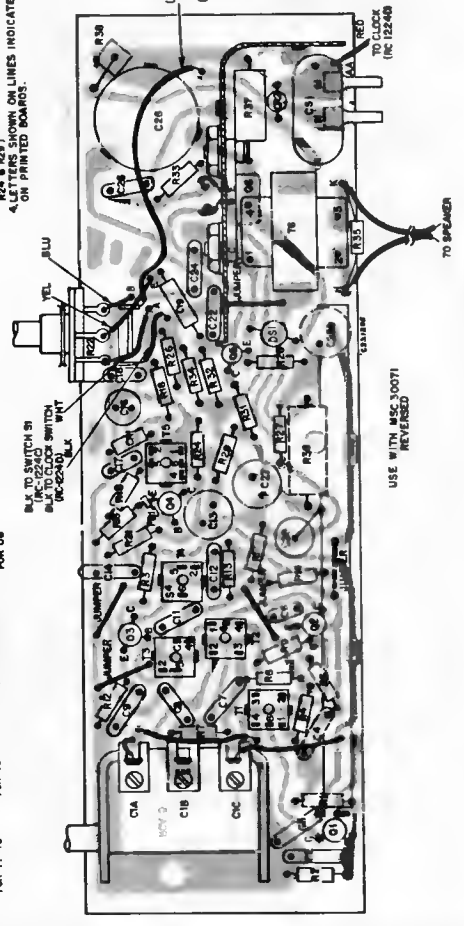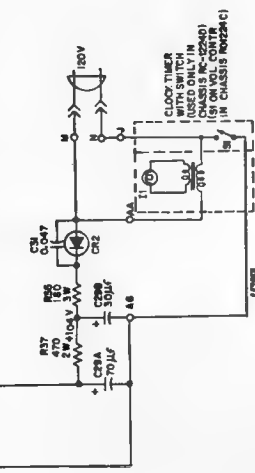


CAUTION
THE CHASSIS IS CONNECTED DIRECTLY TO THE POWER LINE. TO AVOID SHOCK HAZARD, AN ISOLATION TRANSFORMER SHOULD BE USED DURING SERVICE WORK ON THE CHASSIS.

Chassis Layout (Component Side)

RCA



RJG 15 Series RJG 81-K Series

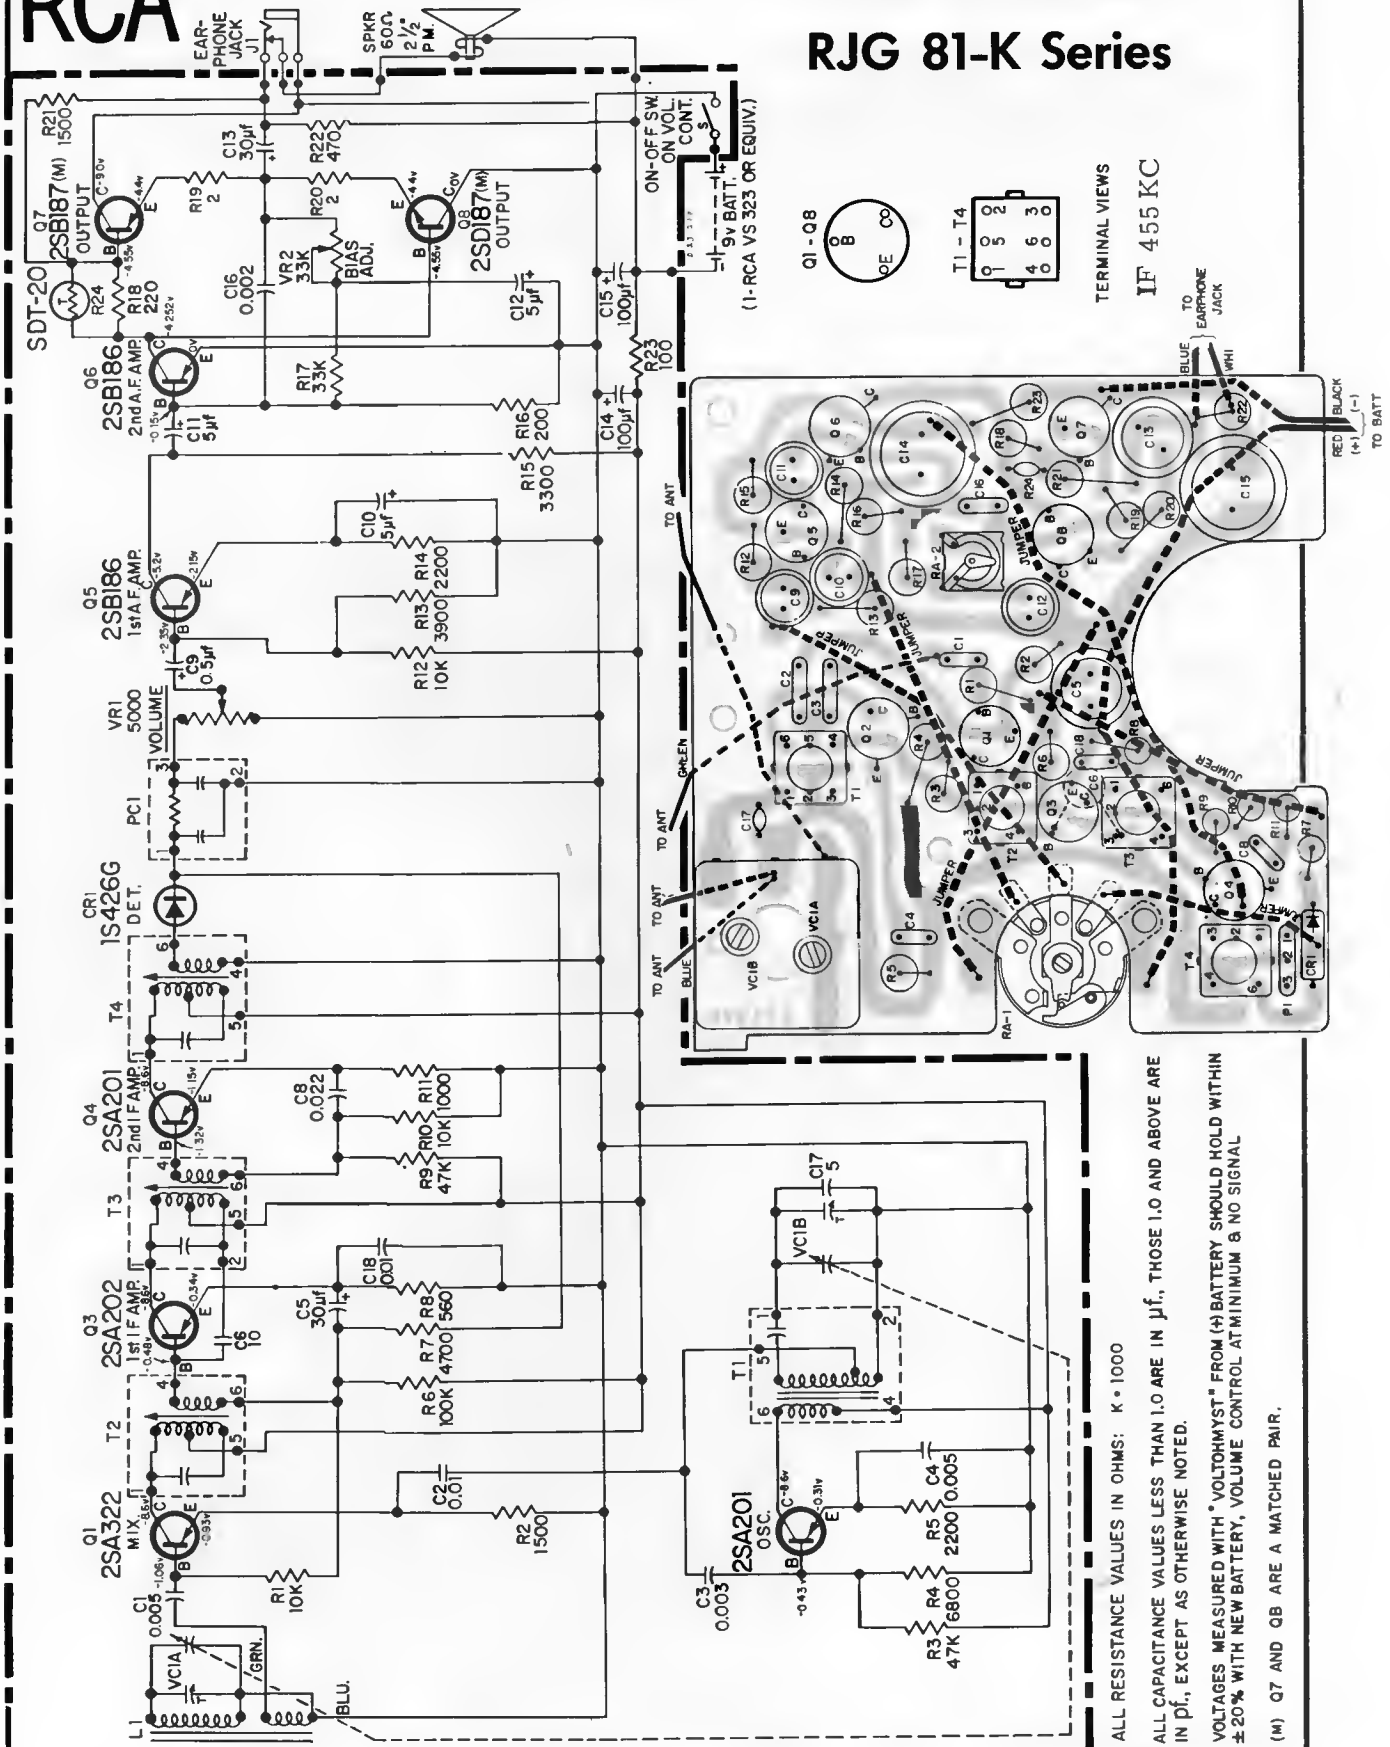

TERMINAL VIEWS
IF 455 KC

ALL RESISTANCE VALUES IN OHMS: K = 1000
ALL CAPACITANCE VALUES LESS THAN 1.0 ARE IN μf , THOSE 1.0 AND ABOVE ARE IN μf , EXCEPT AS OTHERWISE NOTED.
VOLTAGES MEASURED WITH "VOLTOHMYST" FROM (+) BATTERY SHOULD HOLD WITHIN $\pm 20\%$ WITH NEW BATTERY, VOLUME CONTROL AT MINIMUM & NO SIGNAL
(M) Q7 AND Q8 ARE A MATCHED PAIR.

RCA VICTOR Models RJG 25 Series, RJG 86 Series

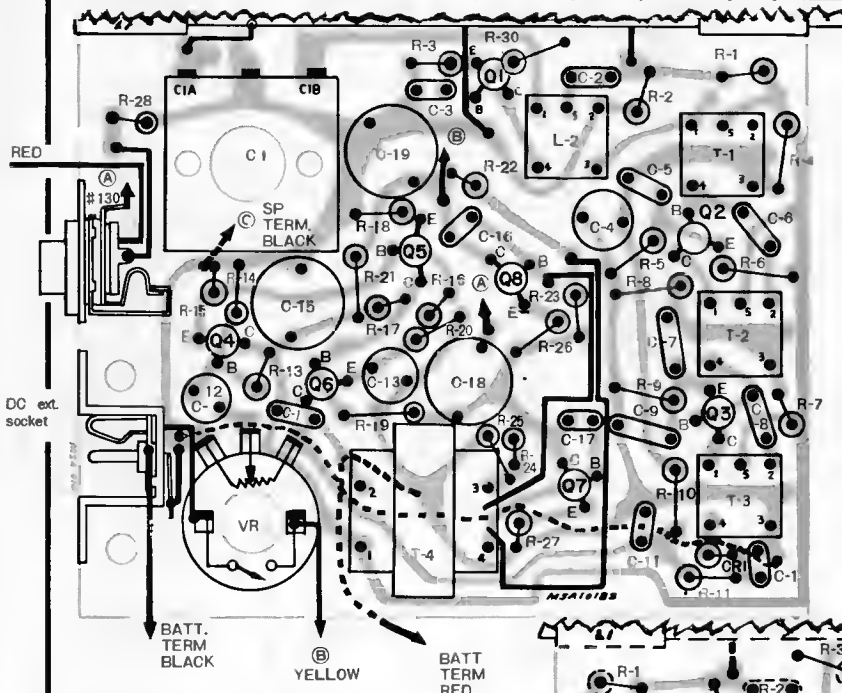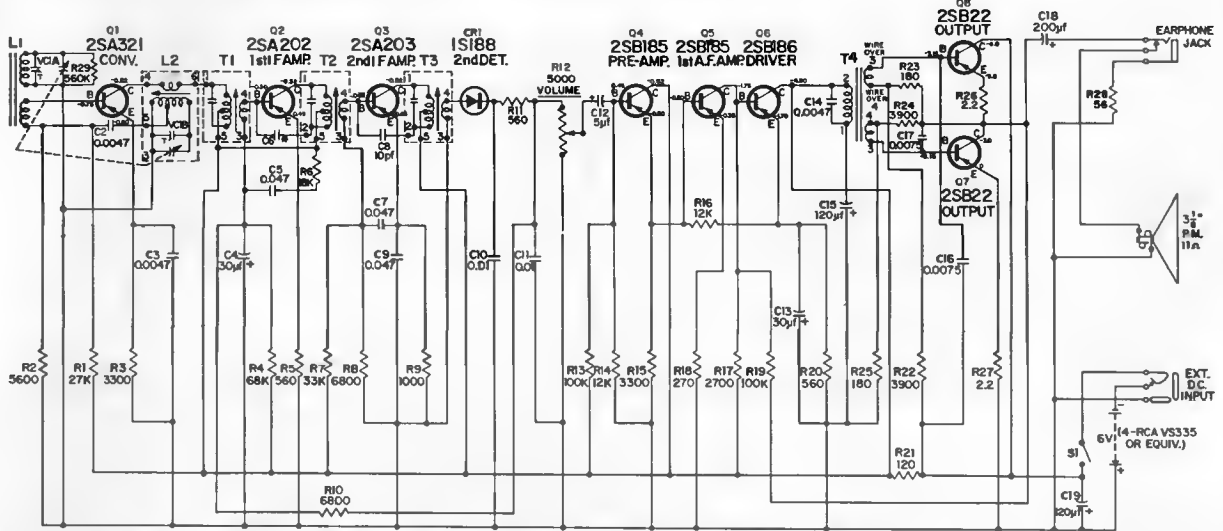

Step	Signal Gan. Output	Dial Pointer Setting	Adjust for Max. Output
1			T3 (3rd IF)
2	455 kc	Gong open	T2 (2nd IF)
3			T1 (1st IF)
4	Repeat Steps 1, 2, and 3		
5	520 kc	Gang closed	L2 (Osc. coil)
6	1650 kc	Gong open	C1B-T (Osc. trim.)
7	1400 kc	1400 kc (rock gang)	C1A-T (Ant. trim.)
8	Repeat Steps 5, 6, and 7		


Connect Signal Generator to— Loop of wire placed near antenna for radiated signal

- RESISTANCE VALUES ARE IN OHMS: K=1000.
- CAPACITANCE VALUES LESS THAN 1.0 ARE IN μ F, VALUES 1.0 AND ABOVE ARE IN μ F., EXCEPT AS OTHERWISE NOTED.
- VOLTAGES ARE MEASURED WITH A "VOLTOMM" TO CHASSIS GROUND WITH NO SIGNAL AND SHOULD HOLD WITHIN $\pm 20\%$ AT RATED SUPPLY VOLTAGE.







TERMINAL VIEWS


Chassis Layout—Wiring Side →

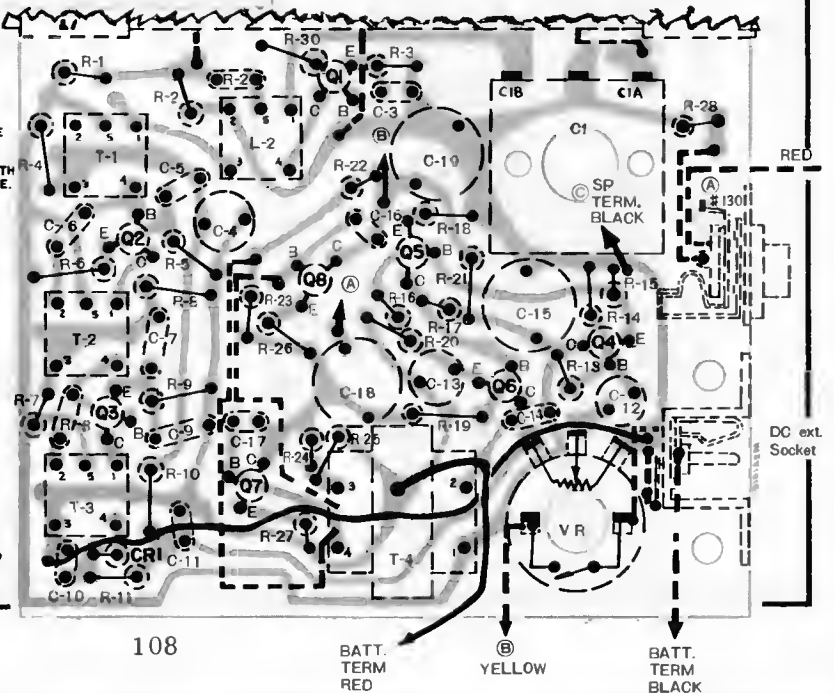


RCA RJG 37 Series

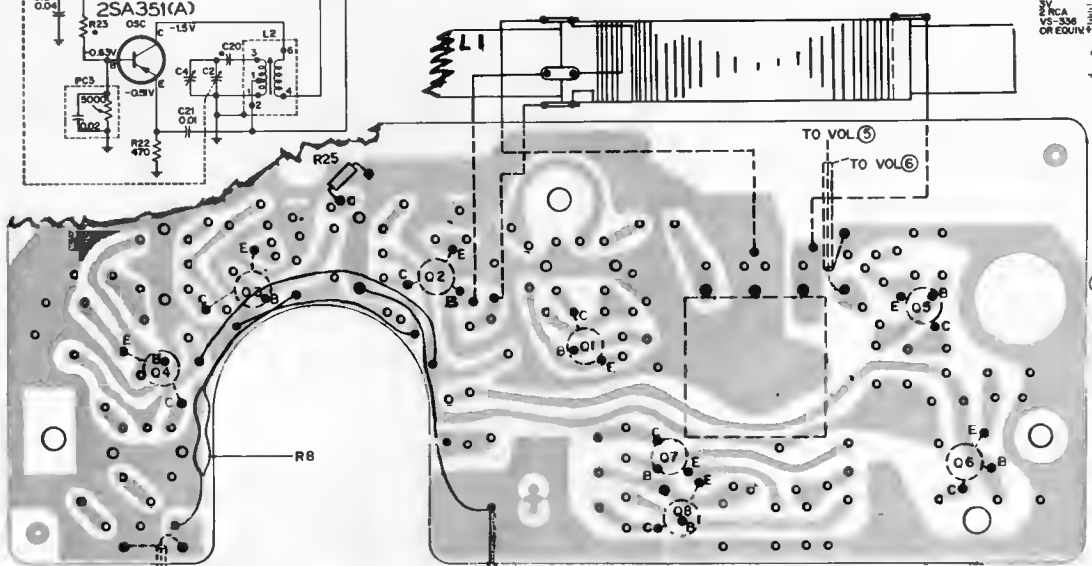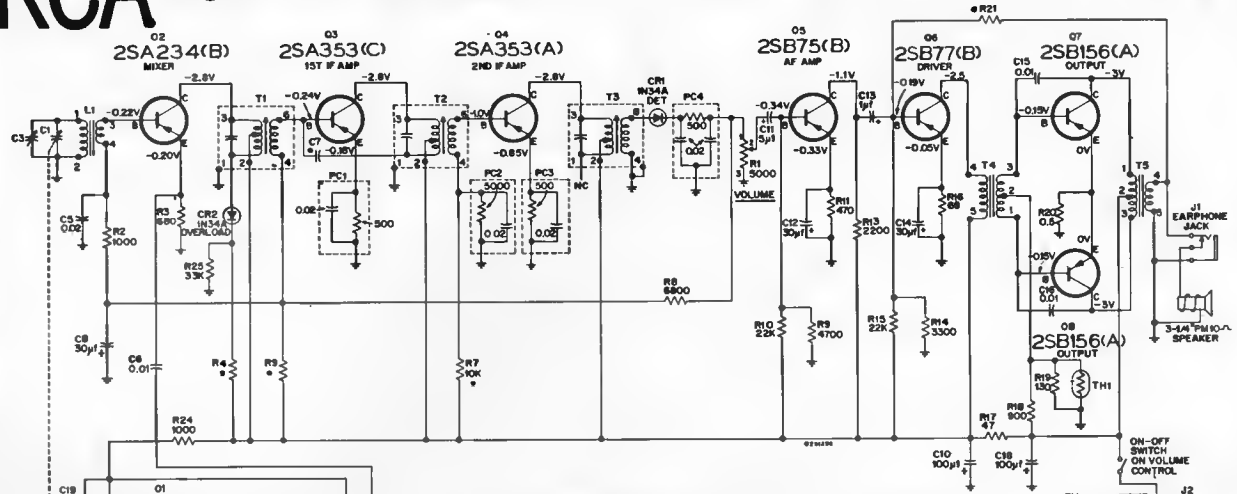


IF
455KC

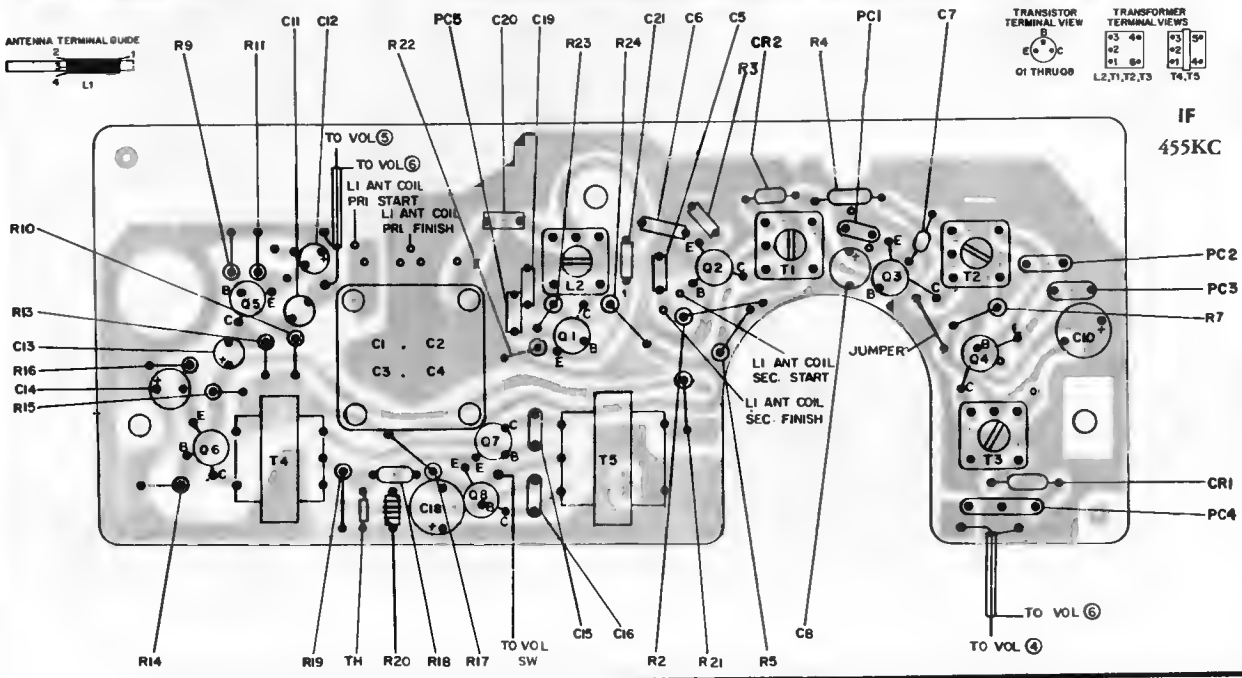


RCA VICTOR RJG 42 Series

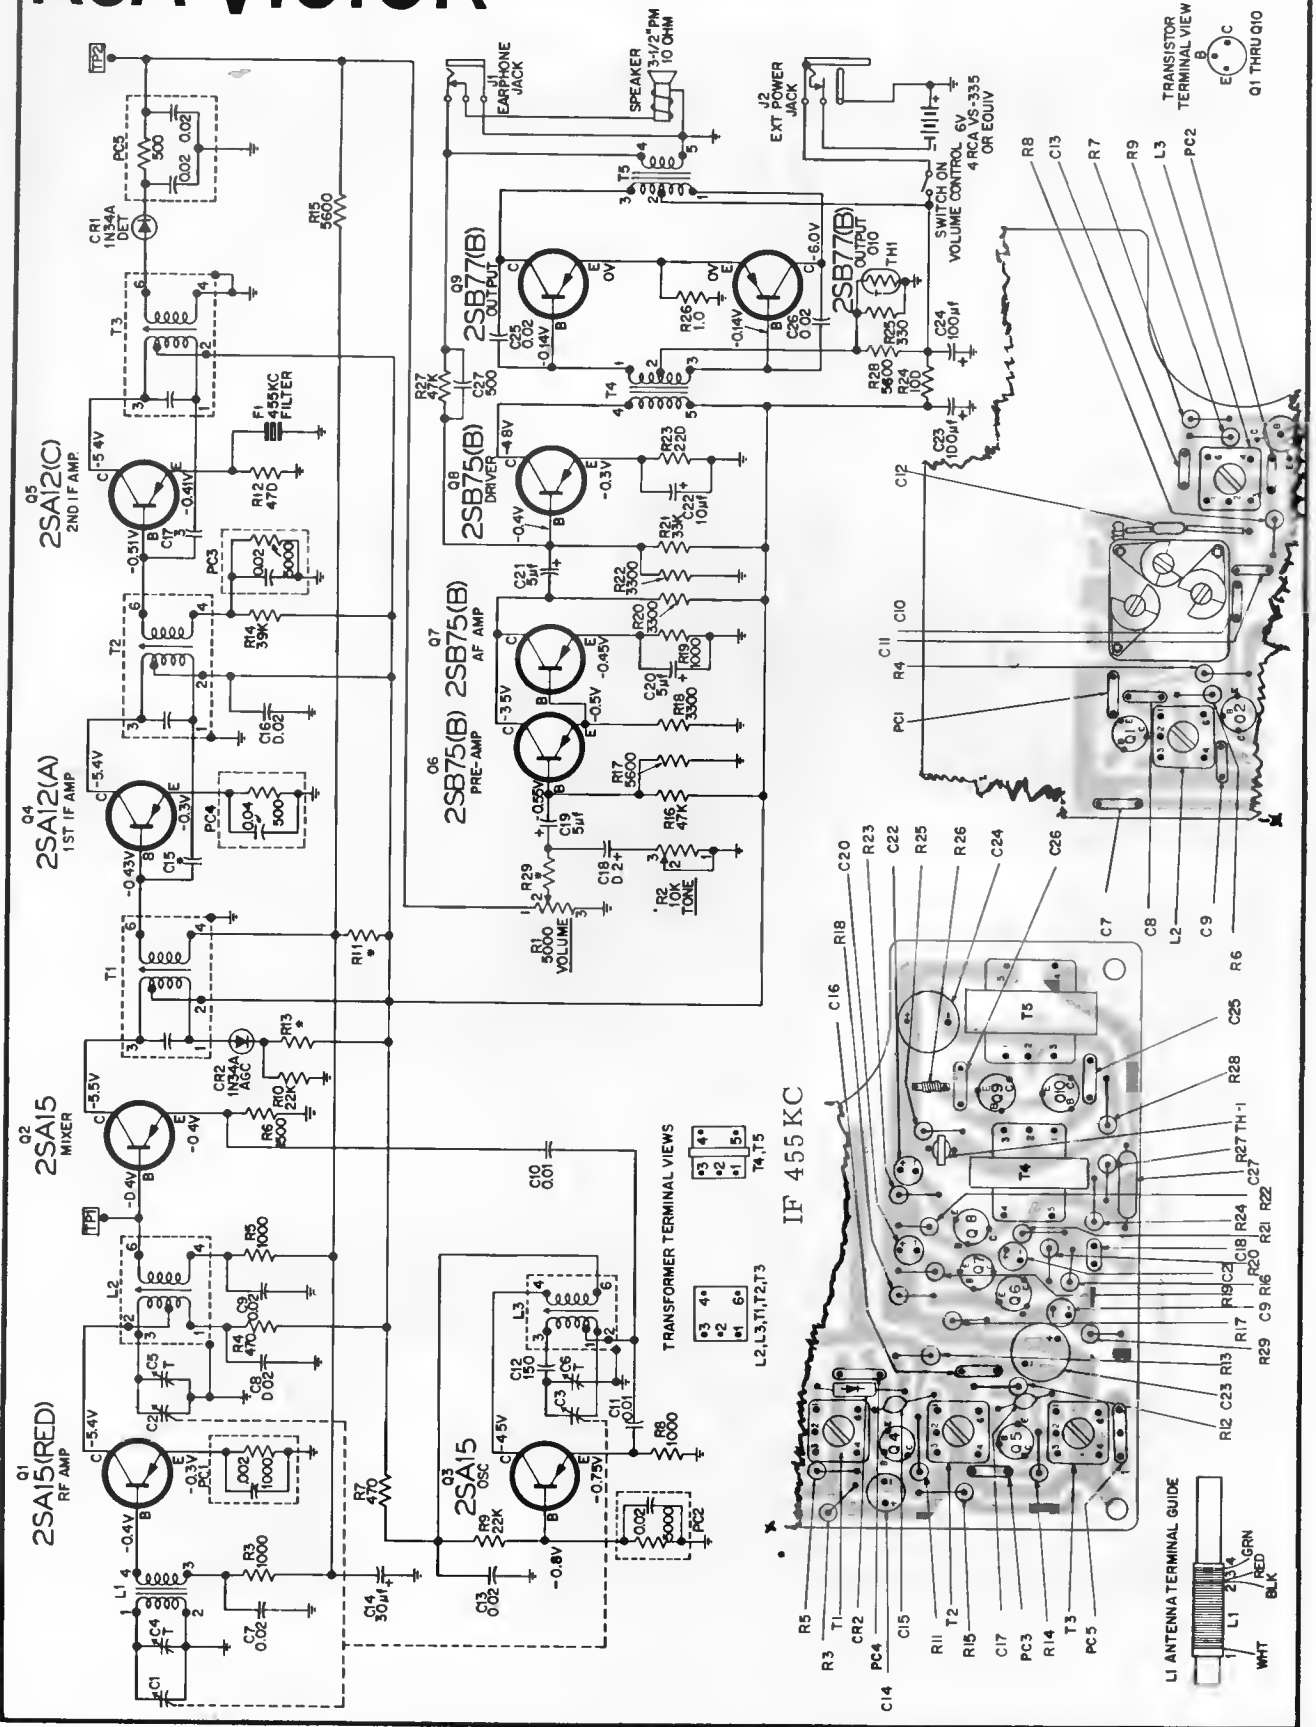

RCA Models RLA 19, RLD 25

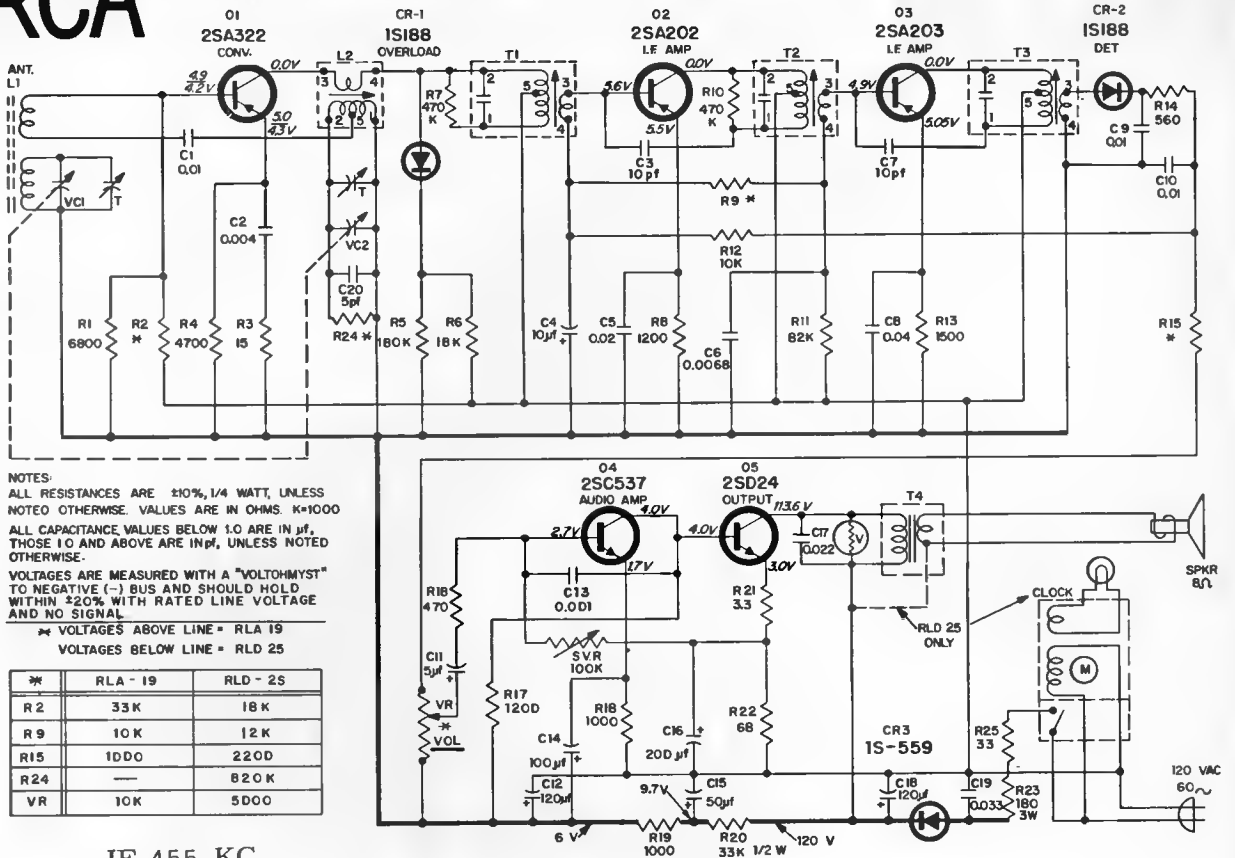

IF 455 KC

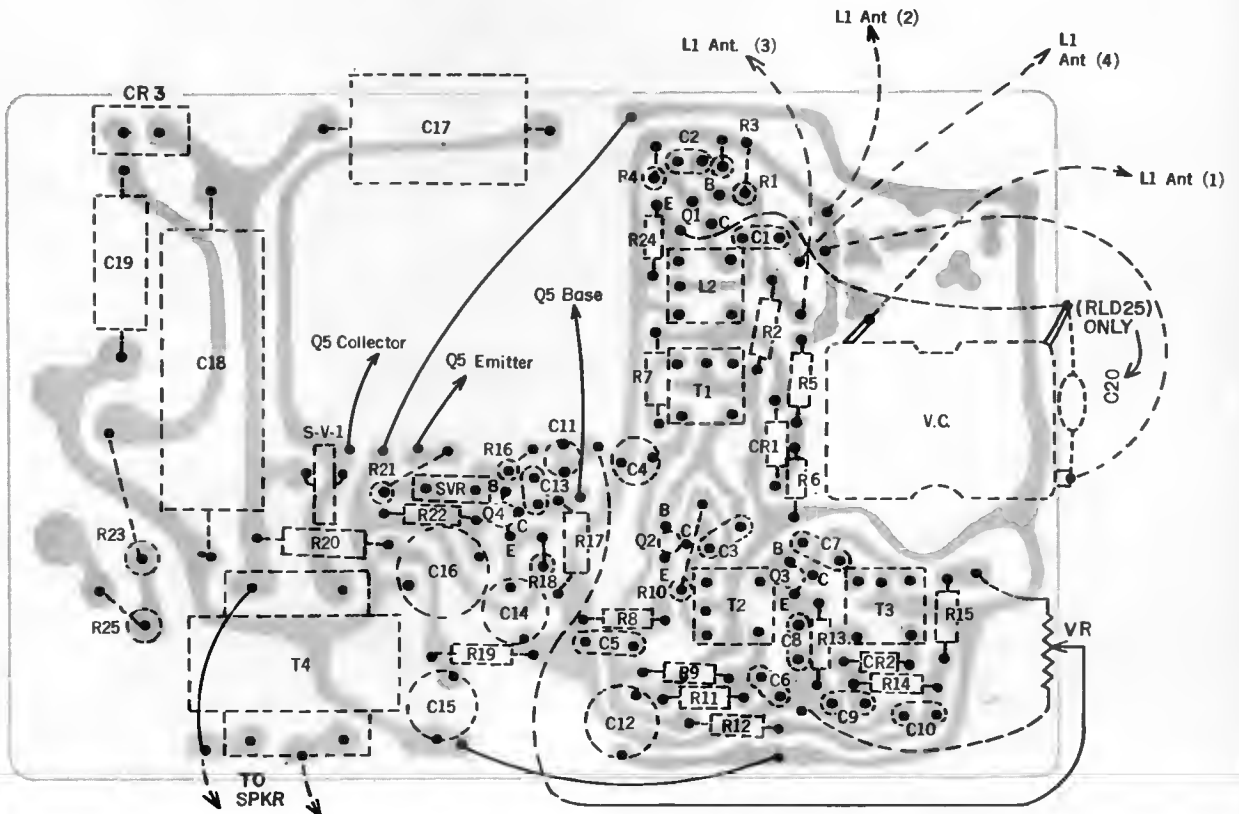




RLC 2,4,5,8-K Series RLS 3,5,7-K,8-K Series

(Continued on next page.)



RZC, RZS 9-K Series are similar.

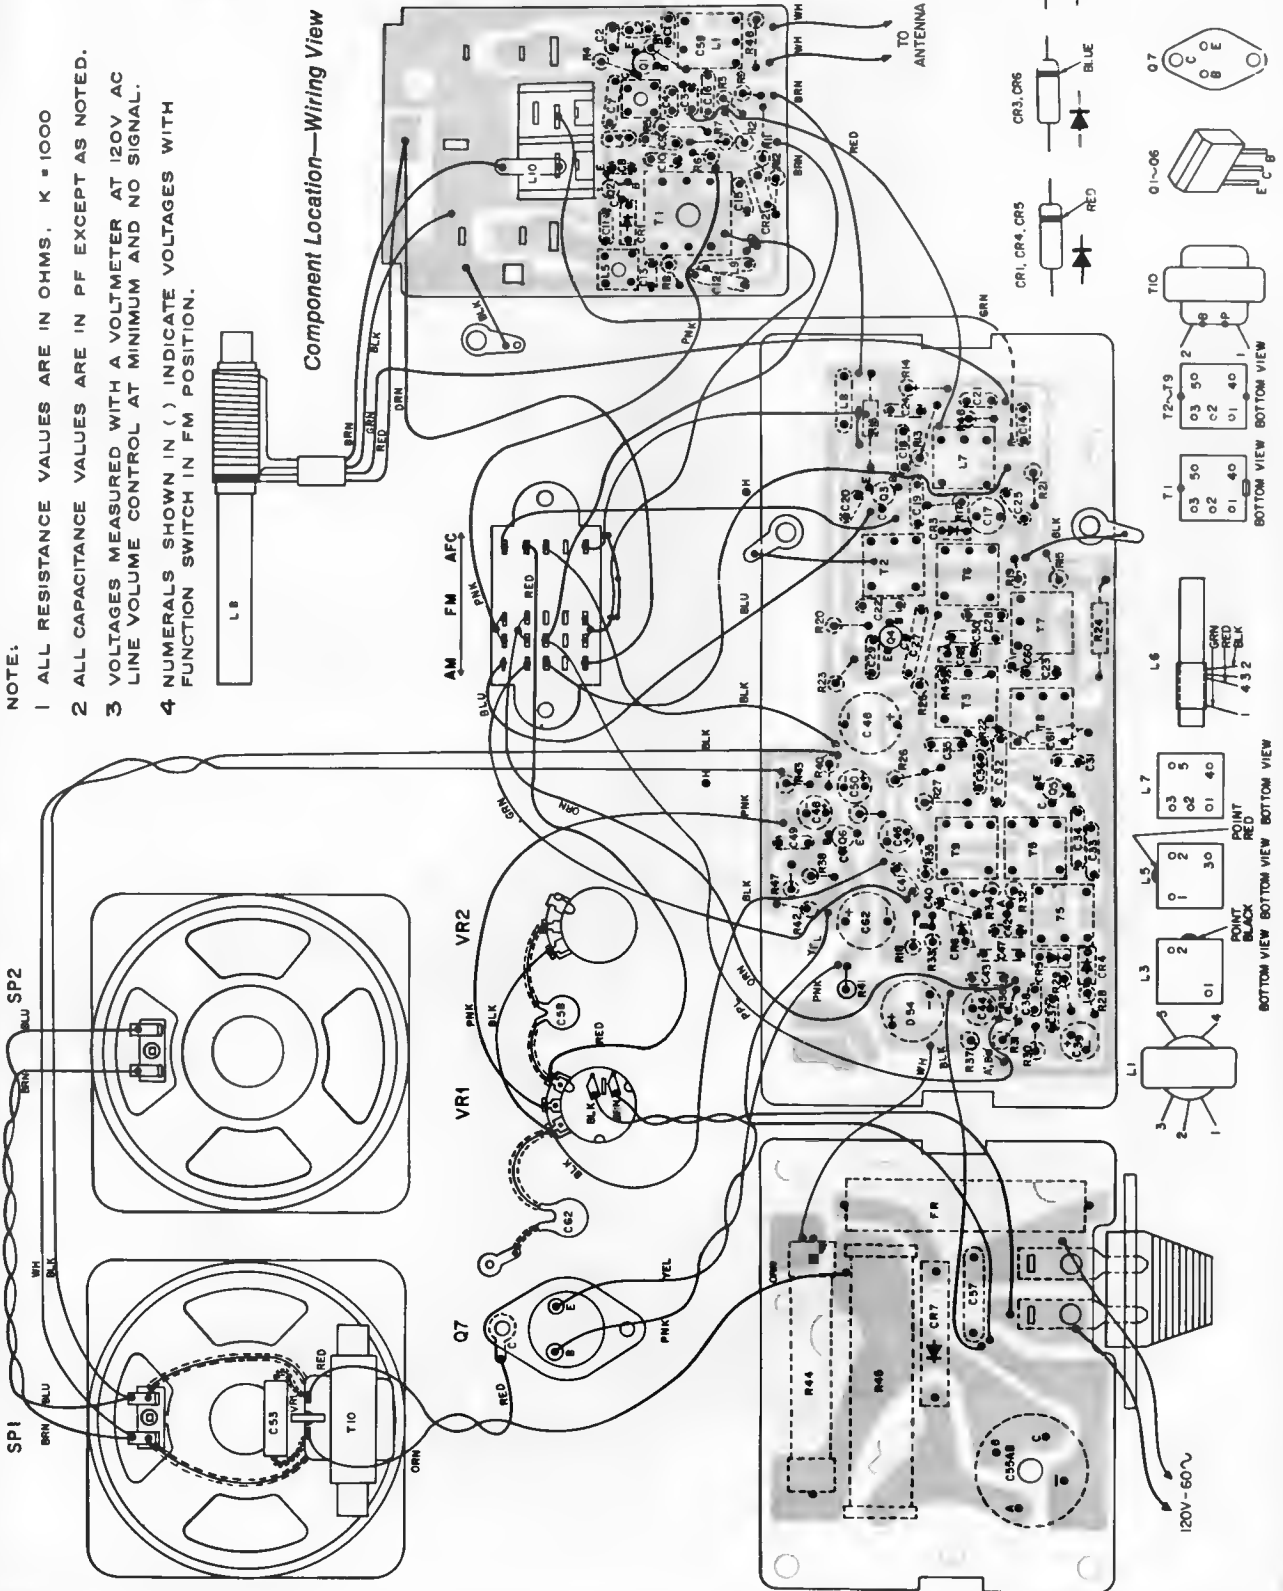

- NOTE:**
- 1 ALL RESISTANCE VALUES ARE IN OHMS. K = 1000
 - 2 ALL CAPACITANCE VALUES ARE IN PF EXCEPT AS NOTED.
 - 3 VOLTAGES MEASURED WITH A VOLTMETER AT 120V AC LINE VOLUME CONTROL AT MINIMUM AND NO SIGNAL.
 - 4 NUMERALS SHOWN IN () INDICATE VOLTAGES WITH FUNCTION SWITCH IN FM POSITION.



Component Location—Wiring View

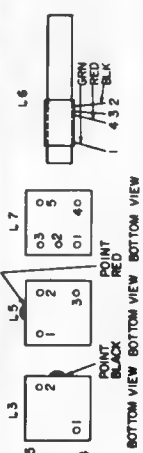
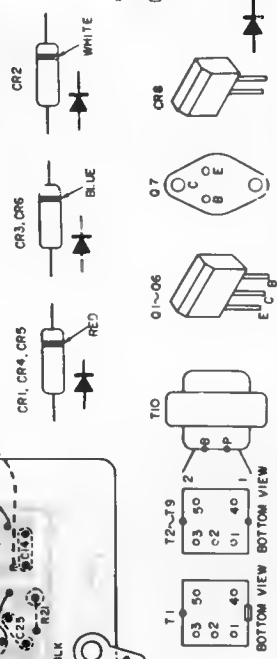


RCA Models RLC 2, 4, 5, 8-K Series
 RLS 3, 5, 7-K, 8-K Series




(Continued from preceding page.)

FM/AM IF A.F. BLOCK

FM R.F. BLOCK

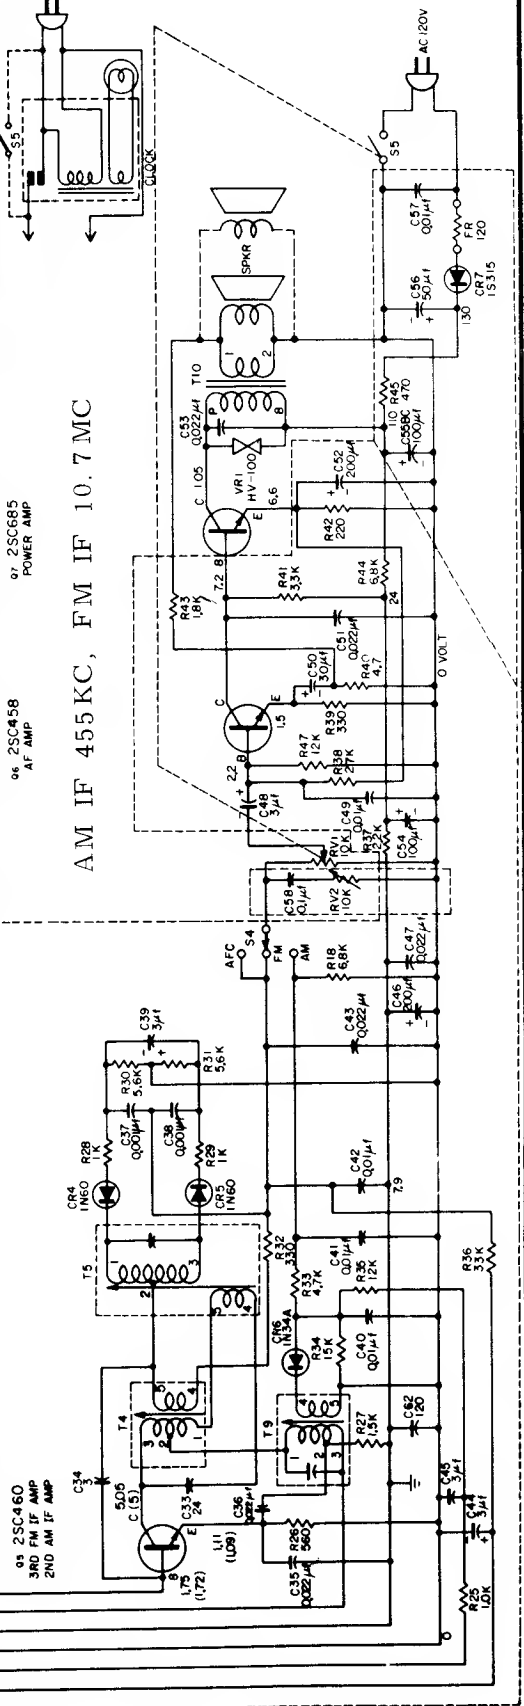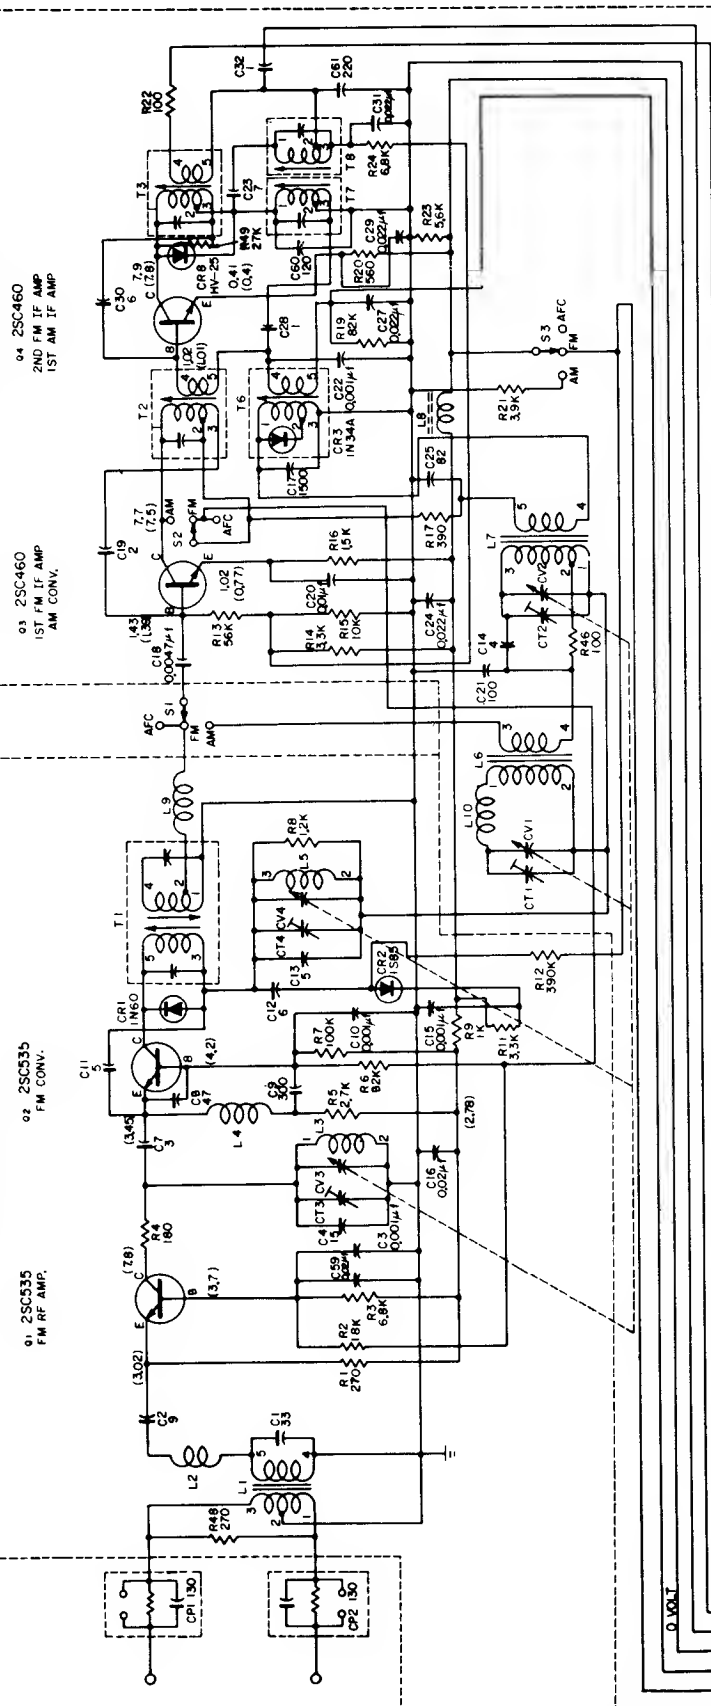

RCA VICTOR Model RLC 22 (Continued on next page.)

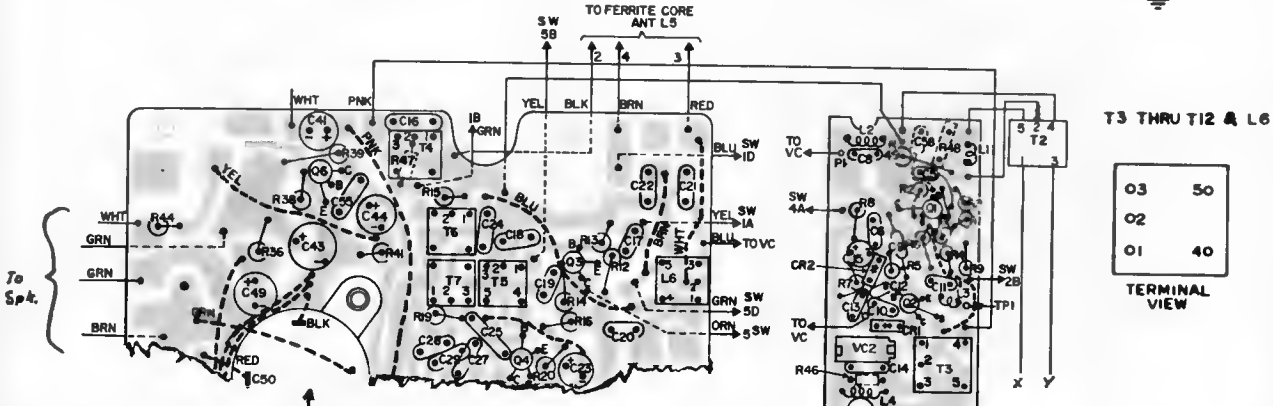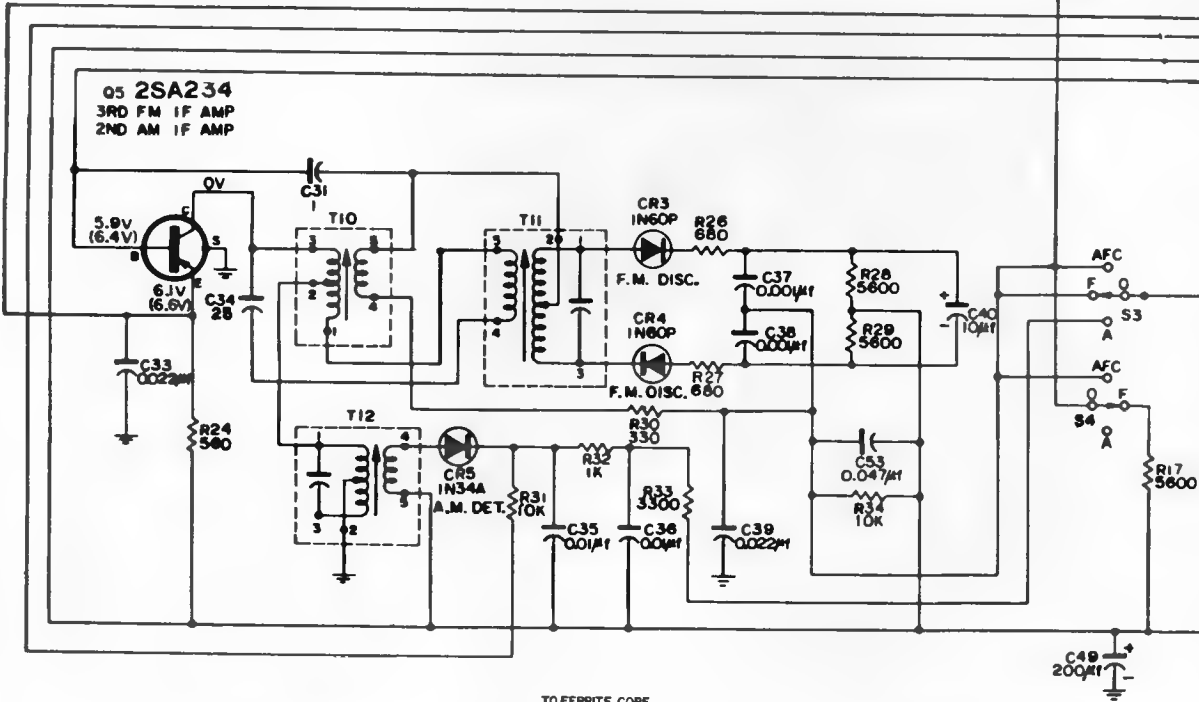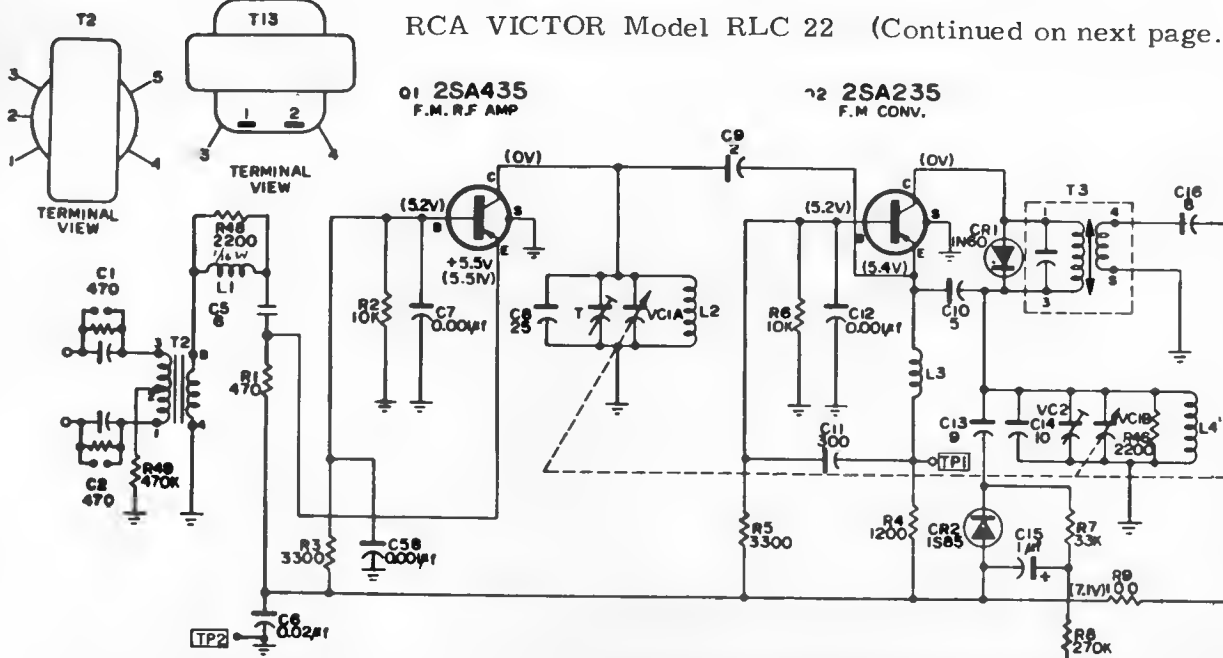


(Continued from right.)



Model RLC 22 (Continued from preceding page.)

03 2SA350
1ST F.M. I-F AMP.
AM CONV.


04 2SA234
2ND F.M. I-F AMP.
1ST A.M. I-F AMP.

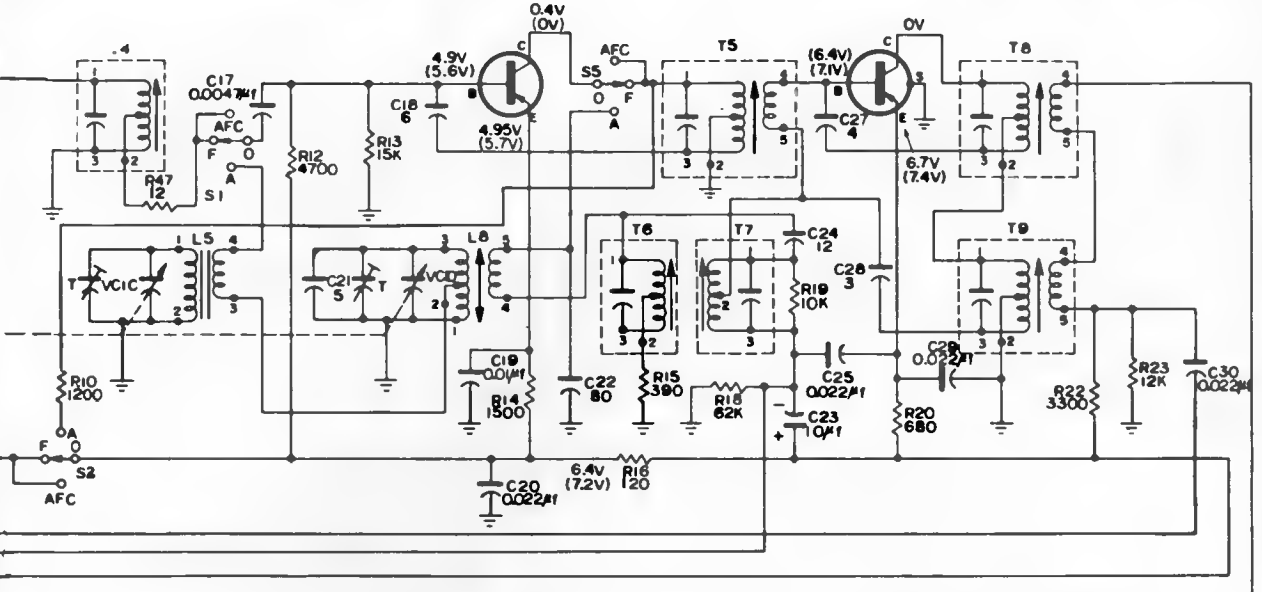


06 2SC281
AF AMP.

07 2SC685
POWER AMP.



L5 A.M. ANT. COIL

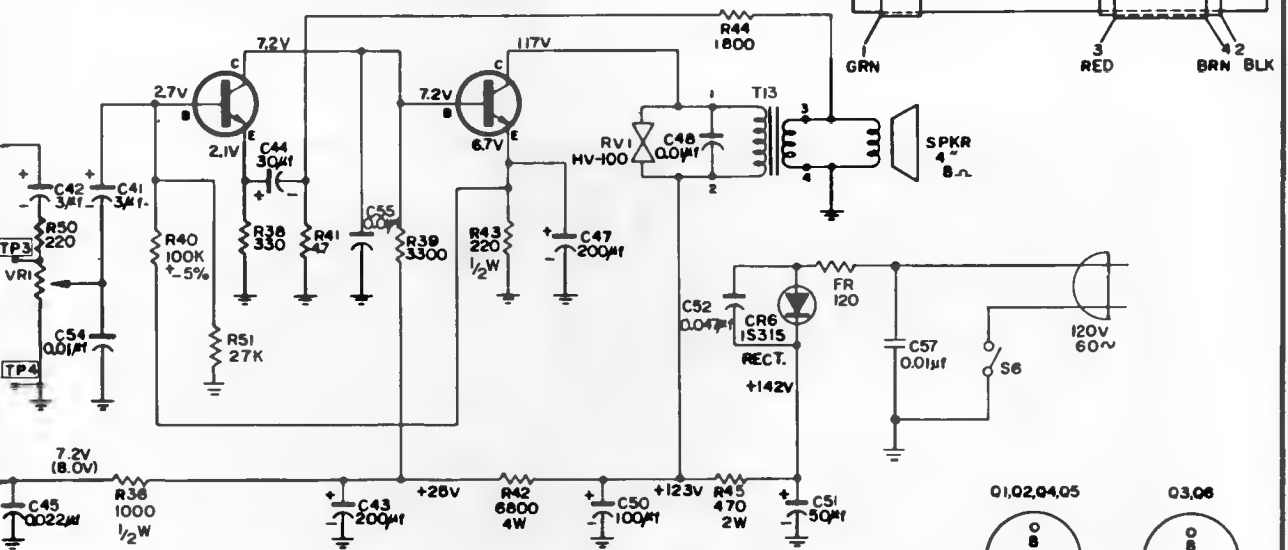


(Continued from left.)

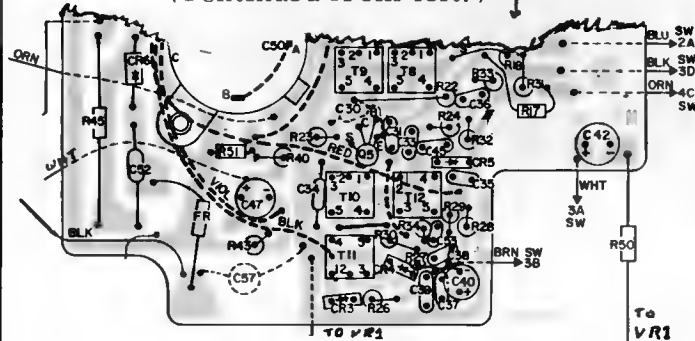

AM IF 455 KC
FM IF 10.7 MC




RCA Model RLG 11

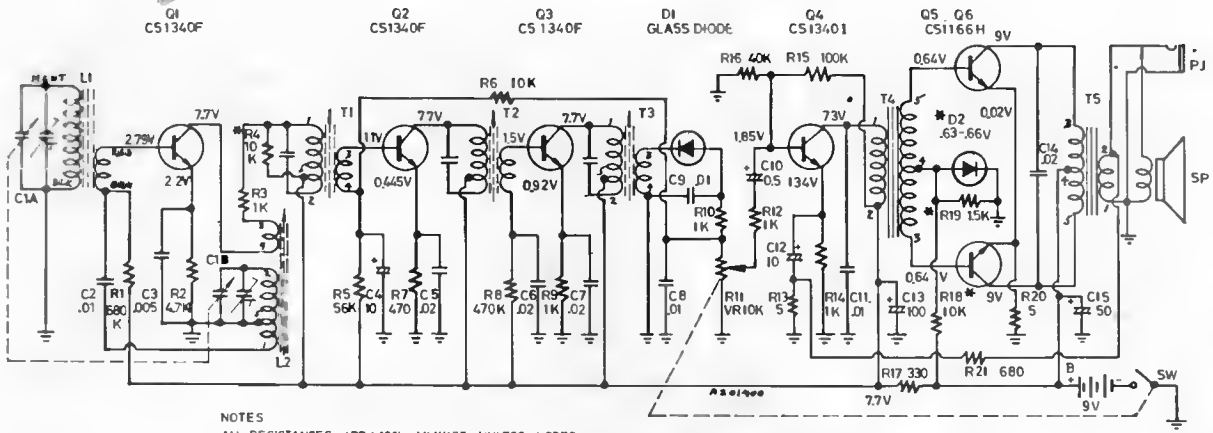

NOTES
 ALL RESISTANCES ARE $\pm 10\%$, 1/4 WATT, UNLESS NOTED OTHERWISE. VALUES ARE IN OHMS, K=1000.
 ALL CAPACITANCE VALUES ARE IN μ , UNLESS NOTED OTHERWISE.
 VOLTAGES ARE MEASURED WITH A "TRIPLETT" FROM (-) BATTERY AND SHOULD HOLD WITHIN $\pm 20\%$ WITH A NEW BATTERY, VOLUME CONTROL AT MINIMUM AND NO SIGNAL.
 *R4, R18, R19 AND D2 MAY CHANGE TO FOLLOWING VALUES ON SOME SETS:
 R4 10K, 6K, OR 4.7K
 R18 10K OR 6K
 R19 15K, 1K, OR NONE
 D2 0.6-0.63 VOLTS, TYPE 6063, OR 0.63-0.66 VOLTS, TYPE 6366, OR 0.66-0.70 VOLTS, TYPE 6670.

POWER OUTPUT Vs CURRENT	
mW	m A
D	8
25	19
50	24.2
75	29
100	32.5
125	36
150	39
175	42
200	45
250	48.5
300	56



IF 455 KC

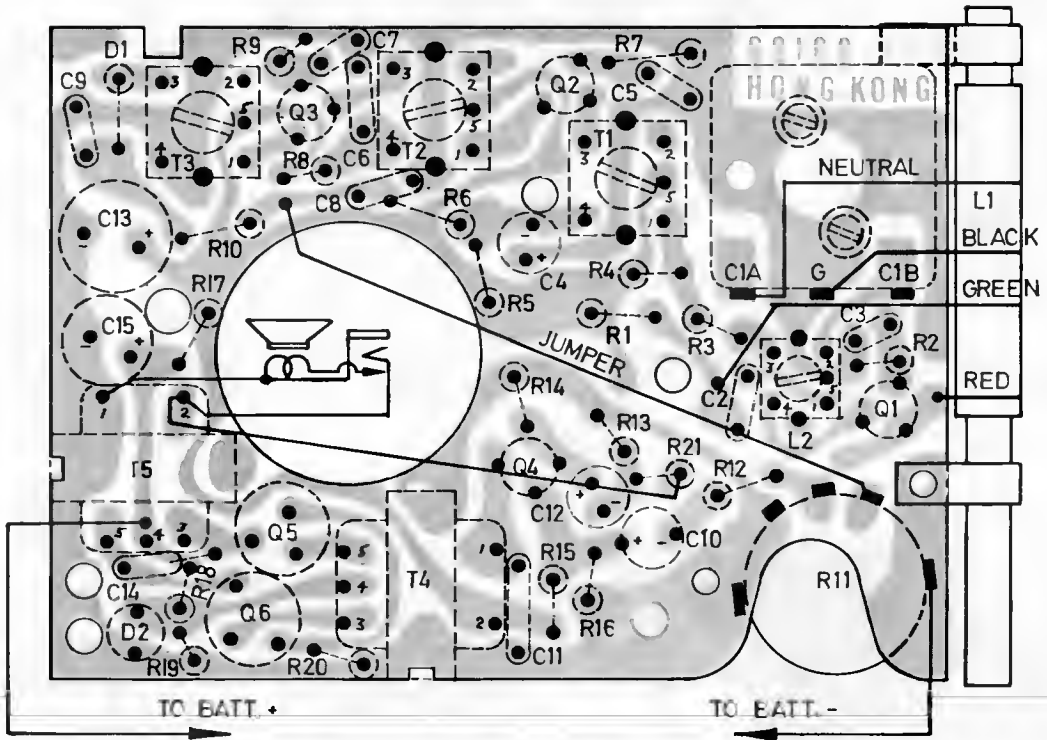

Chassis Layout

RCA

RLG 16 Series, RLG 20 Series

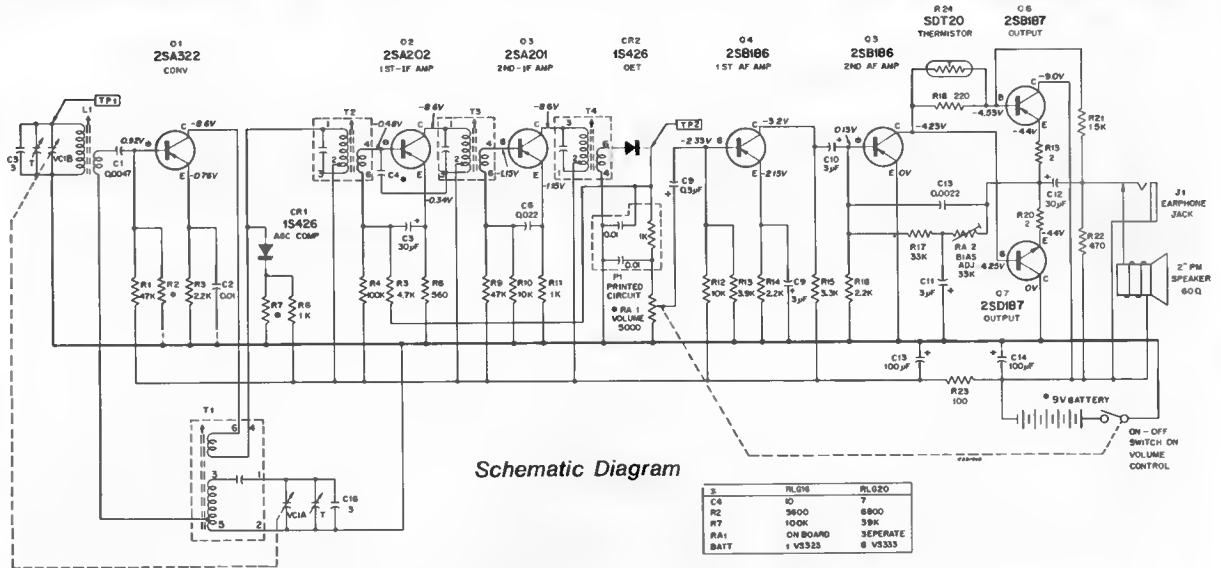



VOLTAGES MEASURED WITH "VOLT-MYST" FROM 1-4 BATTERY SHOULD HOLD WITHIN ±20% WITH NEW BATTERY VOLUME CONTROL AT MINIMUM AND NO SIGNAL.

ALL RESISTANCE VALUES IN OHMS K=1000

ALL CAPACITANCE VALUES LESS THAN 10 ARE IN μF THOSE ABOVE 10 ARE IN nF EXCEPT AS NOTED

O6 AND O7 ARE A MATCHED PAIR

IF 455 KC

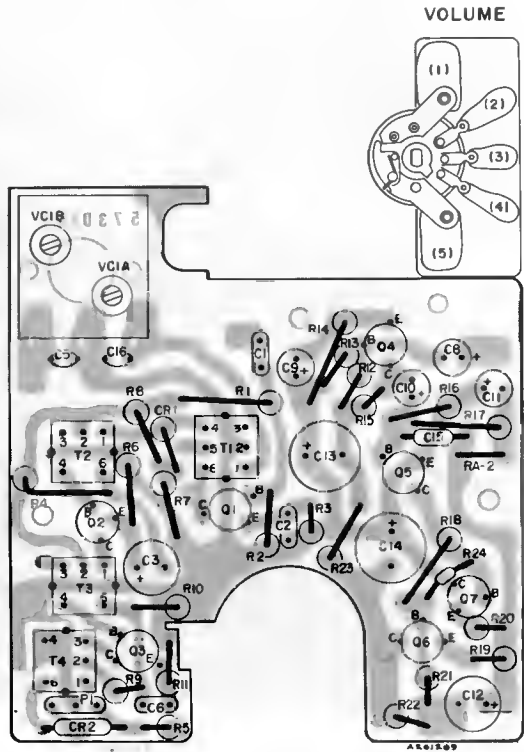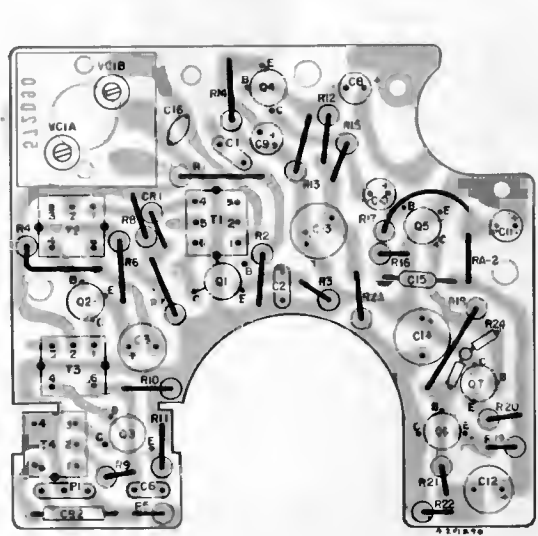


Component Location

RCA

RLG 22 Series

IF 455 KC

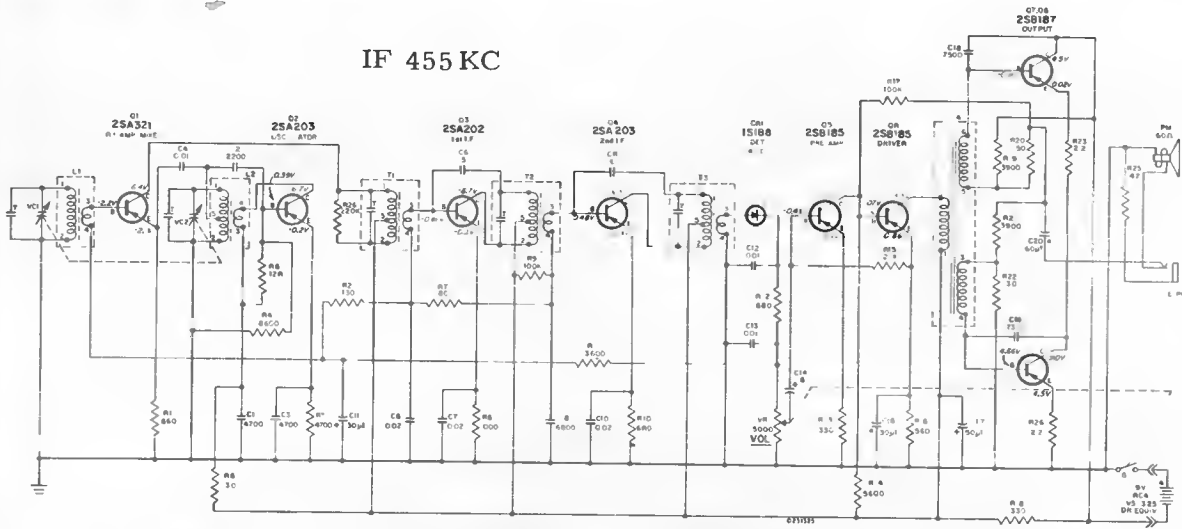


NOTES 1 ALL RESISTANCES ARE $\pm 10\%$ 4 WATT UNLESS NOTED OTHERWISE VALUES ARE IN OHMS K-1000

2 ALL CAPACITANCE VALUES BELOW 10 ARE IN μf 10 AND ABOVE ARE IN pF UNLESS NOTED OTHERWISE

3 VOLTAGES ARE MEASURED WITH A "VOLTOHMIST" FROM 1-1 BATTERY AND SHOULD HOLD WITHIN $\pm 20\%$ WITH A 100W BATTERY VOLUME CONTROL AT MIN. MUM AND NO SIGNAL

Schematic Diagram

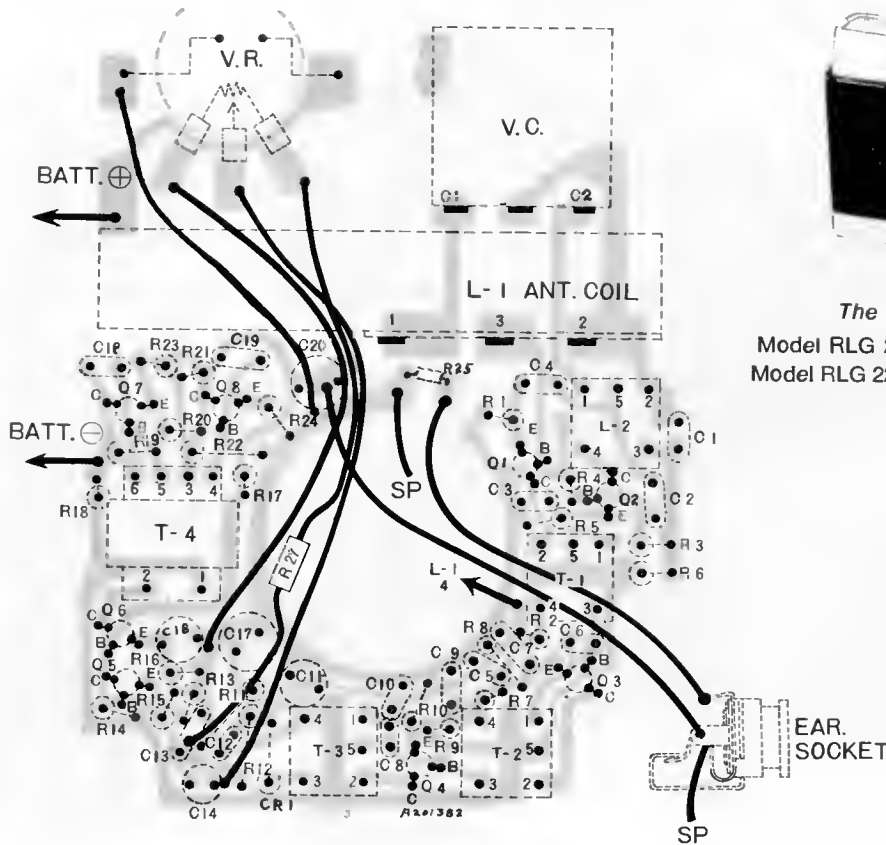


Component Location (Wiring View)




The "Rogue"
Model RLG 22A—Blue/White
Model RLG 22N—Maple/White

RCA

RLG 23 Series

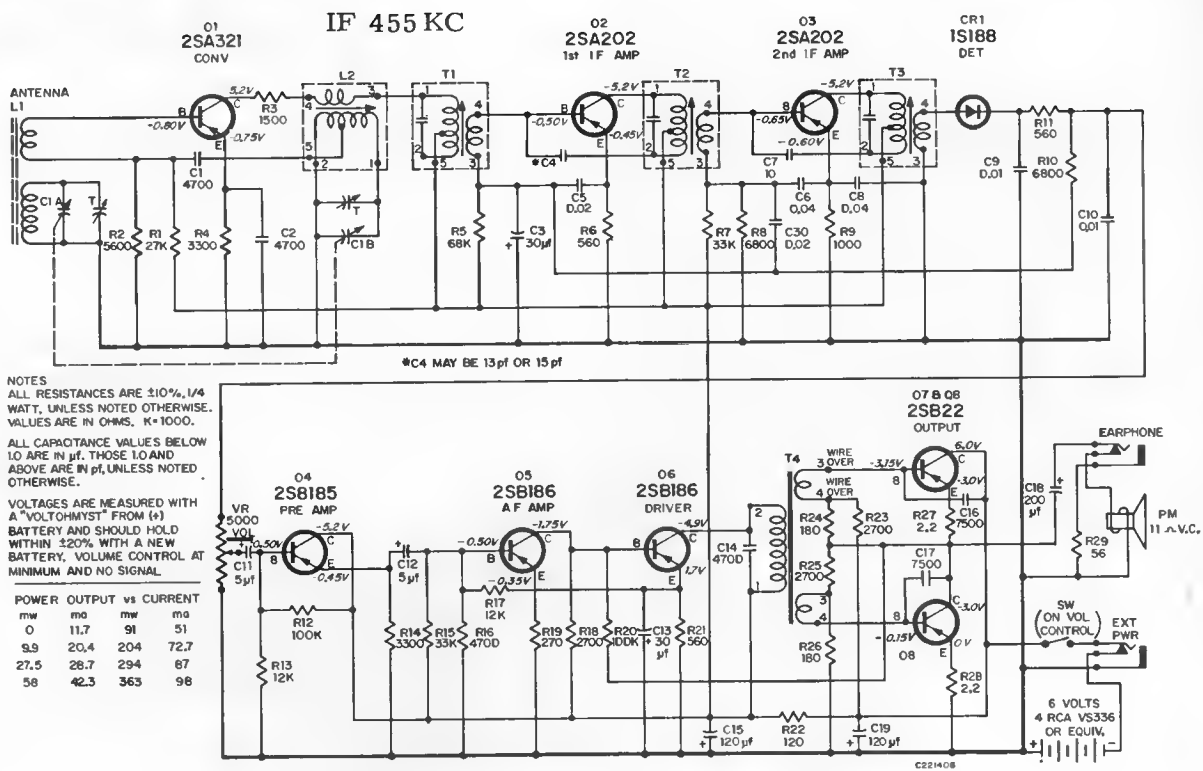

Schematic Diagram

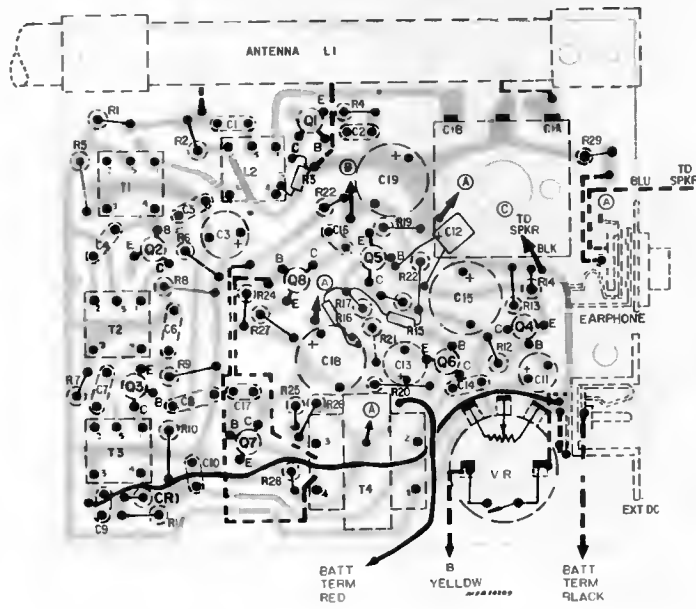


Component Locations (Wiring View)

The "Herald"
Model RLG 23A—Blue




RCA

Model RLG 34

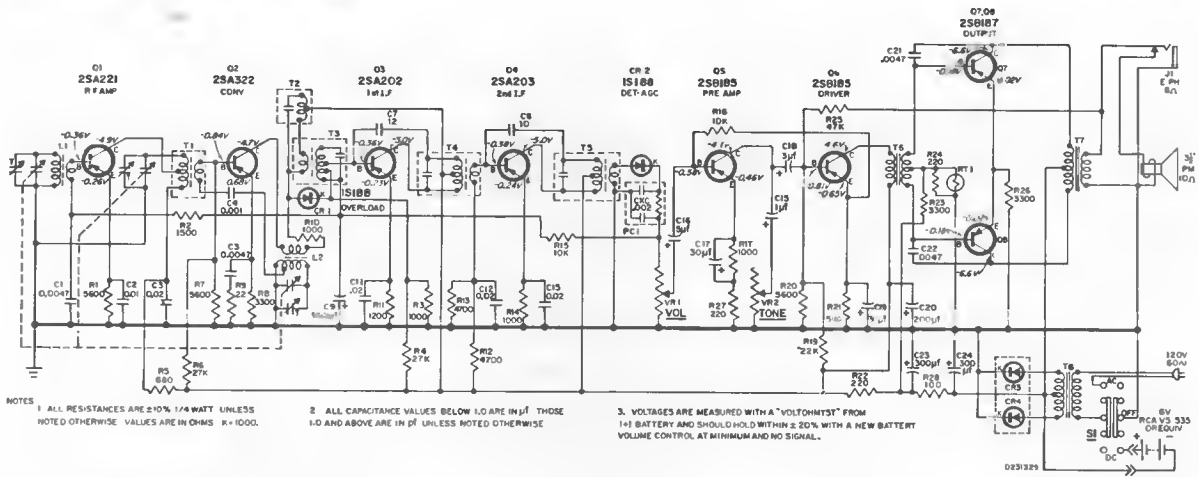

Schematic Diagram

IF 455 KC

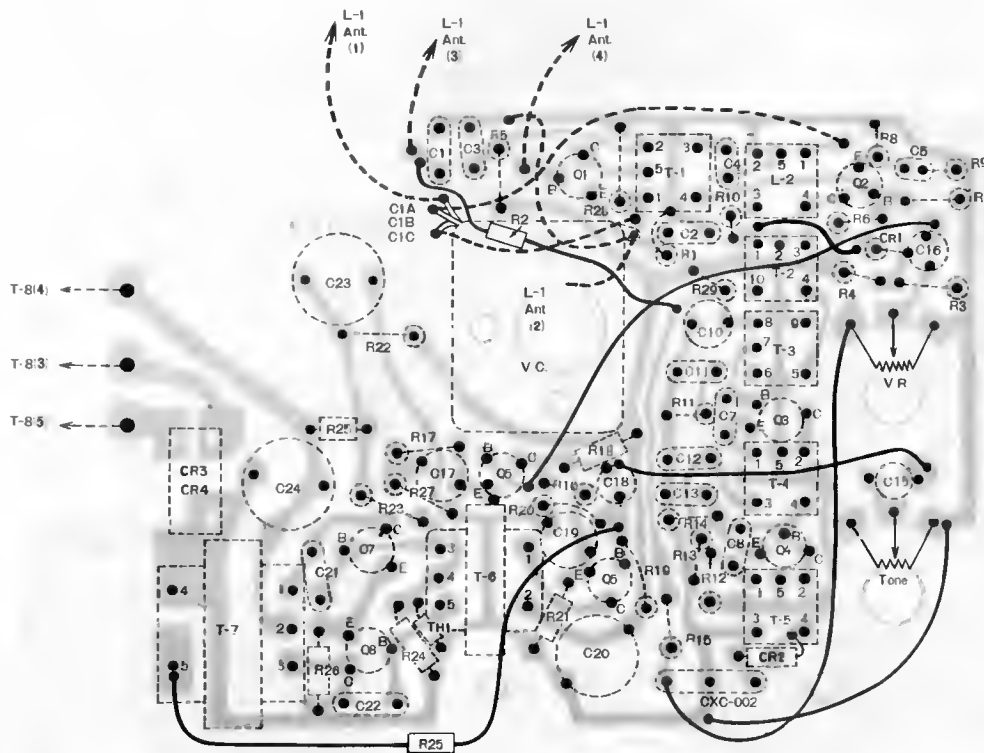


Circuit Board (Wiring Side)

RCA

RLM 68 Series


RLM 96-K Series

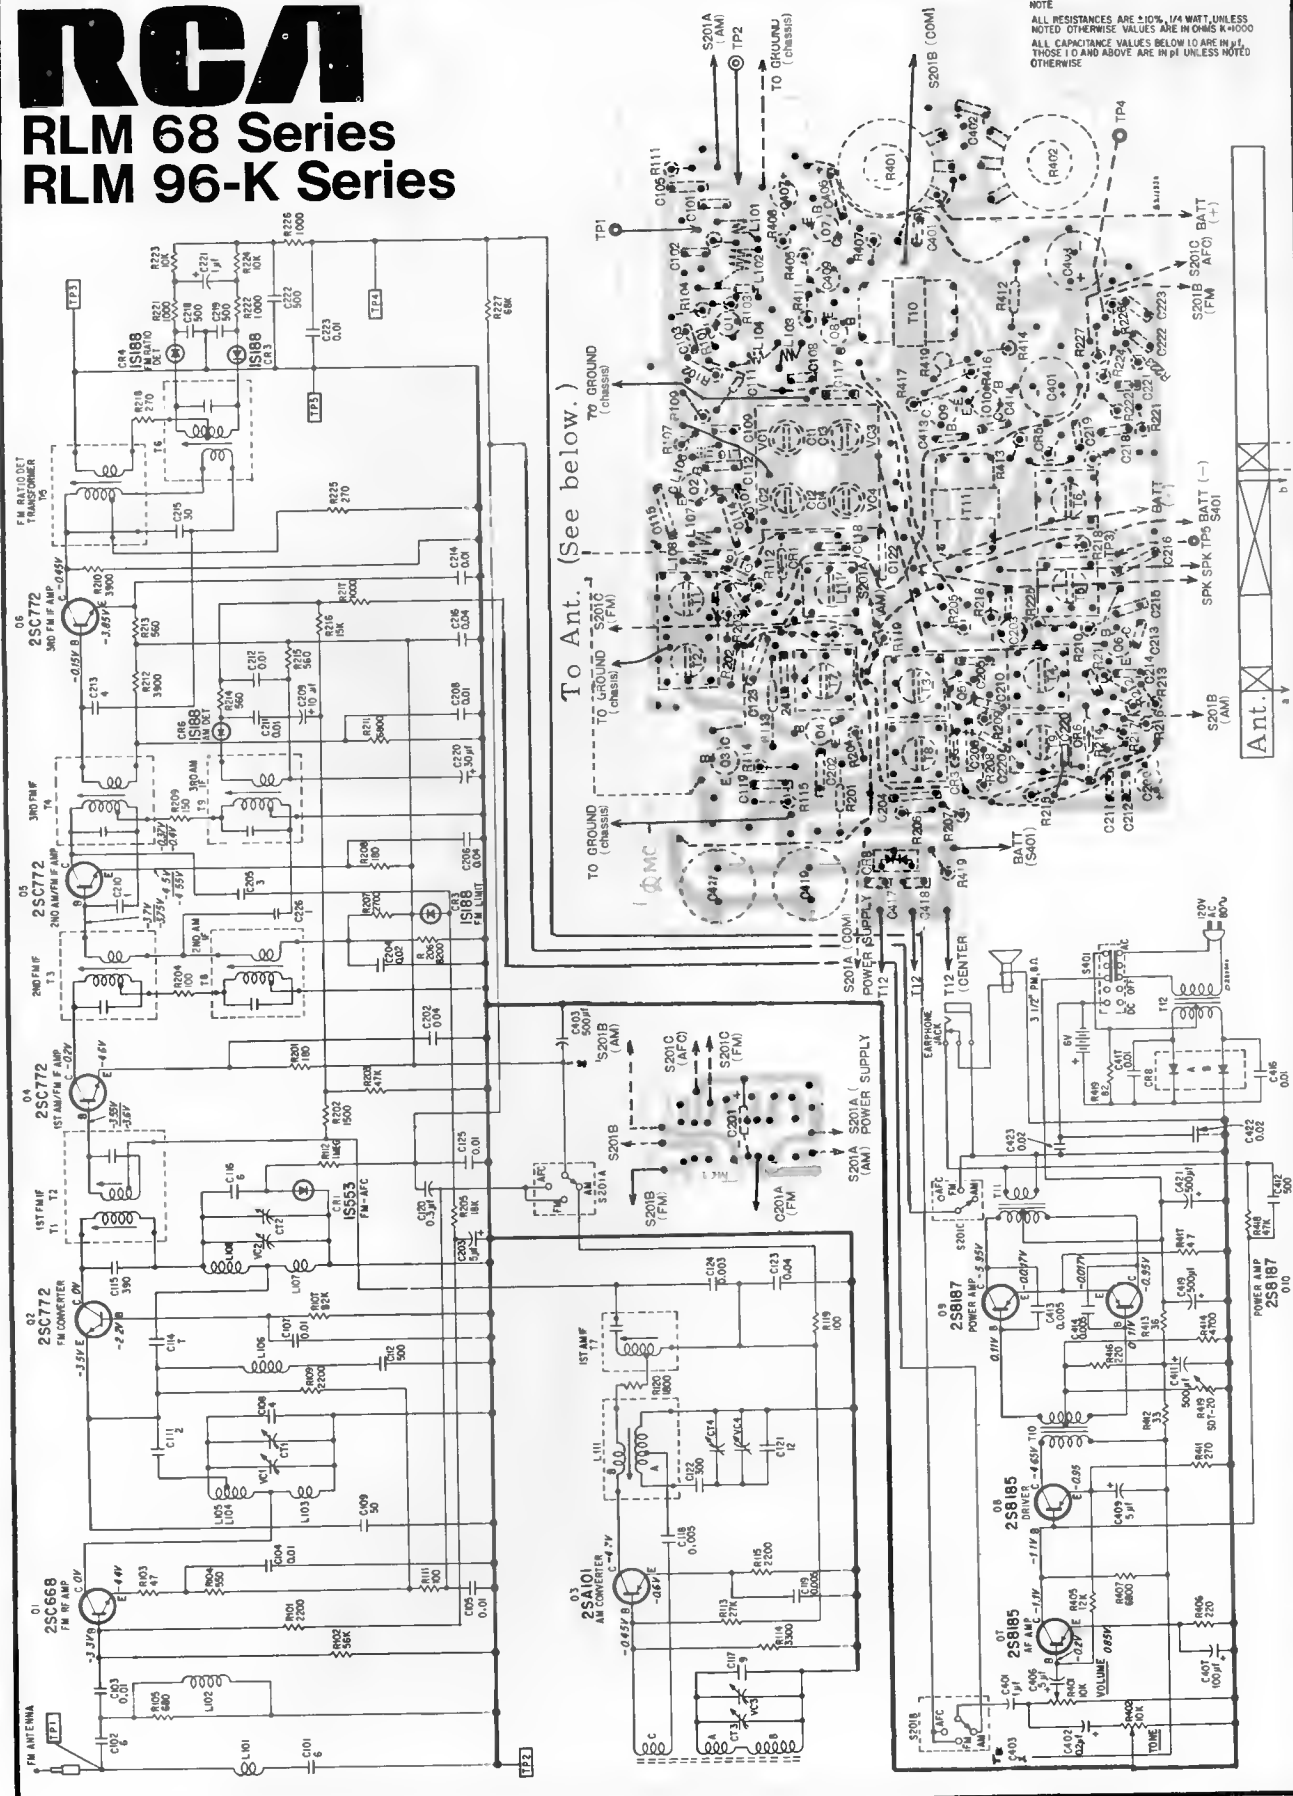

(See above.)



RCA

Models RZA 205, RZD 410, 415, RZD 943-K

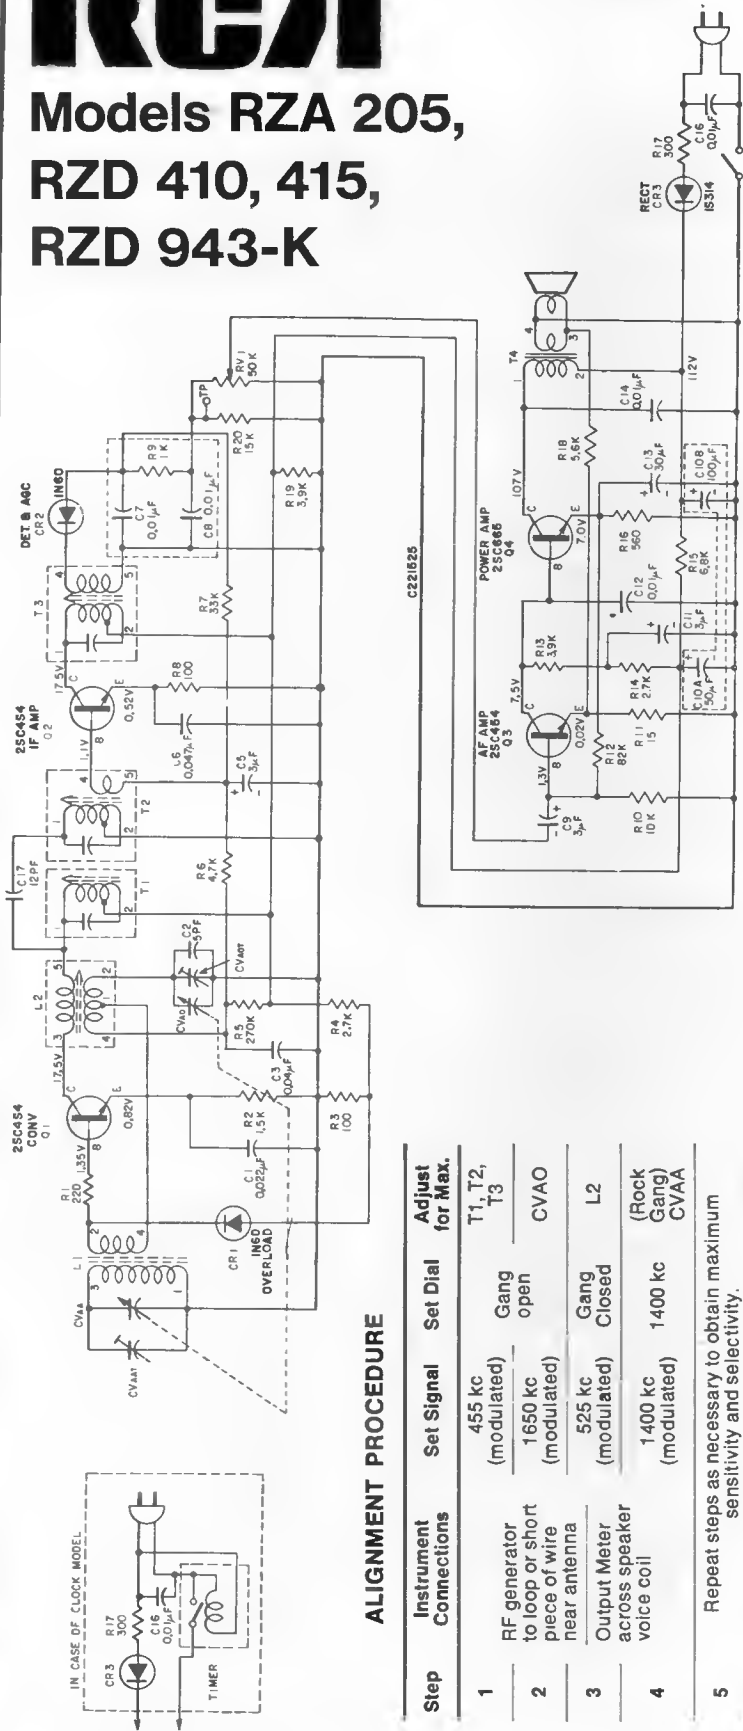

ALIGNMENT PROCEDURE

Step	Instrument Connections	Set Signal	Set Dial for Max.
1	RF generator to loop or short piece of wire near antenna	455 kc (modulated) 1650 kc (modulated)	T1, T2, T3 Gang open
2	Output Meter across speaker voice coil	525 kc (modulated) 1400 kc (modulated)	CVAO L2 (Rock Gang) CVAA
3			
4			
5	Repeat steps as necessary to obtain maximum sensitivity and selectivity.		




NOTES


ALL RESISTANCE VALUES IN OHMS
(K = 1,000)

VOLTAGE MEASURED WITH VOLTOHMIST
FROM GROUND LINE AT 120V AC
(VOLUME CONTROL AT MINIMUM NO
SIGNAL)

IN CASE OF CLOCK MODEL CONNECTION




D 1 . 02 . D3

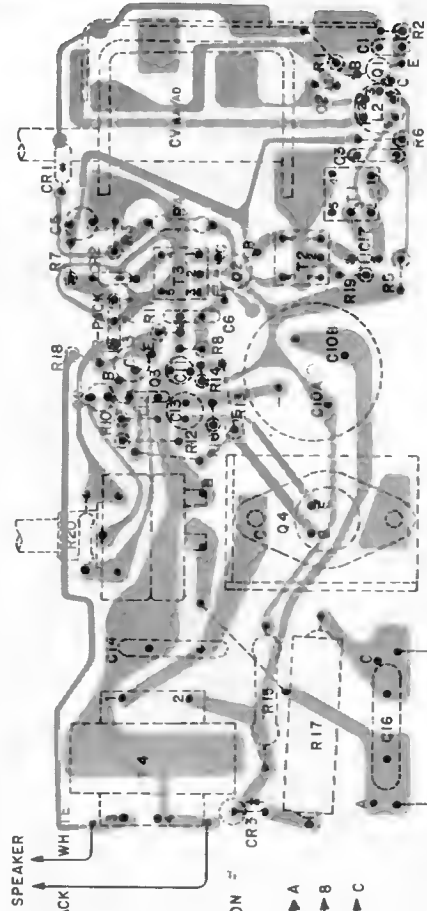

Component Locations



RCA

Model RZA 215

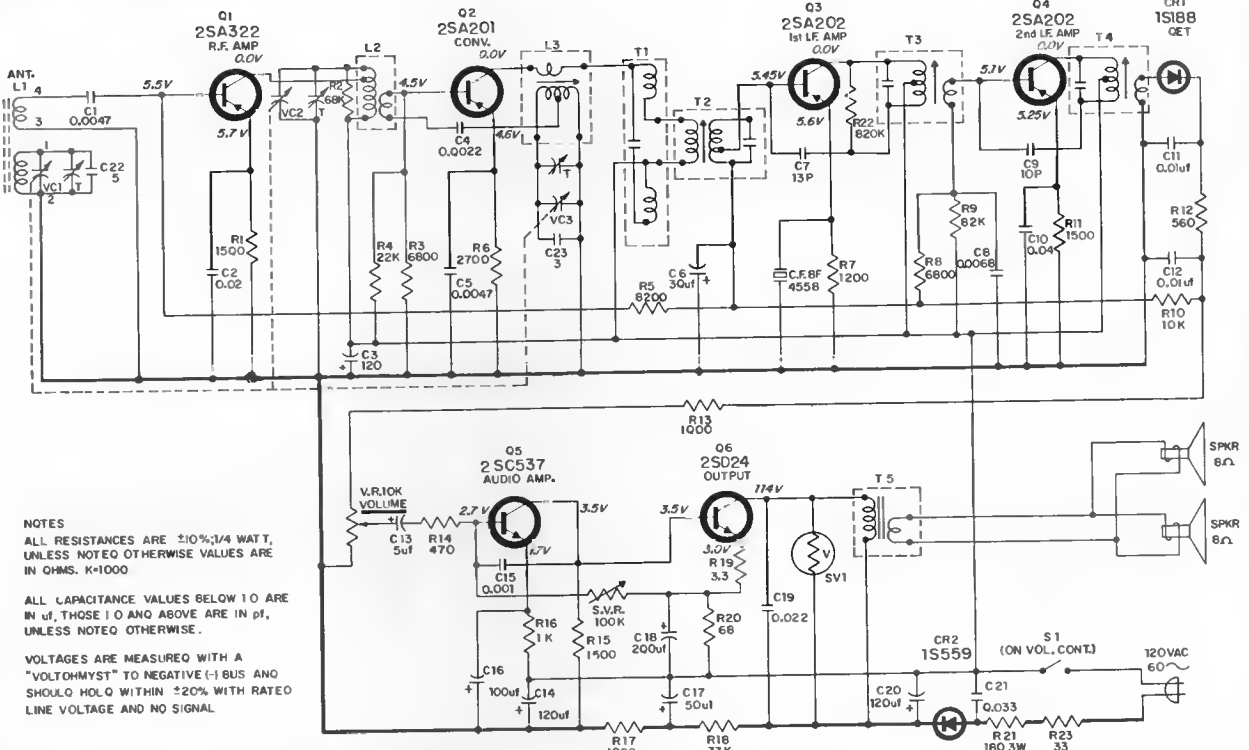

NOTES
 ALL RESISTANCES ARE $\pm 10\%$, 1/4 WATT, UNLESS NOTED OTHERWISE. VALUES ARE IN OHMS. K=1000
 ALL CAPACITANCE VALUES BELOW 1.0 ARE IN μ F, THOSE 1.0 AND ABOVE ARE IN pF, UNLESS NOTED OTHERWISE.
 VOLTAGES ARE MEASURED WITH A "VOLTOMYST" TO NEGATIVE (-) BUS AND SHOULD HOLD WITHIN $\pm 20\%$ WITH RATED LINE VOLTAGE AND NO SIGNAL


Step	Instrument Connections	Set Signal	Set Dial	Adjust for Max.
1		455 kc (Modulated)	Gang Open	T3, T2, T1 (IF's)
2	RF Generator to loop or short piece of wire near antenna.	520 kc (Modulated)	Gang Closed	L3 (Osc. Coil)
3		1650 kc (Modulated)	Gang Open	VC3-T (Osc. Trim)
4	Output meter across speaker voice coil.	600 kc	600 kc	L2 (RF Coil)
5		1400 kc (Modulated)	1400 kc (Rock Gang)	VC1-T (Ant. Trim)
6				VC2-T (RF Trim)
7	Repeat above as necessary to obtain maximum sensitivity and selectivity.			

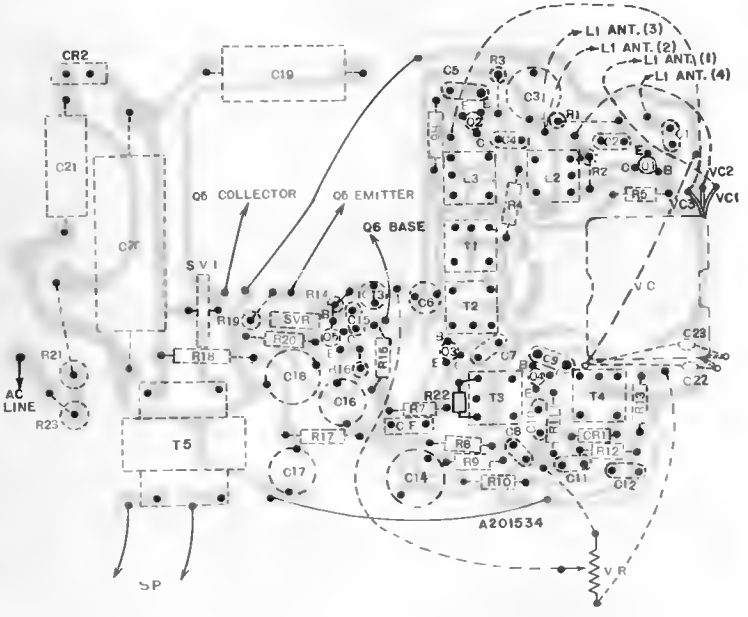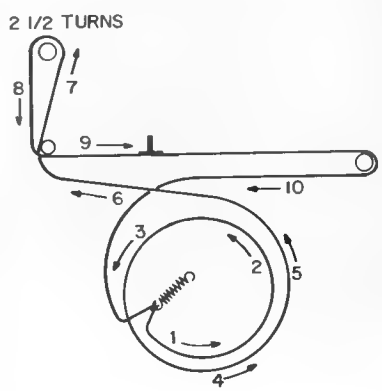


Component Location (Wiring View)




Models RZG 111, 120

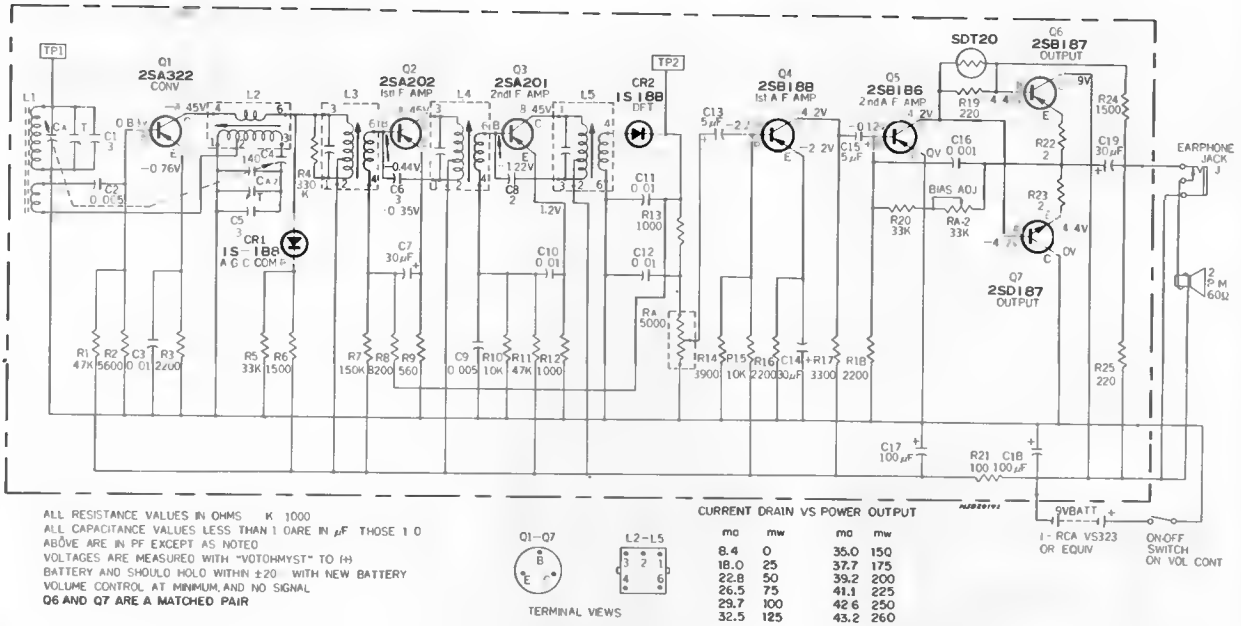

Schematic Diagram

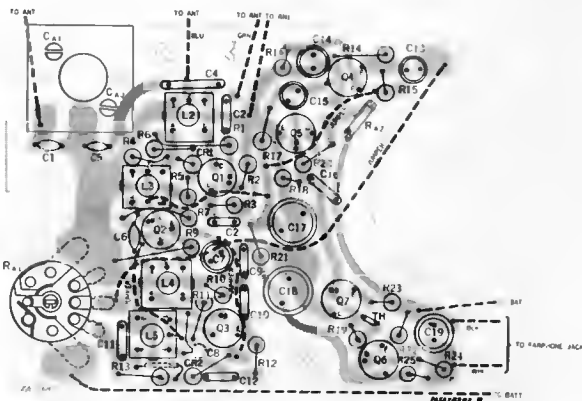

Chassis Layout
(Component View)

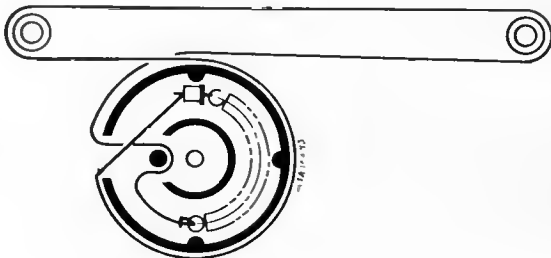

Dial Cord Arrangement—RZG 120

ALIGNMENT PROCEDURE


Instruments Required

1. RF Signal Generator (RCA WR-50B or equivalent)
2. Electronic Voltmeter (RCA WV-500A or equivalent)

General

1. Signal input must be as low as possible to avoid overload and clipping. (Use highest sensitivity of output indicator.)
2. Loudness control at maximum.
3. Standard modulation is 400 cycles at 30% amplitude.

Step	Instrument Connections	Set Signal	Set Dial	Adjust for Max.
1				L3 (1st IF)
2		455 kc	Gang Closed	L4 (2nd IF)
3	RF Generator— Connected to TP1 or short piece of wire near antenna			L5 (3rd IF)
4		Repeat Steps 1 through 3 to obtain maximum sensitivity		
5	E.V.M.— connected to TP 2	525 kc	Gang Closed	L2 (Osc. coil)
6		1650 kc	Gang Open	CA 2 T (Osc. trim)
7		1400 kc	1400 kc Rock gang	CA 1 T (Ant. trim)
8	Repeat Steps 5 through 8 to obtain best tracking and selectivity			

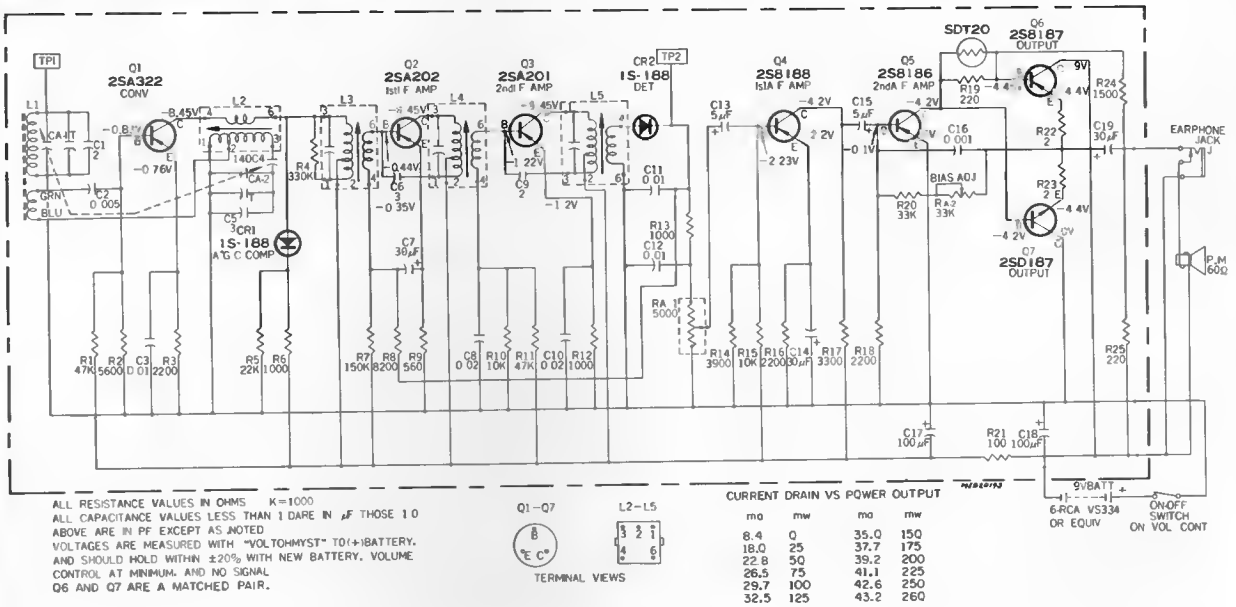

Schematic Diagram


ALIGNMENT PROCEDURE

Instruments Required

1. RF Signal Generator (RCA WR-50B or equivalent)
2. Electronic Voltmeter (RCA WV-500A or equivalent)

General

1. Signal input must be as low as possible to avoid overload and clipping. (Use highest sensitivity of output indicator.)
2. Loudness control at maximum.
3. Standard modulation is 400 cycles at 30% amplitude.

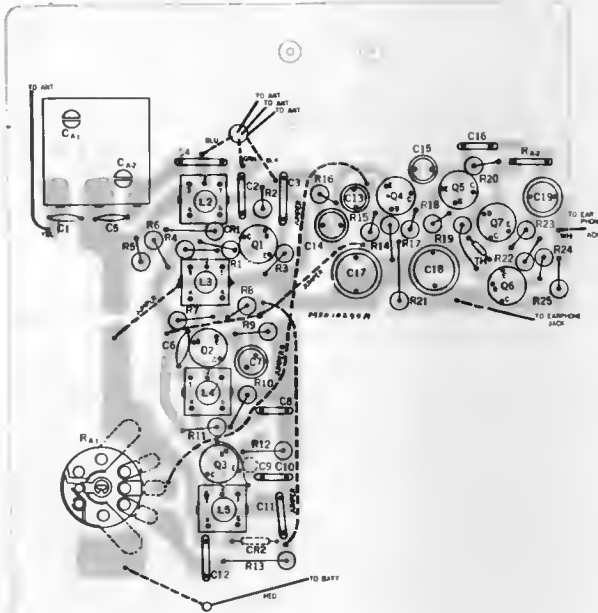


Component Locations
(Component View)

Step	Instrument Connections	Set Signal	Set Dial	Adjust for Max.
1	RF Generator— Connected to TP1 or short piece of wire near antenna	455 kc	Gang Closed	L3 (1st IF)
2				L4 (2nd IF)
3				L5 (3rd IF)
4	E.V.M.— connected to TP 2	Repeat Steps 1 through 3 to obtain maximum sensitivity		
5		525 kc	Gang Closed	L2 (Osc. coil)
6		1650 kc	Gang Open	CA 2 T (Osc. trim)
7		1400 kc	1400 kc Rocg gang	CA 1 T (Ant. trim)
8	Repeat Steps 5 through 8 to obtain best tracking and selectivity			

RCA

Model RZM 990-K

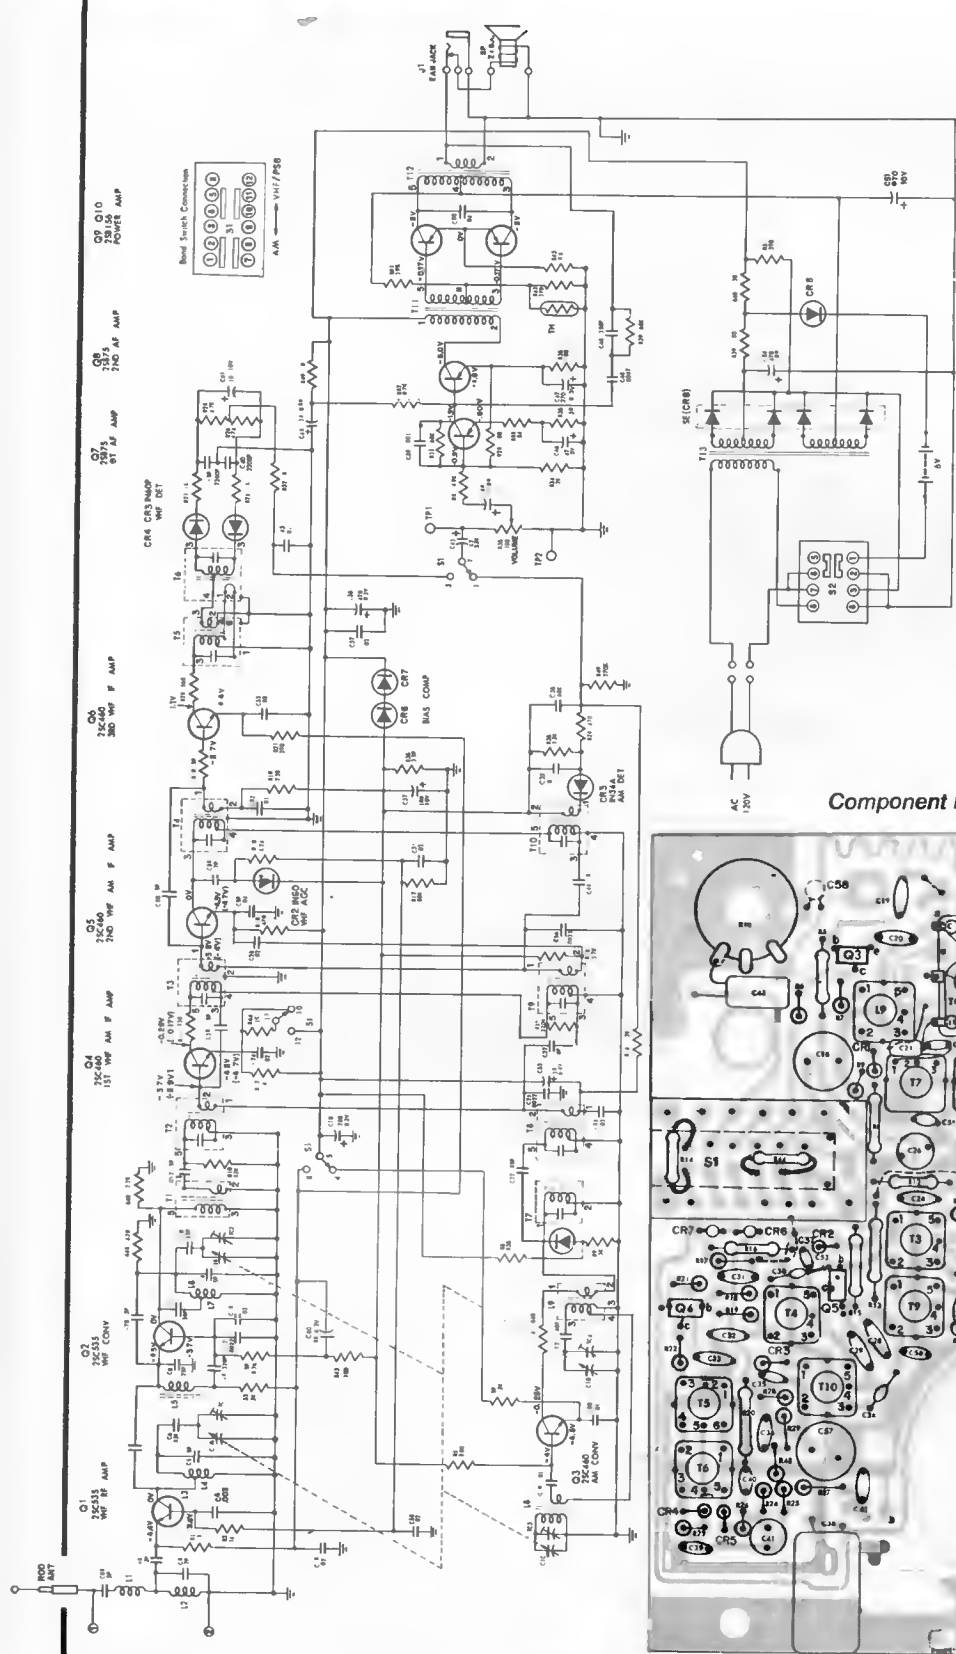

C21 MAY BE ANY VALUE FROM 100P TO 500P

C23	0.5P TO 2P
C24	0.5P TO 2P
C25	0.5P TO 2P
C26	0.5P TO 2P
C27	0.5P TO 2P
C28	0.5P TO 2P
C29	0.5P TO 2P
C30	0.5P TO 2P
C31	0.5P TO 2P
C32	0.5P TO 2P
C33	0.5P TO 2P
C34	0.5P TO 2P
C35	0.5P TO 2P
C36	0.5P TO 2P
C37	0.5P TO 2P
C38	0.5P TO 2P
C39	0.5P TO 2P
C40	0.5P TO 2P
C41	0.5P TO 2P
C42	0.5P TO 2P
C43	0.5P TO 2P
C44	0.5P TO 2P
C45	0.5P TO 2P
C46	0.5P TO 2P
C47	0.5P TO 2P
C48	0.5P TO 2P
C49	0.5P TO 2P
C50	0.5P TO 2P
C51	0.5P TO 2P
C52	0.5P TO 2P
C53	0.5P TO 2P
C54	0.5P TO 2P
C55	0.5P TO 2P
C56	0.5P TO 2P
C57	0.5P TO 2P
C58	0.5P TO 2P
C59	0.5P TO 2P
C60	0.5P TO 2P
C61	0.5P TO 2P
C62	0.5P TO 2P
C63	0.5P TO 2P
C64	0.5P TO 2P
C65	0.5P TO 2P
C66	0.5P TO 2P
C67	0.5P TO 2P
C68	0.5P TO 2P
C69	0.5P TO 2P
C70	0.5P TO 2P
C71	0.5P TO 2P
C72	0.5P TO 2P
C73	0.5P TO 2P
C74	0.5P TO 2P
C75	0.5P TO 2P
C76	0.5P TO 2P
C77	0.5P TO 2P
C78	0.5P TO 2P
C79	0.5P TO 2P
C80	0.5P TO 2P
C81	0.5P TO 2P
C82	0.5P TO 2P
C83	0.5P TO 2P
C84	0.5P TO 2P
C85	0.5P TO 2P
C86	0.5P TO 2P
C87	0.5P TO 2P
C88	0.5P TO 2P
C89	0.5P TO 2P
C90	0.5P TO 2P
C91	0.5P TO 2P
C92	0.5P TO 2P
C93	0.5P TO 2P
C94	0.5P TO 2P
C95	0.5P TO 2P
C96	0.5P TO 2P
C97	0.5P TO 2P
C98	0.5P TO 2P
C99	0.5P TO 2P
C100	0.5P TO 2P

NOTES

ALL RESISTANCES ARE 10% TOLERANCE UNLESS OTHERWISE NOTED OTHERWISE VALUES ARE OHMS K-1000


ALL CAPACITANCES VALUES BELOW 10 ARE IN P/F THOSE 10 AND ABOVE ARE IN P/F UNLESS NOTED OTHERWISE

VOLTAGES ARE MEASURED WITH A "VOLTCOM" TESTER - BATTERY AND SHOULD HOLD WITHIN ± 20% WITH A NEW BATTERY VOLUME CONTROL AT MINIMUM AND NO SIGNAL

VOLTAGES IN () ARE MEASURED IN "AM" POSITION

OUTPUT (WATT)	VOLUME CONTROL POSITION	POWER OUTPUT WITH BATTERY CURRENT
0	MIN	0
25	MIN	25
50	MIN	35
100	MIN	40
150	MIN	42
200	MIN	44
250	MIN	46
300	MIN	48
350	MIN	50
400	MIN	52
450	MIN	54
500	MIN	56
550	MIN	58
600	MIN	60
650	MIN	62
700	MIN	64
750	MIN	66
800	MIN	68
850	MIN	70
900	MIN	72
950	MIN	74
1000	MIN	76
1050	MIN	78
1100	MIN	80
1150	MIN	82
1200	MIN	84
1250	MIN	86
1300	MIN	88
1350	MIN	90
1400	MIN	92
1450	MIN	94
1500	MIN	96
1550	MIN	98
1600	MIN	100

Component Location—Top View

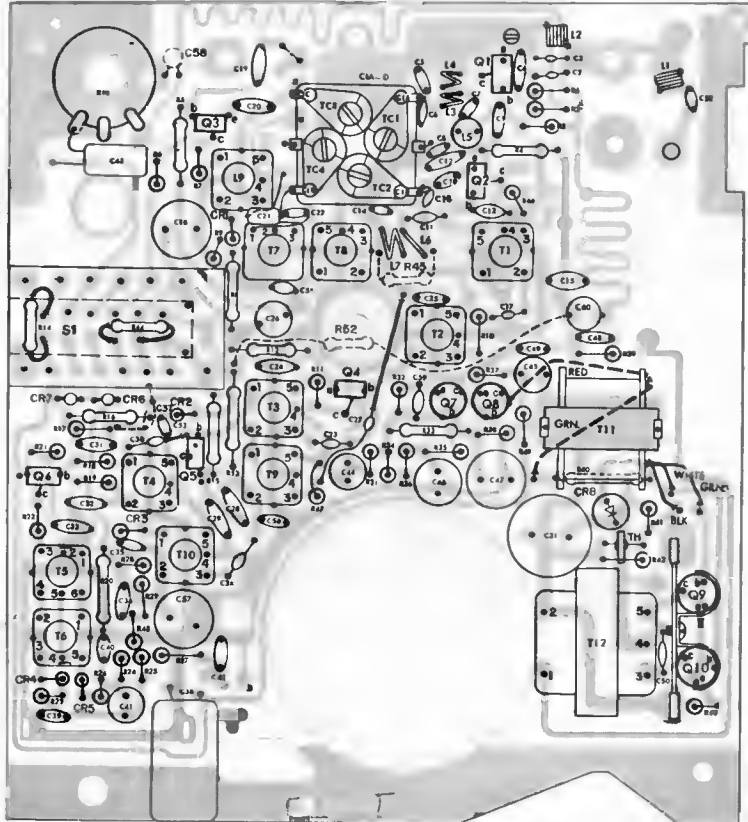



AM IF 455 KC
FM IF 10.7 MC



RCA

Models


VJP 12 Series,
 VJP 16 Series,
 VJP 88-K Series,
 VLP 12 Series,
 VMP 12 Series

Chassis RS-225B,
 RS-250A

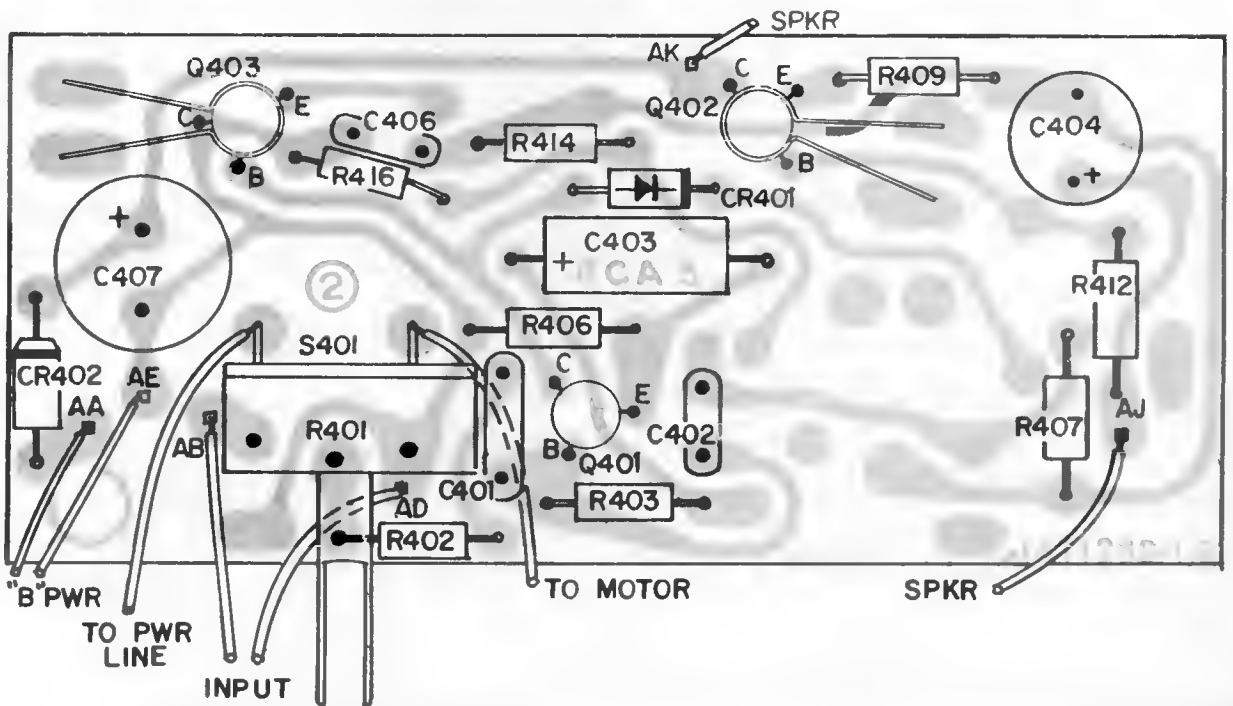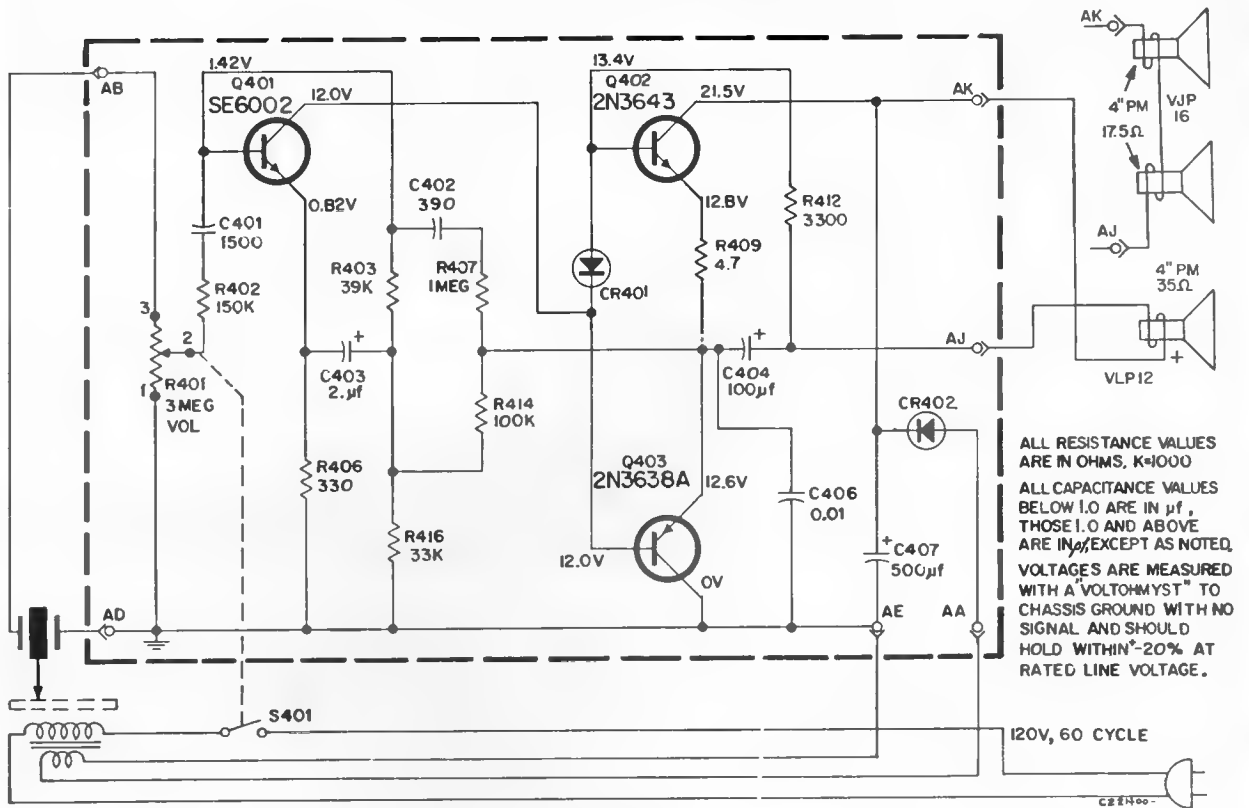


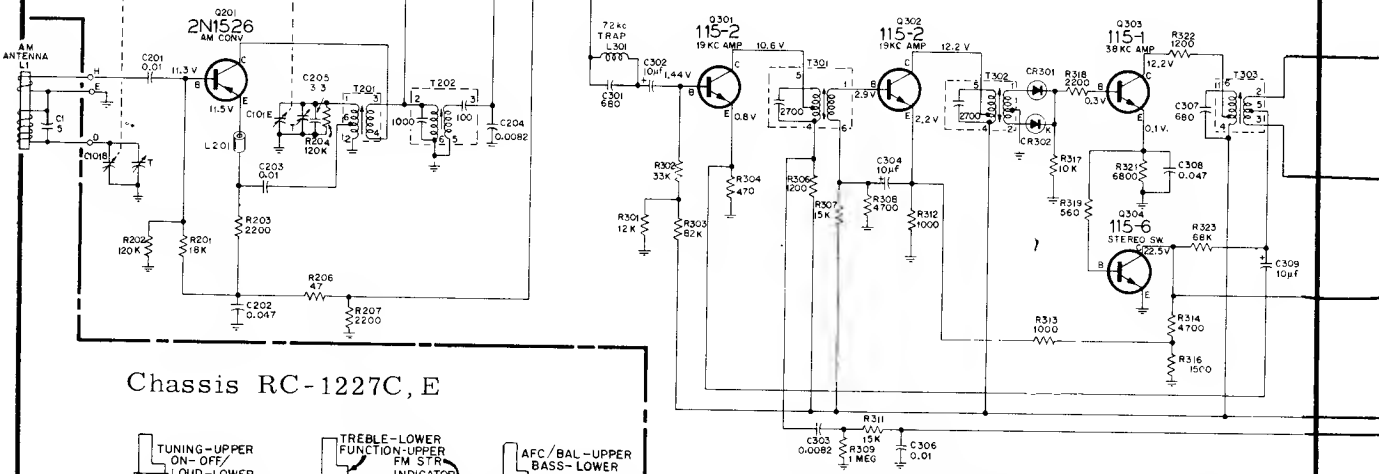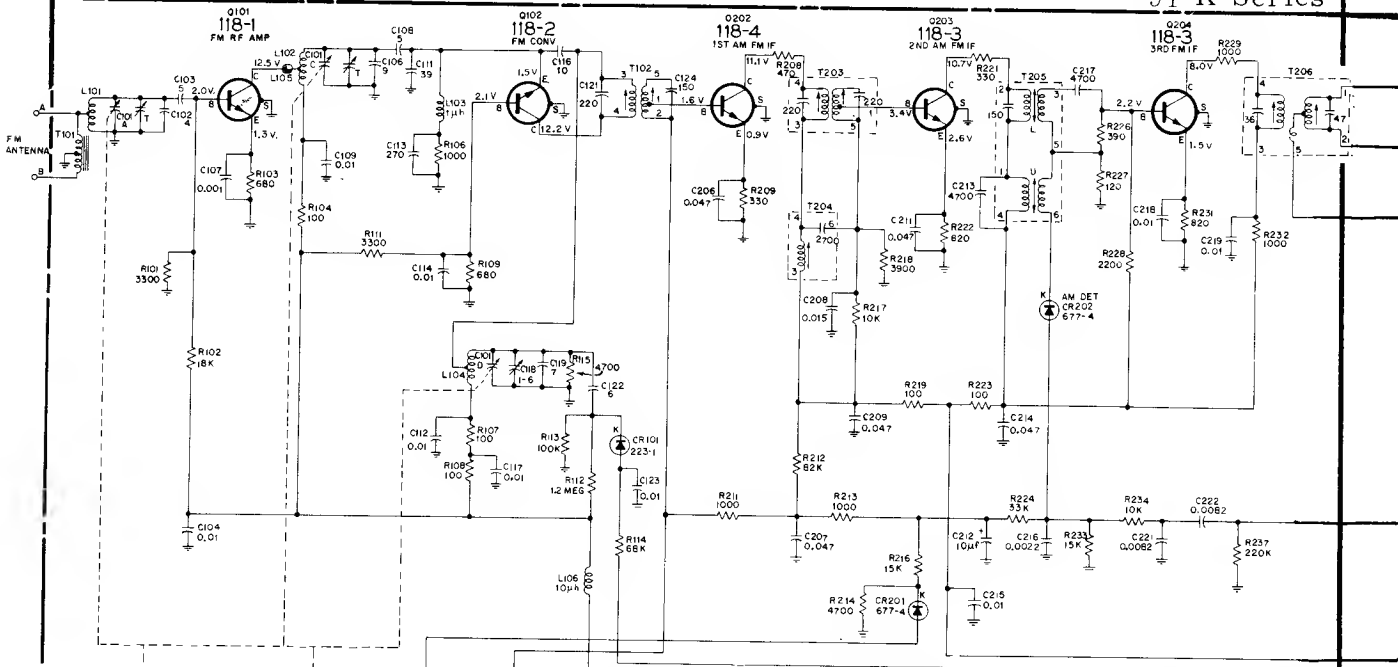

Chassis RC-1227C, E

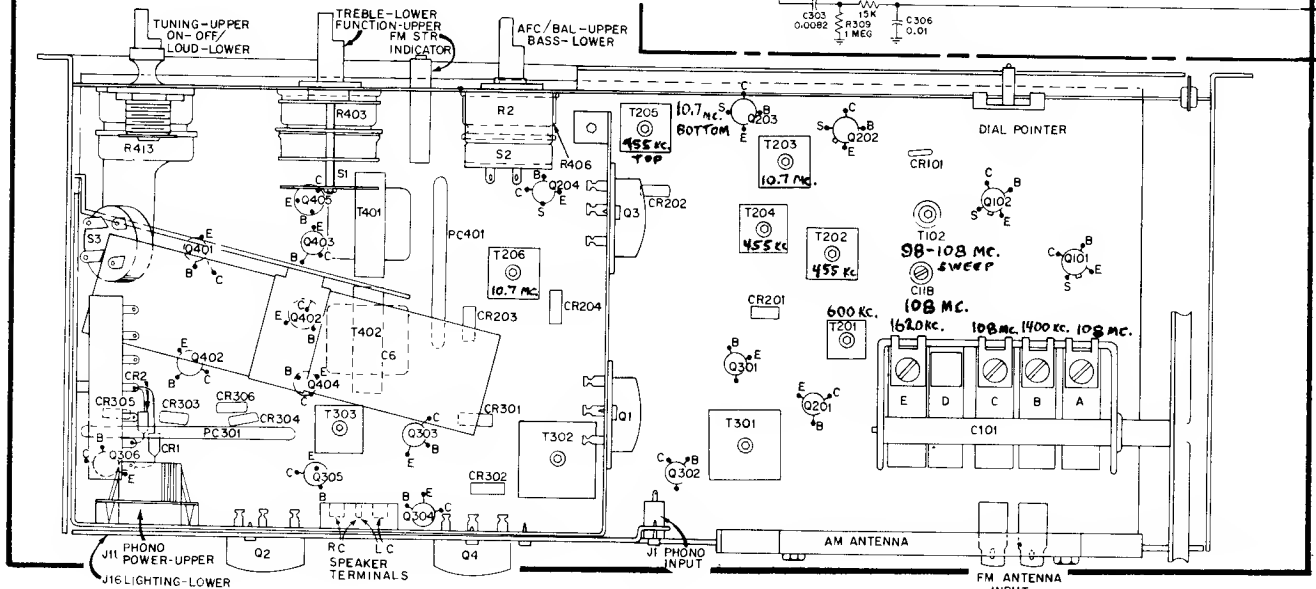

RCA Models VJT 16, 18, 23, 24, 25, 29, 30, 31, 33, 35, 37, 84-K, 85-K, 89-K, 90-K, 91-K Series

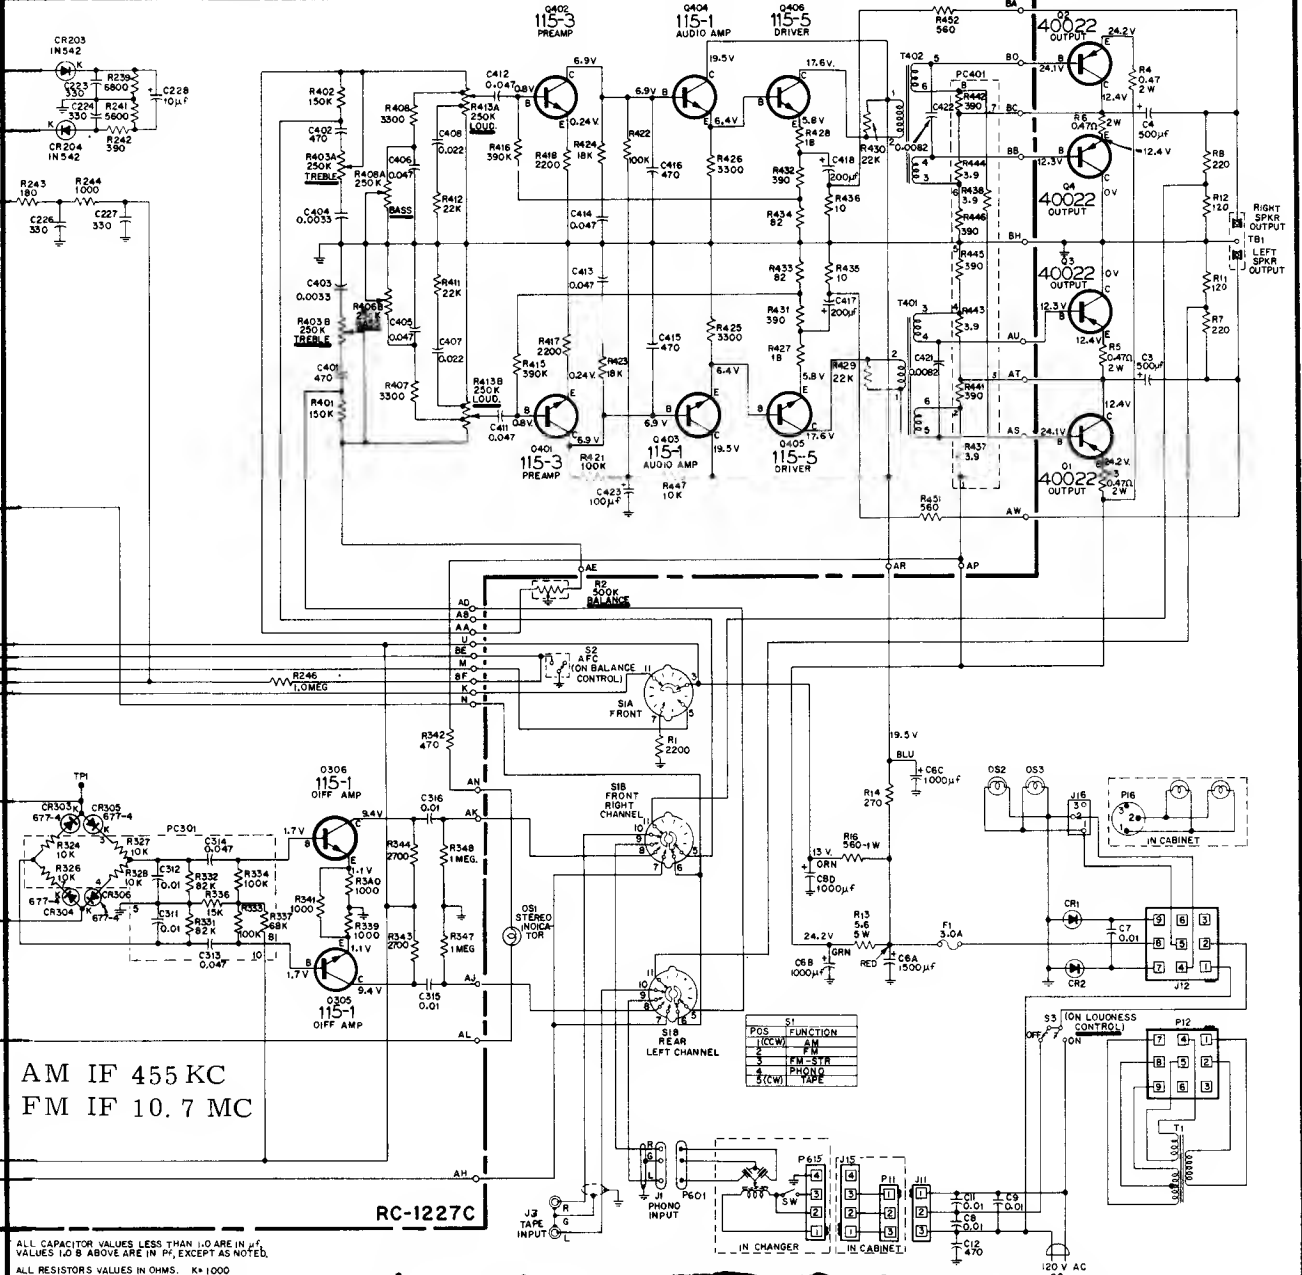

AM IF 455 KC
FM IF 10.7 MC

RC-1227C

ALL CAPACITOR VALUES LESS THAN 1.0 ARE IN μ F. VALUES 1.0 & ABOVE ARE IN μ M, EXCEPT AS NOTED.


ALL RESISTOR VALUES IN OHMS. K = 1000

ALL CONNECTORS SHOWN FROM WIRING SIDE.

CONNECTOR PIN NUMBERS FOR REF ONLY

ALL SECTIONS OF SWITCH "S" ARE VIEWED FROM FRONT, WITH SWITCH IN EXTREME CCW POSITION

ALL VOLTAGES MEASURED WITH A VOLTOHMIST TO CHASSIS GROUND (B-) WITH NO SIGNAL APPLIED, & SHOULD HOLD WITHIN $\pm 20\%$ AT RATED LINE VOLTAGE.




FOR RC-1227E

THE SCHEMATIC FOR RC-1227E IS THE SAME AS RC-1227C EXCEPT AS NOTED.

- C411 & C412 - 0.027
- R141 - 100
- R16 - 390
- R316 - 2200
- R342 - 330


POS	S1 FUNCTION
1 (CCW)	FM
2	FM-STR
3 (CW)	TABE

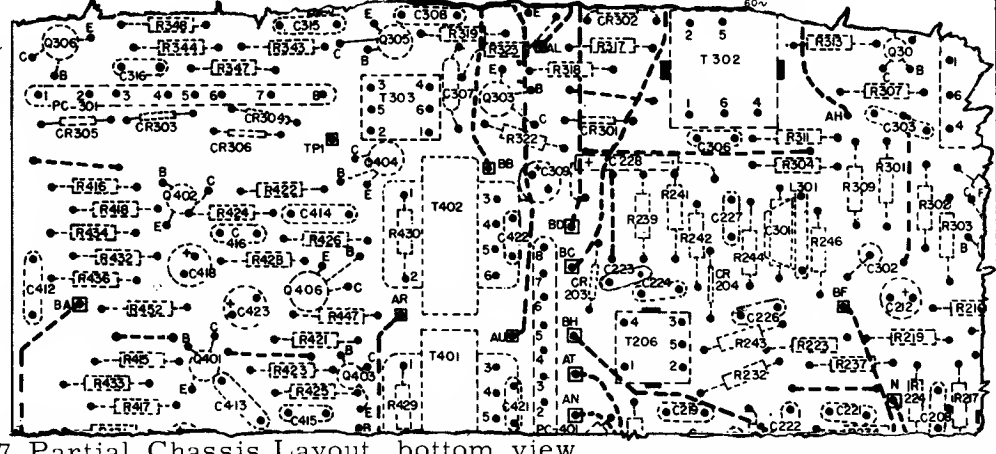


RC-1227 Partial Chassis Layout, bottom view.

RCA

VLP 20 Series VMP 20 Series Amplifier Chassis RS-249A

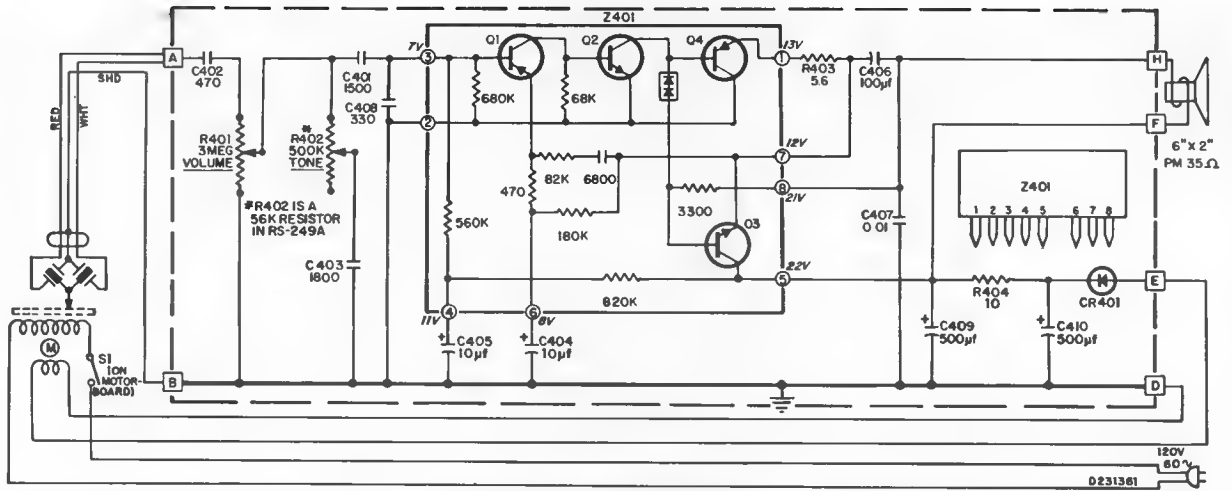

1. RESISTOR VALUES ARE IN OHMS, $\pm 10\%$, 1/2 WATT UNLESS NOTED OTHERWISE K = 1000
2. CAPACITOR VALUE BELOW 10 ARE IN μf , THOSE 10 AND ABOVE ARE IN pf UNLESS OTHERWISE NOTED
3. VOLTAGES ARE MEASURED WITH A "VOLTOHMYST" AND SHOULD HOLD WITHIN $\pm 20\%$ WITH NO SIGNAL APPLIED AT RATED LINE VOLTAGE


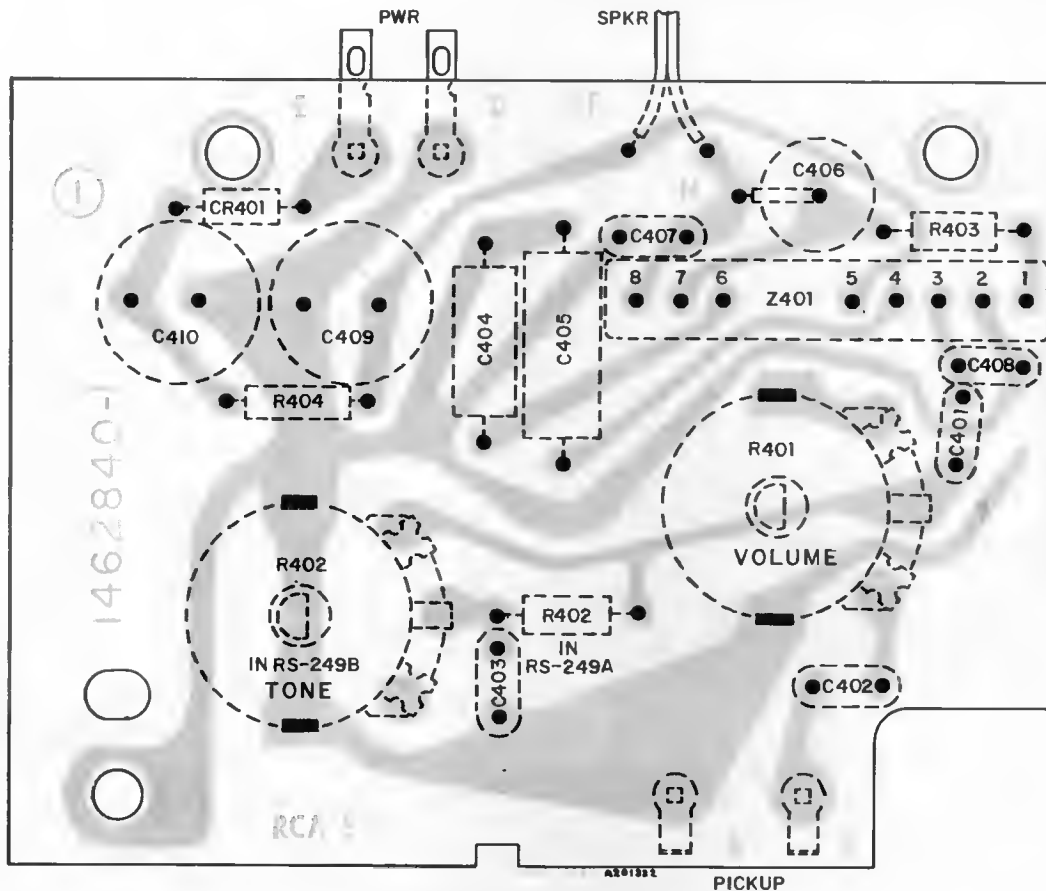


Component Locations (Wiring Side)




Models VLP 34, 36, 39 Models VMP 34, 38, 47

Amplifier Chassis
RS-243A
RS-245A

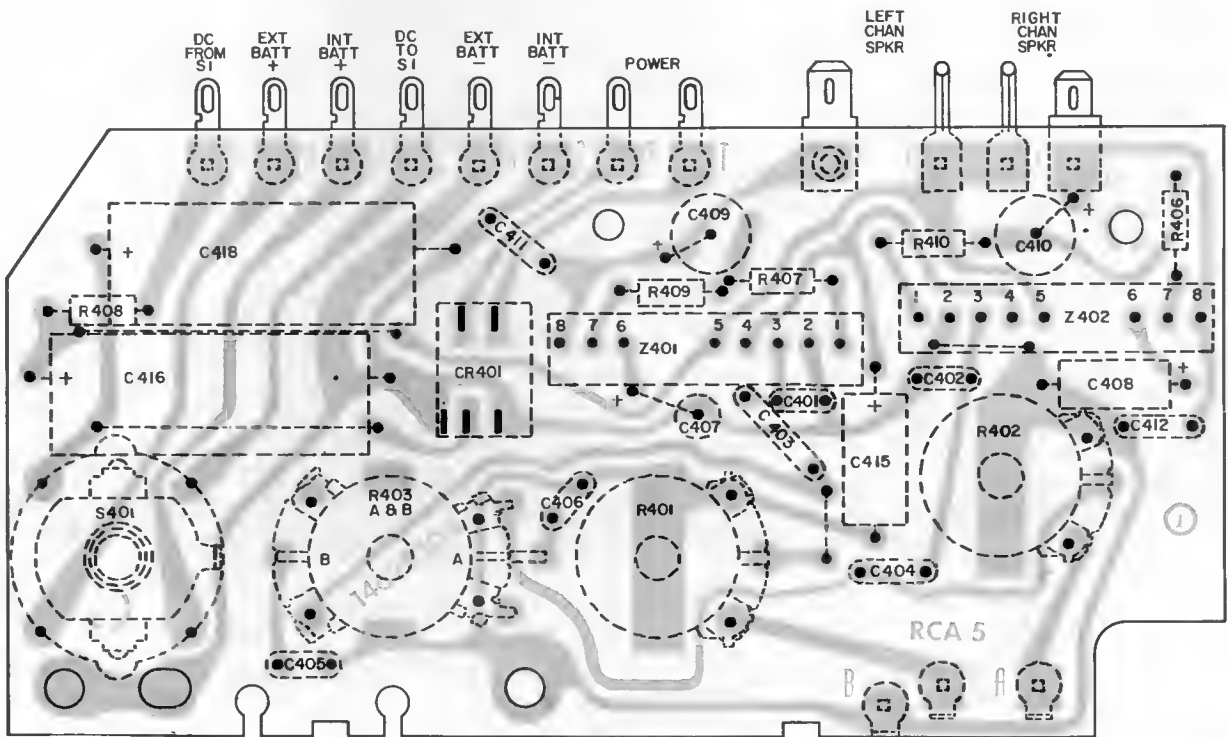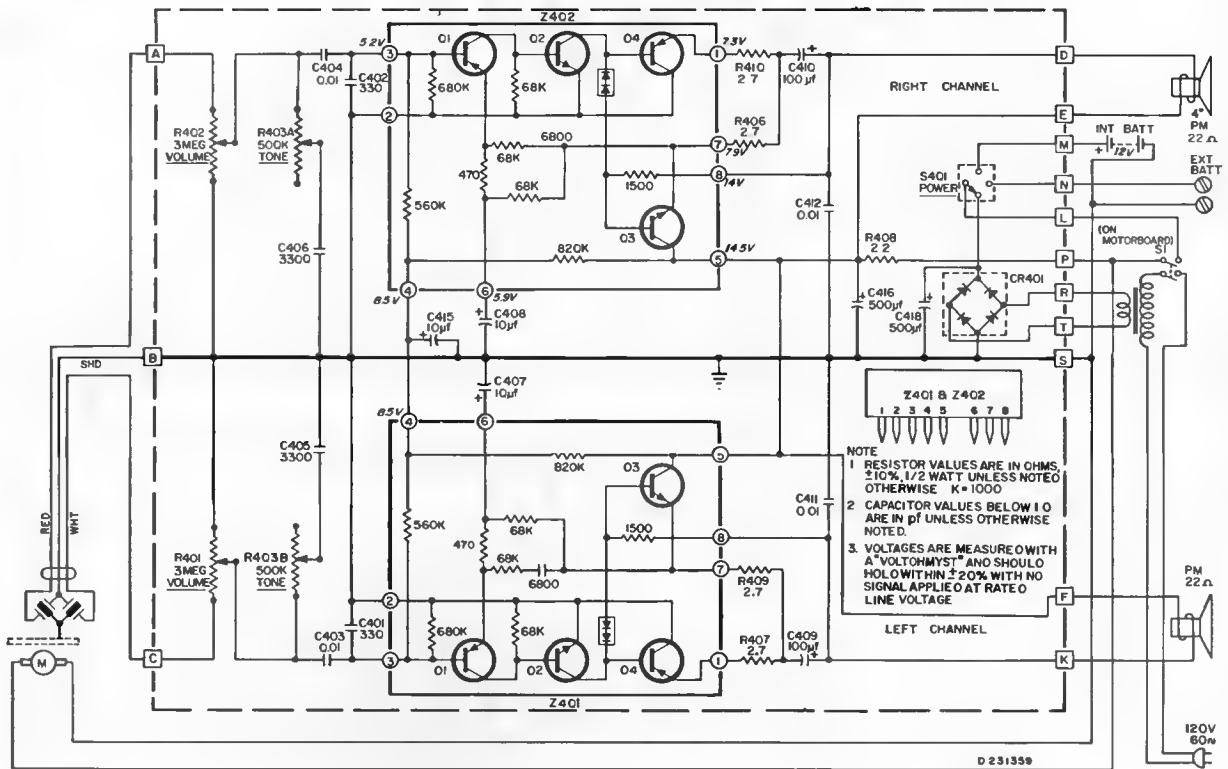

RCA Models VME 11, 12

Amplifier Chassis RS-256A

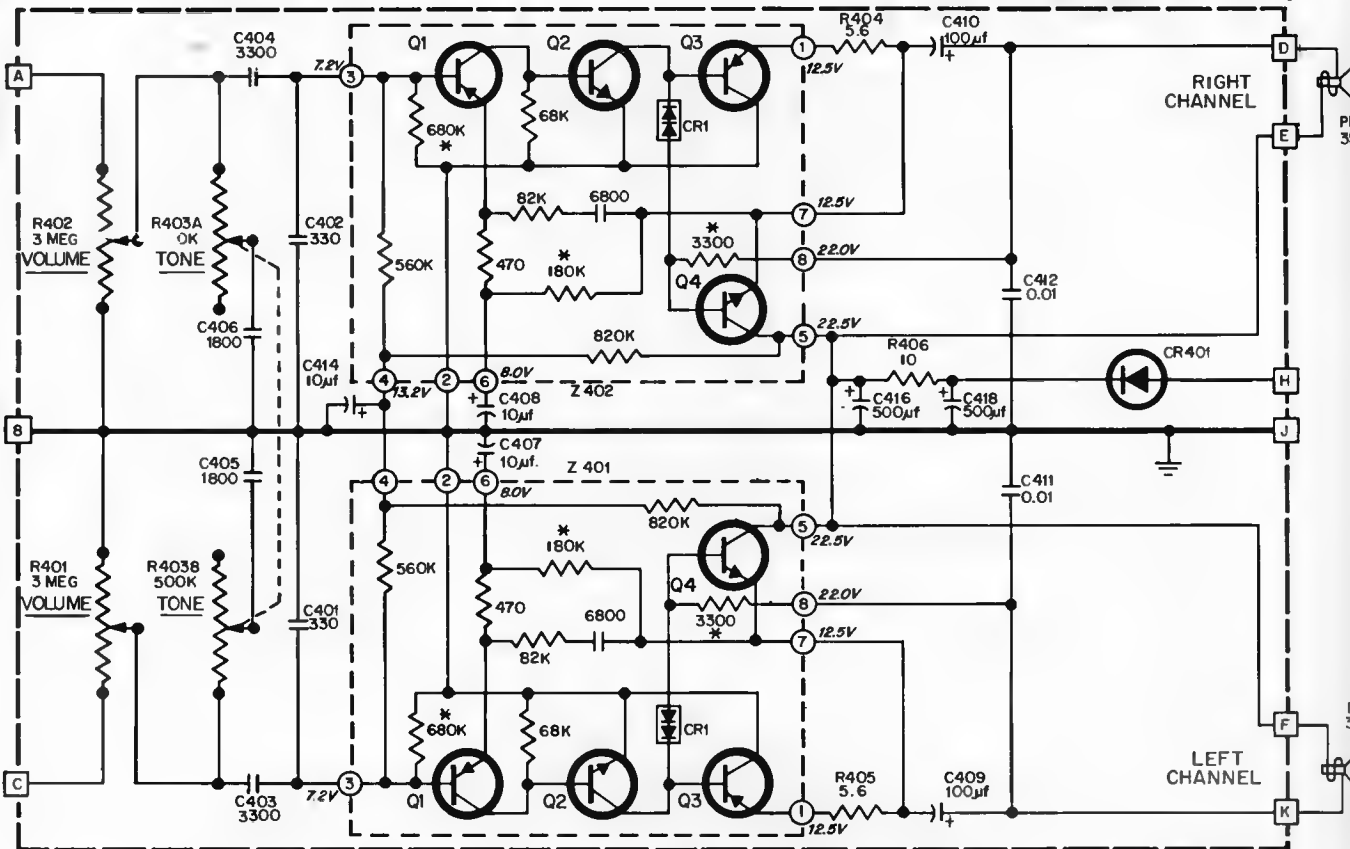


NOTES:

1. ALL RESISTOR VALUES ARE IN OHMS AND ARE $\pm 10\%$, 1/2 WATT UNLESS OTHERWISE SPECIFIED. K=1000
 2. ALL CAPACITOR VALUES LESS THAN 1.0 ARE μ F, THOSE 1.0 AND GREATER ARE pF UNLESS OTHERWISE SPECIFIED.
 3. VOLTAGES ARE MEASURED WITH A "VOLTOHMYST" TO CHASSIS GROUND (-) WITH NO SIGNAL AND SHDULO HOLD WITHIN $\pm 20\%$ AT RATED LINE VOLTAGE.
- PEC'S BEARING THE SAME NUMBER MUST BE USED IN BOTH CHANNELS

SI (ON CHANGER)



120V AC
60 ϕ

R.C. OUTPUT L.C.

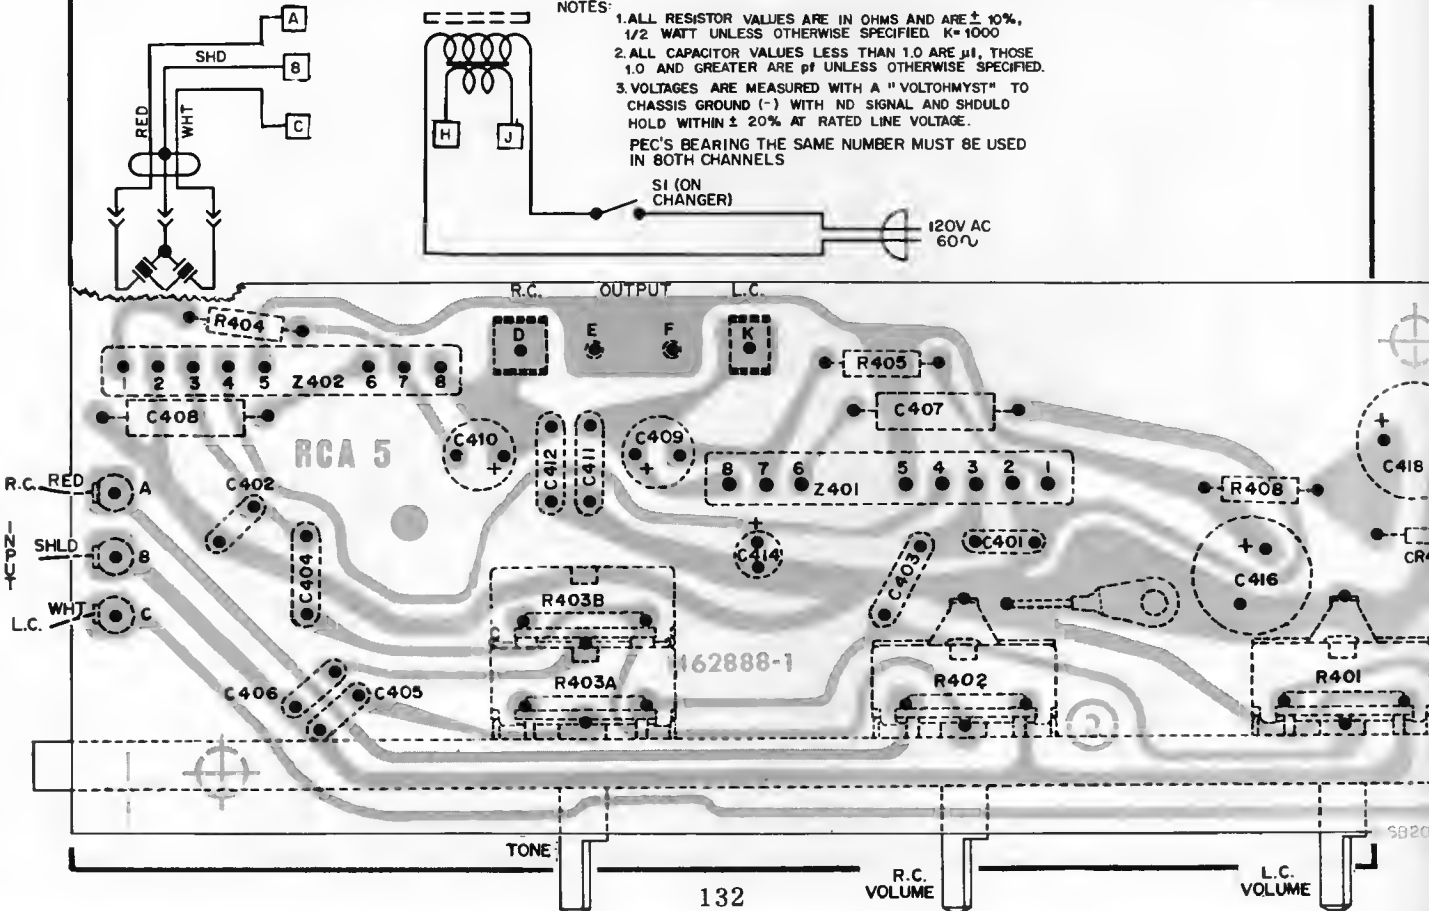

RCA

Model VMP 14

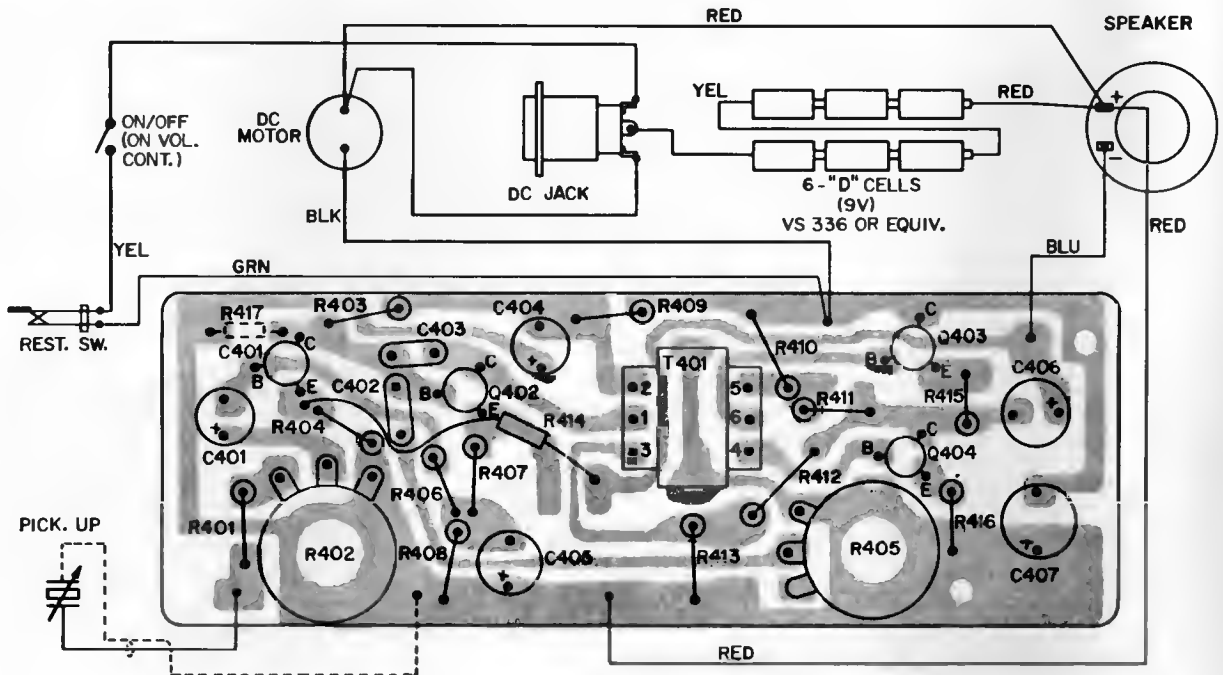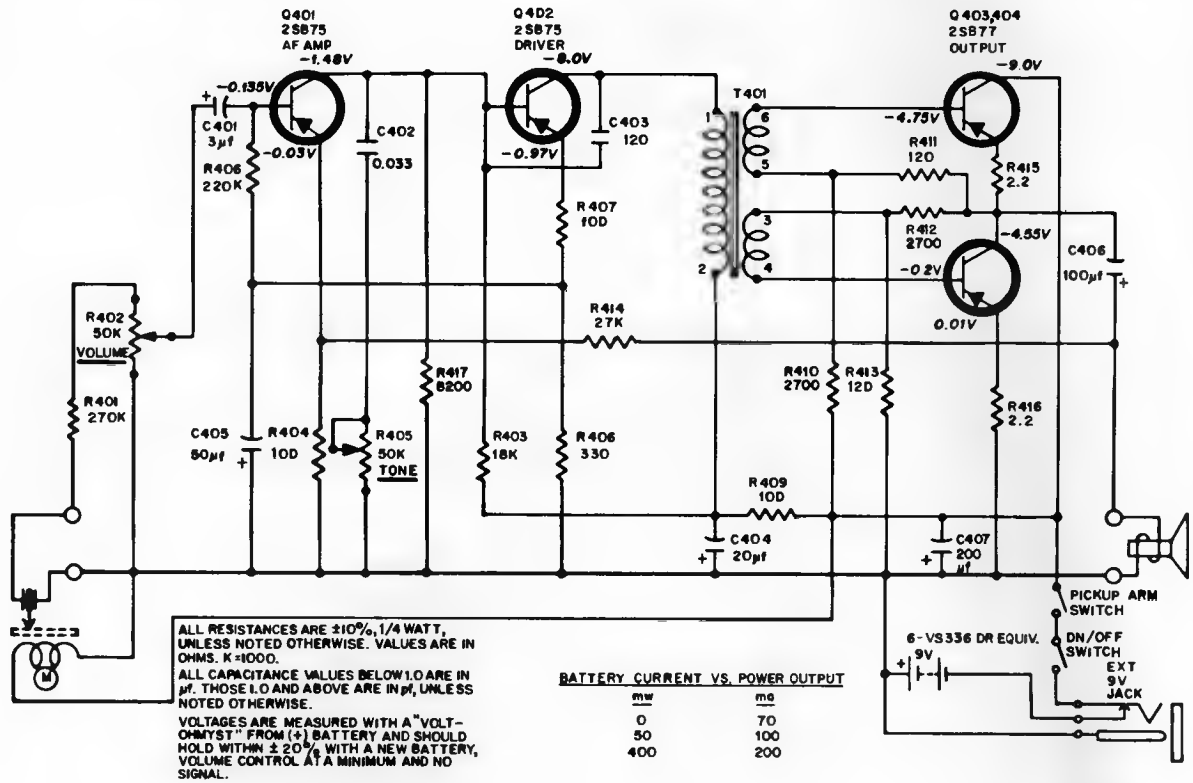

Chassis Layout




Models VMT 1, 2 Series

Radio Chassis RC-127K

MODEL TO CHASSIS CROSS REFERENCE

MODEL	TUNER, AMPLIFIER	RECORD CHANGER	Speakers
VMT 10	RC1227K	RP-232-5	2— 9" x 6", 2—3½" Tweeters
VMT 13	RC1227K	RP-232-5	2— 9" x 6", 2—3½" Tweeters
VMT 14	RC1227K	RP-232-5	2— 9" x 6", 2—3½" Tweeters
VMT 15	RC1227K	RP-232-5	2— 9" x 6", 2—3½" Tweeters
VMT 25	RC1227K	RP-232-9	2—12" x 8", 2—3½" Middlers, 2—3½" Tweeters
VMT 27	RC1227K	RP-232-9	2—12" x 8", 2—3½" Middlers, 2—3½" Tweeters

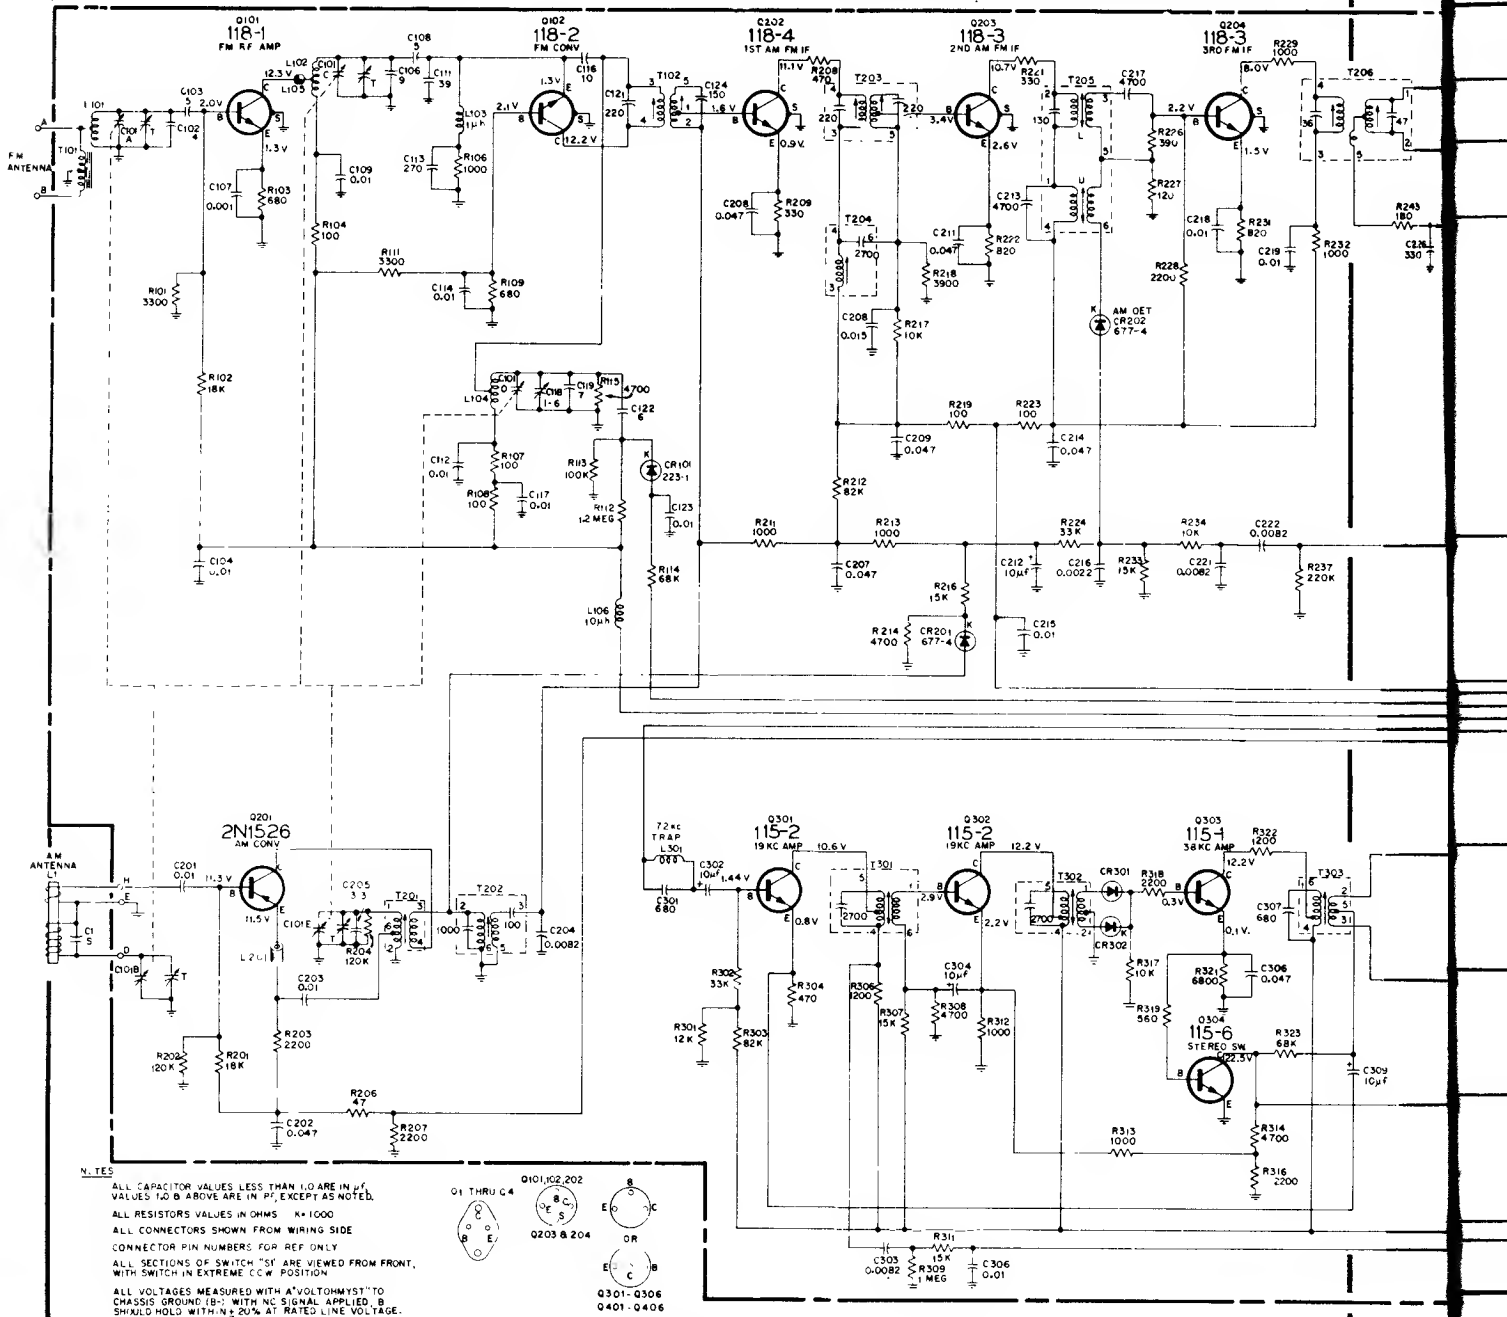



Models VMT 1, 2 Series

Chassis RC-1227K

AUDIO FREQUENCY RESPONSE

VMT 10, 13, 14, 15 60-20,000 cycles/sec
 VMT 25, 27 50-20,000 cycles/sec


POWER SUPPLY RATING

VMT 10, 13, 14, 15, 25, 27 12 volts, 60 cycles
 Power Consumption 55 watts


FREQUENCIES

	Tuning	IF
AM	540-1620 kc/s	455 kc/s
FM	88-108 mc/s	10.7 mc/s

(Continued from preceding page and on next page.)

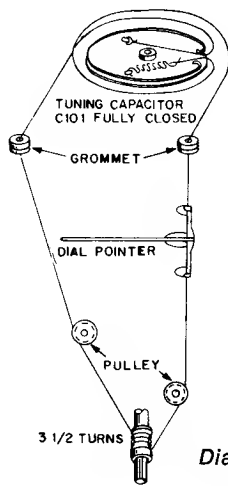

Dial Cord Arrangement


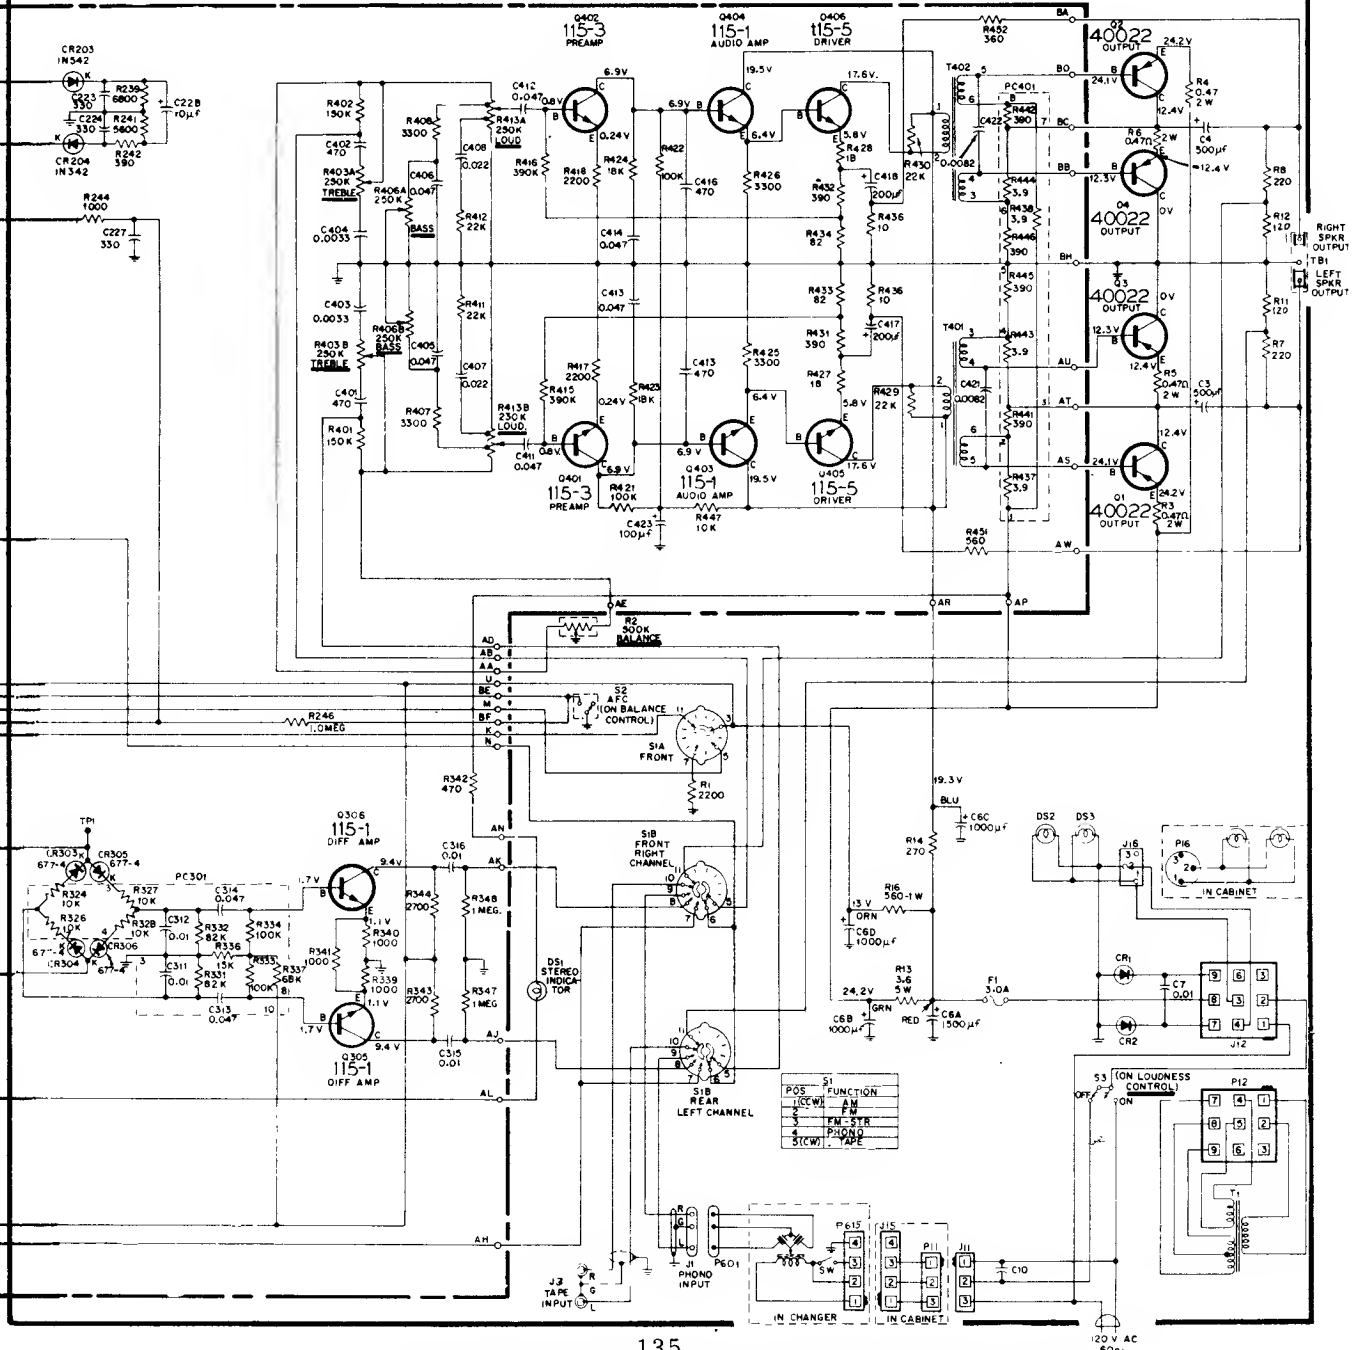


SEARS | *Silvertone*


CHASSIS 132.42701
MODEL 2063, 2064, 2065

Q1
95223
CONV.

Q2
95130
I.F. AMPL.

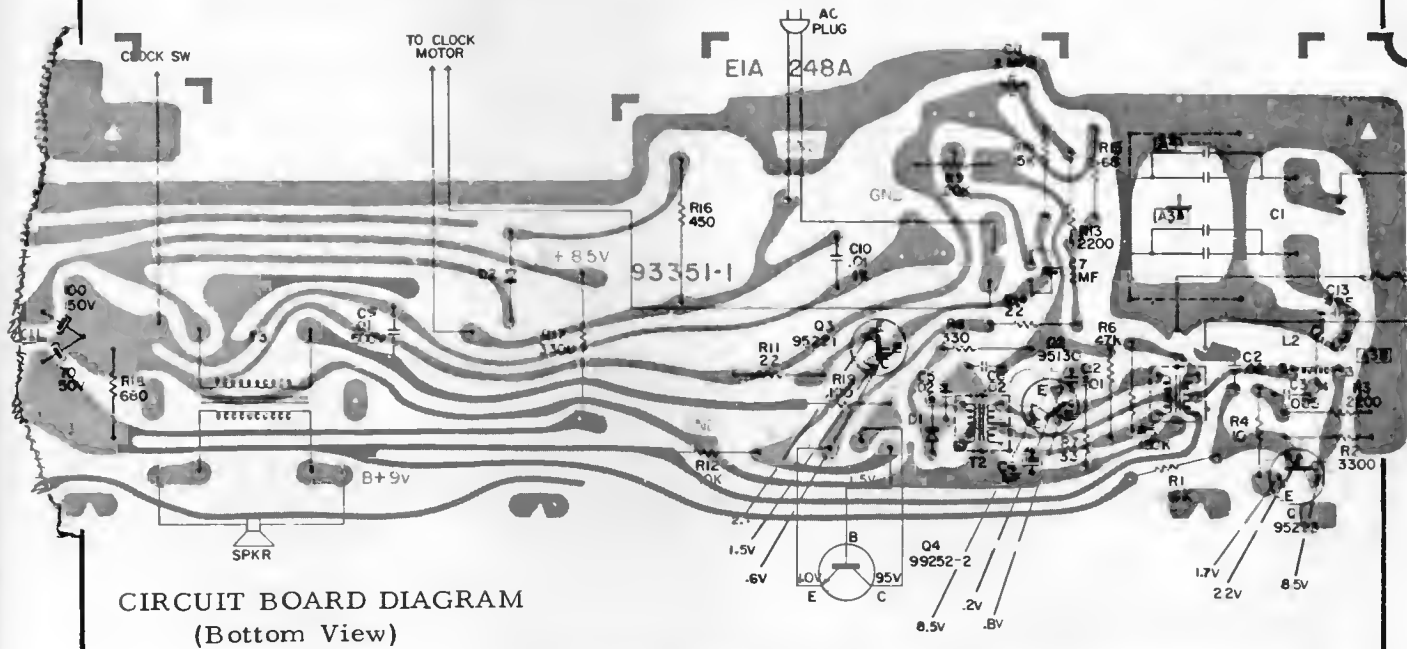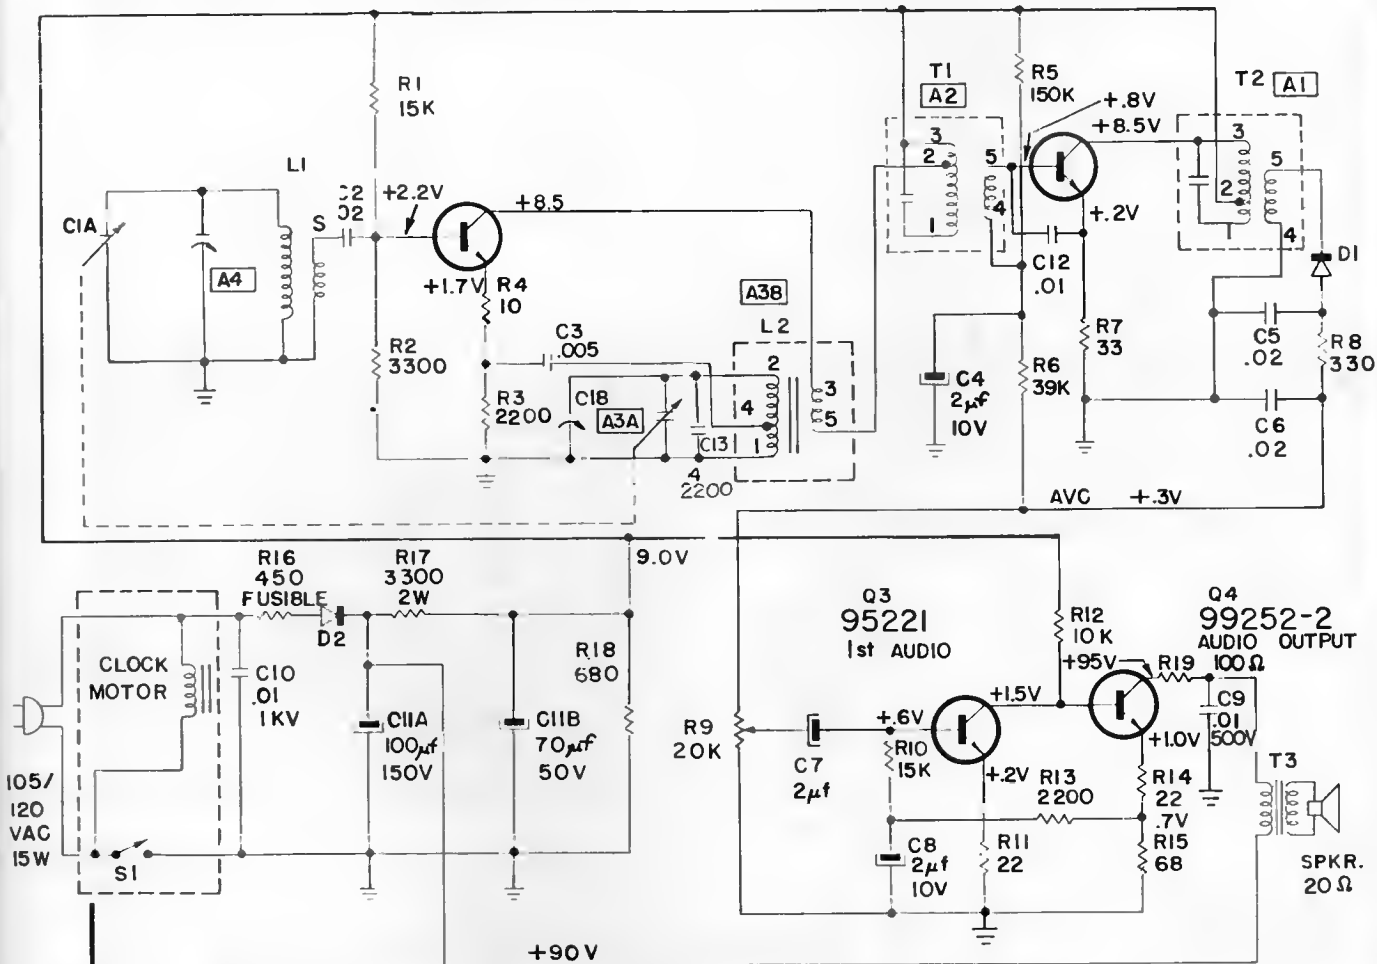




CIRCUIT BOARD DIAGRAM
(Bottom View)

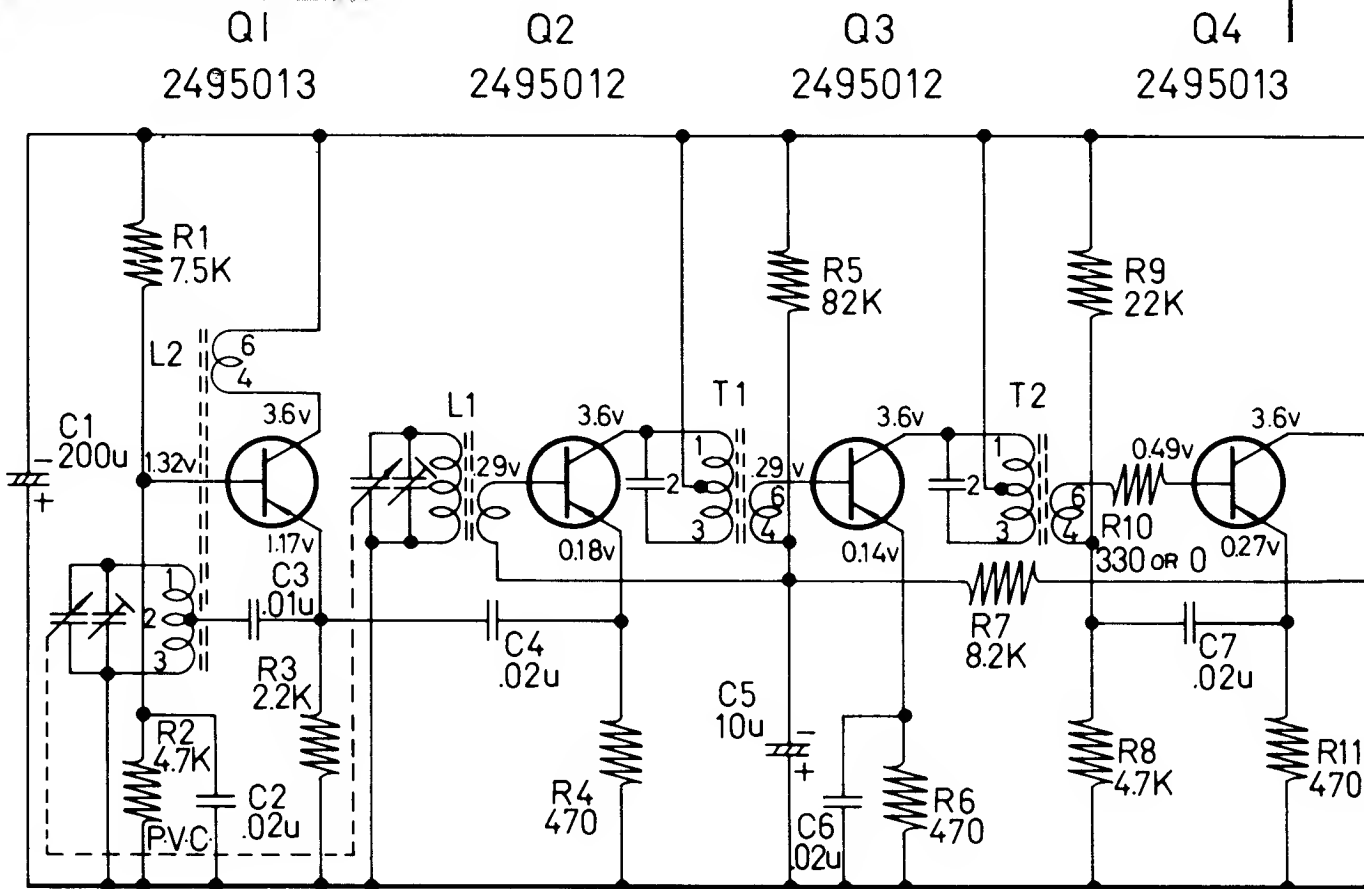

L2, T1, T2, T3

T4, T5

Q1 Q8

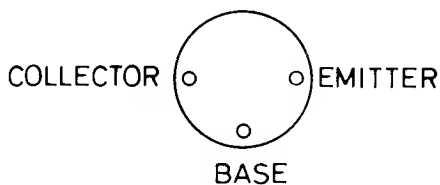

ONE COMPLETE TURN
 AT FINISH


(BOTTOM VIEW)

IF 455 KC

Silvertone

VARIABLE CONDENSER
 AT MINIMUM CAPACITY

RADIO
 CHASSIS NO. **132.41501**

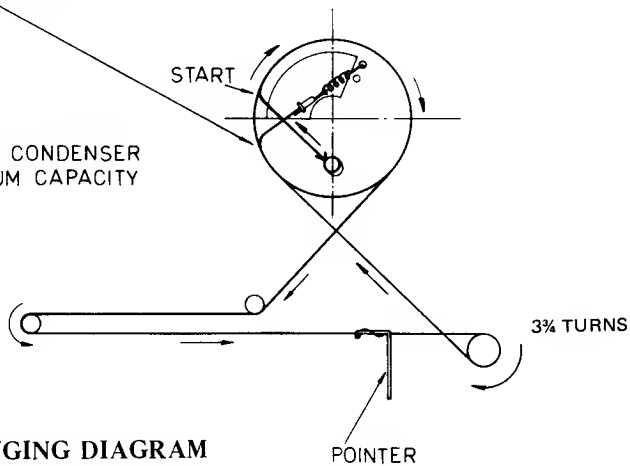

STRINGING DIAGRAM



USED IN RADIO MODEL	
2230	
2231	
2232	

SEARS

CHASSIS 132.41501
MODELS 2230, 2231, 2232

(Continued from preceding page.)

D	Q5	Q6	Q7, Q8
2495083	2495014	2495014	2497473

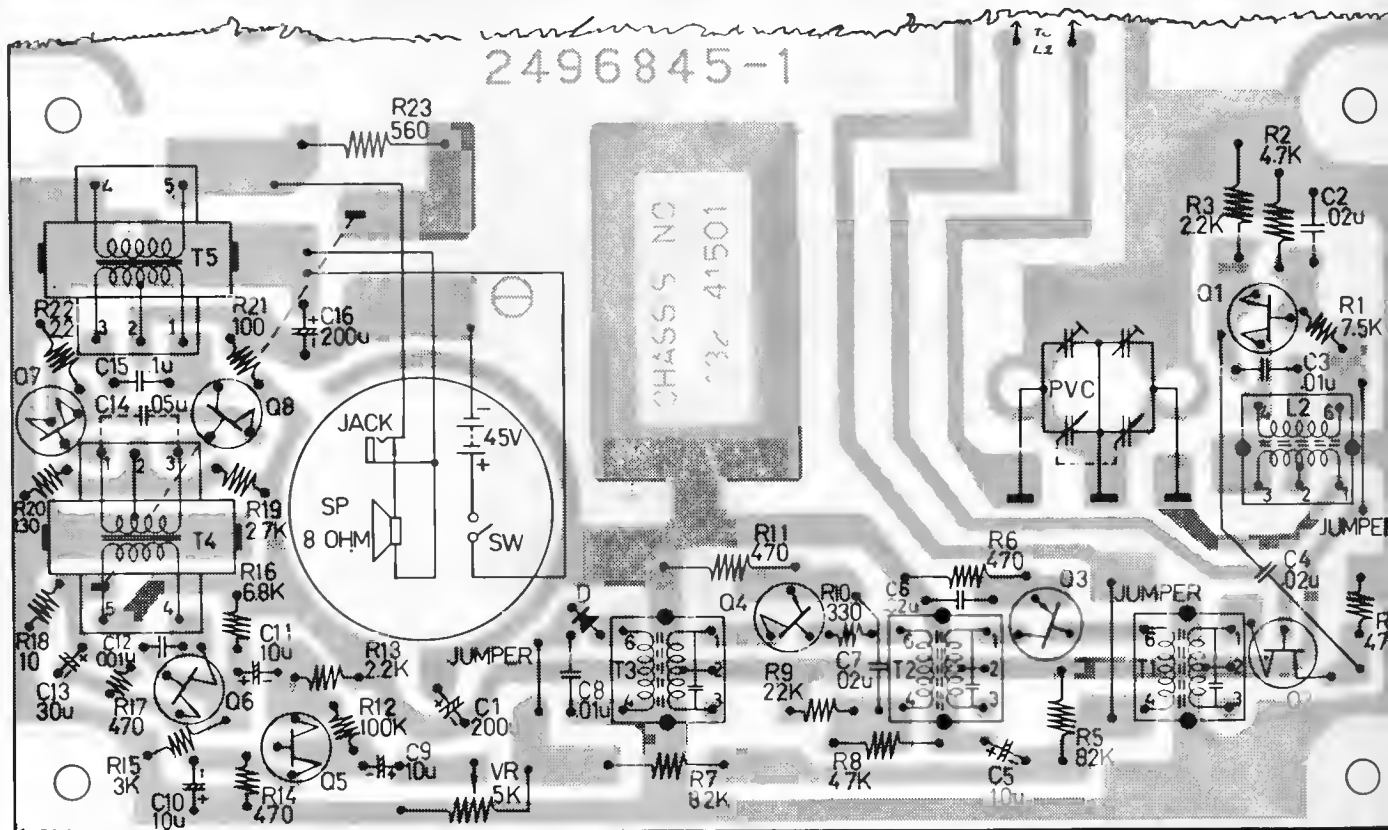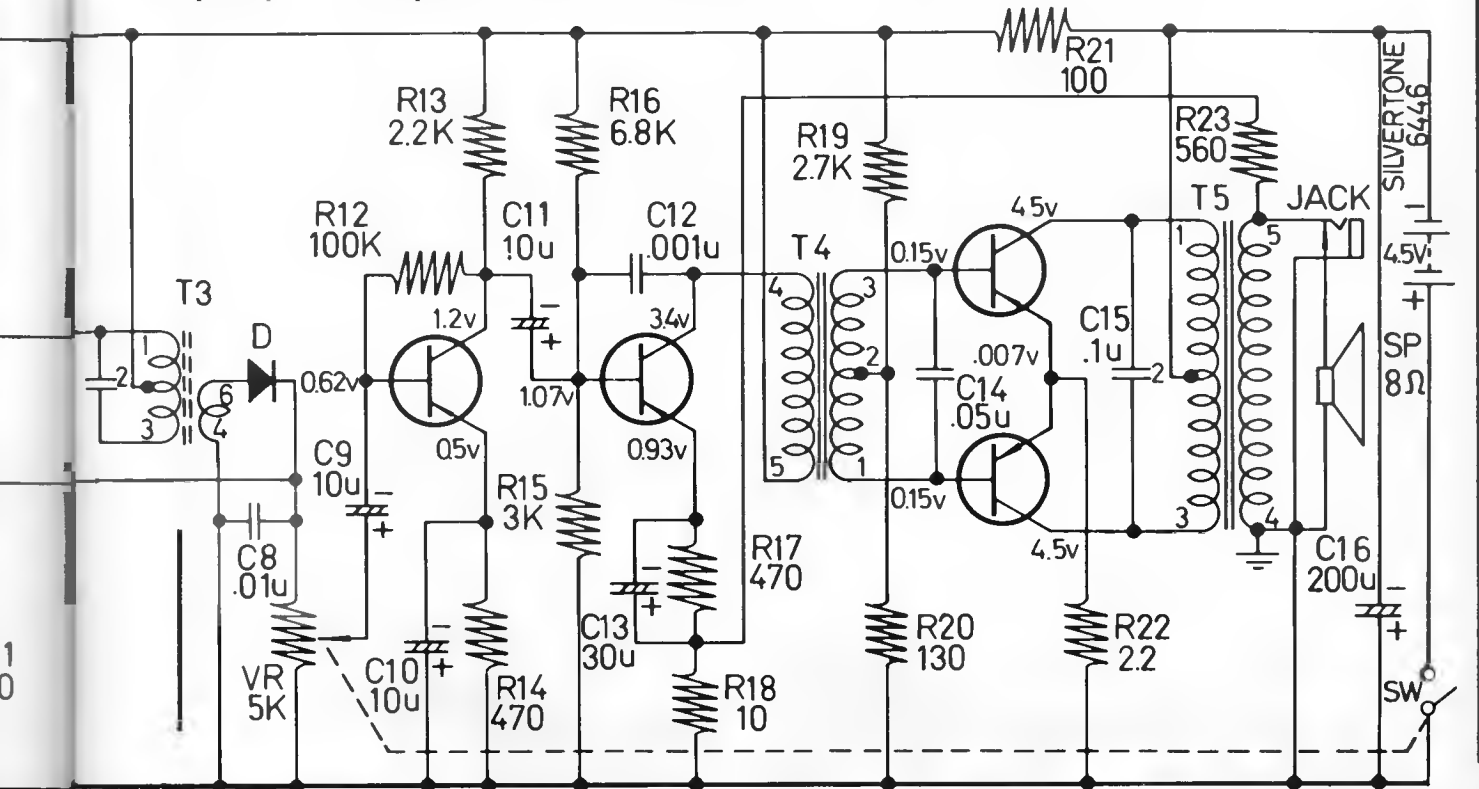

SEARS

RADIO CHASSIS NO.

132.42301



(Continued on next page.)

Silvertone



TR-1
2SA29-1
CONVERTER

TR-2
2SA29-2
FIRST I.F.

TR-3
2SA29-3
SECOND I.F.

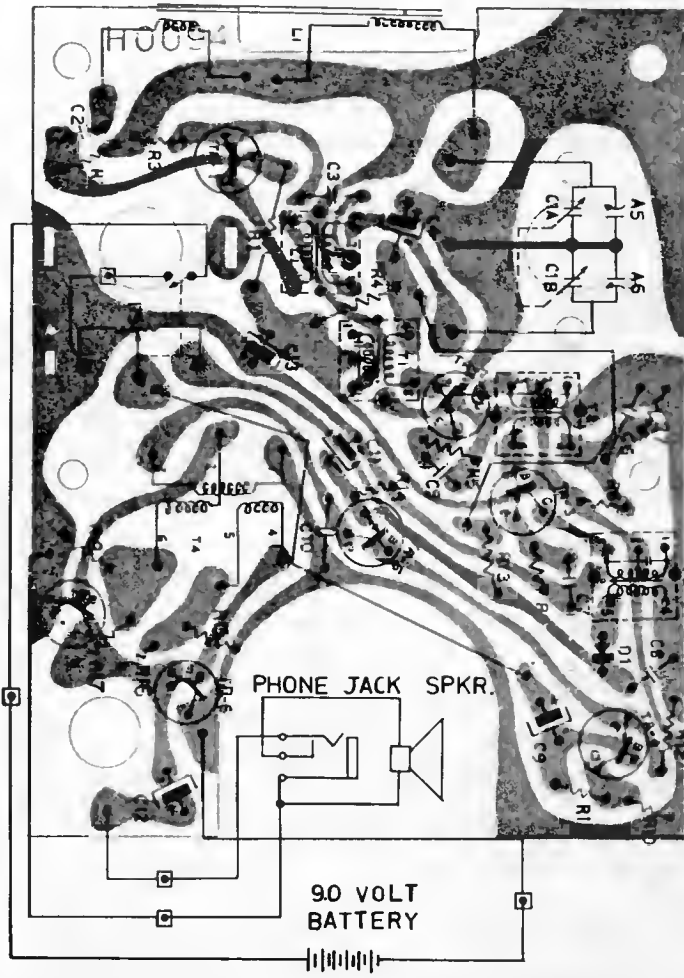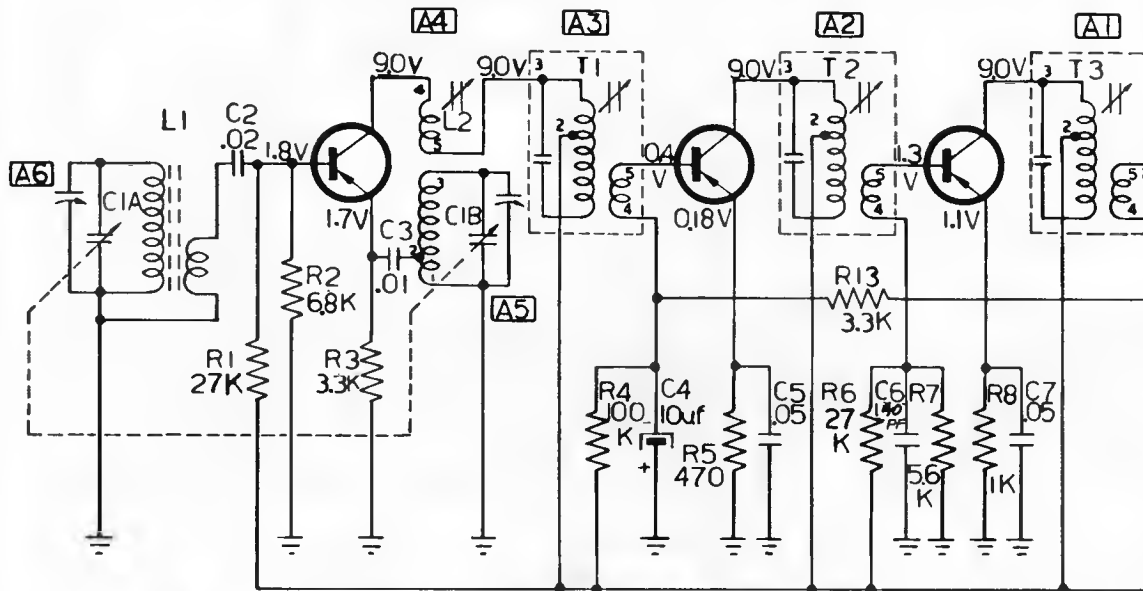

TRANSISTOR
(BOTTOM VIEW)



AUDIO DRIVER TRANSFORMER T4
(BOTTOM VIEW)



I.F. TRANSFORMER &
OSCILLATOR COIL
(BOTTOM VIEW)



USED IN RADIO MODEL

2203

SEARS CHASSIS 132.42301 (Continued from preceding page.)
MODEL 2203


D-1	TR-4	TR-5	TR-6 & TR-7
IN60	2SB422	2SB422	2SB423
DETECTOR	FIRST AUDIO AMP.	DRIVER	AUDIO OUTPUT

Frequency of Generator	Position of Variable	Dummy Antenna
455 kHz	Open	.05 mf.
530 kHz	Closed	
1640 kHz	Open	
1400 kHz	1400 kHz	
600 kHz	600 kHz	

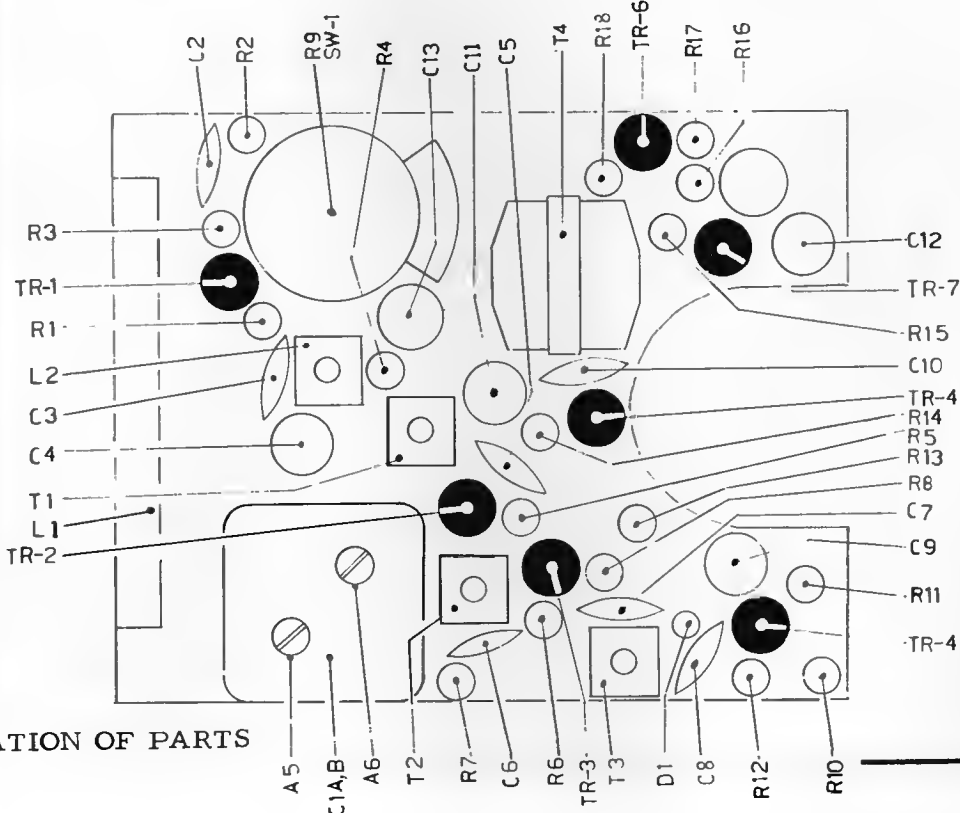
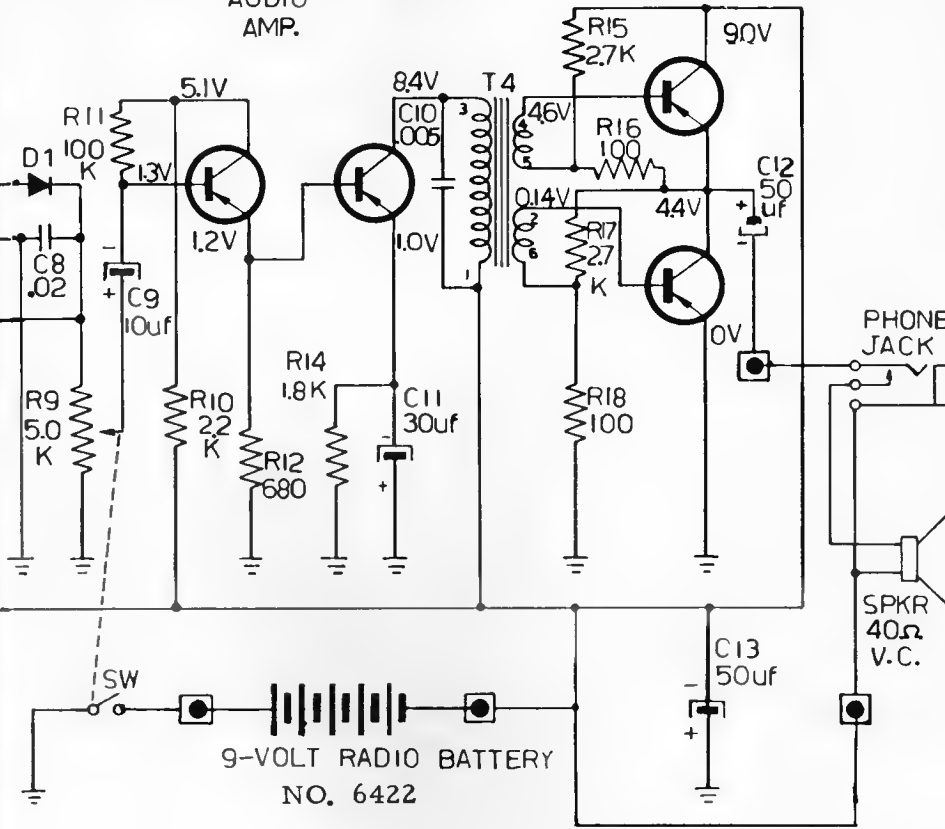


LOCATION OF PARTS

⊥ = COMMON GROUND SYMBOL.
 □ = EXTERNAL CONNECTION TO PRINTED CIRCUIT.
 RESISTANCE VALUES ARE IN OHMS; K=1000.
 CAPACITANCE VALUES LESS THAN 1.0 ARE MICROFARADS (uf), AND VALUES GREATER THAN 1.0 ARE IN MICRO-MICROFARADS (pF) EXCEPT WHERE NOTED.
 VOLTAGE READINGS TO COMMON GROUND ARE MEASURED WITH VACUUM TUBE VOLT-METER UNDER NO SIGNAL CONDITIONS WITH TUNING CAPACITOR CLOSED AND VOLUME CONTROL AT MINIMUM VOLUME POSITION. TOTAL BATTERY CURRENT DRAIN UNDER NO SIGNAL CONDITIONS, 8 TO 15 MA.

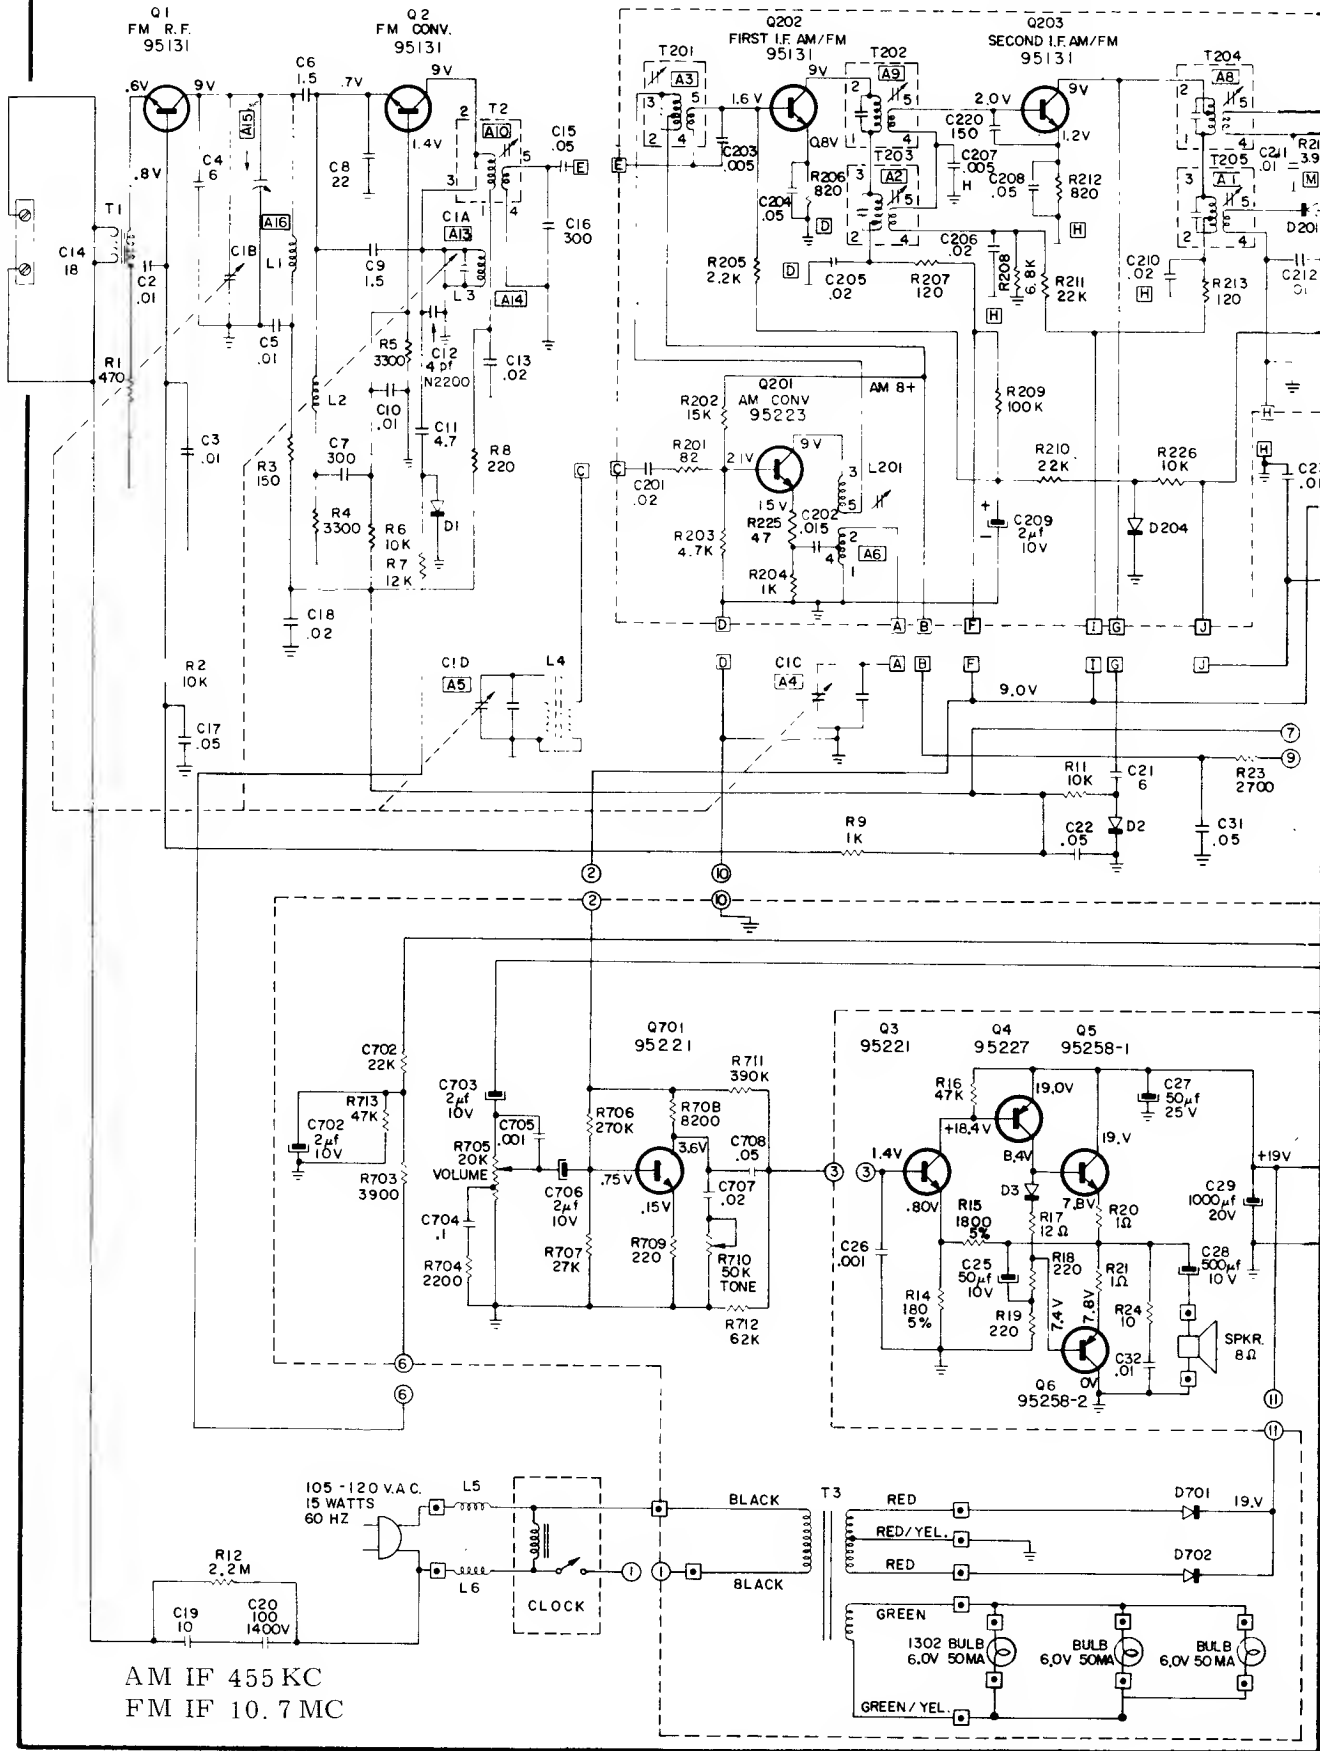

AM IF 455 KC
FM IF 10.7 MC

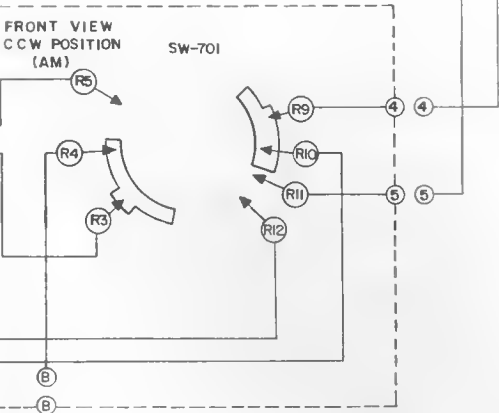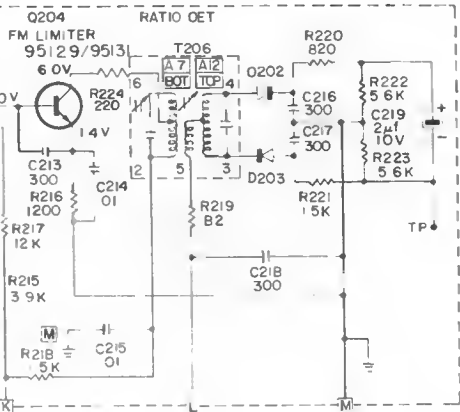


NOTES


- 1 RESISTANCE VALUES ARE IN OHMS K=1000, M=MEG
- 2 ALL RESISTORS 10% AND 1/2 WATT UNLESS OTHERWISE SPECIFIED
- 3 ALL VOLTAGES MEASURED WITH A VTVM WITH NO SIGNAL
- 4 ALL VOLTAGES MEASURED FROM B-GROUND
- 5 ALL CAPACITORS 25 VOLTS UNLESS OTHERWISE SPECIFIED
- 6 CAPACITANCE VALUES LISTED IN DECIMALS ARE IN MICROFARADS (μF) AND VALUES GREATER THAN 1.0 ARE PICOFARADS (pF) UNLESS OTHERWISE SPECIFIED
- 7 ⚭ = COMMON GROUND SYMBOL
- 8 [A] = IF MODULE BOARD TO CARRIER BOARD CONNECTION
- 9 [I] = CONTROL BOARD CONNECTION TO CARRIER BOARD
- 10 [Δ] = TERMINAL STRIP CONNECTION
- 11 [⊞] = OFF BOARD CONNECTIONS
- 12 COMPONENT NUMBERS 1 TO 99 ARE LOCATED ON CARRIER BOARD
- 13 COMPONENT NUMBERS 201 TO 299 ARE LOCATED ON IF MODULE
- 14 COMPONENT NUMBERS 701 TO 799 ARE LOCATED ON CONTROL BOARD

R22
1300 9V



C30
500μF
10V

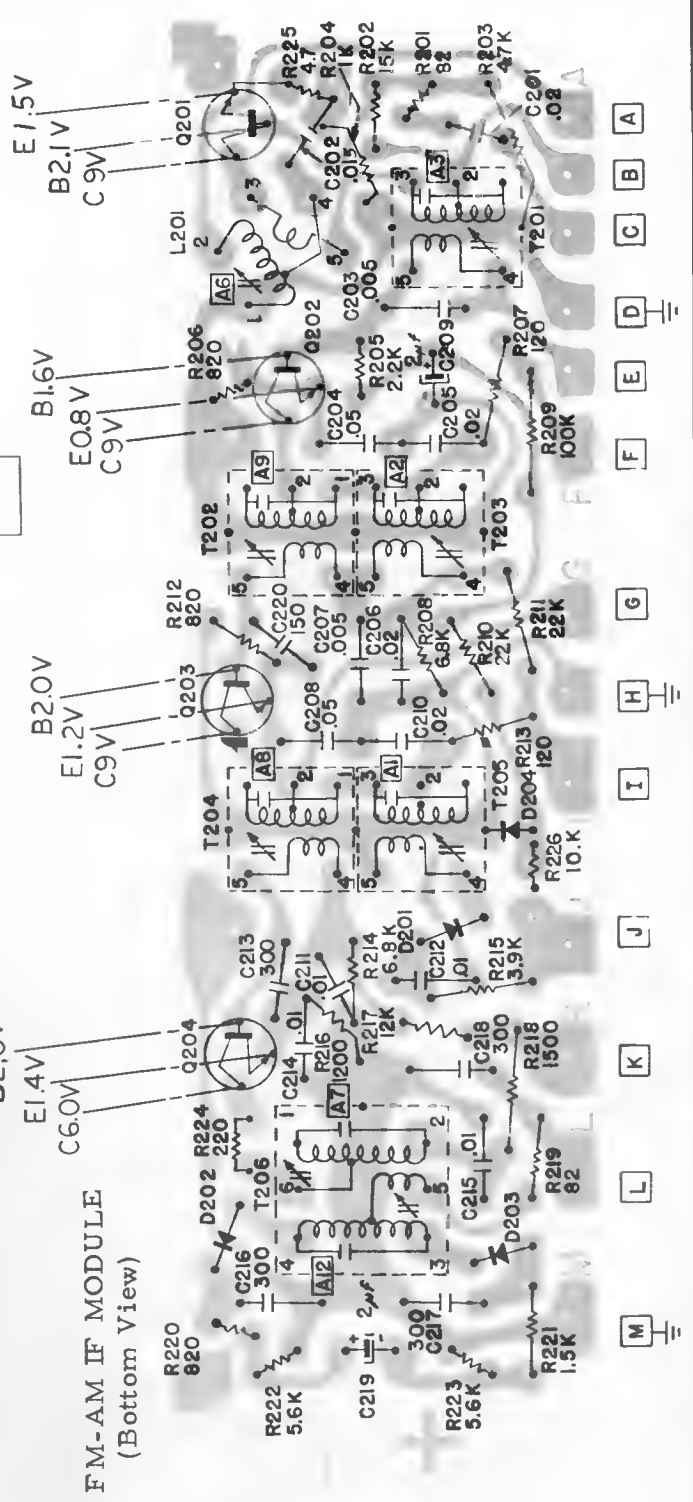


FM-AM IF MODULE
(Bottom View)

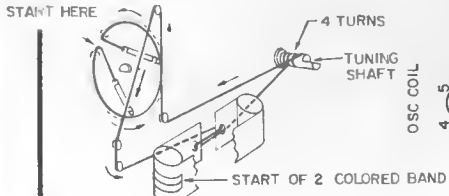

VARIABLE SHOWN
IN CLOSE POSITION

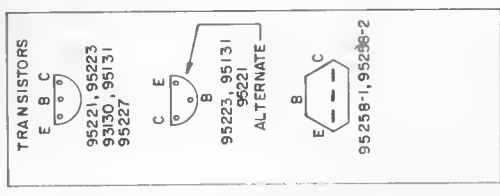


(ALL ARE BOTTOM VIEWS)

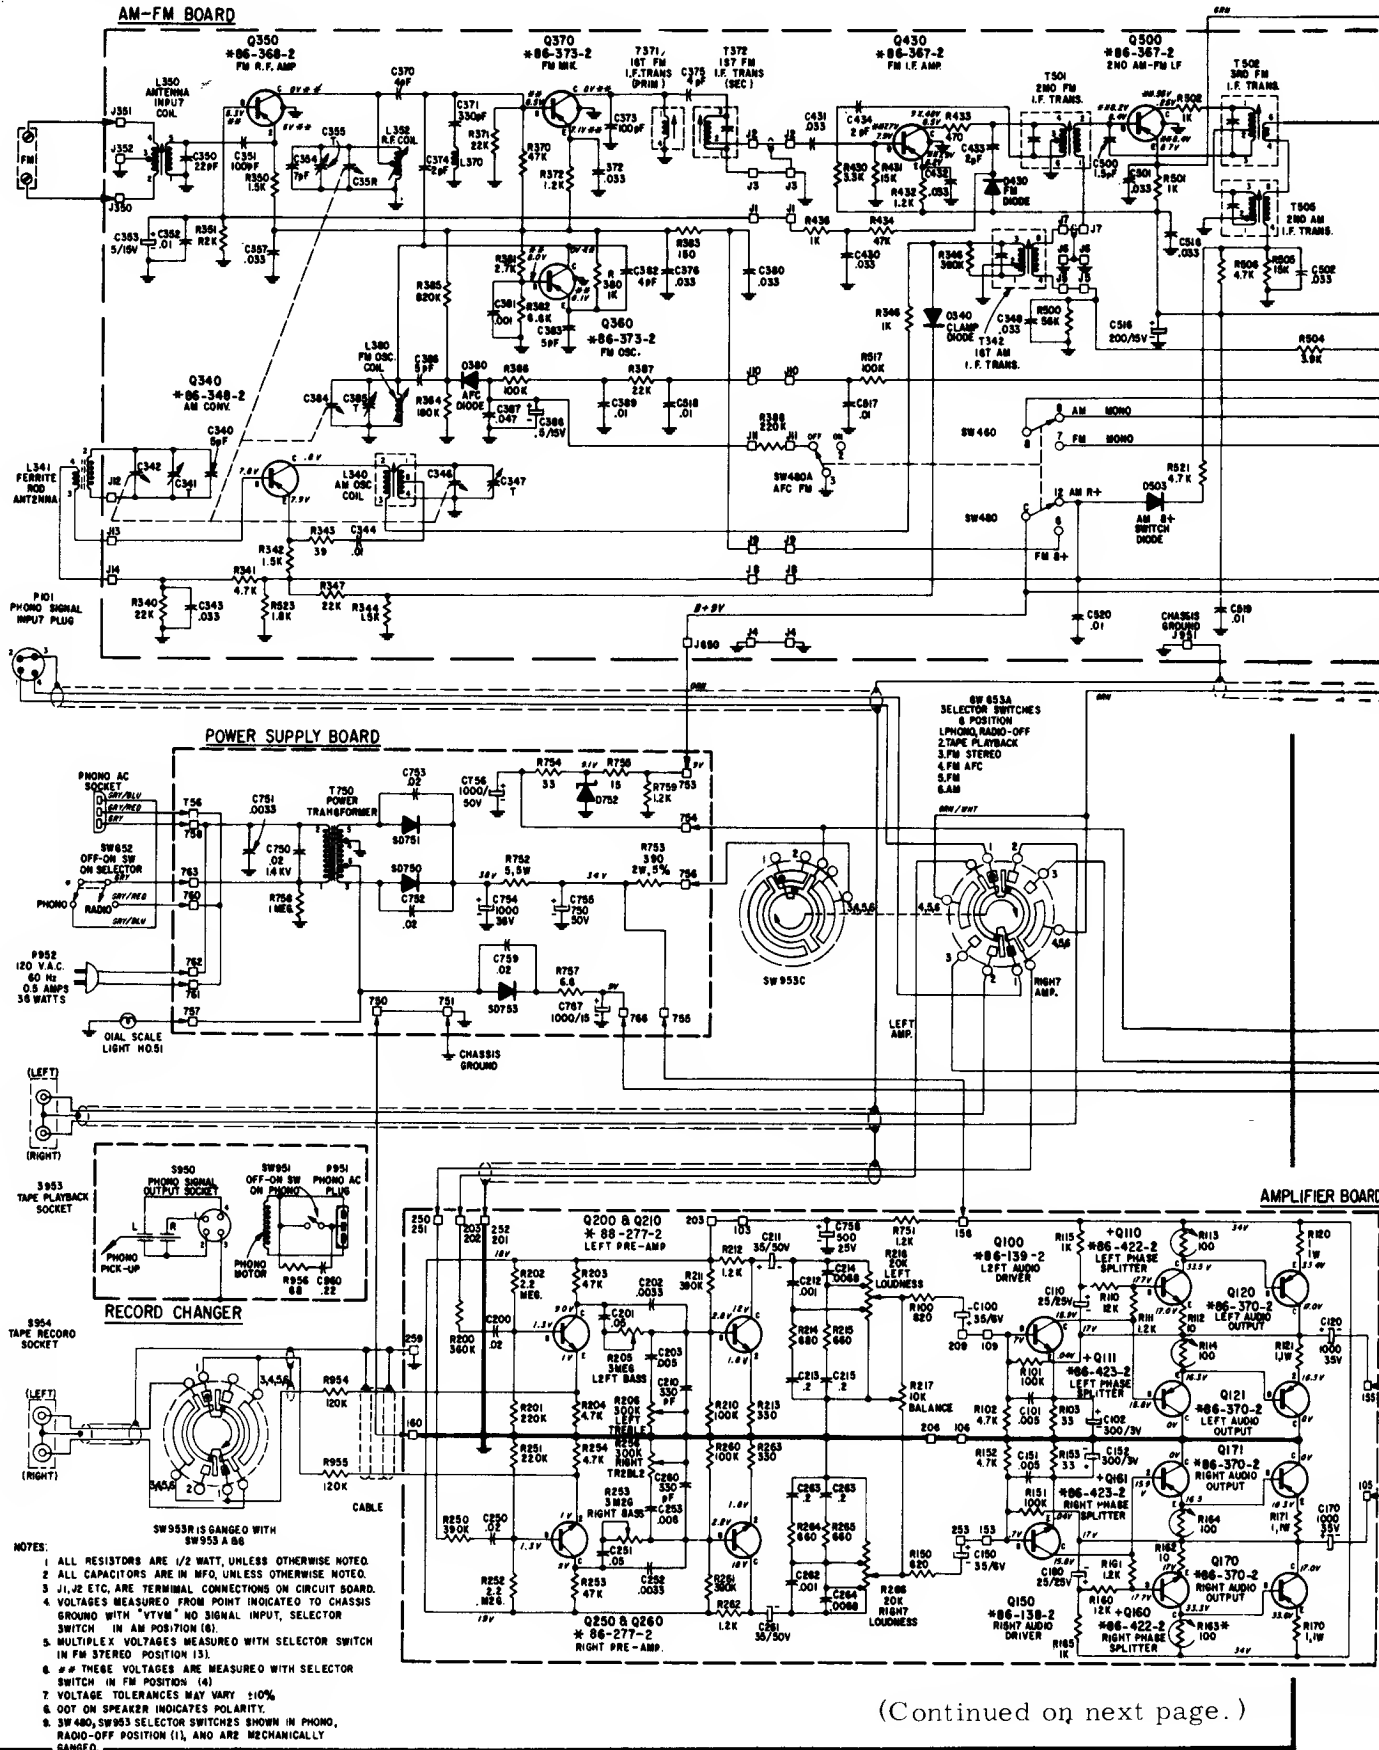


- NOTES:**
1. ALL RESISTORS ARE 1/2 WATT, UNLESS OTHERWISE NOTED.
 2. ALL CAPACITORS ARE IN MFD, UNLESS OTHERWISE NOTED.
 3. J1, R ETC. ARE TERMINAL CONNECTIONS ON CIRCUIT BOARD.
 4. VOLTAGES MEASURED FROM POINT INDICATED TO CHASSIS GROUND WITH "VTVM" NO SIGNAL INPUT, SELECTOR SWITCH IN AM POSITION (8).
 5. MULTIPLEX VOLTAGES MEASURED WITH SELECTOR SWITCH IN FM STEREO POSITION (13).
 6. * IN THESE VOLTAGES ARE MEASURED WITH SELECTOR SWITCH IN FM POSITION (4).
 7. VOLTAGE TOLERANCES MAY VARY ±10%.
 8. DOT ON SPEAKER INDICATES POLARITY.
 9. SW 480, SW 953 SELECTOR SWITCHES SHOWN IN PHONO, RADIO-OFF POSITION (1), AND ARE MECHANICALLY GANGED.

(Continued on next page.)


(Continued from preceding page)

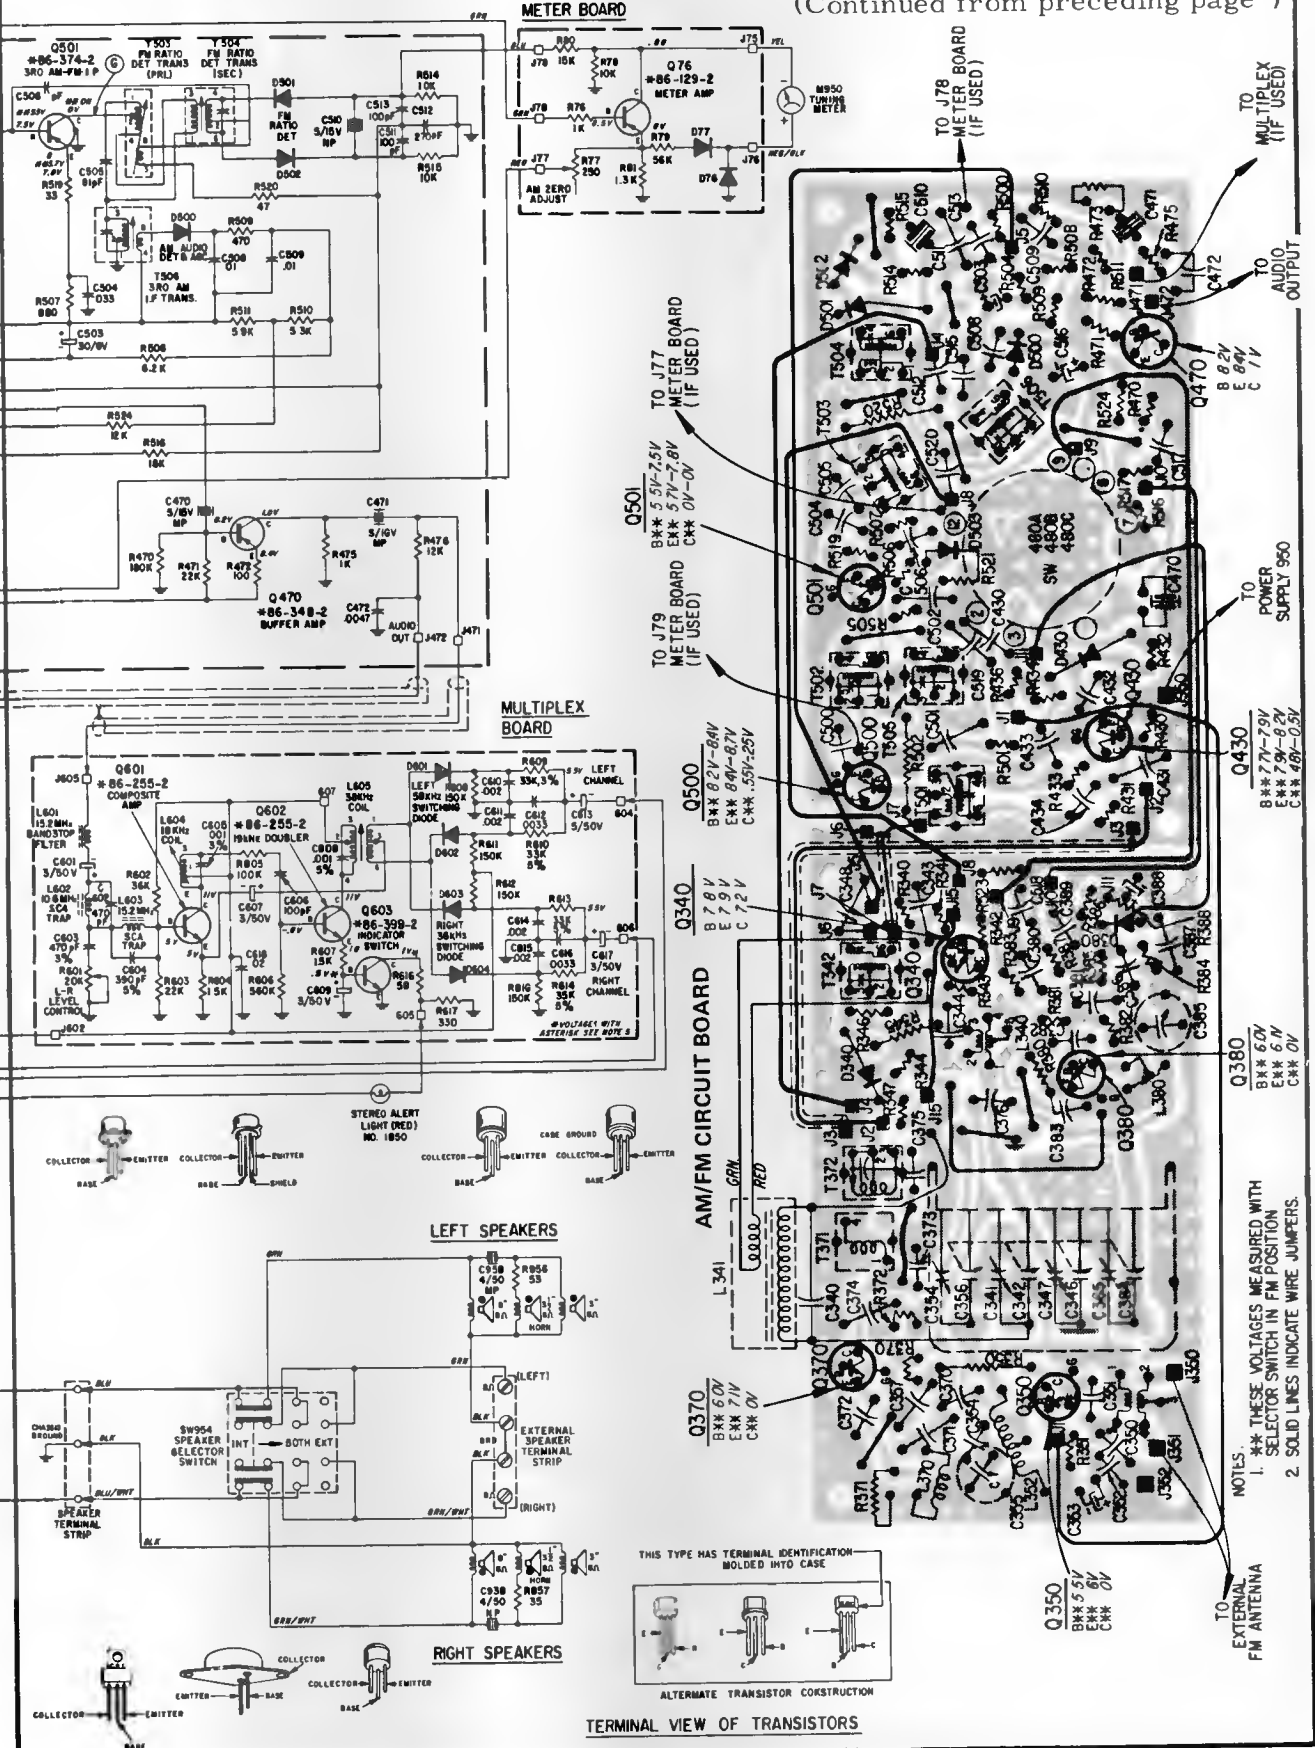


METER BOARD




MULTIPLEX BOARD

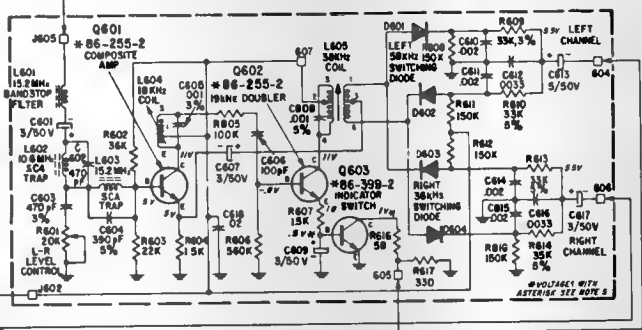


AM/FM CIRCUIT BOARD

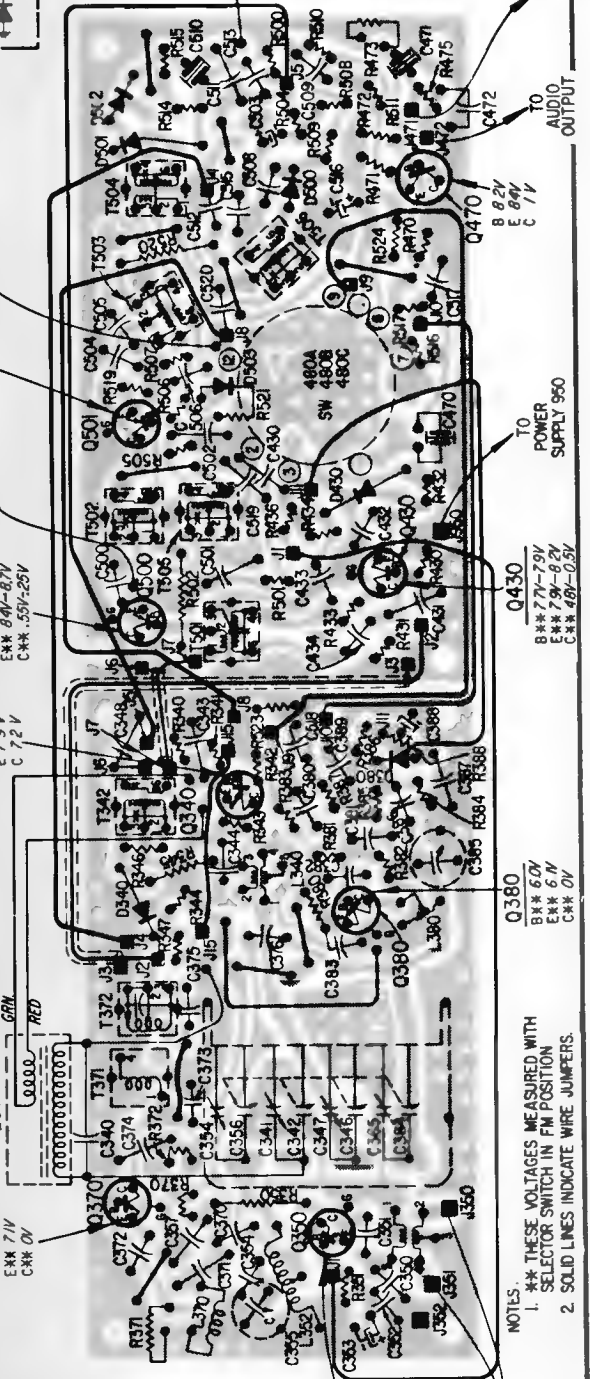

LEFT SPEAKERS

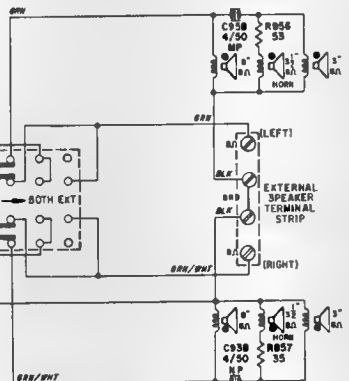

RIGHT SPEAKERS



TERMINAL VIEW OF TRANSISTORS

- NOTES:
 1. ** THESE VOLTAGES MEASURED WITH SELECTOR SWITCH IN FM POSITION
 2. SOLID LINES INDICATE WIRE JUMPERS.

SEARS CHASSIS 132,41801
MODEL 2263

Silvertone

AM IF 455 KC
FM IF 10.7 MC

TR8 9
25B56A2

TR7
25B54

TR6
25B54

TR2
25A240

TR1
25A525

TR5
25A471-2

TR4
25A471-2


TR3
25A471-1

TR1, TR2

TR3 TR4, TR5, TR6, TR7, TR8, TR9

S1, S2, S3, S4, S5
O1 AM
O2 FM


L6, T1, T2, T3, T6, T7, T8

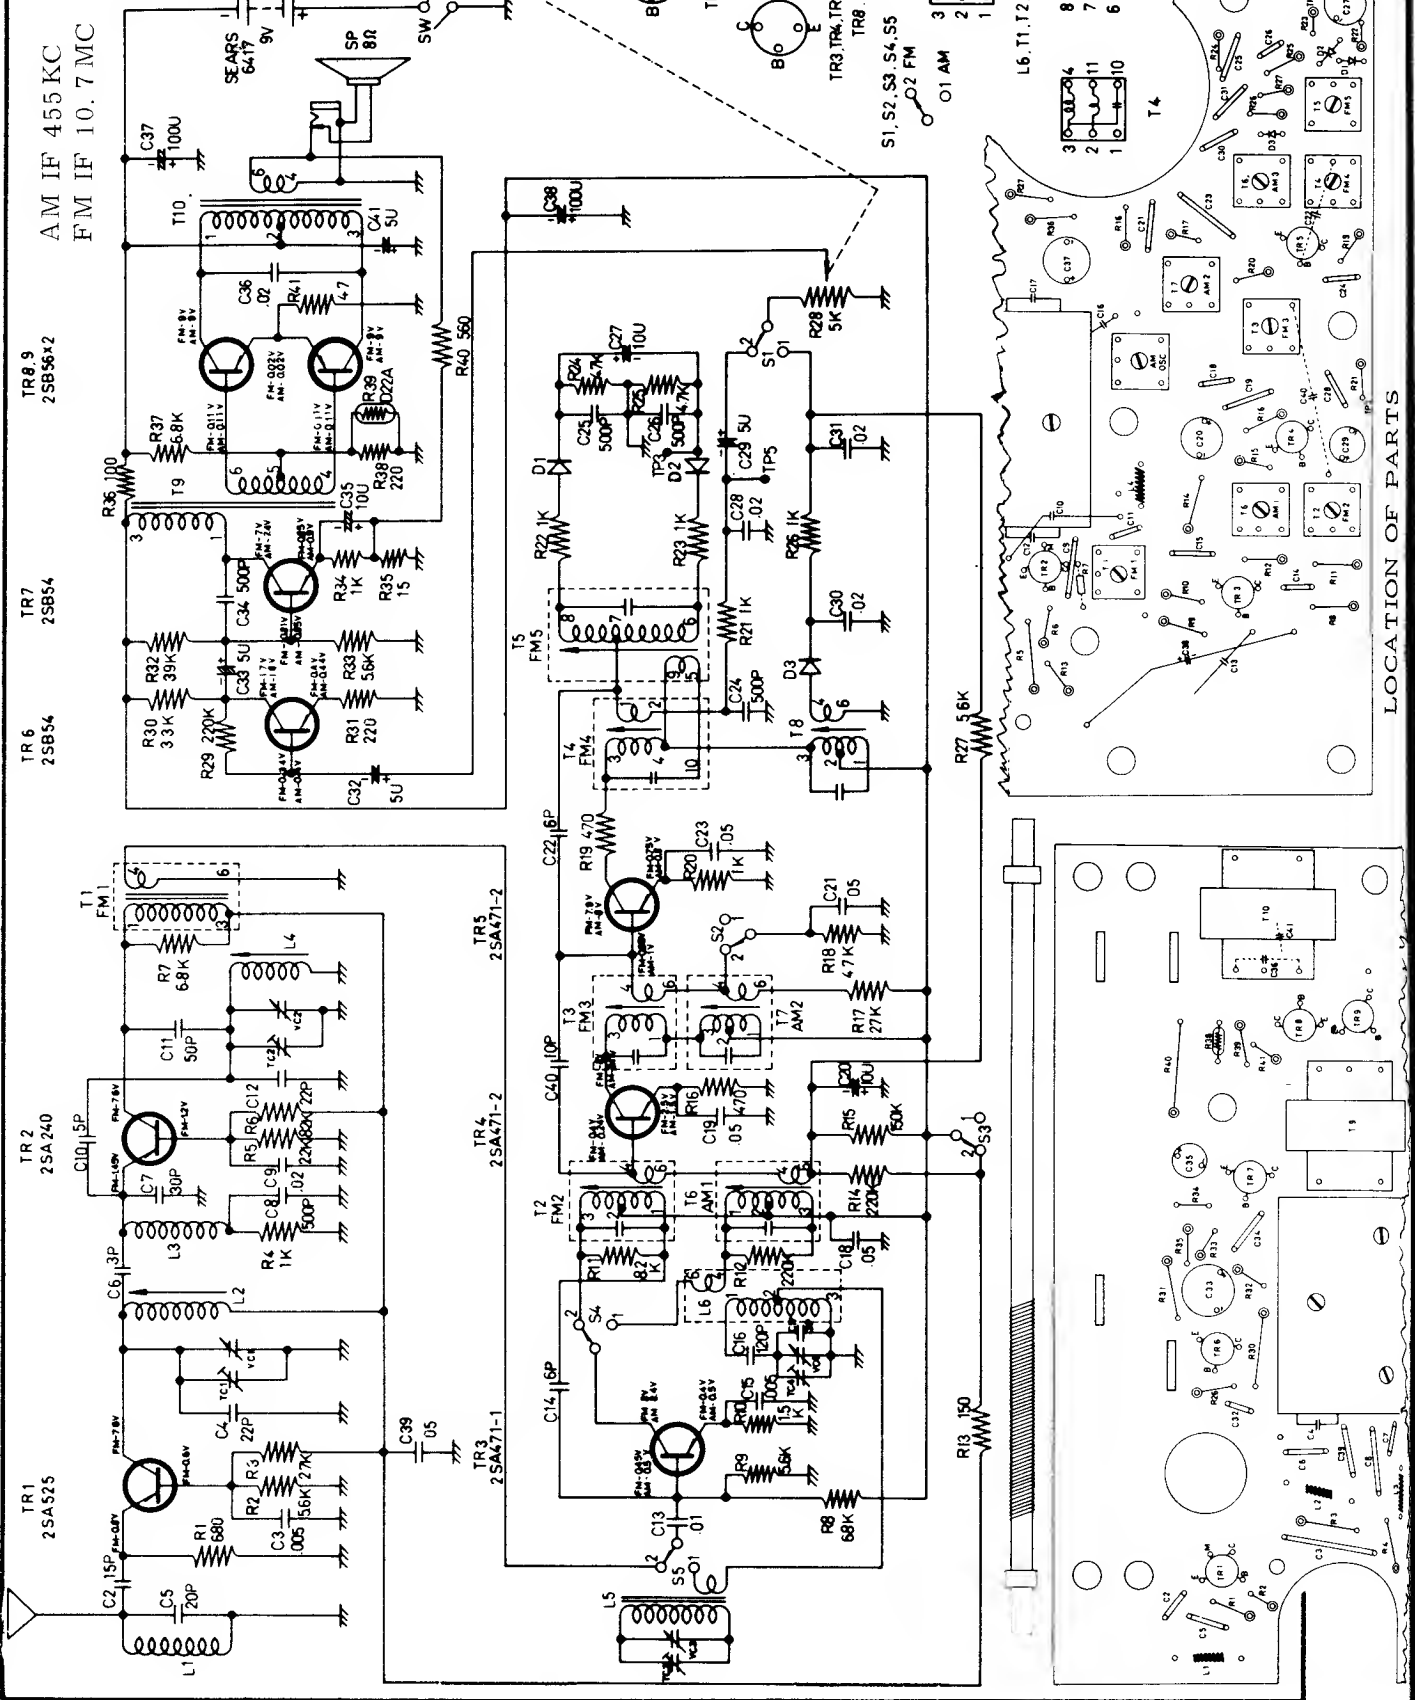



LOCATION OF PARTS




MODEL BP-110



- NOTES
1. FREQ. RANGE MW 520-1650kHz
 2. IF 455kHz
 3. CAPACITANCE VALUES ARE IN MFD P:MMFD
 4. RESISTANCE VALUES ARE IN OHMS K:1000
 5. VOLTAGE READINGS TO COMMON GROUND(+) ARE MEASURED WITH V-T-V-M UNDER NO SIGNAL CONDITIONS

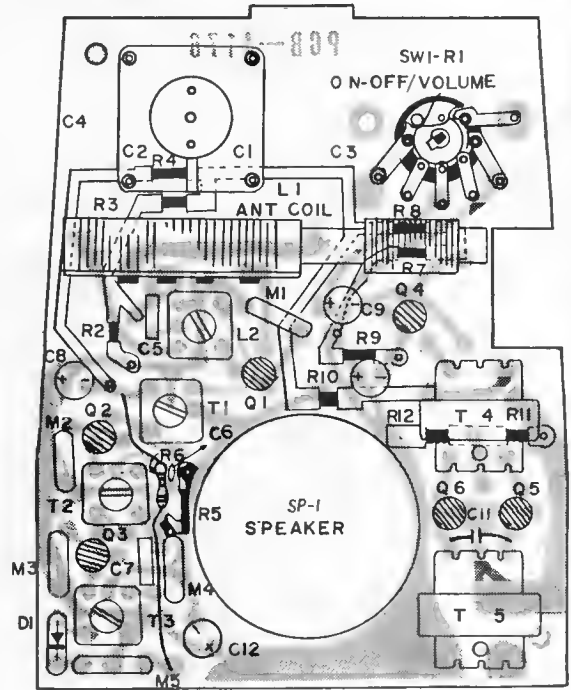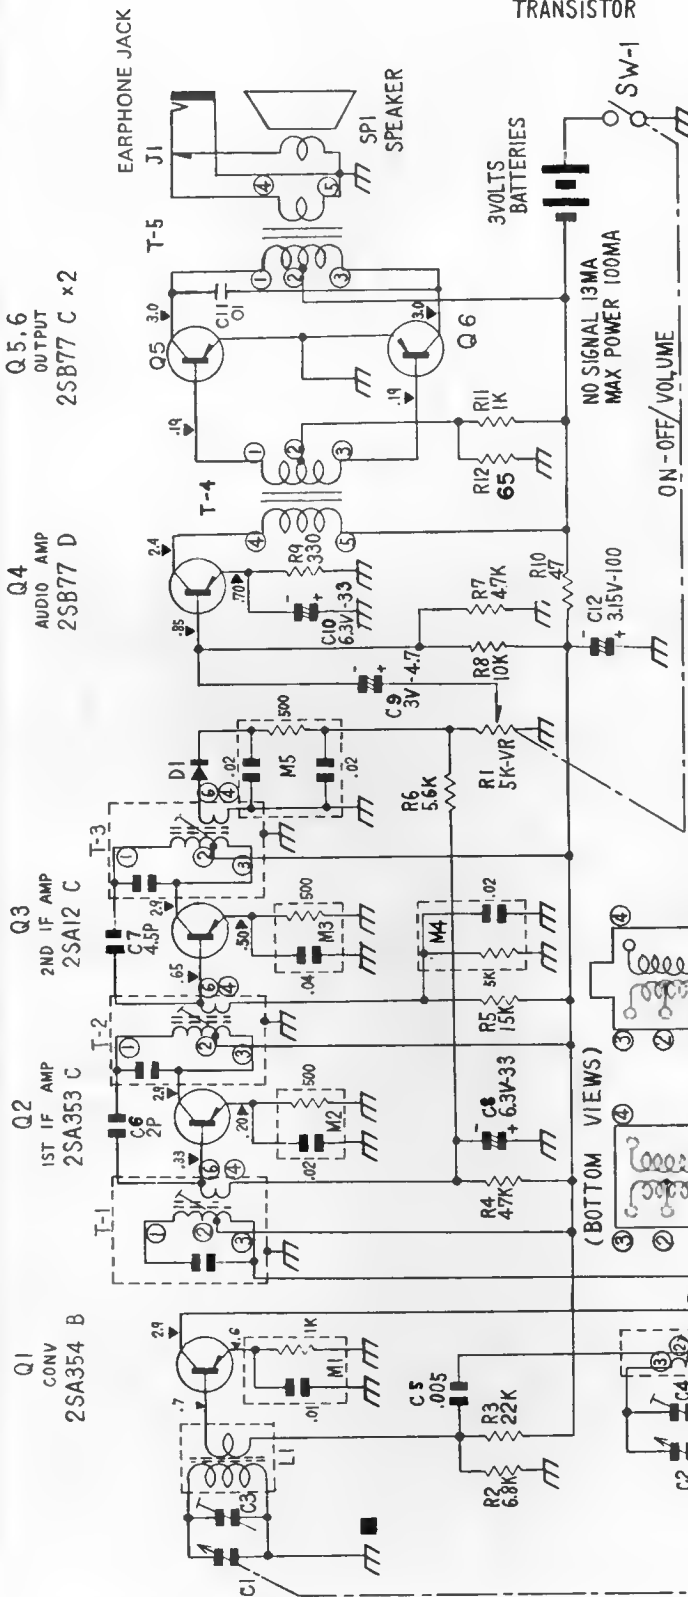


Component Side of Printed Circuit Board

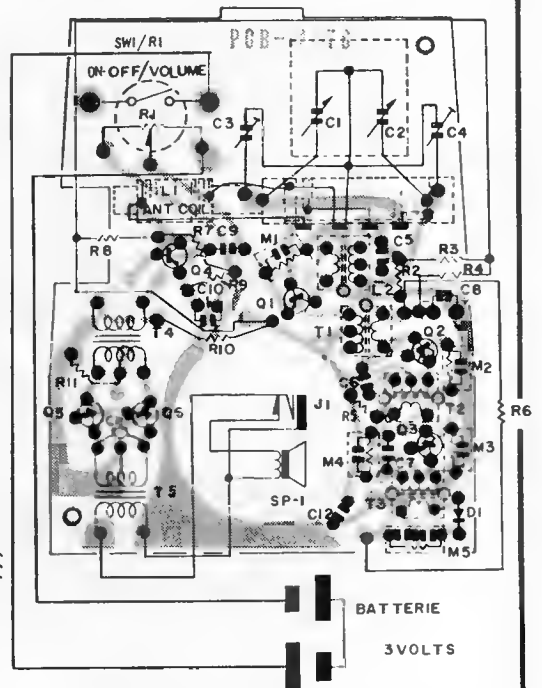

Wiring Side of Printed Circuit Board





MODEL BP-111

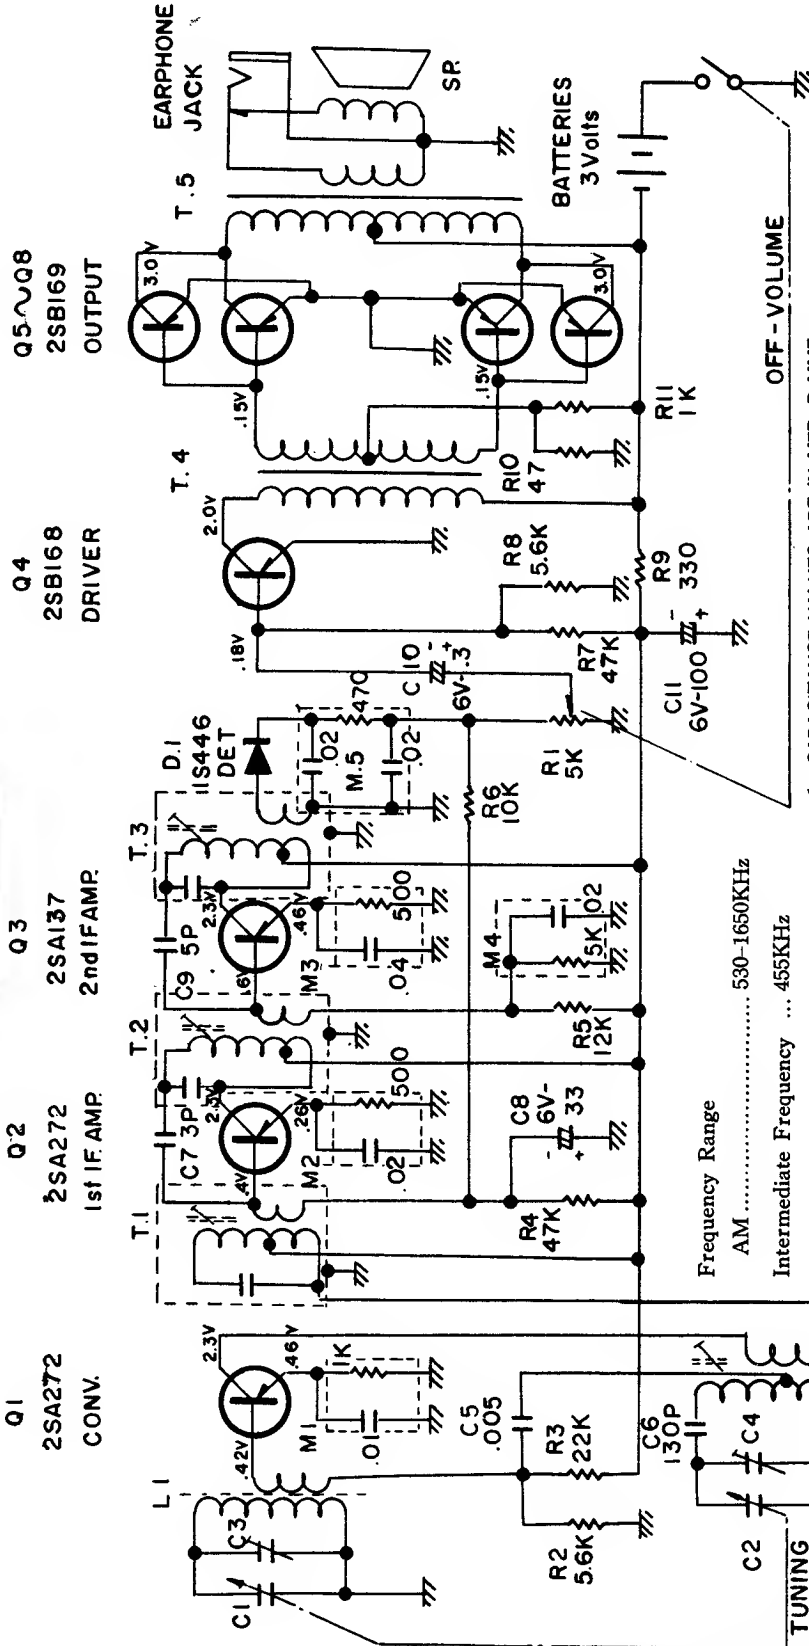

Frequency Range
 AM 530-1650KHz
 Intermediate Frequency ... 455KHz

1. CAPACITANCE VALUES ARE IN MFD. P=PMF
2. RESISTANCE VALUES ARE IN OHMS, K=1000
3. *FREQ RANGE 530-1650KHZ

TUNING OFF-VOLUME

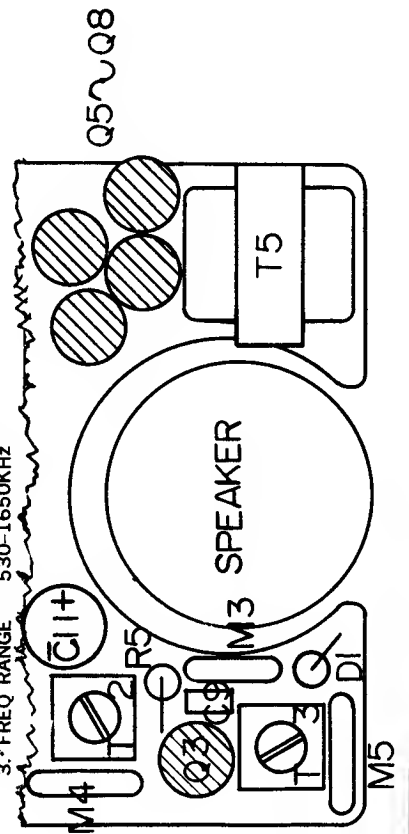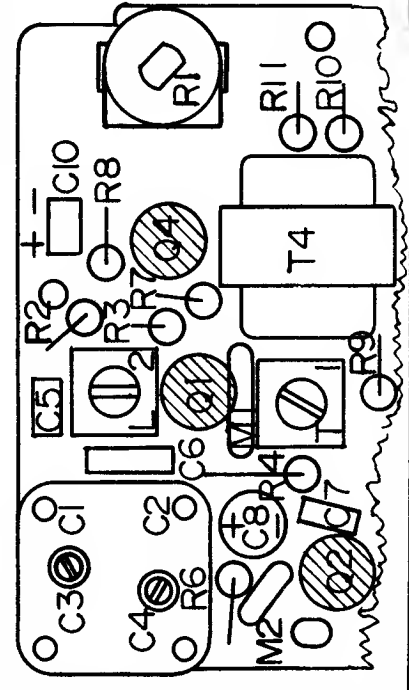

COMPONENT SIDE OF PRINTED CIRCUIT BOARD




MODEL FX-111A

Q1 FM RF AMP 2SA235A


Q2 AM FM CONV. 26A235A

Q4 1st IF AMP. 26A234B

Q5 2nd IF AMP. 26A234B

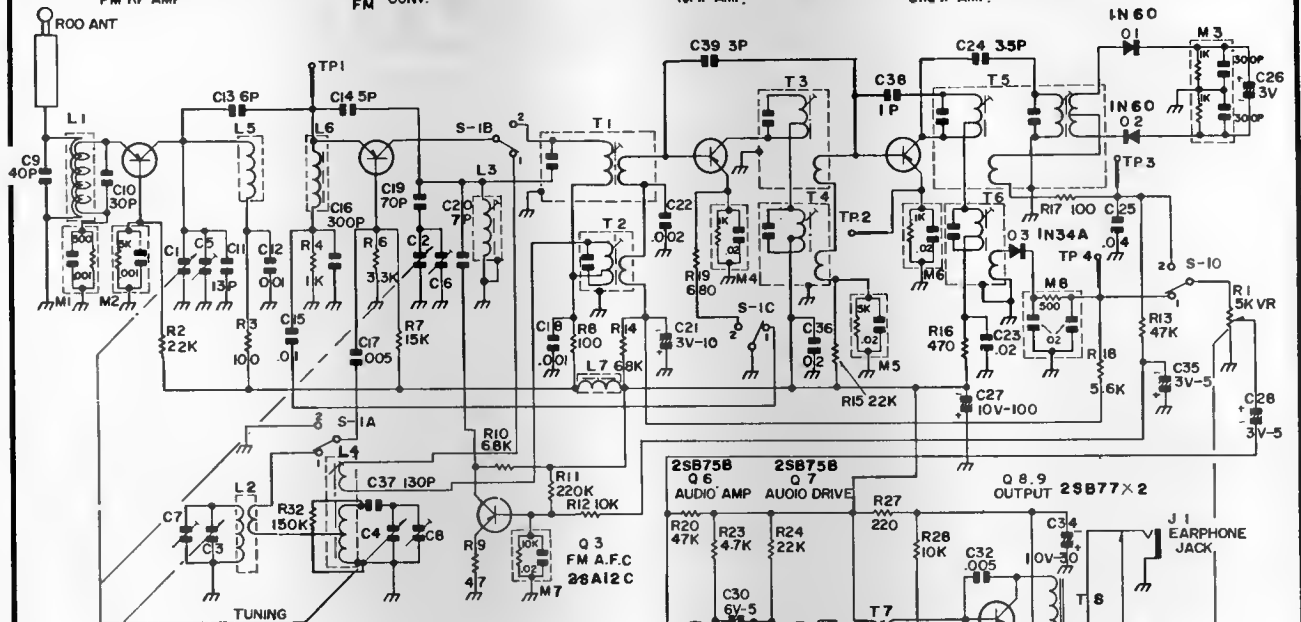

I. F.	A M	455	K C C
FREQ. RANGE	A M (1)	530 - 1650	K C C
	F M (2)	87.5 - 108	M C C
CAPACITANCE VALUES		P - PF or μ F	
RESISTANCE VALUES		OHMS	

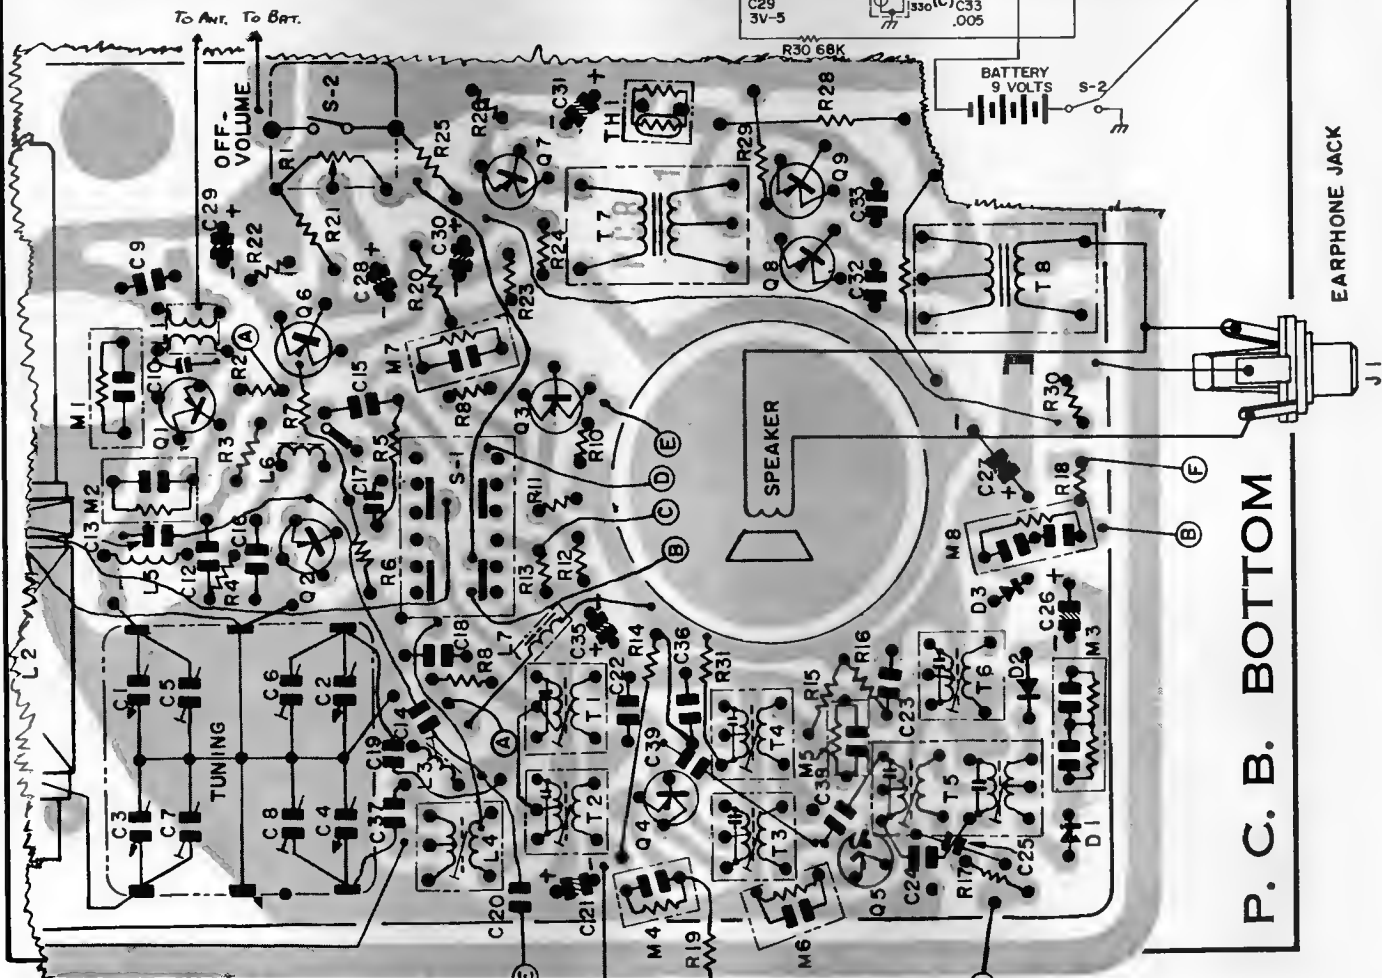

P. C. B. BOTTOM

SONY 8FC-69W

(Continued on next page.)

X101 2SC629



X102 2SC629

X201 2SC403A

X202 2SC403A

D101 IT26 D102 IT240

D201 IT26

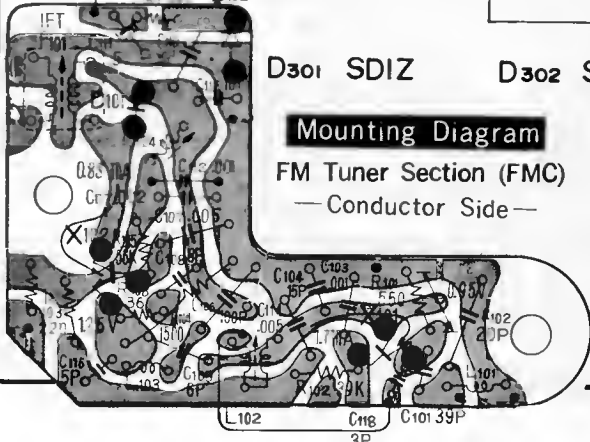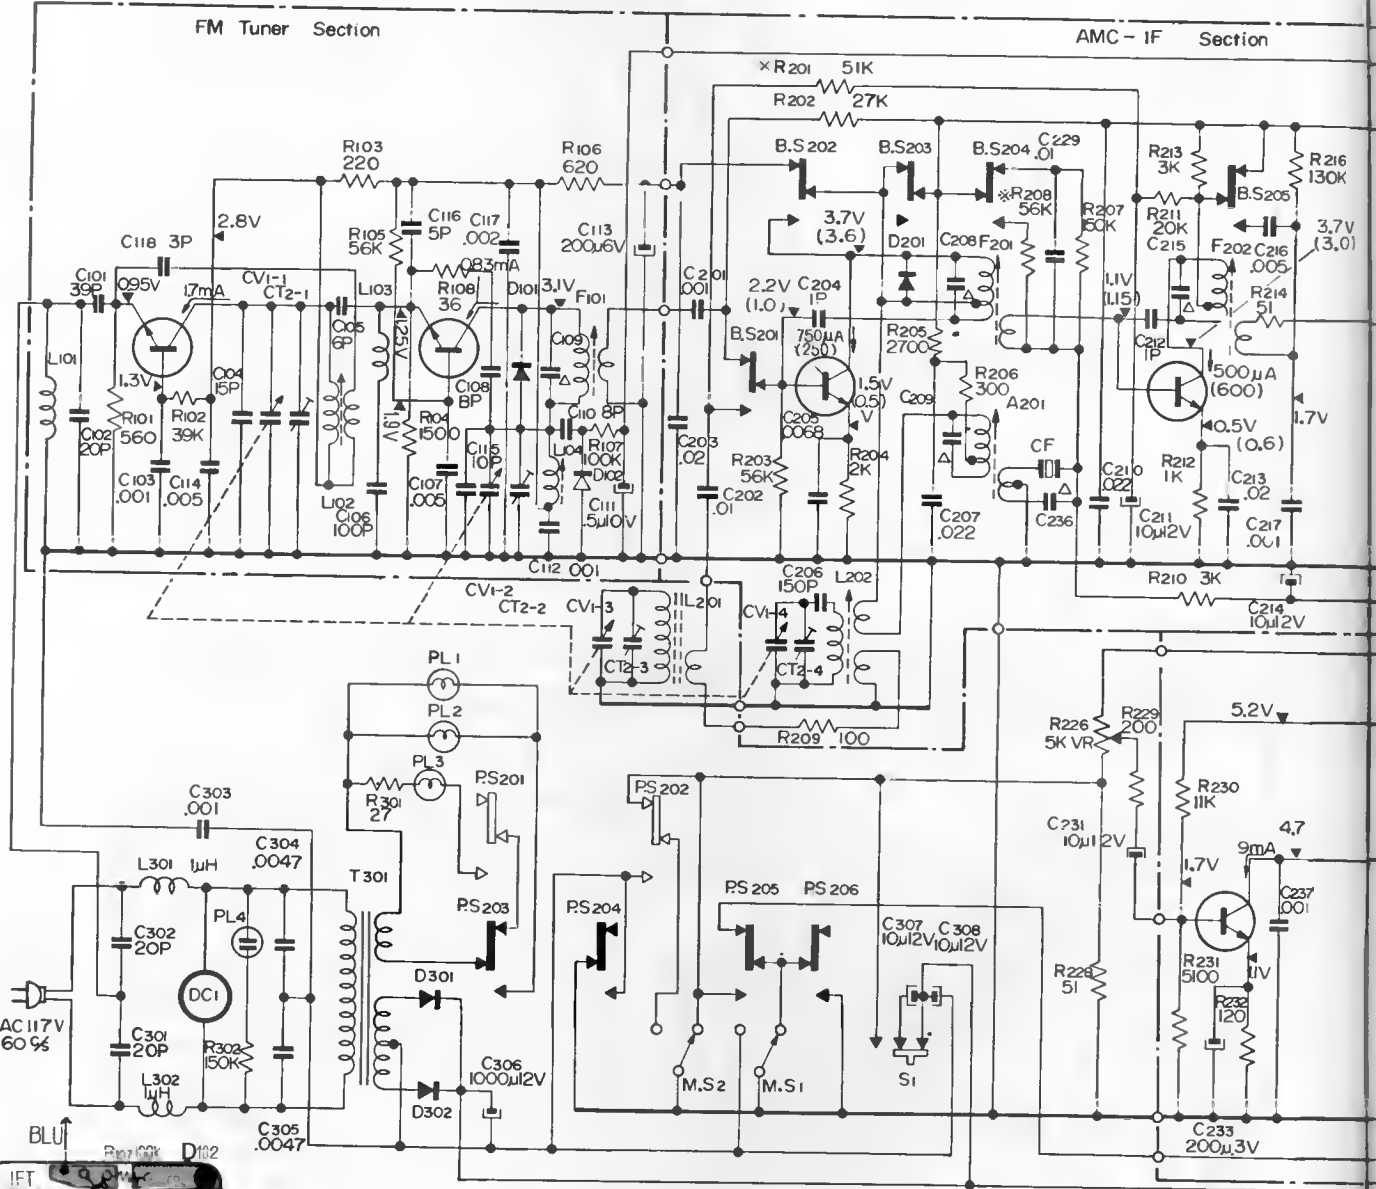

D301 SD1Z

D302 SD1Z

Mounting Diagram



FM Tuner Section (FMC)

— Conductor Side —

X101 2SC629
X102 2SC629

D102 IT-240

X204 2SC633





SONY

8FC-69W

(Continued from preceding page.)

X203 2SC403A

D204 1T23 D202,203 1T26

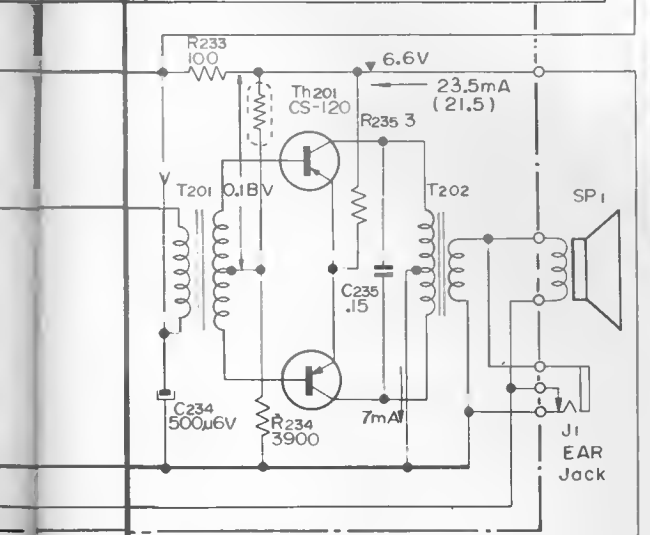
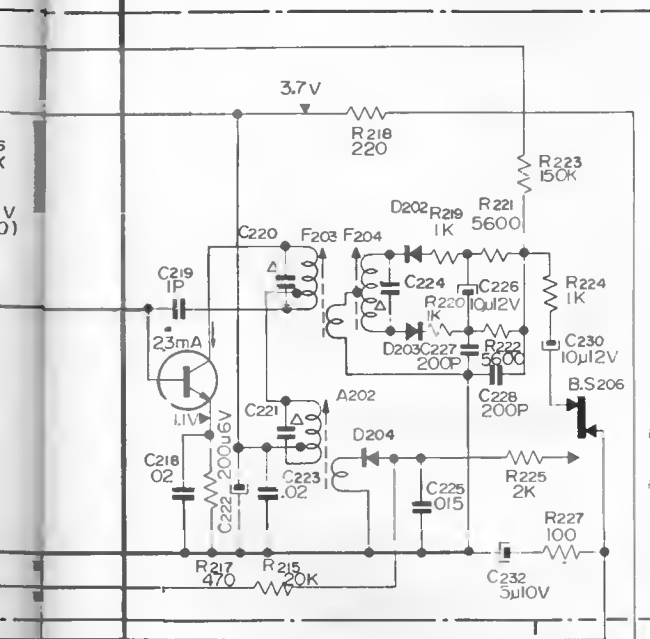


AF Section


X205, 206 2SB383

X201 2SC403
X202 2SC403
X203 2SC403
X204 2SC633

X205 2SB383
X206 2SB383



Mounting Diagram AMC-IF-AF Section

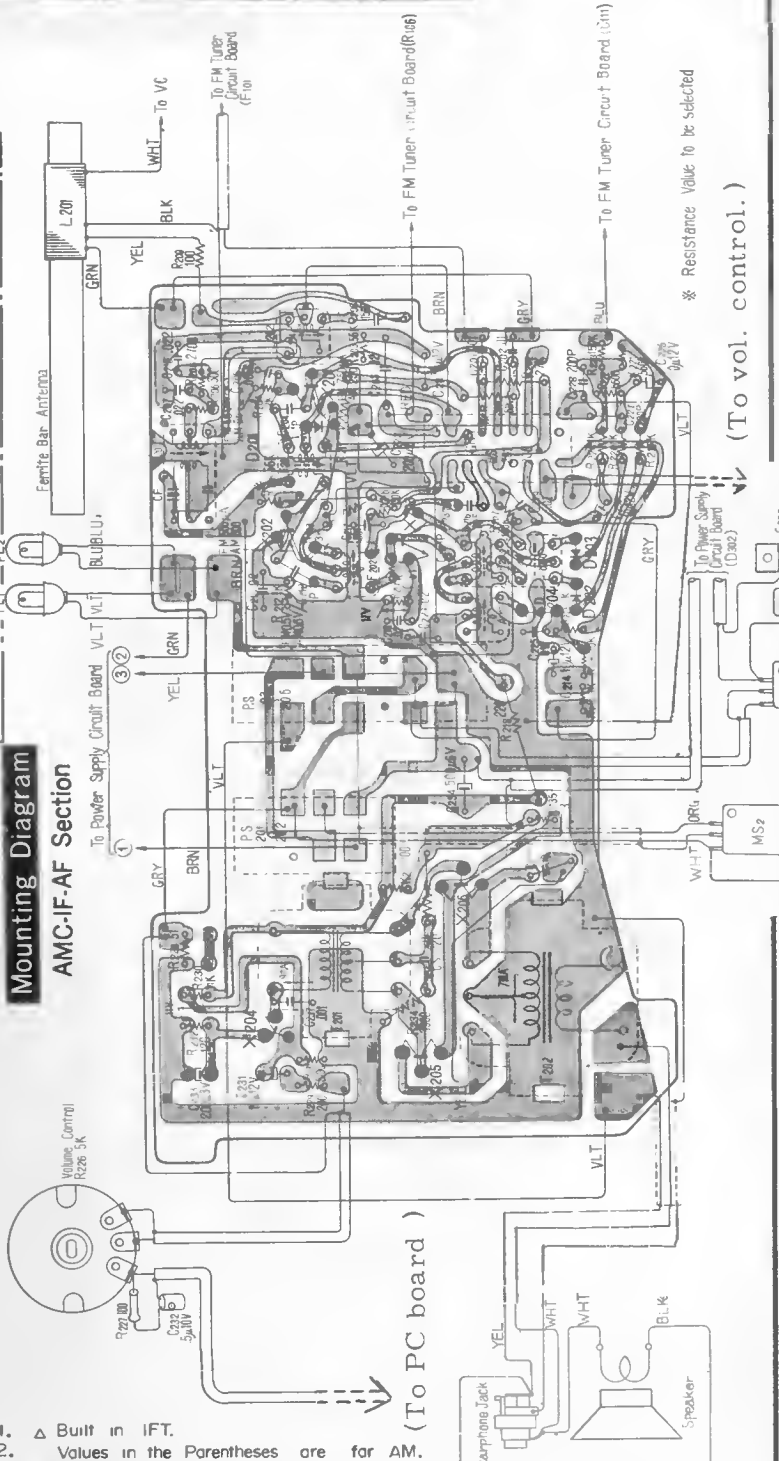


1. Δ Built in IFT.
2. Values in the Parentheses are for AM.
3. X: Resistance Value to be selected.
4. B.S201-206 : Band Setting Switch.
5. FM Bond Setting Switch shown is set to FM position.
- AM ▶
6. P.S201-202 : Automatic Switch.
7. P.S203-206 : Manual Switch.

Intermediate Frequency: FM 10.7 Mc AM 455 Kc

* Resistance Value to be selected
(To vol. control.)


(To PC board)




SONY

6RC-23

X1 2SA201 X2 2SC537 X3 2SC537 X4 2SB186 X5,6 2SB187
 D1 IS426G Th 23D27

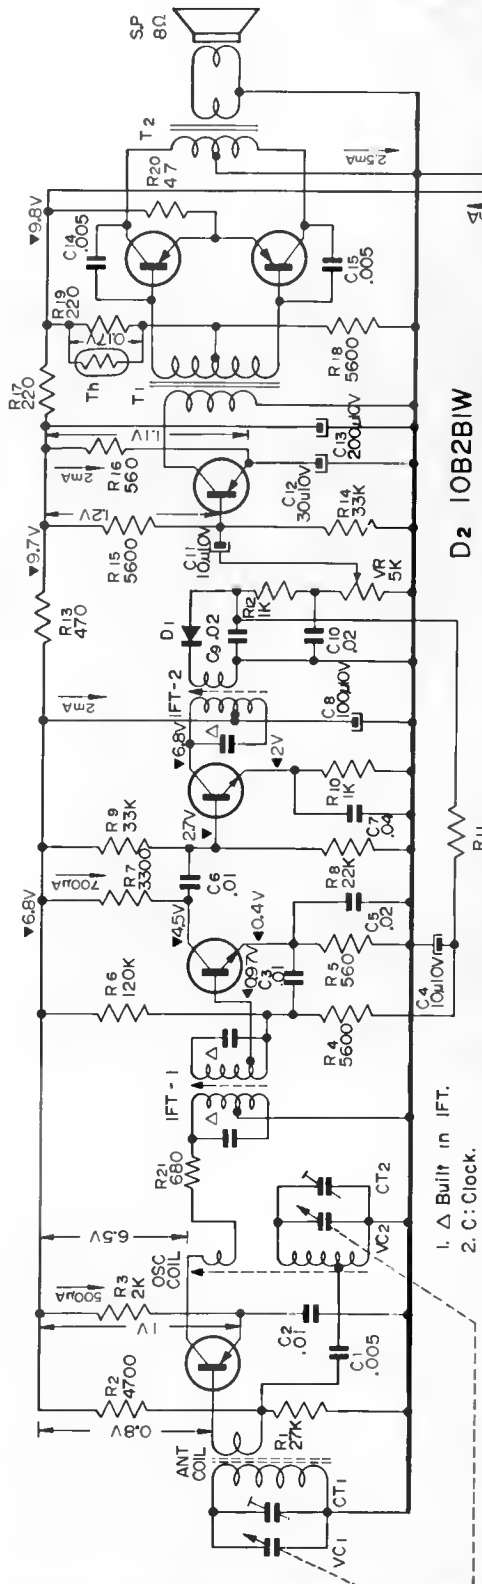

D2 10B2BIW

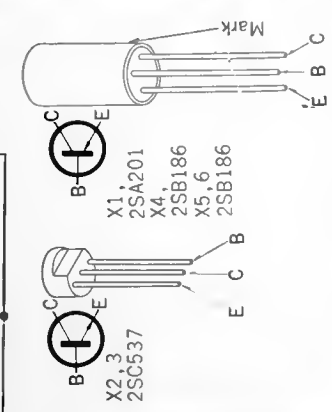

Mounting Diagram


— Conductor Side —

Antenna System: Built-in Ferrite Bar Antenna
Intermediate Frequency: 455 Kc
Maximum Sensitivity: 100 µV/m (at 50mW output)
Selectivity: 20 dB at 10 Kc off resonance, at 1,400 Kc
Power Output: 300 mW (undistorted)
 450 mW (maximum)
Speaker: 2 1/2" (60mm) PM dynamic, impedance 8Ω
Power Requirement: AC 110-120V, 60 c/s, 5 W

SYLVANIA

MODELS: AK55, AK60, AK70, AT50

Chassis U50-3, 4, 6

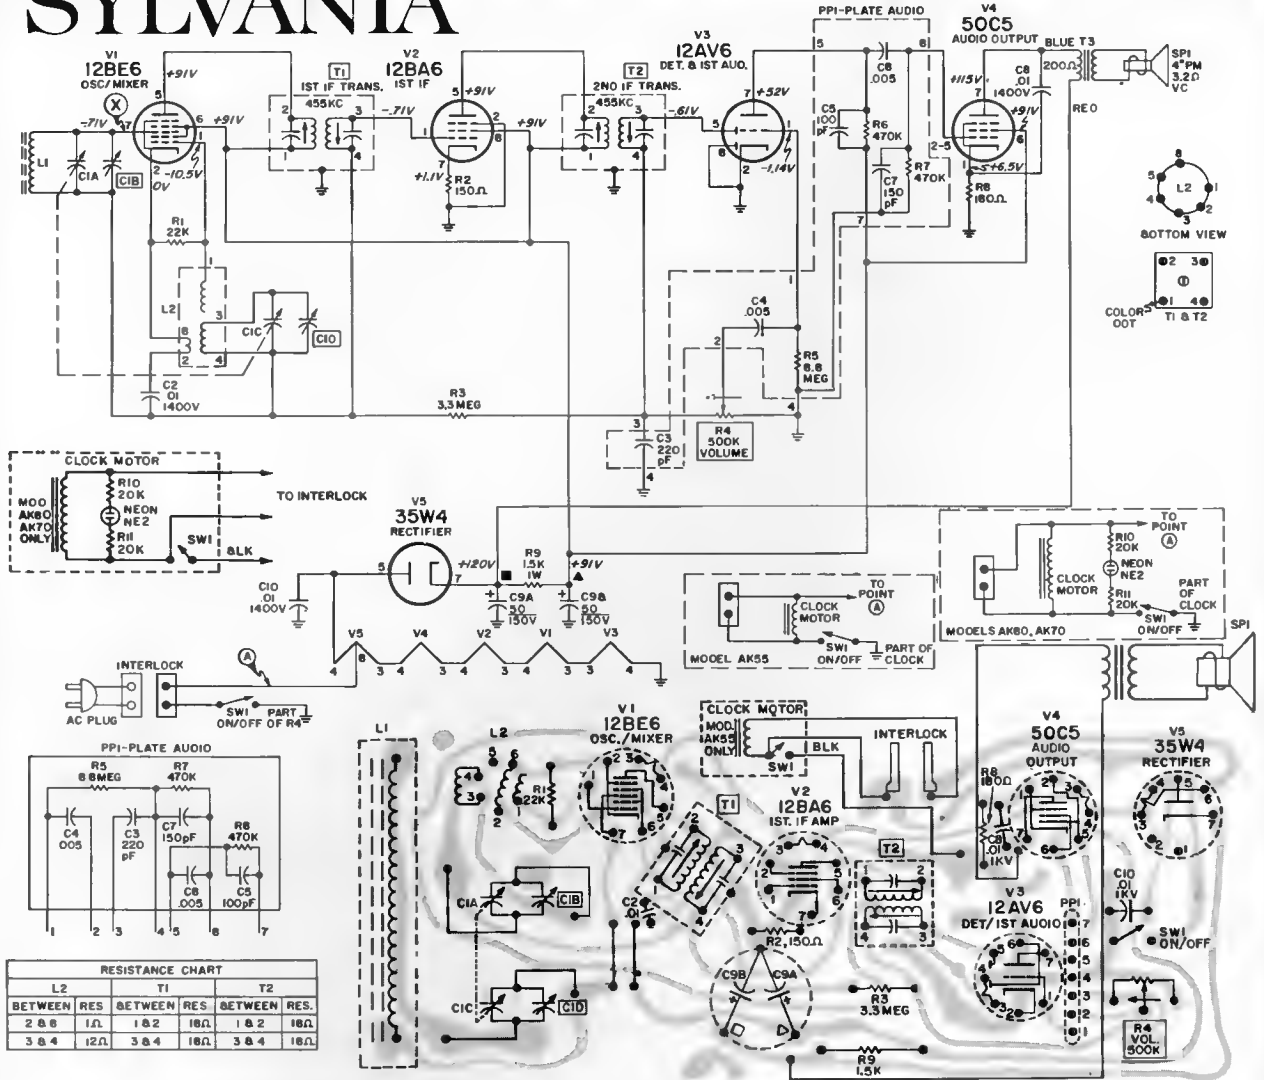

RESISTANCE CHART


L2		T1		T2	
BETWEEN	RES.	BETWEEN	RES.	BETWEEN	RES.
2 & 6	1Ω	1 & 2	18Ω	1 & 2	18Ω
3 & 4	12Ω	3 & 4	18Ω	3 & 4	18Ω

BOTTOM VIEW


STEP	TUNING CAPACITOR SETTING	TEST EQUIPMENT HOOK-UP	GENERATOR FREQUENCY	ADJUSTMENT POINT	ADJUST FOR
1	Fully open	SIGNAL GENERATOR - "Hot" lead thru a 200pF capacitor to test point (X). Ground lead to chassis AC VOLTMETER - Across speaker voice coil.	455 KC 400 CPS 30% MOD.	T2 Bottom Core T2 Top Core T1 Bottom Core T1 Top Core	Maximum Meter Reading
2	Same as Step 1	SIGNAL GENERATOR - Radiate signal to receiver thru a loop of several turns of wire. AC VOLTMETER - Same as Step 1.	1625 KC 400 CPS. 30% MOD.	CID Trimmer	Maximum Meter Reading
3	1400 KC	Same as Step 2	Set generator to a frequency corresponding to receiver tuning capacitor setting (until signal is heard thru receiver speaker).	CIB Trimmer	Maximum Meter Reading

SYLVANIA


MODELS: BT44, BT46, BK54, BK56 (Continued on next page.)

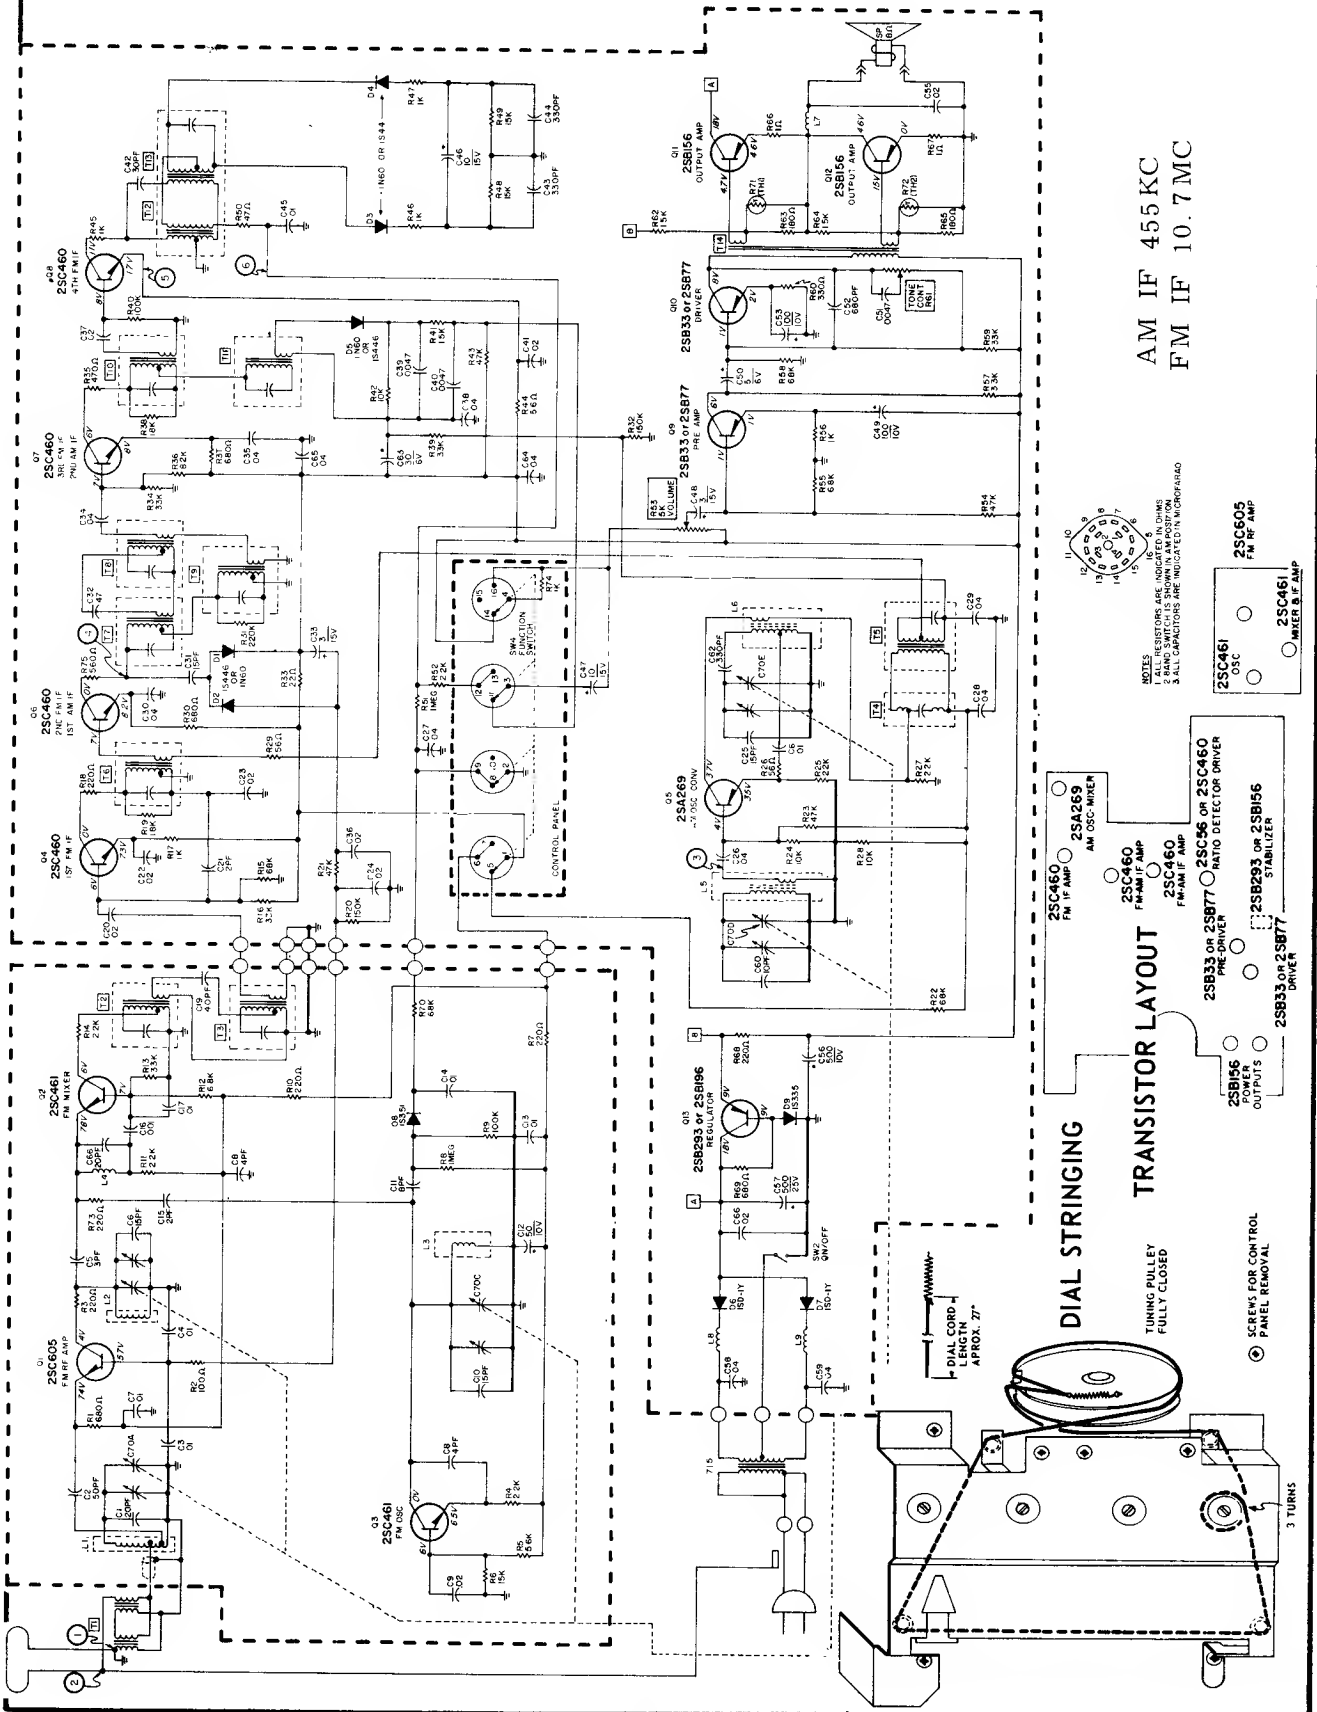


AM IF 455 KC
FM IF 10.7 MC



TRANSISTOR LAYOUT

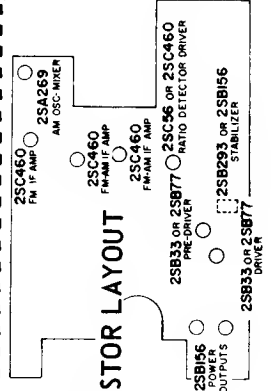


DIAL STRINGING
TUNING PULLEY FULLY CLOSED
3 SCREWS FOR CONTROL PANEL REMOVAL

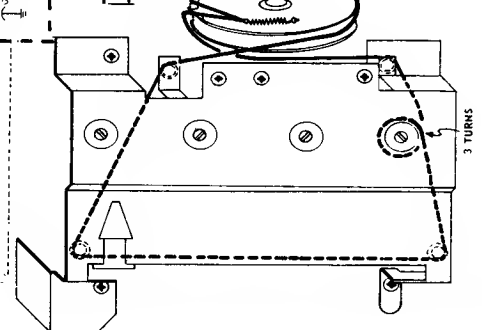

SYLVANIA



MODELS: BT44, BT46, BK54, BK56

(Continued from preceding page)





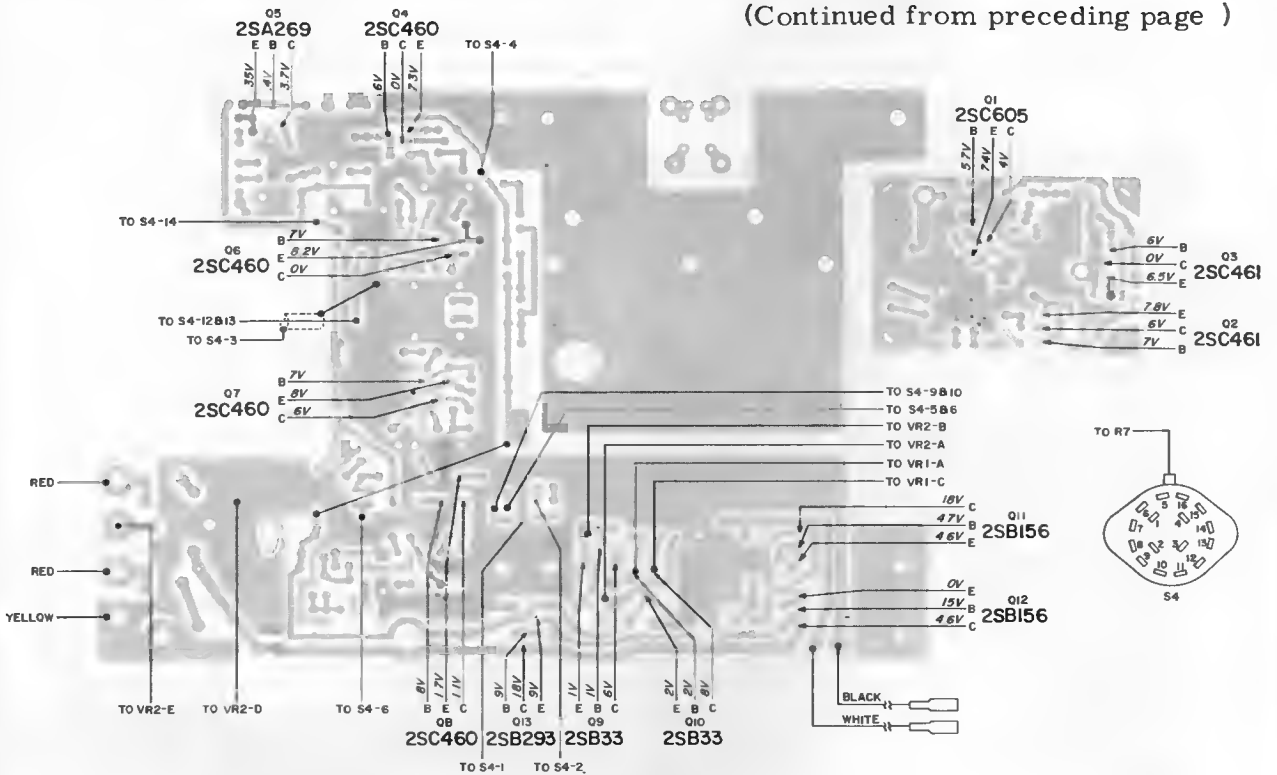


PRINTED PANEL ASSEMBLY BOTTOM VIEW

TOP PARTS LAYOUT - RF BOARD

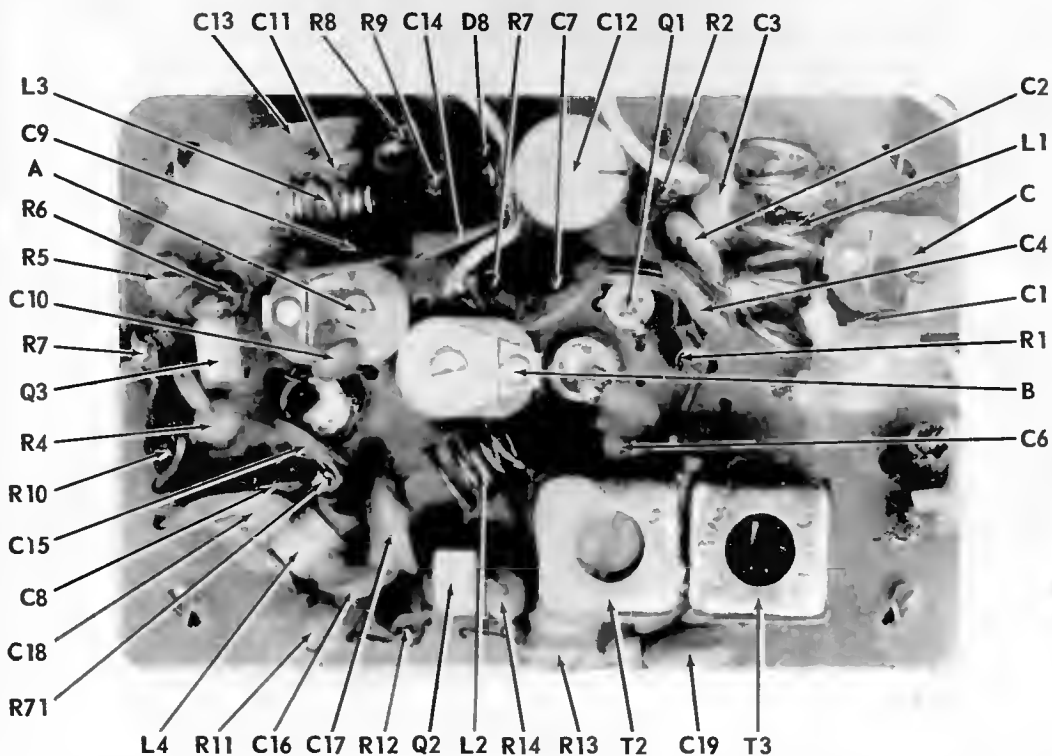


SYLVANIA Models SK30, SK35, SK40, ST10; Chassis 354-1, 355-1, 358-1, 359-1

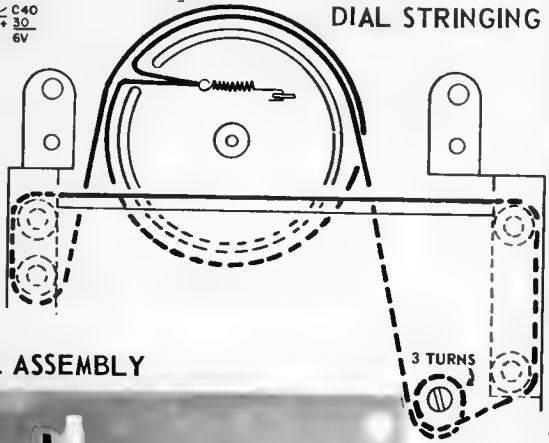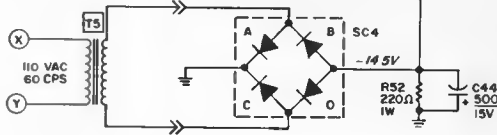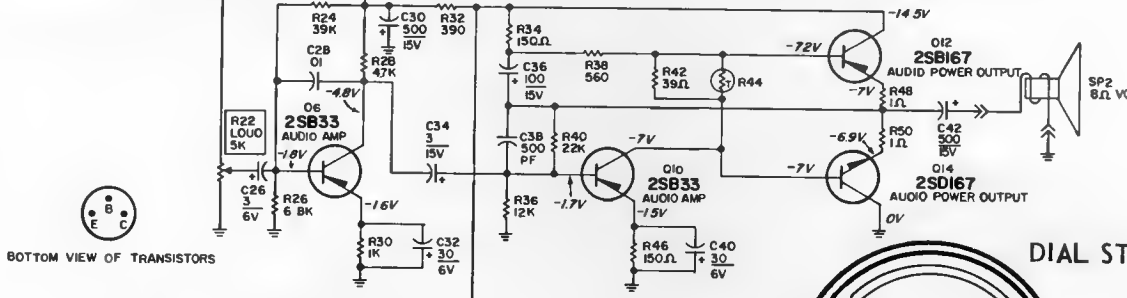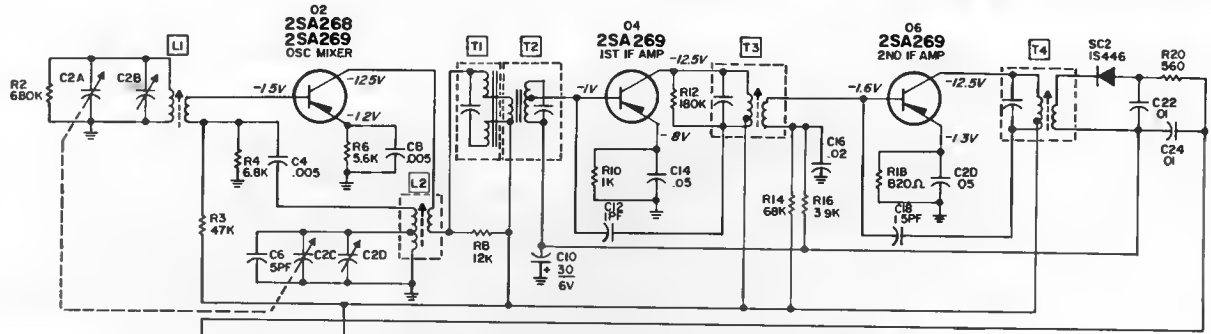

PRINTED PANEL ASSEMBLY

- SCHEMATIC NOTES**
1. LINE VOLTAGE SET AT 120 VOLT, 60 CYCLE.
 2. VOLTAGES SHOWN ARE AVERAGE READINGS MEASURED TO CHASSIS GROUND WITH NO SIGNAL, MINIMUM VOLUME SETTING AND VARIABLE CAPACITOR FULLY OPEN. VARIATIONS MAY BE NOTED DUE TO NORMAL PRODUCTION TOLERANCES.
 3. ALL CAPACITORS ARE IN MICROFARADS UNLESS OTHERWISE SPECIFIED.
 4. ALL RESISTORS ARE 10%, 1/2 WATT UNLESS OTHERWISE SPECIFIED.
 5. INTERMEDIATE FREQUENCY (IF), 455 KC
 6. ⏏ DESIGNATES CHASSIS GROUND

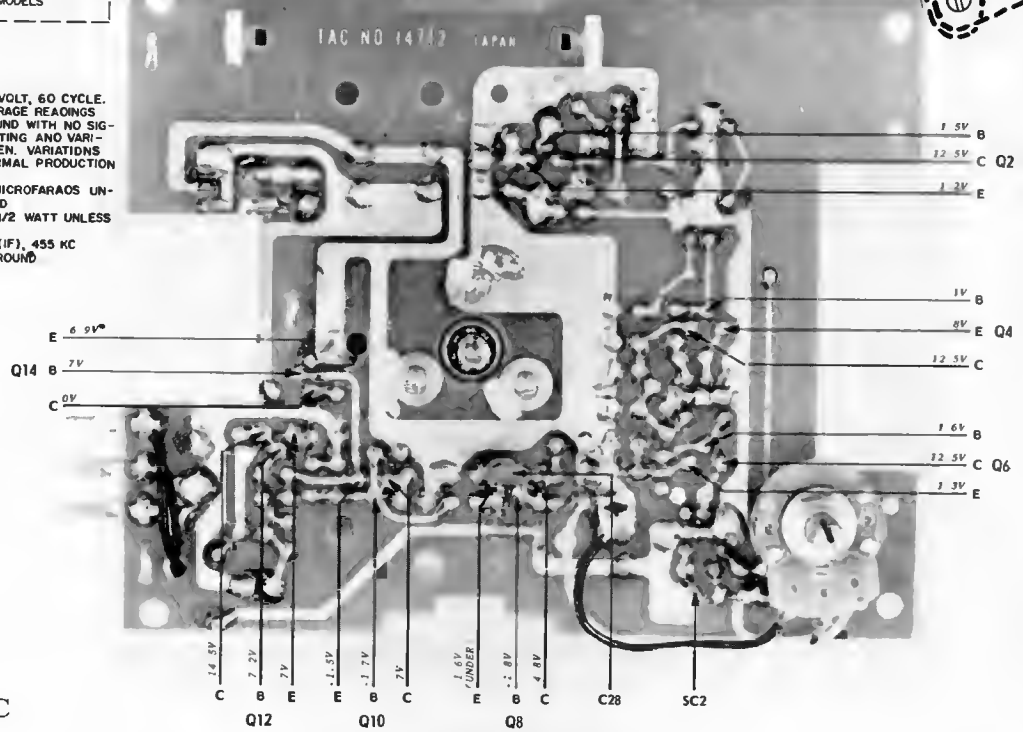




IF 455 KC

BOTTOM VIEW

SYLVANIA


Model TR74; Chassis 328-2

All capacitors in microfarads unless otherwise specified.
Intermediate frequency (IF), 455 KC.
All resistors are 1/4W - 10% unless otherwise specified.

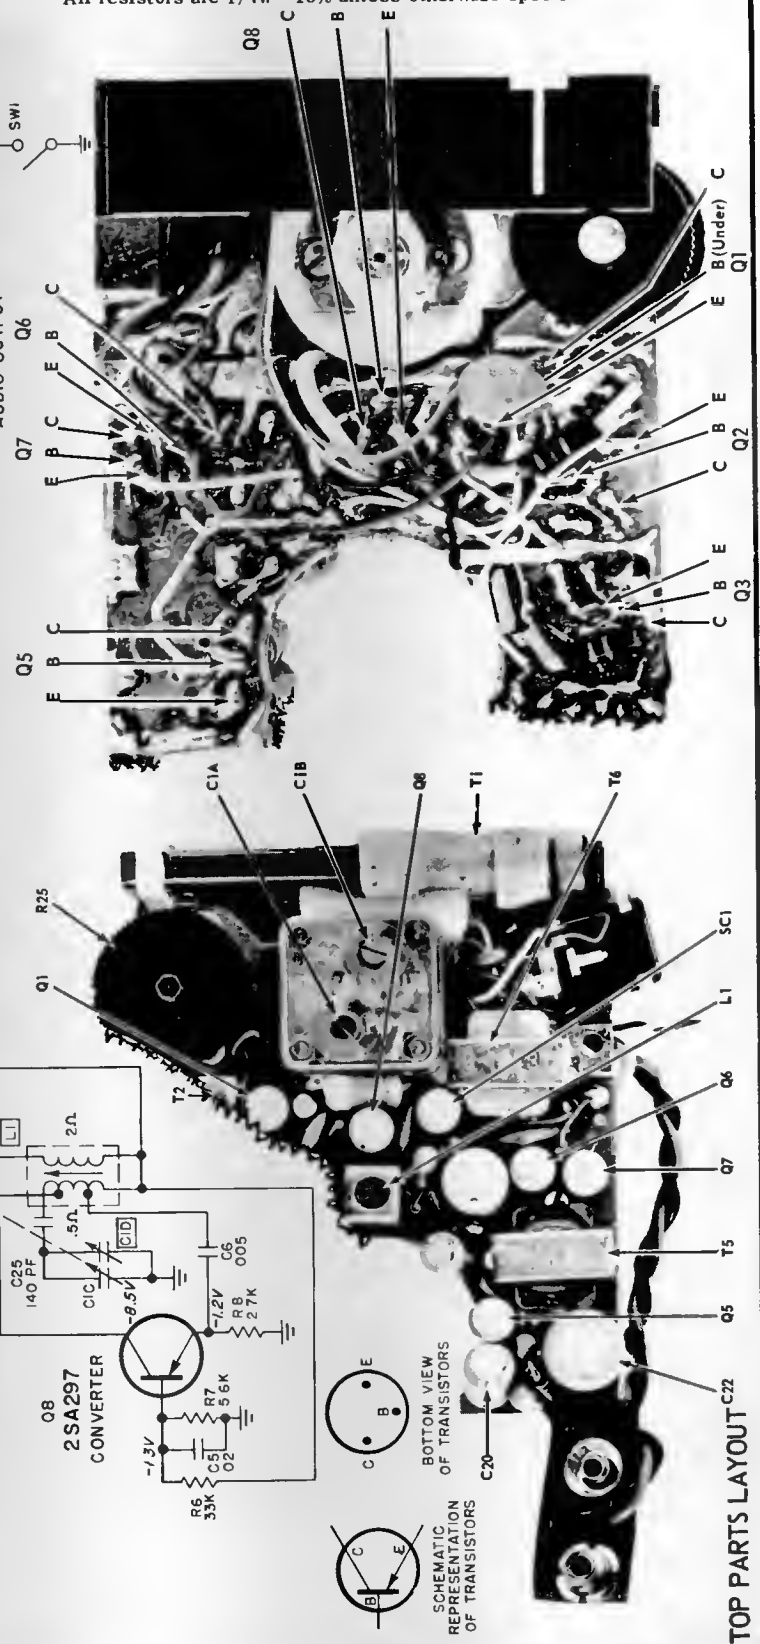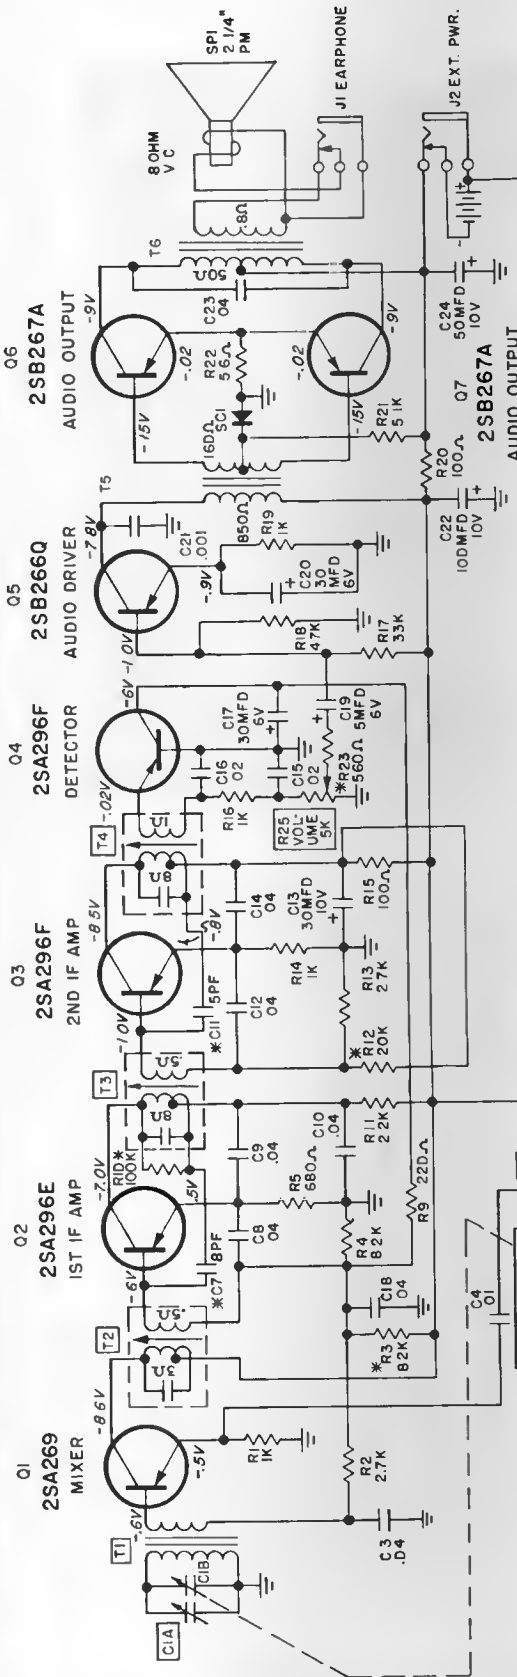


TOP PARTS LAYOUT

SYLVANIA Model TR106

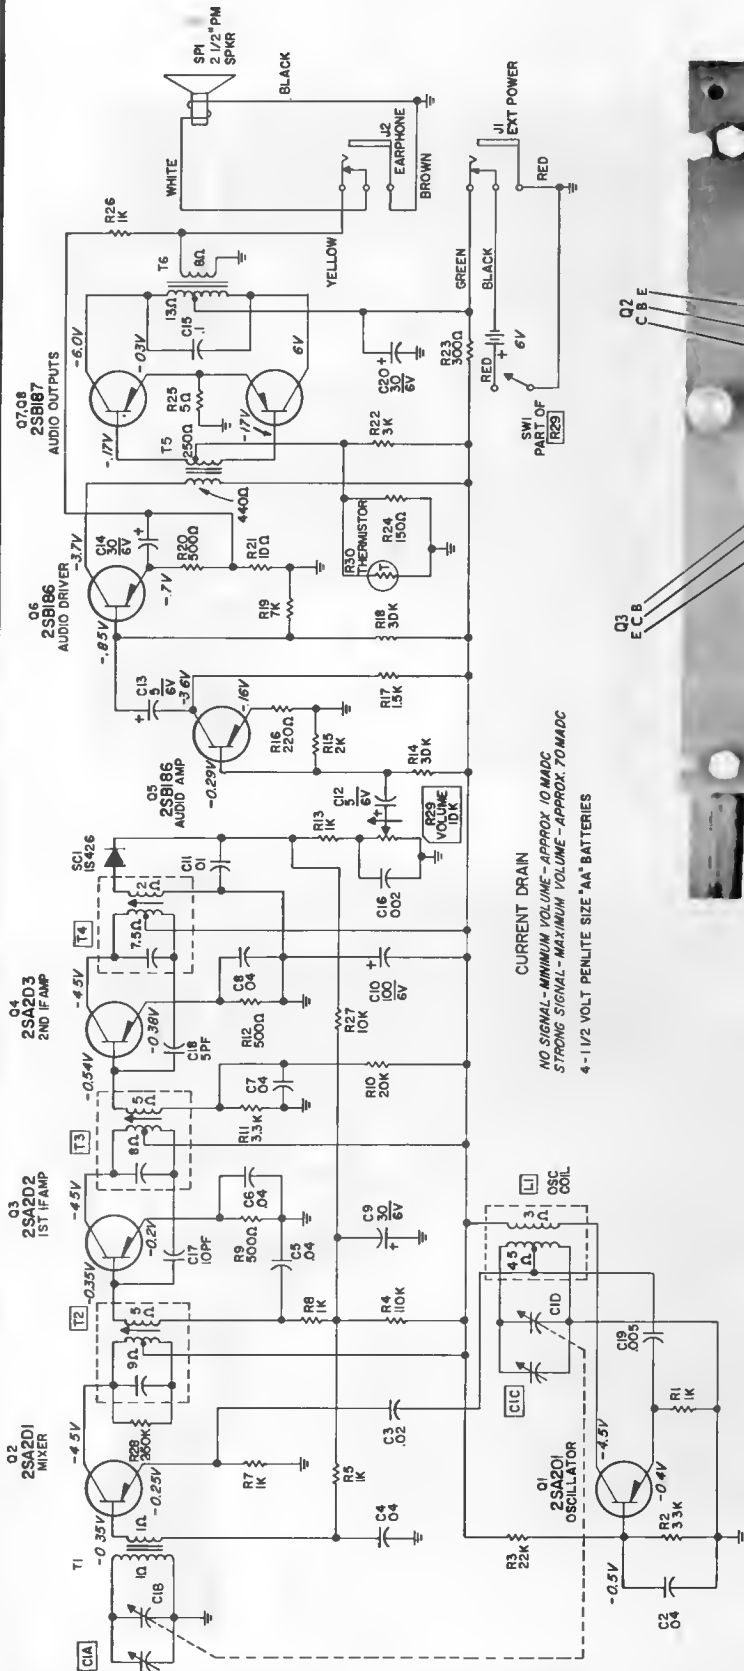

CURRENT DRAIN
 NO SIGNAL - MINIMUM VOLUME - APPROX 10 MADC
 STRONG SIGNAL - MAXIMUM VOLUME - APPROX 70 MADC
 4 - 1 1/2 VOLT PENLITE SIZE "AA" BATTERIES

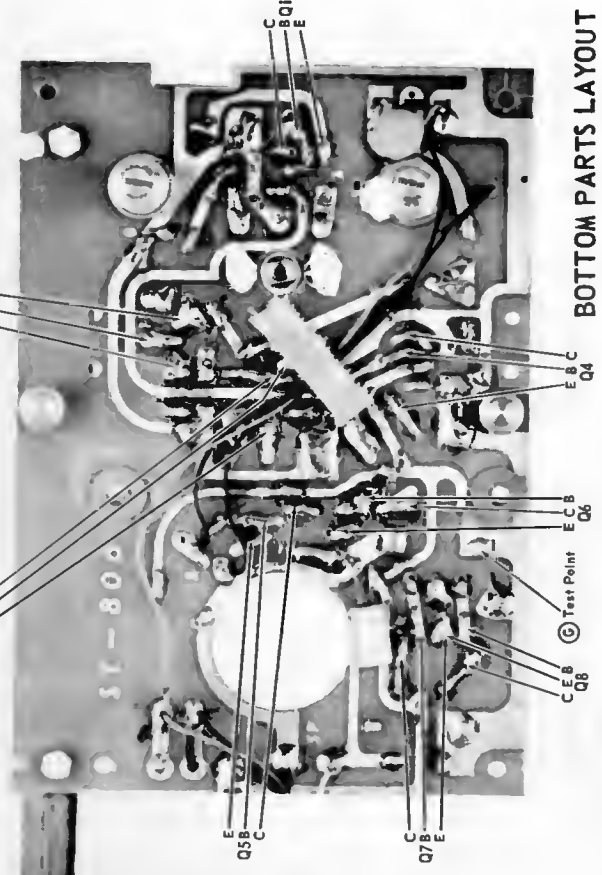

BOTTOM PARTS LAYOUT


SCHEMATIC NOTES

1. Voltage measured to chassis ground, test point (G), with receiver tuned to off station and full volume.
2. Operating voltage must be 6 volts DC. (Employ battery eliminator).
3. Voltages shown are average readings. Variations may be noted due to normal production tolerance ($\pm 10\%$).
4. All voltage readings taken with RCA Volt-Ohmyst (WV - 97A).
5. All capacitors in microfarads unless otherwise specified.
6. Intermediate frequency (IF), 455 KC.
7. Resistance readings taken with components in circuit.

IF 455 KC

SYLVANIA

MODEL: TR114

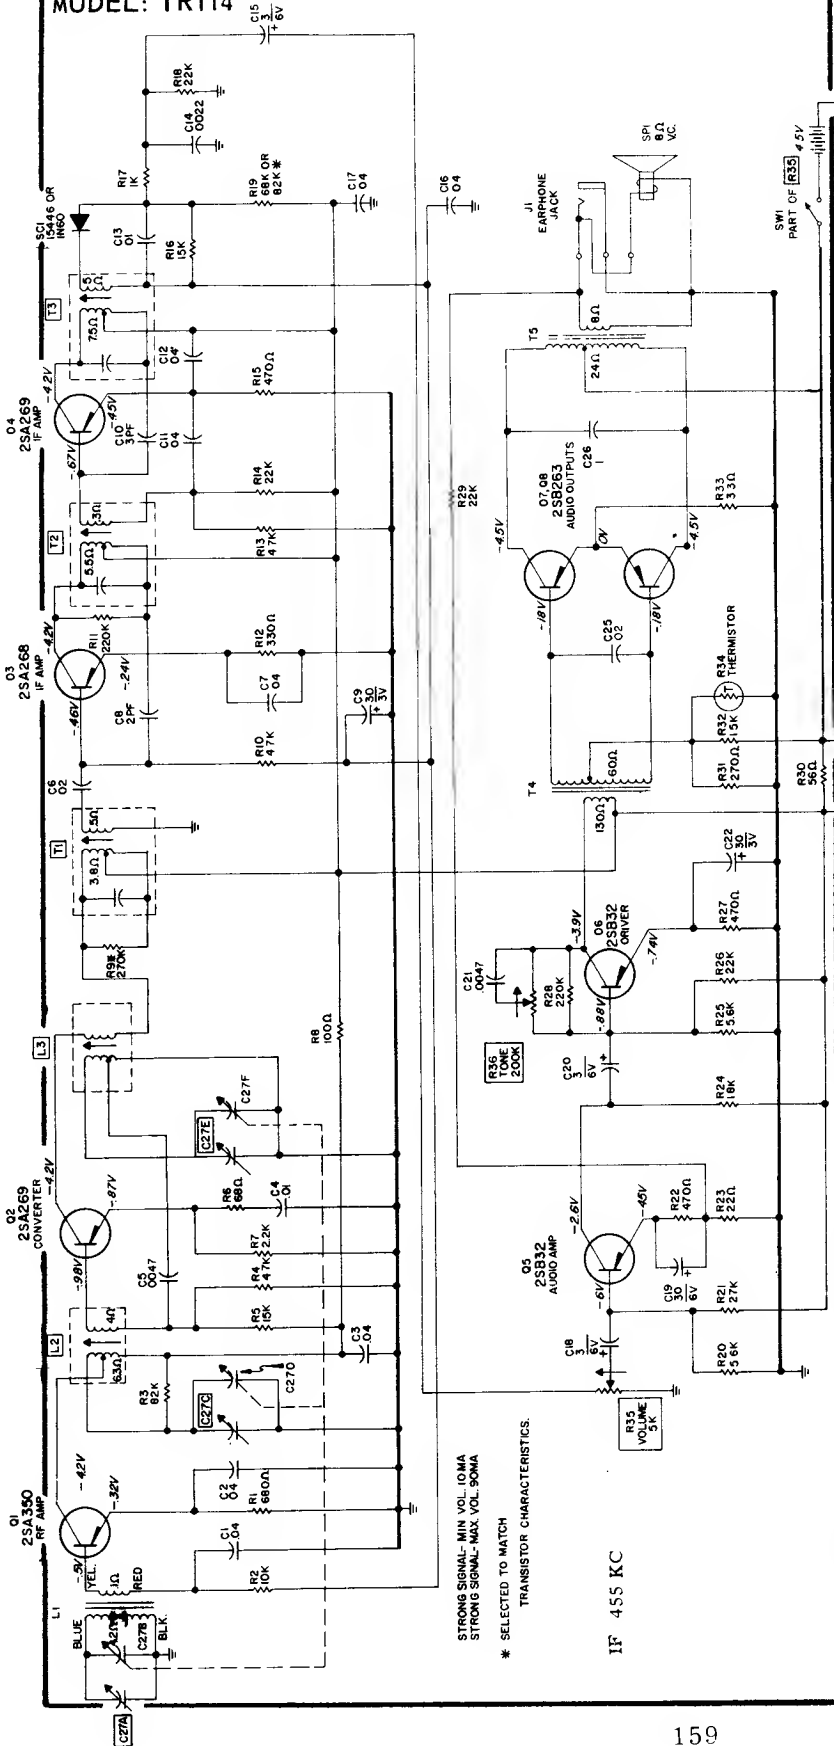


STRONG SIGNAL-MIN VOL. 10MA
STRONG SIGNAL-MAX VOL. 50MA

* SELECTED TO MATCH
TRANSISTOR CHARACTERISTICS.

IF 455 KC

SYLVANIA

MODEL: TR102

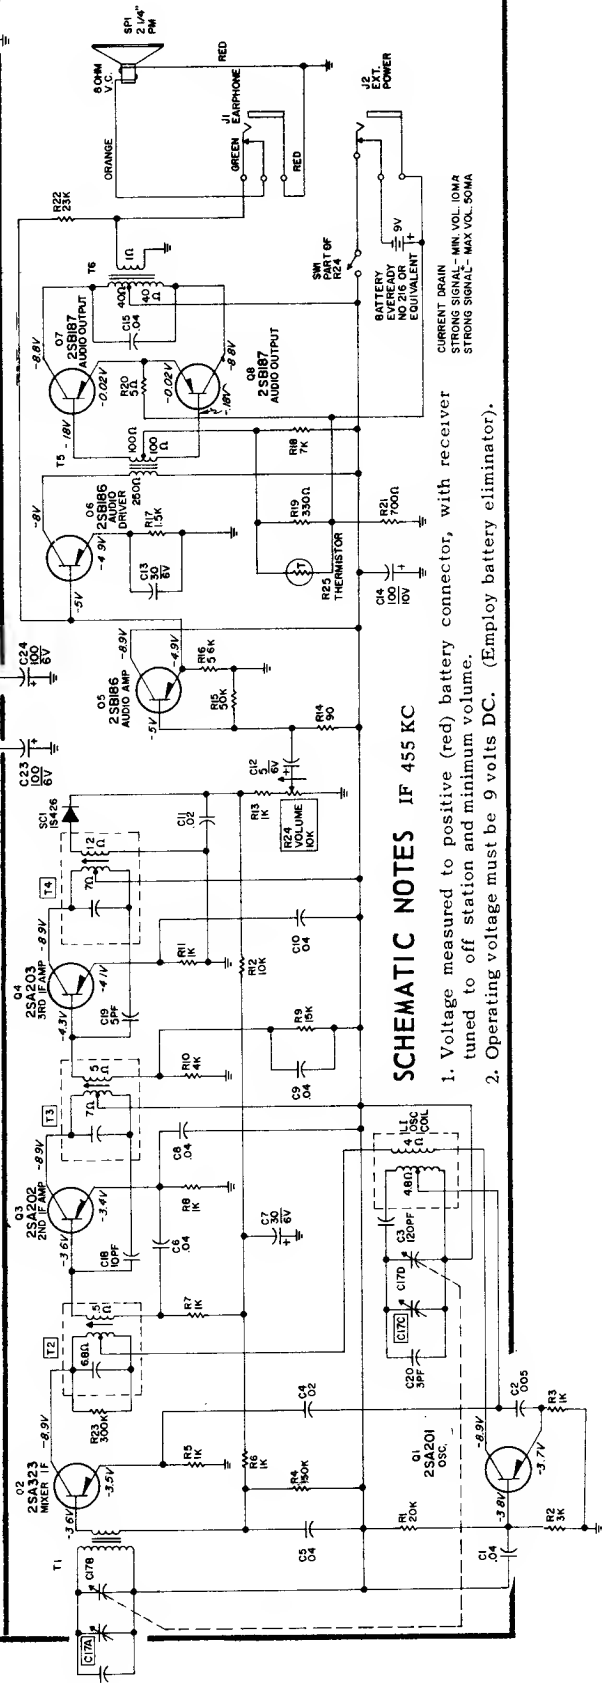


SCHEMATIC NOTES

1. Voltage measured to positive (red) battery connector, with receiver tuned to off station and minimum volume.
2. Operating voltage must be 9 volts DC. (Employ battery eliminator).


SYLVANIA MODEL: TR122

AM IF 455KC
FM IF 10.7 MC

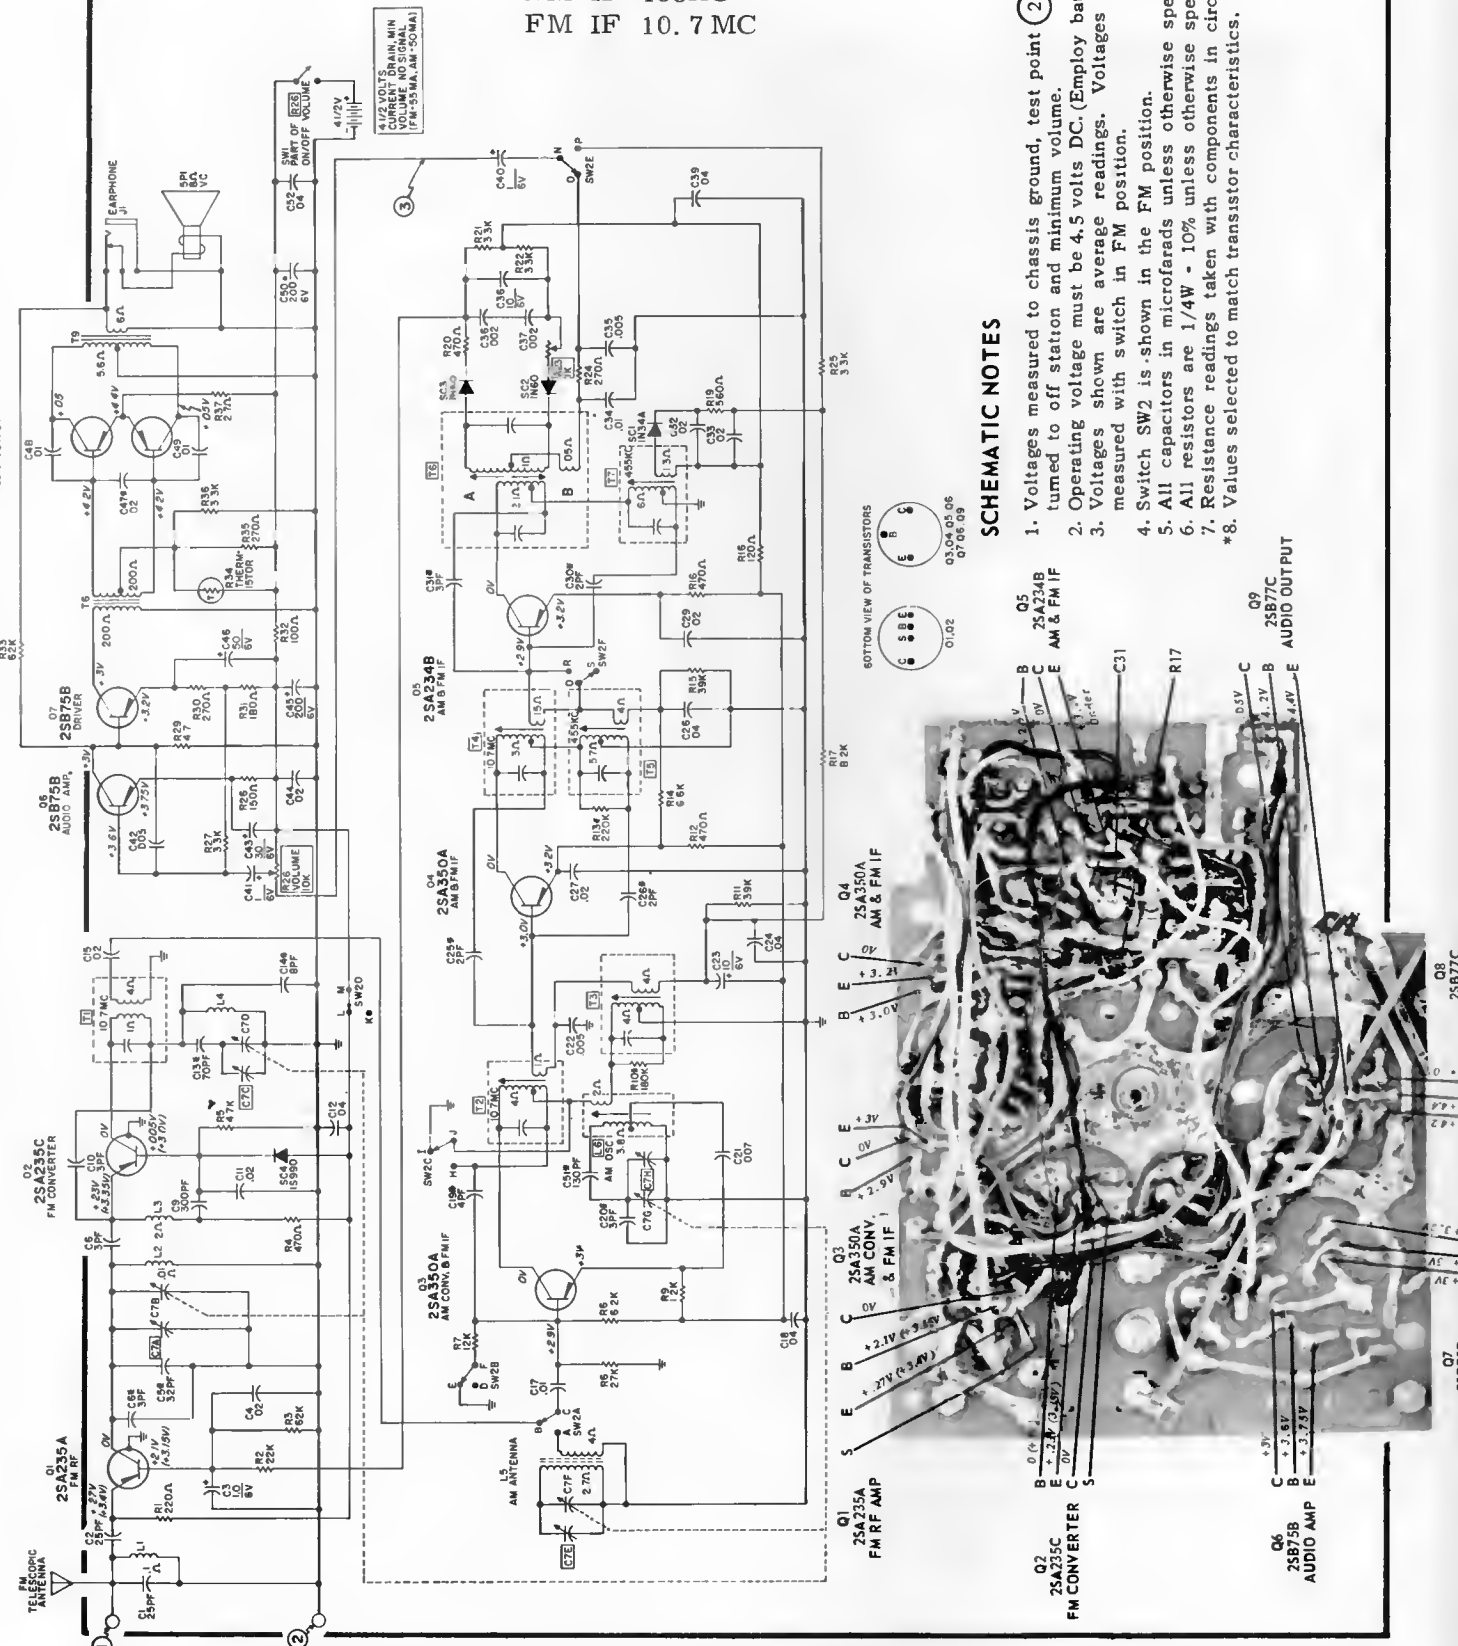

SCHEMATIC NOTES

1. Voltages measured to chassis ground, test point (2), with receiver turned to off station and minimum volume.
2. Operating voltage must be 4.5 volts DC. (Employ battery eliminator).
3. Voltages shown are average readings. Voltages in brackets are measured with switch in FM position.
4. Switch SW2 is shown in the FM position.
5. All capacitors in microfarads unless otherwise specified.
6. All resistors are 1/4W - 10% unless otherwise specified.
7. Resistance readings taken with components in circuit.
8. Values selected to match transistor characteristics.

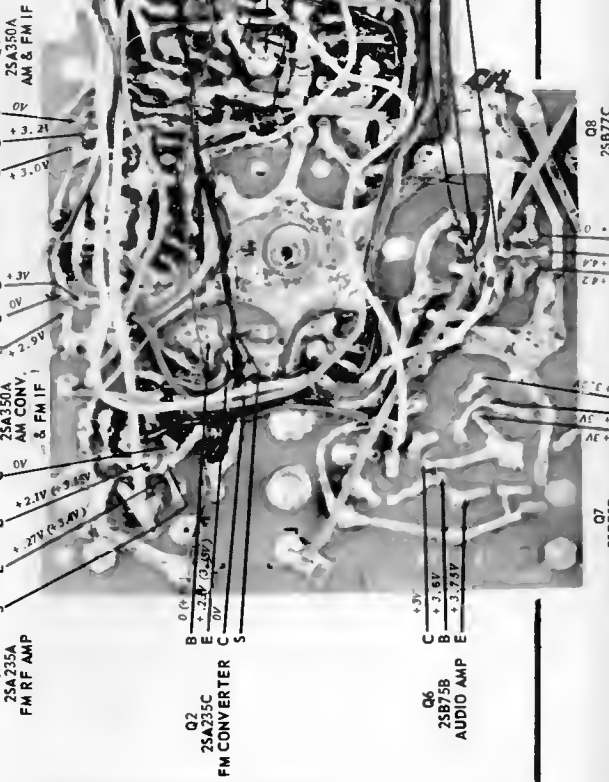



SYLVANIA

Models: Exponent 4/20, 4/30 Series; Chassis P05-1, -2

(Continued on next page.)

SCHEMATIC DIAGRAM P05-2

P05-1 similar

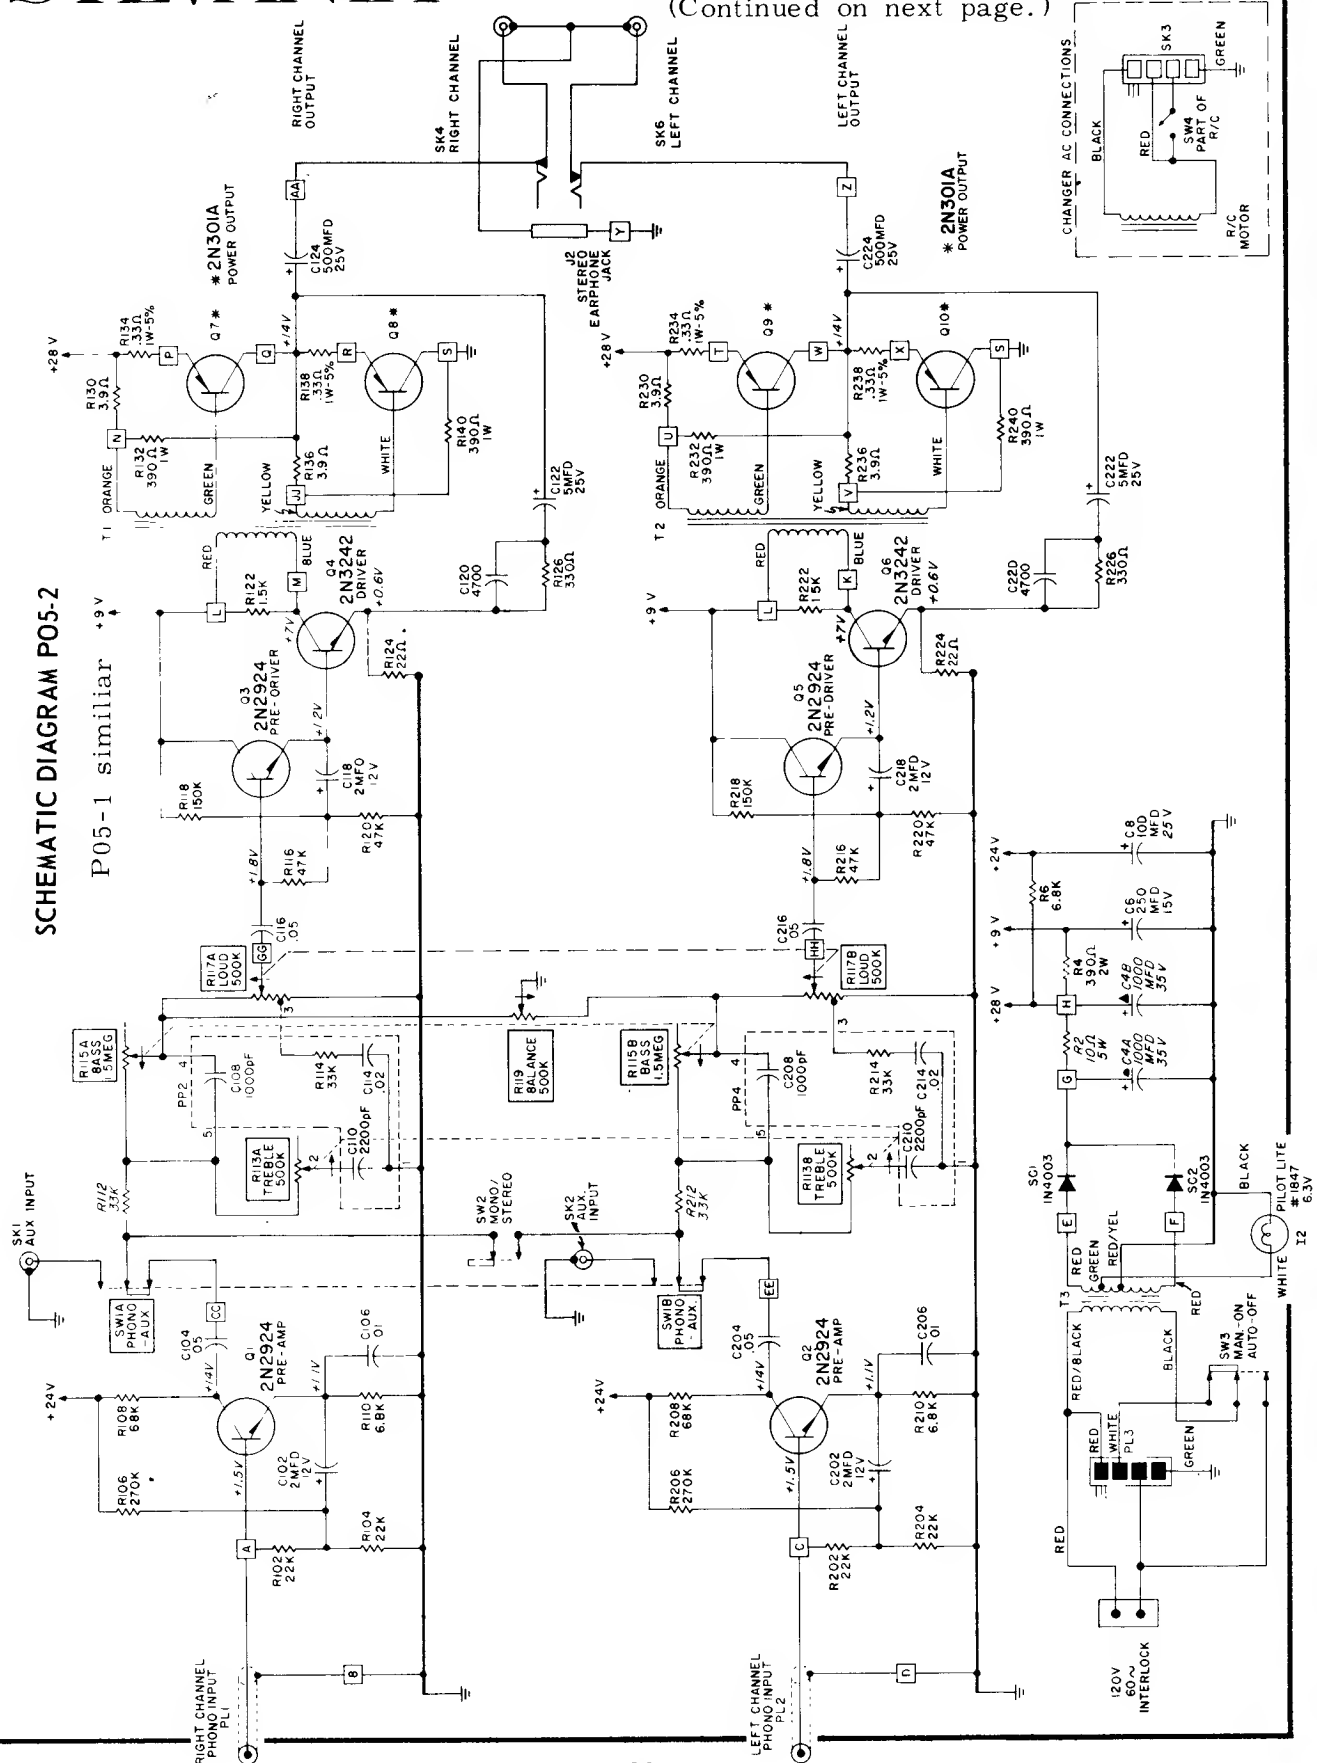

(Continued from preceding page.)

NOTE:

1. Voltage measurements are average readings measured to chassis ground with no signal input. Variations may be noted due to normal production tolerances.
2. See schematic diagram on page 5 for voltage readings on power output transistors (Q7,Q8,Q9,Q10).

BOTTOM VIEW OF TRANSISTORS



Q1,Q2,Q3,Q5




Q4,Q6



Q7,Q8,Q9,Q10

PRINTED BOARD PARTS LAYOUT

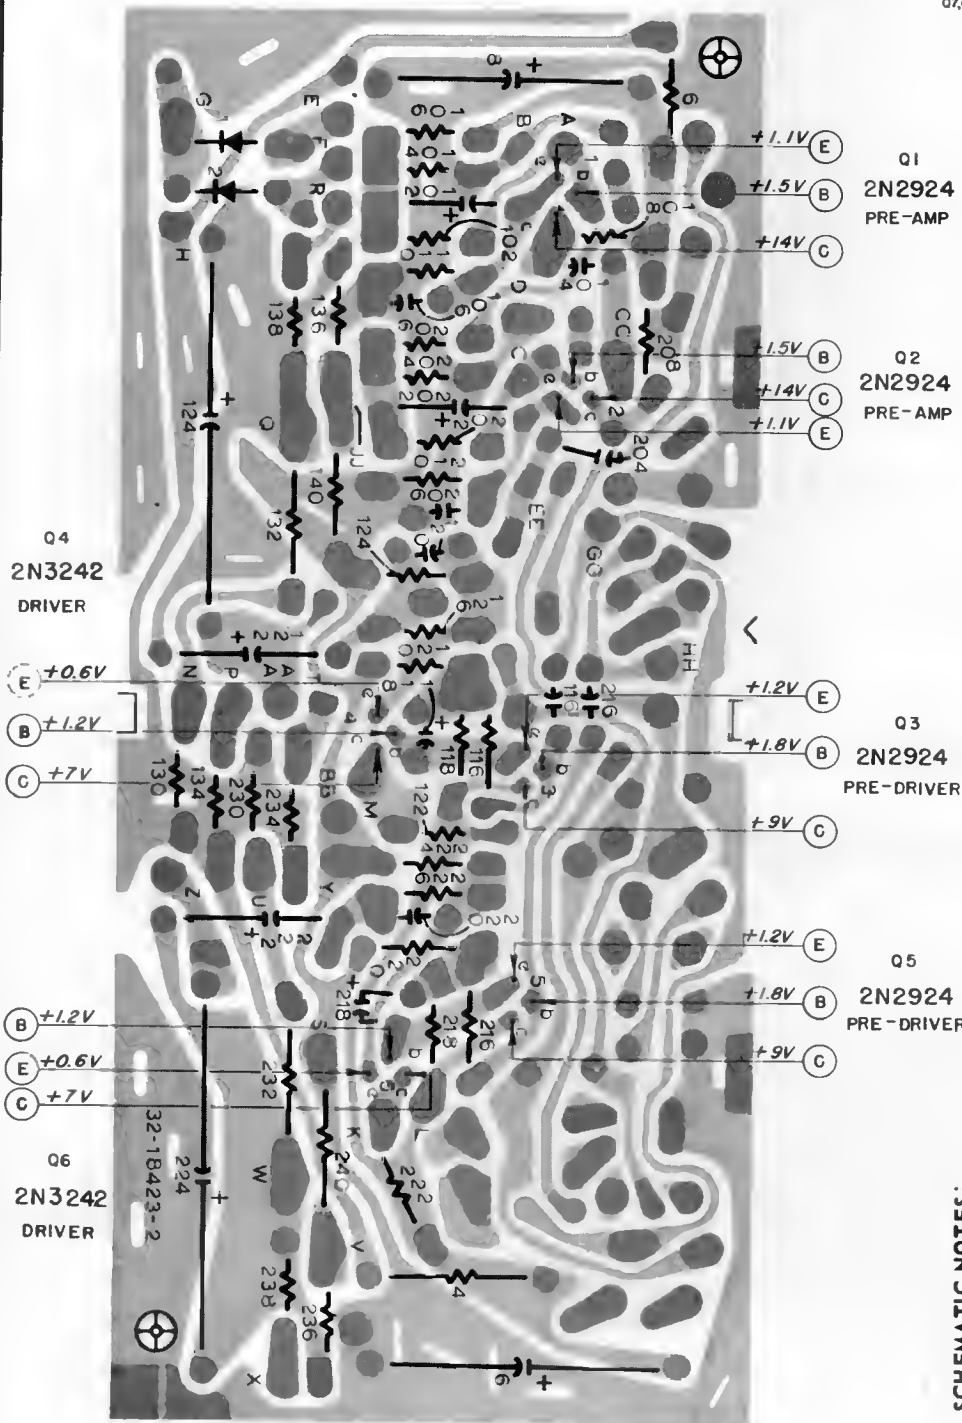


5. All resistors are 1/2W, 10% unless otherwise specified.
6. Designates chassis ground.
7. Indicates color dot on speakers for correct phasing.
8. **[R115]**, **[R117]** are dual ganged controls.
9. **[R113]** indicates replace in matched pairs.
10. Arrows on controls indicates clockwise rotation.


SCHEMATIC NOTES :

1. Voltage measurements are average reading measured to chassis with no signal input. Variations may be noted due to normal production tolerances.
2. AC power source 120 volt, 60 cycle.
3. Capacitance in MFD unless otherwise specified.
4. Resistors and capacitors not on printed circuit board are shown in italics.



SYLVANIA MODEL: 45P80 CHASSIS: P02-5

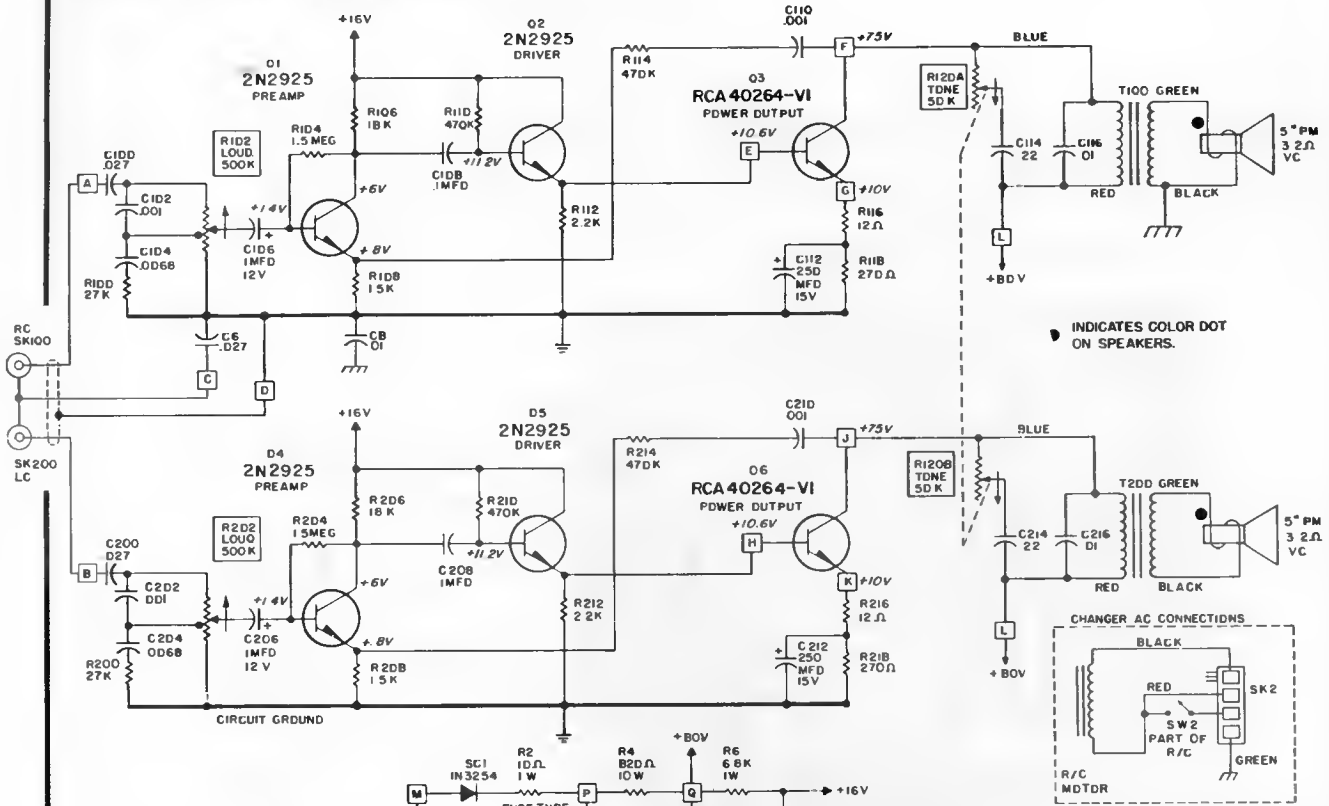

INDICATES COLOR DOT ON SPEAKERS.




- NOTE
 1 ALL RESISTORS 1/2W 10% UNLESS OTHERWISE SPECIFIED
 2 ALL CAPACITORS IN MFD UNLESS OTHERWISE SPECIFIED
 3 ALL DC VOLTAGES MEASURED WITH A DC VTVM

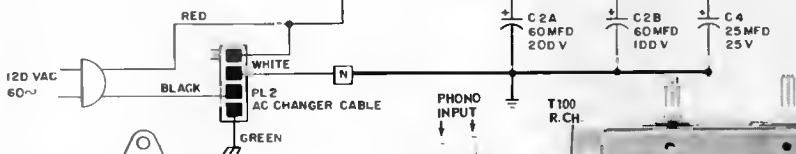


BOTTOM VIEW OF TRANSISTORS

* LATER PRODUCTION INCORPORATES OVAL PLUG ASM.

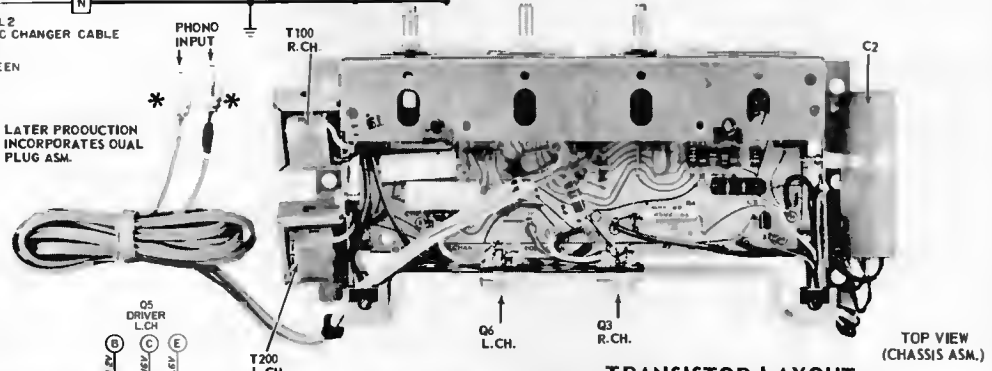


TOP VIEW (CHASSIS ASM.)

PRINTED BOARD

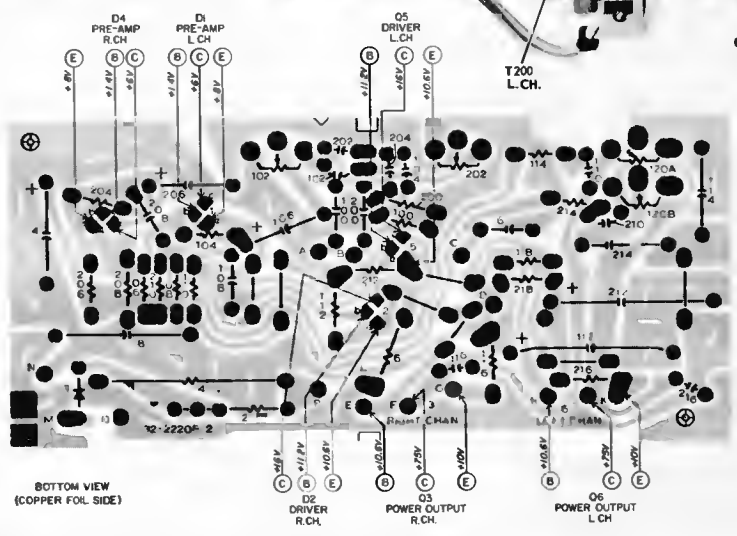

BOTTOM VIEW (COPPER FOIL SIDE)

TRANSISTOR LAYOUT

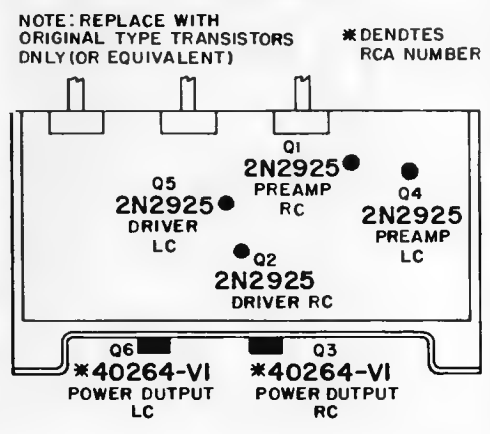


NOTE: REPLACE WITH ORIGINAL TYPE TRANSISTORS ONLY (OR EQUIVALENT)

* DENOTES RCA NUMBER

SYLVANIA


MODEL: 45P84
CHASSIS: P03-5

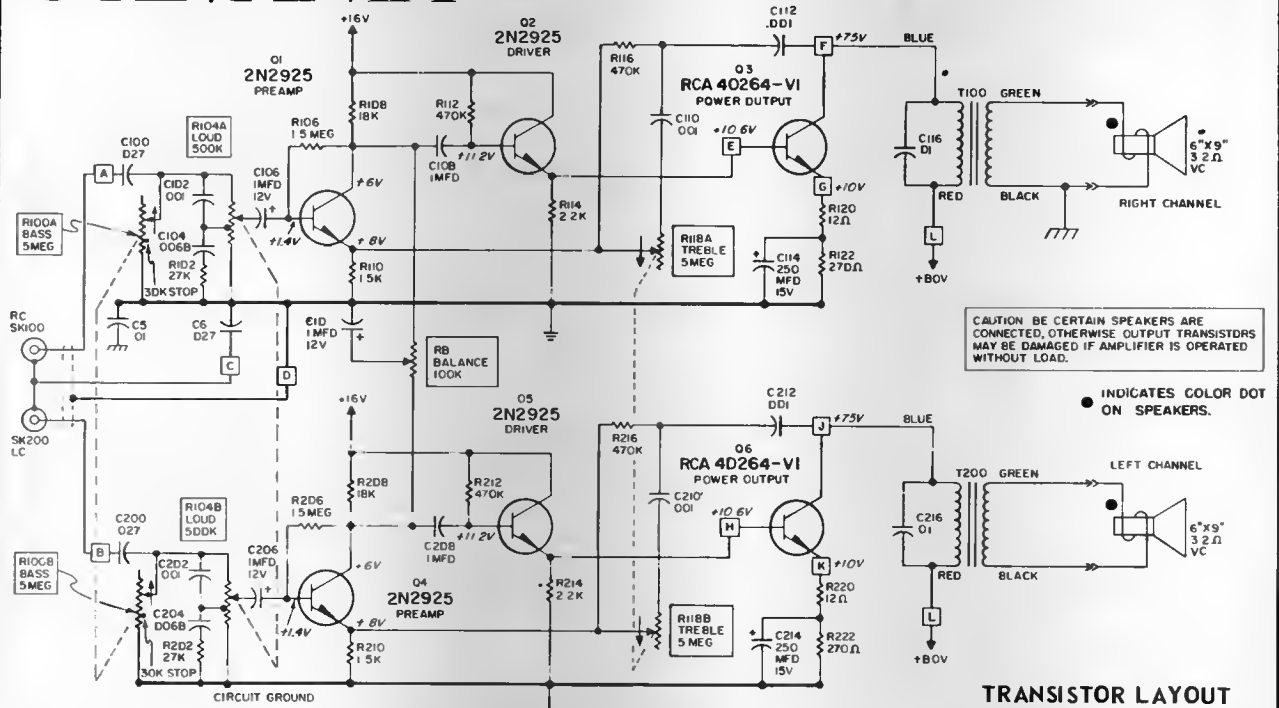

CAUTION: BE CERTAIN SPEAKERS ARE CONNECTED. OTHERWISE OUTPUT TRANSISTORS MAY BE DAMAGED IF AMPLIFIER IS OPERATED WITHOUT LOAD.



● INDICATES COLOR DOT ON SPEAKERS.

TRANSISTOR LAYOUT

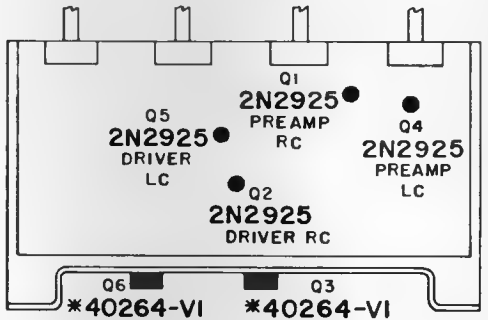


NOTE:
1 ALL RESISTORS 1/2W 10% UNLESS OTHERWISE SPECIFIED
2 ALL CAPACITORS IN MFD UNLESS OTHERWISE SPECIFIED
3 ALL DC VOLTAGES MEASURED WITH A DC VTVM

Voltage measurements are average readings to circuit ground with no signal input. Variations may be noted due to normal production tolerances.




BOTTOM VIEW (COPPER FOIL SIDE)

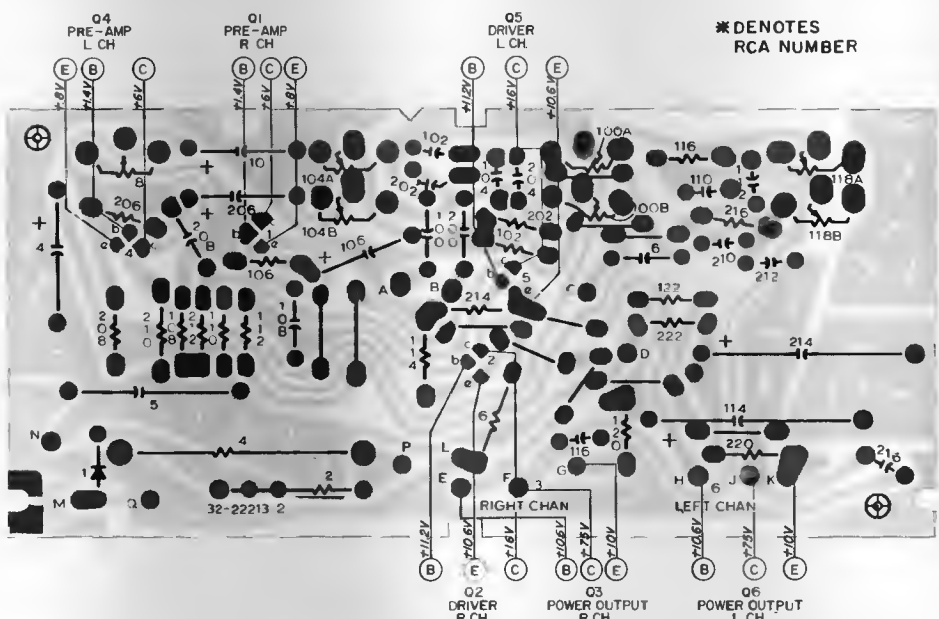


Westinghouse

PAM 7000A CHASSIS V4005C01

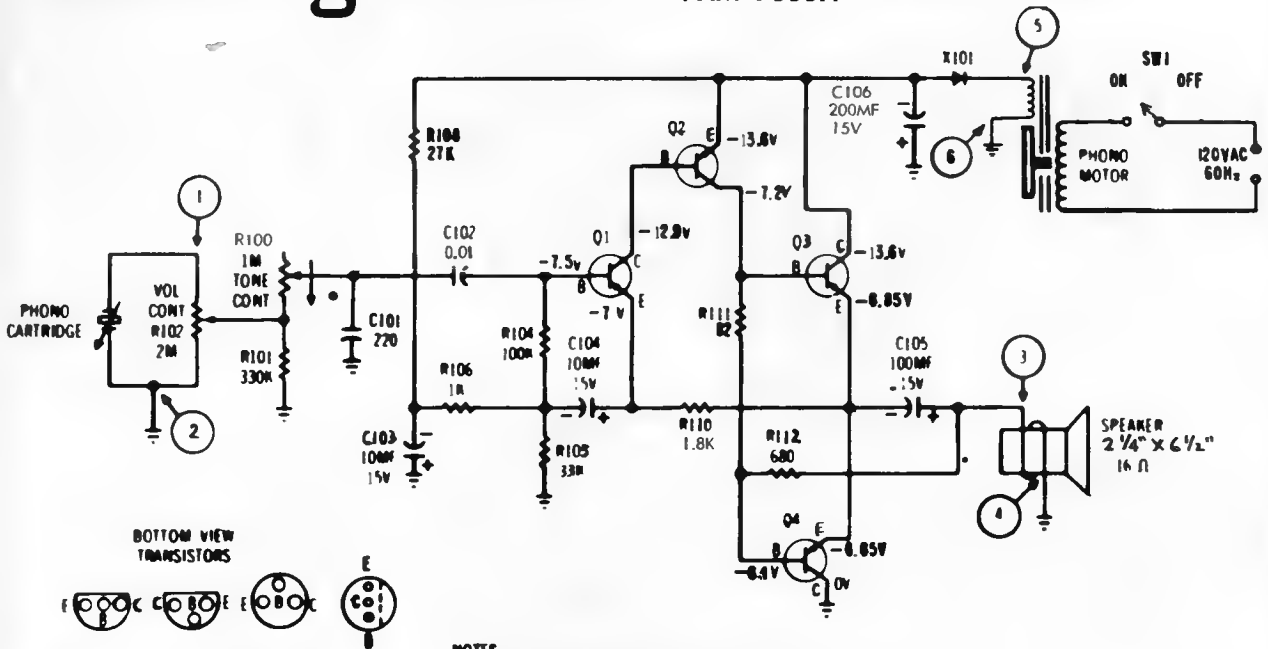

BOTTOM VIEW TRANSISTORS





TRANSISTOR COMPLEMENT			
	FUNCTION	TYPE	W PART NO.
Q1	INPUT	PNP	297V083C01
Q2	DRIVER	NPN	297V083C02
Q3	OUTPUT	PNP	297V083C03
Q4	OUTPUT	NPN	297V083C04

NOTES:

- UNLESS OTHERWISE INDICATED ALL CAPACITANCE VALUES LESS THAN 1 ARE IN MF AND VALUES GREATER THAN 1 ARE IN PF, ALL RESISTANCE VALUES ARE IN OHMS, 1/2 WATT.
- VOLTAGE MEASUREMENTS MADE WITH A VTVM FROM POINTS INDICATED TO GROUND, VOLUME CONTROL AT MINIMUM, LINE VOLTAGE AT 120VAC.
- DIRECTION OF ARROW INDICATES MAXIMUM TREBLE.

Cartridge Wiring

○ DENOTES CONNECTIONS ON PC BOARD.

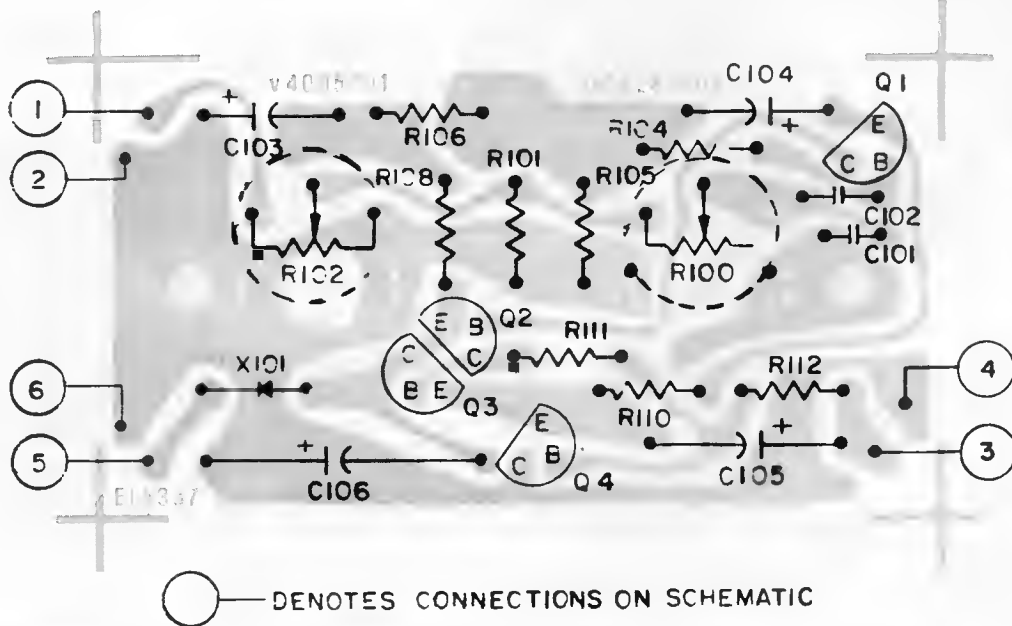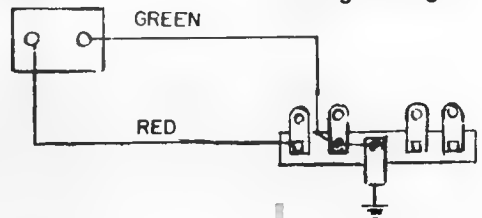


○ DENOTES CONNECTIONS ON SCHEMATIC



AM IF 455 KC, FM IF 10.7 MC

- NOTES:
1. UNLESS OTHERWISE INDICATED, ALL CAPACITANCE VALUES LESS THAN 1 ARE IN MF, AND ALL VALUES GREATER THAN 1 ARE IN PY.
ALL RESISTANCE VALUES ARE IN OHMS UNLESS OTHERWISE INDICATED.
2. VOLTAGE MEASUREMENTS MADE WITH VTVM FROM POINTS INDICATED TO CIRCUIT GROUND WITH TUNING CAPACITOR AT MAX. VOLUME CONTROL AT MIN (NO SIGNAL INPUT) LINE VOLTAGE SET AT 120 VAC.
3. UNDERLINED VOLTAGES TAKEN IN FM POSITION.
4. RESISTANCE MEASUREMENTS TAKEN WITH COMPONENTS IN CIRCUIT.
ON CLOCK MODELS, SWITCH SW1 IS PART OF CLOCK FROM CLOCK MODELS SWITCH SW1 IS PART OF VOLUME CONTROL R33

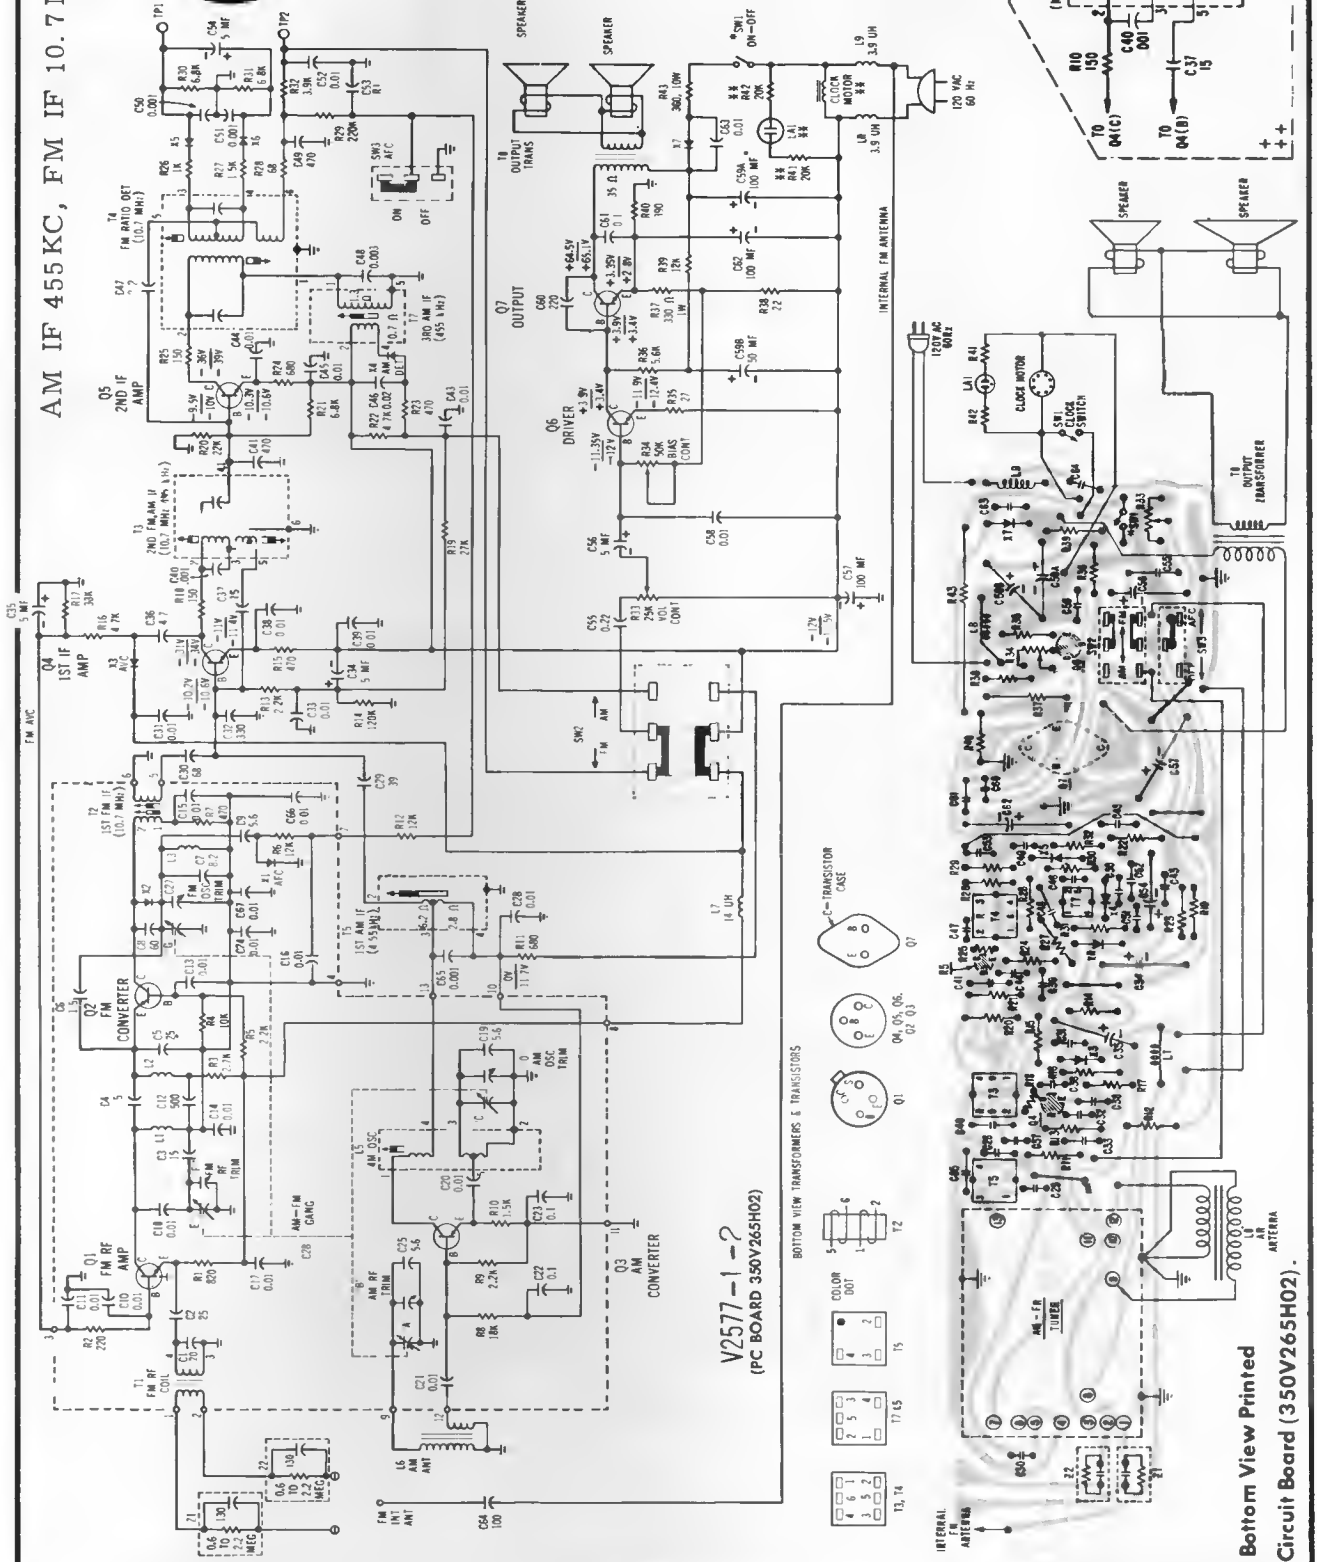


V2577-1-2
(PC BOARD 350V265H02)

BOTTOM VIEW TRANSFORMERS & TRANSISTORS




Bottom View Printed
Circuit Board (350V265H02)

WESTINGHOUSE Models: RC42R67B, 42R87B, 52R07B, Chassis: V3004CO1, 2, 3, 4
RT42R37B, 42R87B

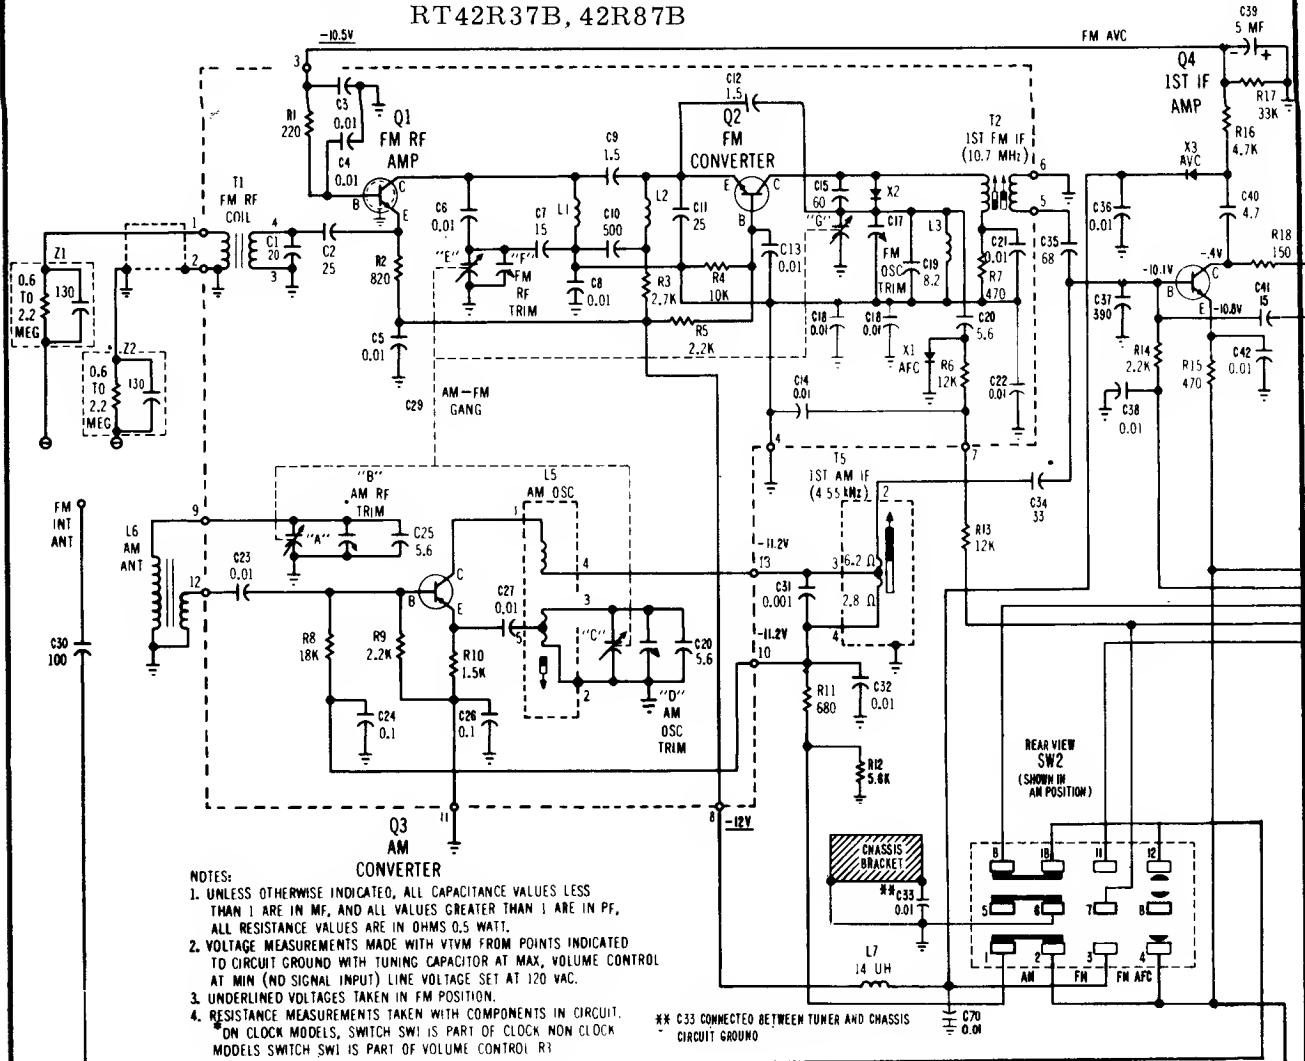


- NOTES:**
- UNLESS OTHERWISE INDICATED, ALL CAPACITANCE VALUES LESS THAN 1 ARE IN MF, AND ALL VALUES GREATER THAN 1 ARE IN PF, ALL RESISTANCE VALUES ARE IN OHMS 0.5 WATT.
 - VOLTAGE MEASUREMENTS MADE WITH VTVM FROM POINTS INDICATED TO CIRCUIT GROUND WITH TUNING CAPACITOR AT MAX. VOLUME CONTROL AT MIN (NO SIGNAL INPUT) LINE VOLTAGE SET AT 120 VAC.
 - UNDERLINED VOLTAGES TAKEN IN FM POSITION.
 - RESISTANCE MEASUREMENTS TAKEN WITH COMPONENTS IN CIRCUIT. ON CLOCK MODELS, SWITCH SW1 IS PART OF CLOCK NON CLOCK MODELS SWITCH SW1 IS PART OF VOLUME CONTROL R3

** C33 CONNECTED BETWEEN TUNER AND CHASSIS CIRCUIT GROUND

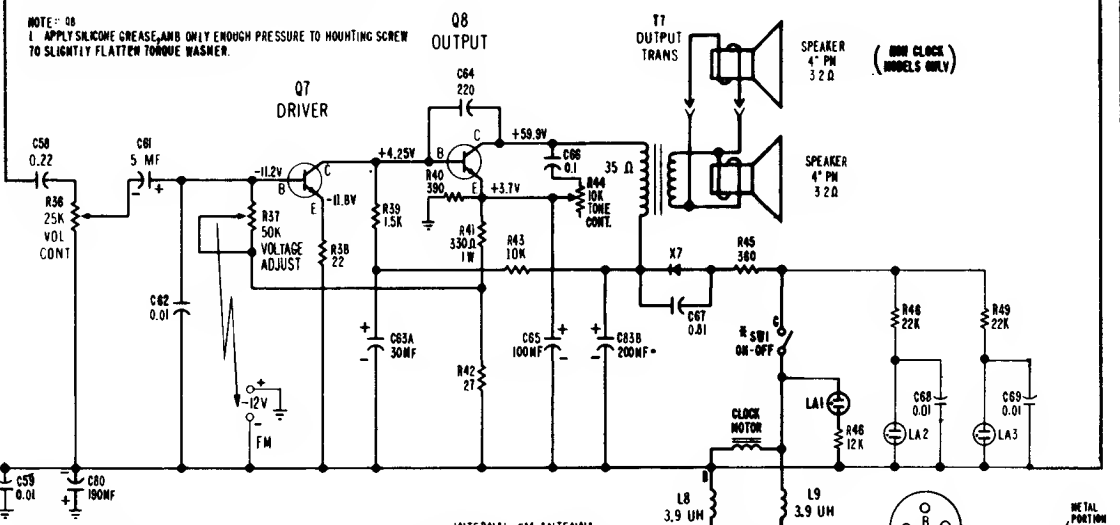

NOTE: Q8
1. APPLY SLIGHT GREASE, AND ONLY ENOUGH PRESSURE TO HOISTING SCREW TO SLIGHTLY FLATTEN TORQUE WASHER.

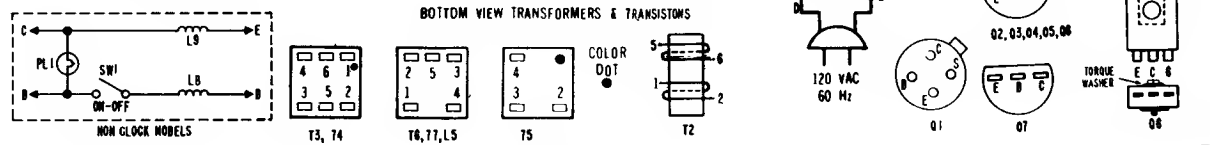


Westinghouse

Models: RC42R67B, 42R87B, 52R07B,
RT42R37B, 42R87B;

Chassis V3004C01, 2, 3, 4

(Continued from preceding page.)

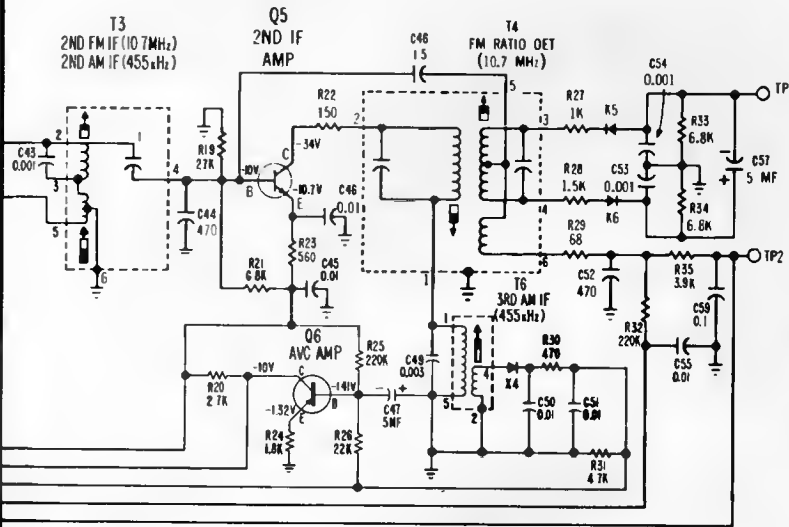

AM IF 455 KC
FM IF 10.7 MC

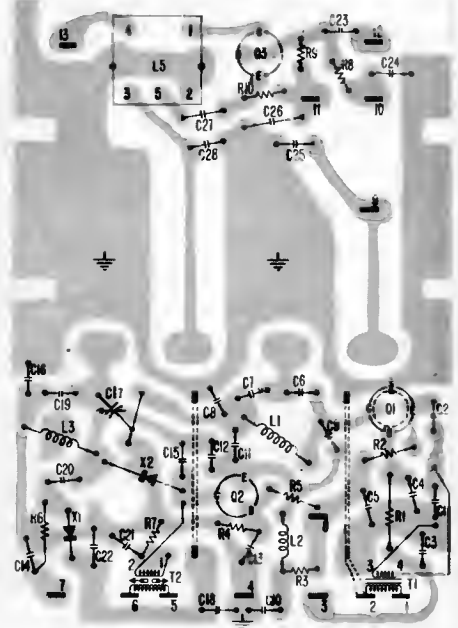


Figure 7 - Bottom View Tuner


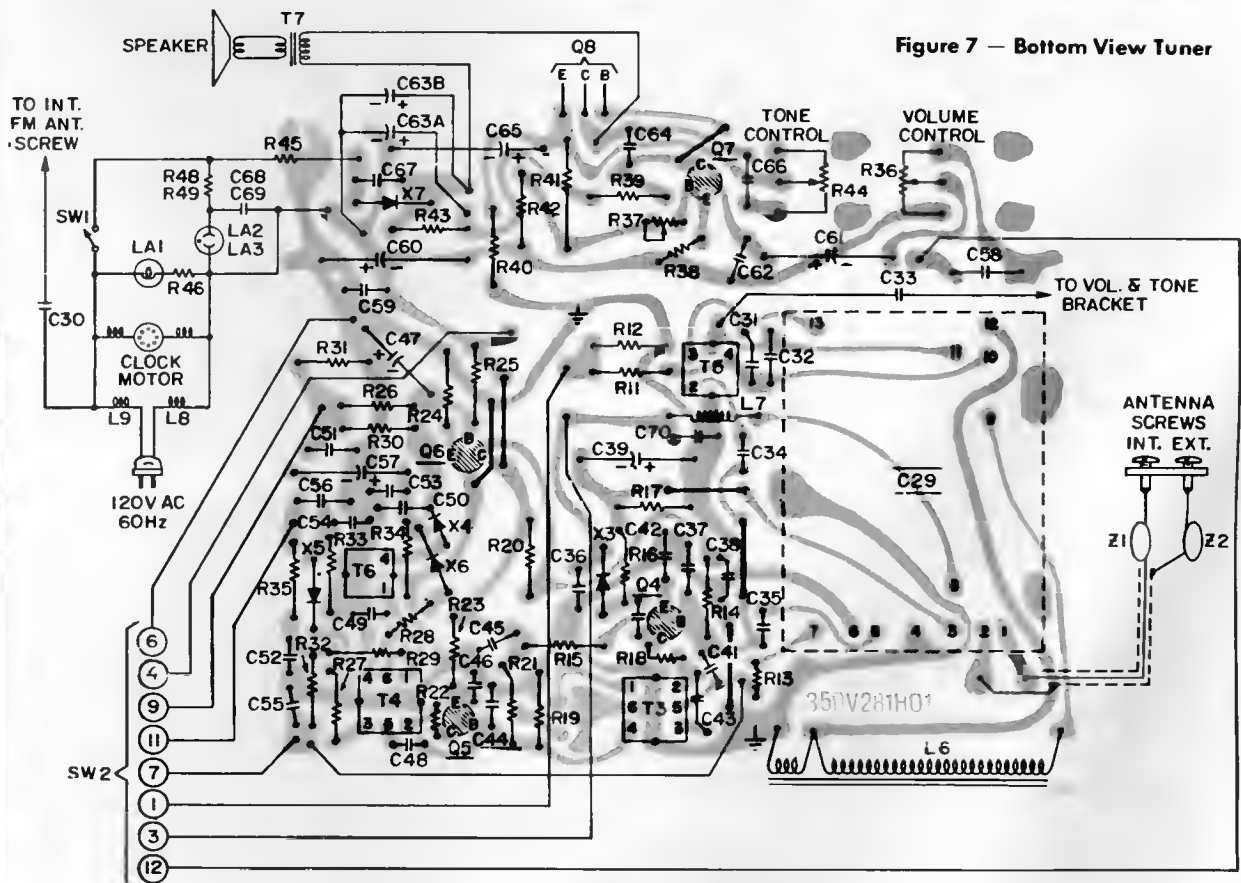


Figure 9 - Bottom View PC Board 350V281H01

WESTINGHOUSE Models H-972XLB, H-974XLA; Chassis V-2463-5

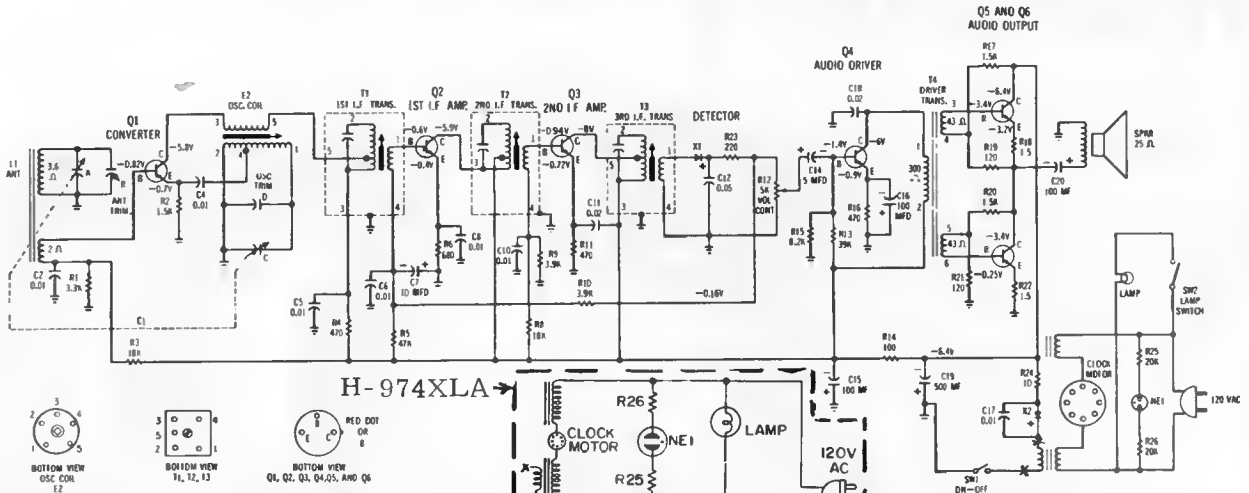


- NOTES**
1. VOLTAGE MEASUREMENTS MADE WITH A VTVM FROM POINTS INDICATED TO GROUND WITH TUNING CAPACITOR AT MAXIMUM, VOLUME CONTROL AT MINIMUM FOR CORRECT REPLACEMENT SEE PARTS LIST
 2. ALL CAPACITANCE VALUES LESS THAN .01 ARE IN MF AND VALUES GREATER THAN 1 ARE IN μ F
 3. ALL RESISTANCE VALUES ARE IN OHMS, 0.5 WATT UNLESS OTHERWISE INDICATED.

H-974XLA


IF 455 KC

Bottom View of PC Board showing top components in solid outline.


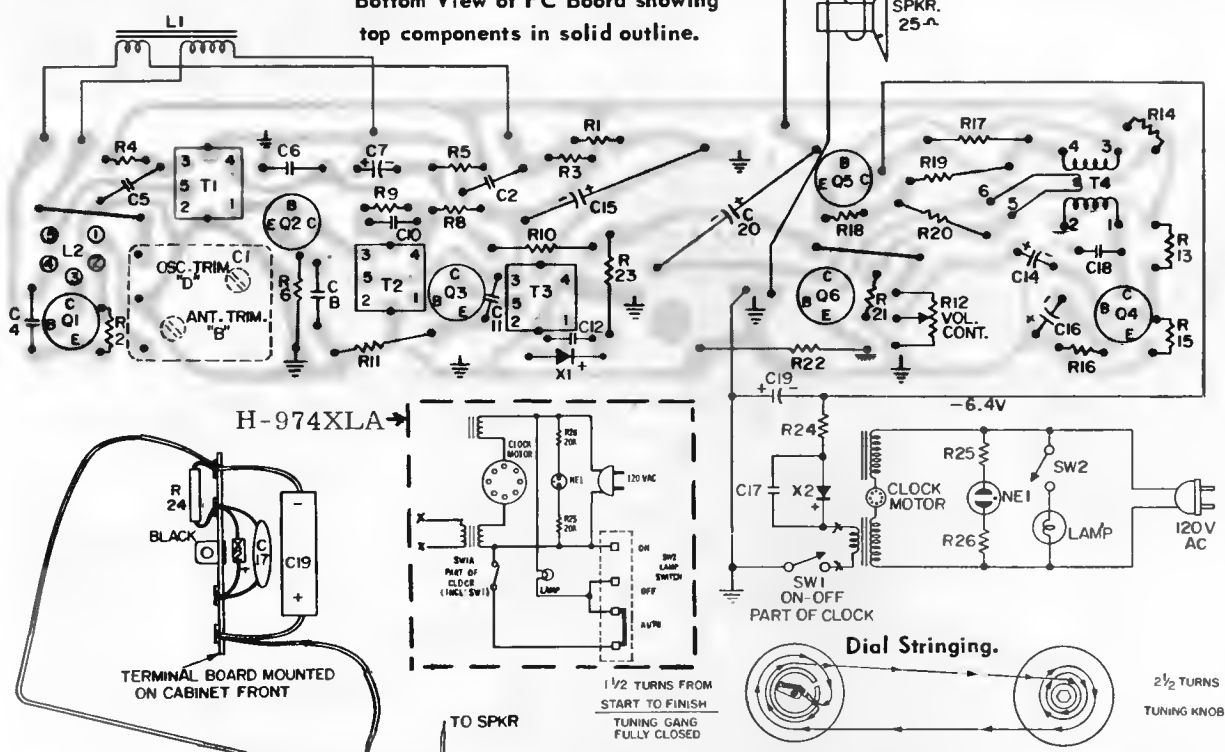


H-974XLA

TERMINAL BOARD MOUNTED ON CABINET FRONT

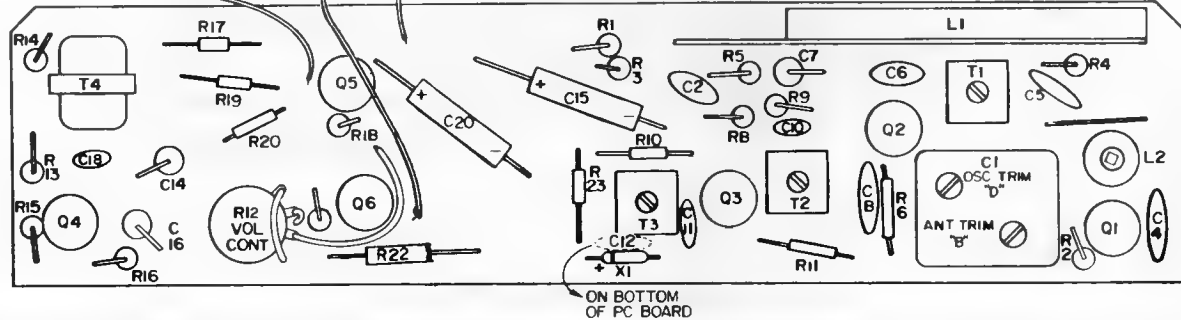

WESTINGHOUSE Models RLA1160A, 1161A; Chassis V-2463-9
 Models RS31M08A, M38A, M78A; Chassis V-2463-8

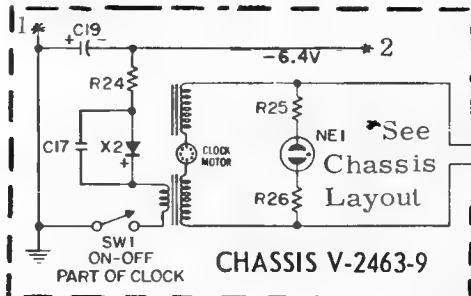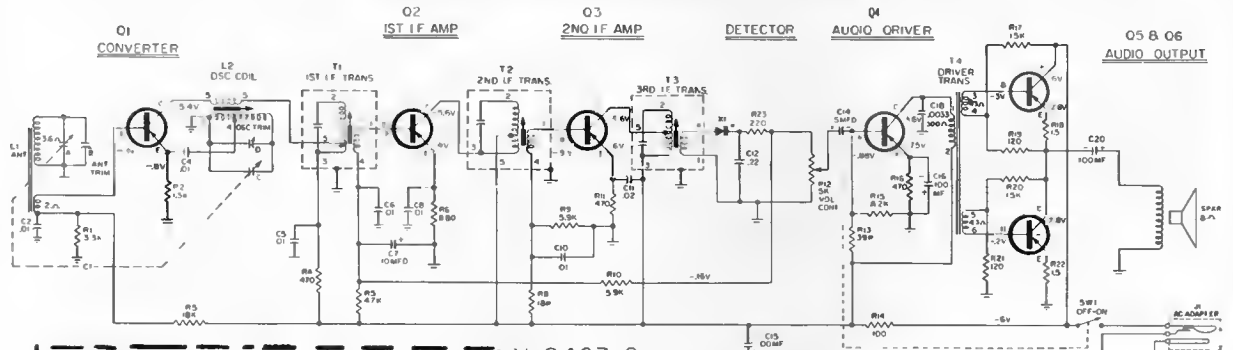

V-2463-8



FUNCTION	TYPE	PART NO.	ALTERNATE
CONVERTER	PNP	29FV055H01	
1ST IF	PNP	29FV055H01	
2ND IF	PNP	29FV055H02	
AUDIO DRIVER	PNP	29FV055H02	
AUDIO OUTPUT	PNP	29FV055H01	

● MATCHED PAIR



V-2463-9

FUNCTION	TYPE	PART NO.	ALTERNATE
CONVERTER	PNP	29FV055H01	
1ST IF	PNP	29FV055H01	
2ND IF	PNP	29FV055H02	
AUDIO DRIVER	PNP	29FV055H02	
AUDIO OUTPUT	PNP	29FV055H01	





● MATCHED PAIR

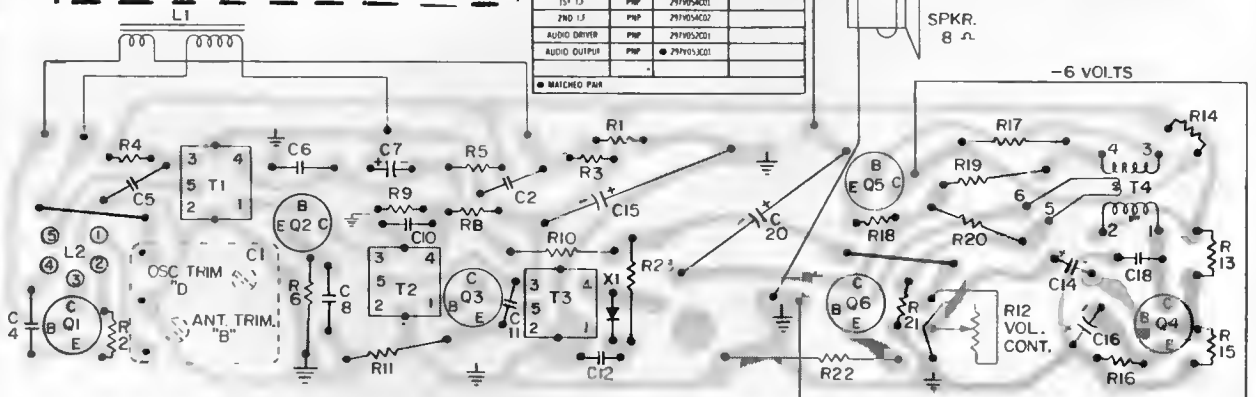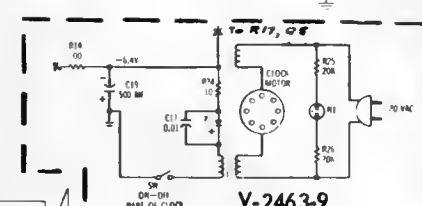

- NOTES
- DURING SERVICING TOTAL BATTERY CURRENT SHOULD BE METERED WITH NO SIGNAL & VOLUME CONTROL. AT MINIMUM TOTAL BATTERY DRAIN SHOULD BE APPROX. 12 MA.
 - VOLTAGE MEASUREMENTS MADE WITH A VTVM FROM POINTS INDICATED TO GROUND WITH TUNING CAPACITOR AT MAXIMUM VOLUME CONTROL AT MINIMUM BATTERY SOURCE AT 6 VOLTS.
 - ALL CAPACITANCE VALUES LESS THAN 1 ARE IN MF. B VALUES GREATER THAN 1 ARE IN PF. ALL RESISTANCE VALUES ARE IN OHMS. 1/2 WATT UNLESS OTHERWISE INDICATED.

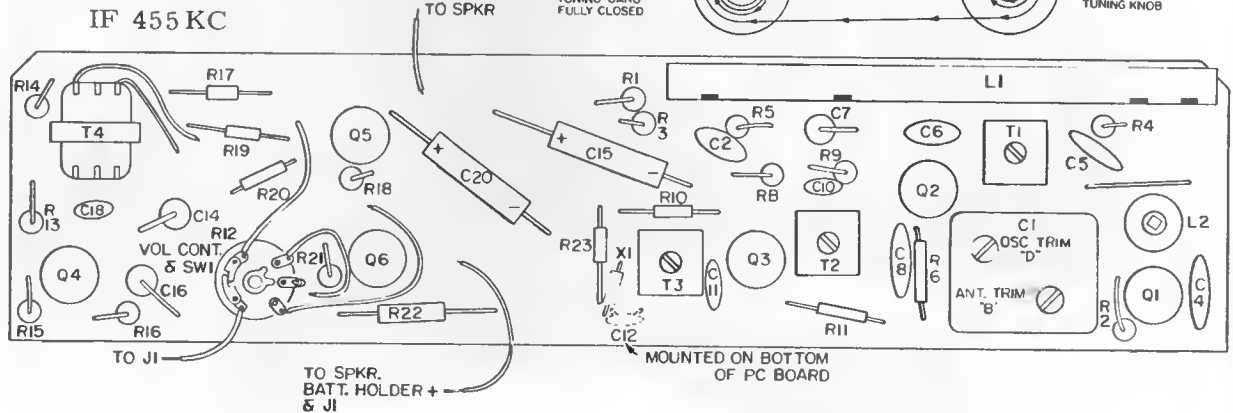


WESTINGHOUSE Models RC31P78A, RT41P58A; Chassis V-2575-3, V-2575-2

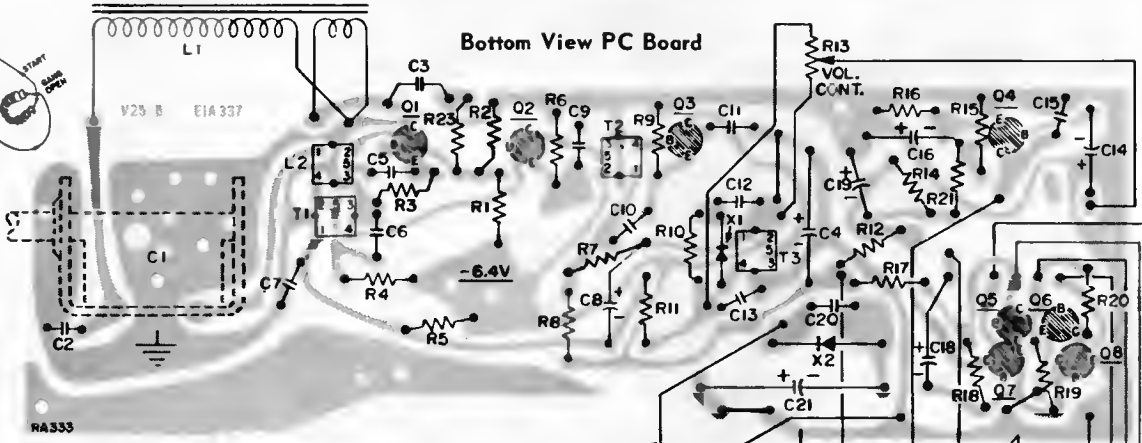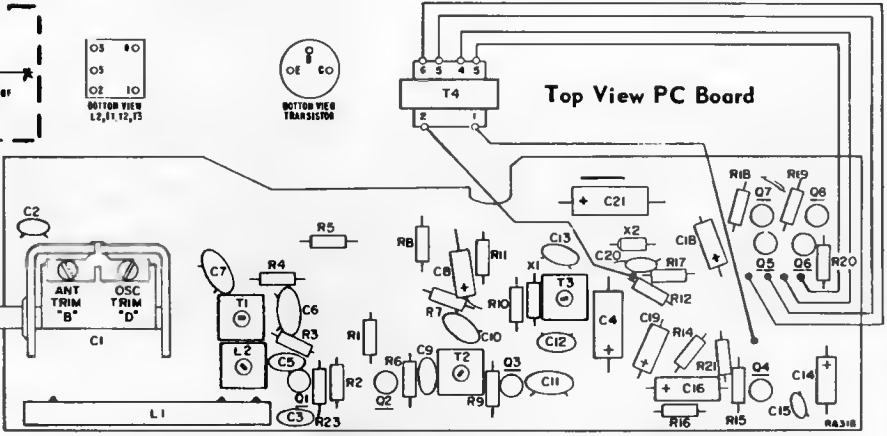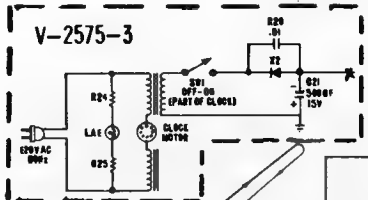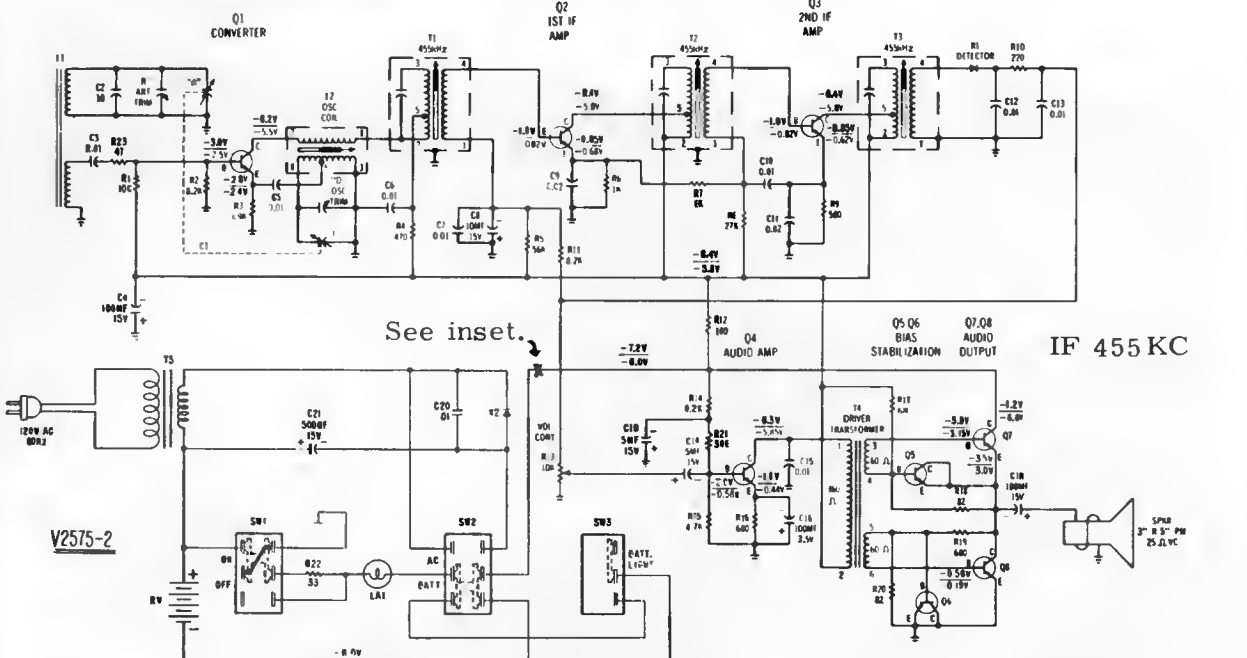


- NOTES:
1. DURING SERVICING, BATTERY OHMS SHOULD BE MEASURED WITH NO SIGNAL INPUT. VOLUME CONTROL AT MINIMUM. CURRENT OHMS SHOULD BE APPROX 1500.
 2. ALL CAPACITANCE VALUES LESS THAN 1 MFD IN WFT, AND VALUES GREATER THAN 1 ARE IN PF. ALL RESISTANCE VALUES ARE IN OHMS 0.5 MATT, UNLESS OTHERWISE INDICATED.
 3. VOLTAGE MEASUREMENTS MADE WITH V.T.M. FROM POINTS INDICATED TO GROUND, WITH TUNING CAPACITOR AT MAXIMUM VOLUME CONTROL AT MINIMUM (NO SIGNAL INPUT). VOLTAGE SOURCES AT 8 VOLTS.
 4. UNBELIEVED VOLTAGES TAKEN WITH 250 WATT AC PLUG 100.
 5. SWITCHES VIEWED FROM REAR.

To SW1.
and
Pow. trans.

WESTINGHOUSE Models RLA1010A, 1010B, 1011A, 1011B, 1020A, 1020B, 1021A, 1021B, 1100B, 1110B, 1120A, RTA3010A, 3010B; Chassis V-2576

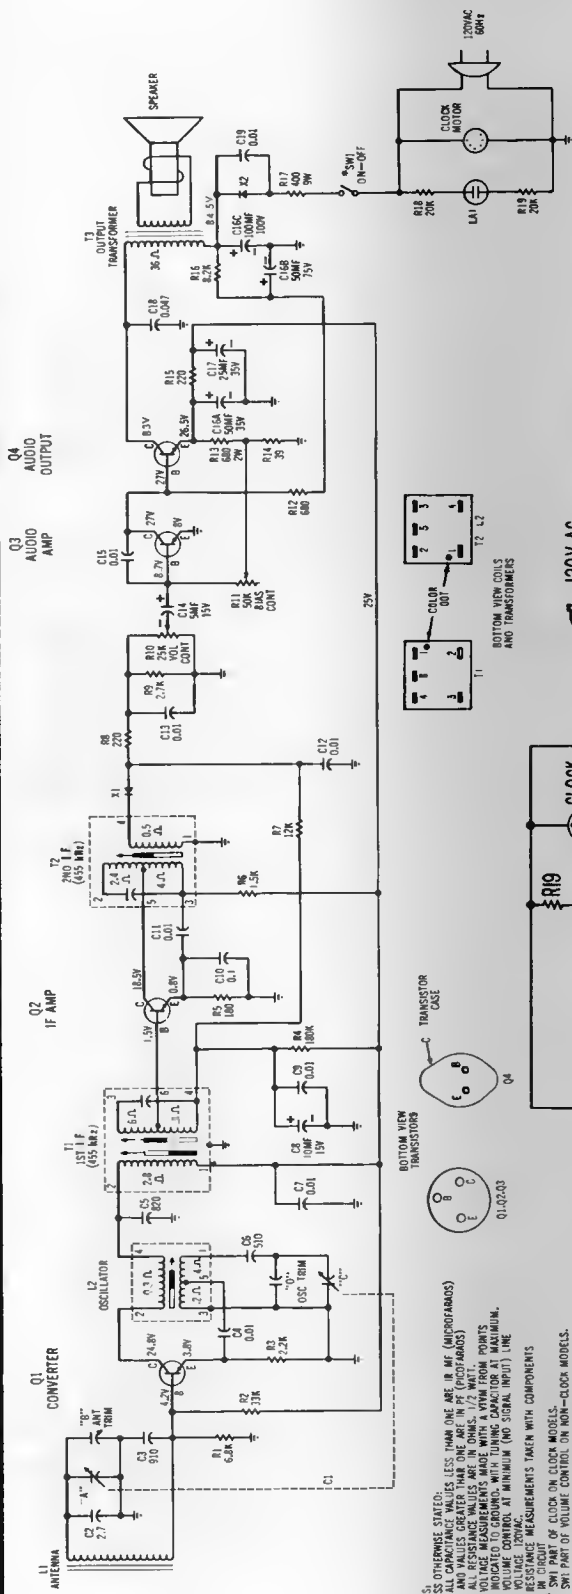



Chassis Top View.

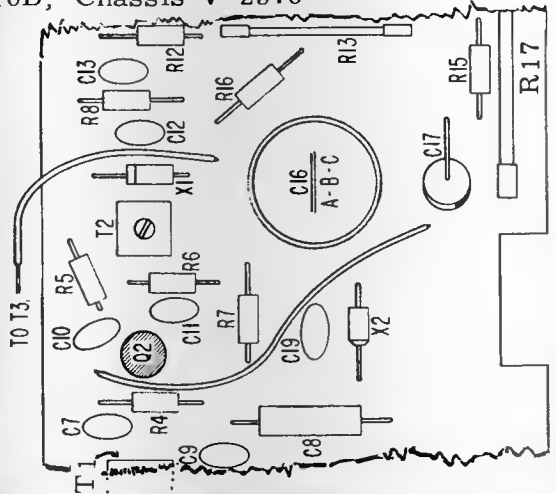

- NOTES:
- UNLESS OTHERWISE STATED:
 - ALL VALUES LESS THAN ONE ARE IN MF (MICROFARADS)
 - ALL VALUES GREATER THAN ONE ARE IN PF (PICOFARADS)
 - ALL RESISTANCE VALUES ARE IN OHMS, 1/2 WATT.
 - VOLUME MEASUREMENTS MADE WITH SIGNAL INPUT AT MAXIMUM.
 - VOLUME CONTROL AT MINIMUM (NO SIGNAL INPUT) LINE.
 - VOLTAGE, 120VAC.
 - AVC MEASUREMENTS TAKEN WITH COMPONENTS IN CIRCUIT.
 - SW1 PART OF CLOCK ON CLOCK MODELS.
 - SW1 PART OF VOLUME CONTROL ON NON-CLOCK MODELS.



Chassis Bottom View.

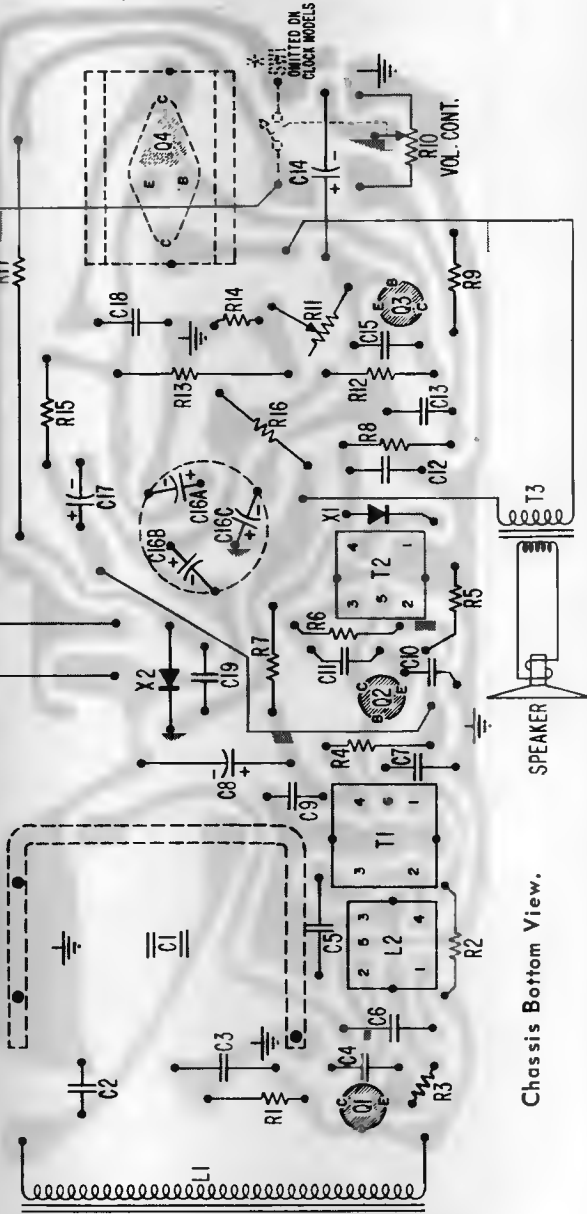

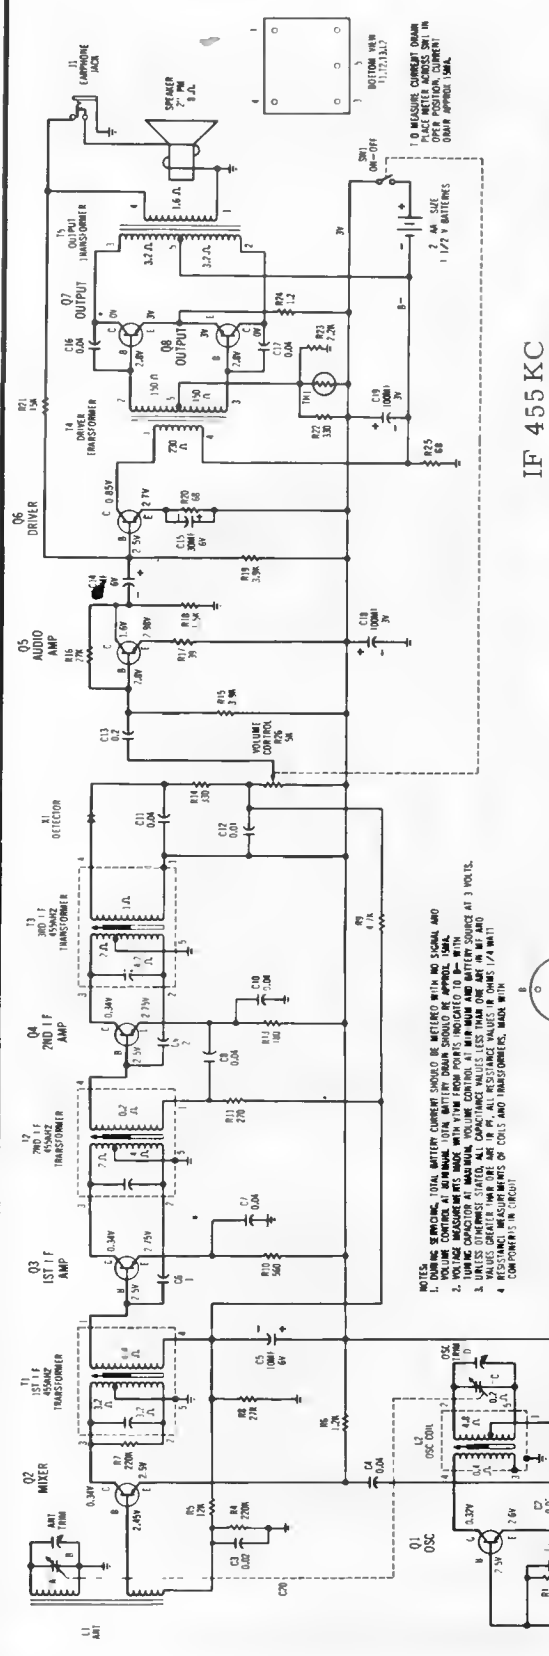


- NOTES:
1. VOLUME RESPONSE: TOTAL BATTERY CURRENT SHOULD BE MEASURED WITH NO SIGNAL AND WITH THE VOLUME CONTROL AT MAXIMUM. VOLUME CONTROL AT MINIMUM AND BATTERY SOURCE AT 3 VOLTS.
 2. VOLUME MEASUREMENTS MADE WITH VTM FROM POINTS INDICATED TO BE WITH TUNING CAPACITOR AT MAXIMUM.
 3. VALUES GREATER THAN ONE ARE IN P.P. ALL RESISTANCE VALUES IN OHMS (1/4 WATT) COMPONENTS IN CIRCUIT.
 4. RESISTANCE MEASUREMENTS OF COILS AND TRANSFORMERS, MADE WITH COMPONENTS IN CIRCUIT.

IF 455 KC

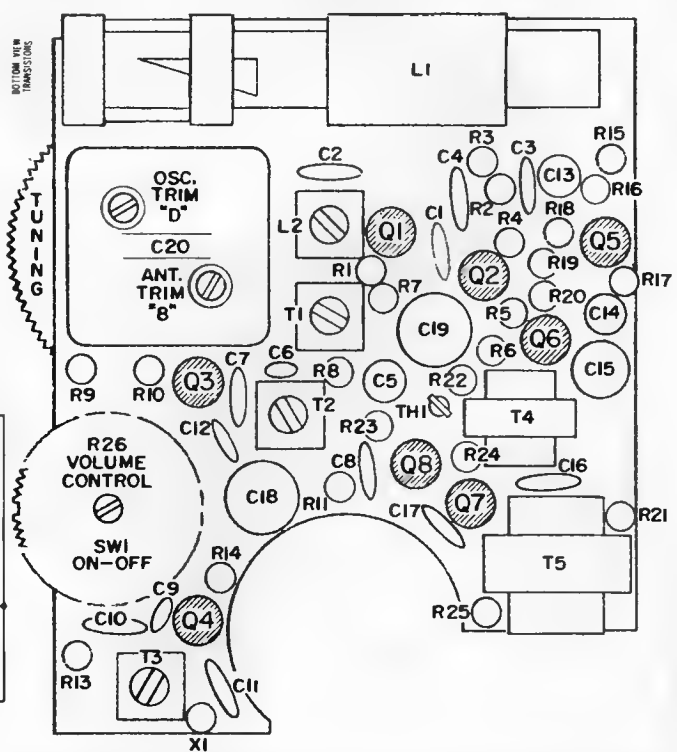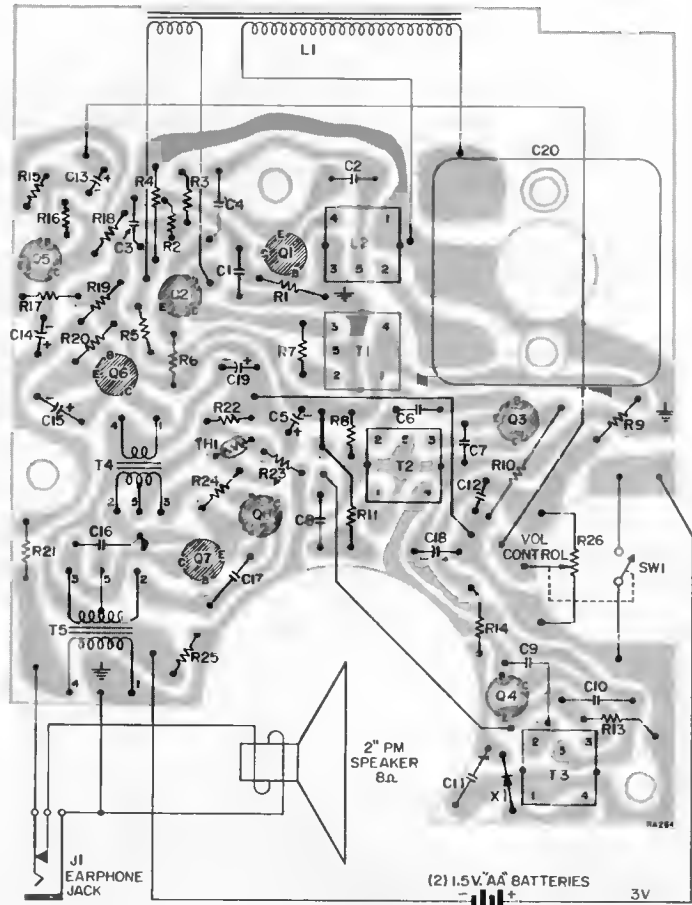


WESTINGHOUSE Model PS70E170; Chassis V-2684-1

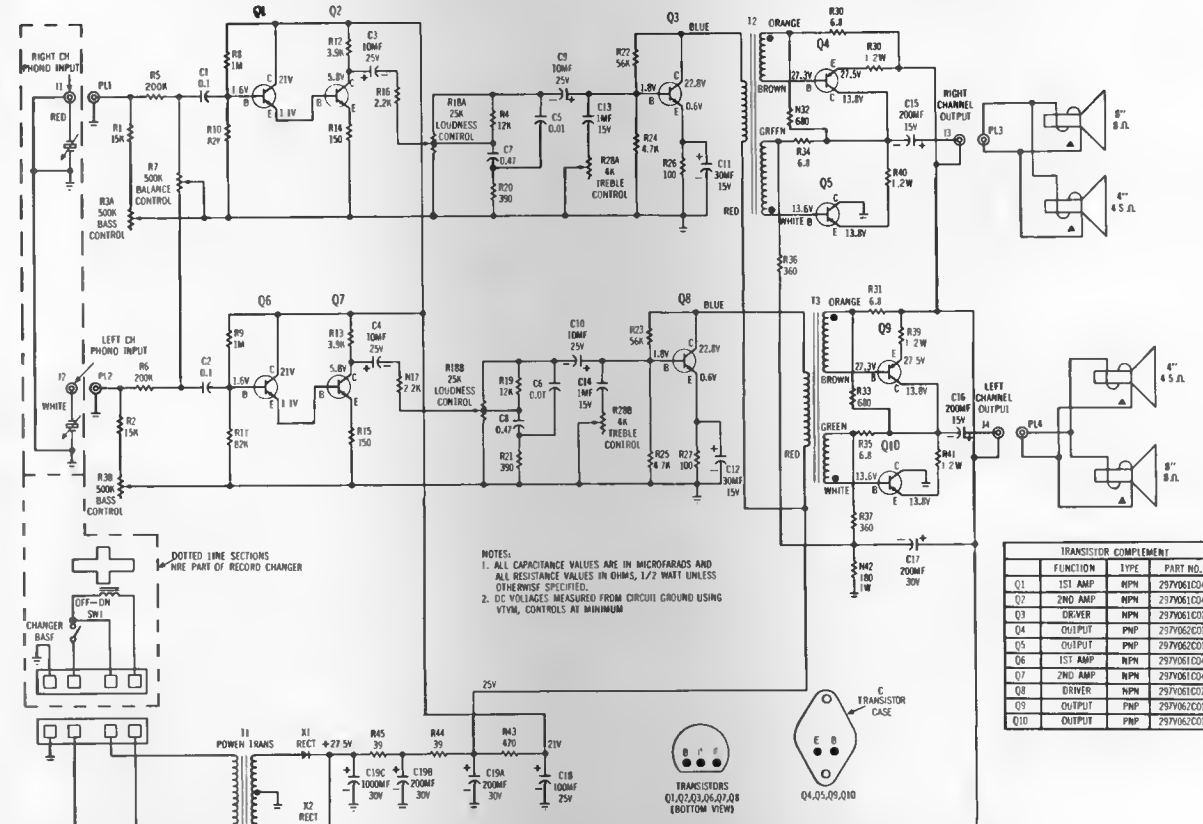


NOTES:
 1. ALL CAPACITANCE VALUES ARE IN MICROFARADS AND ALL RESISTANCE VALUES IN OHMS, 1/2 WATT UNLESS OTHERWISE SPECIFIED.
 2. DC VOLTAGES MEASURED FROM CIRCUIT GROUND USING VTVM, CONTROLS AT MINIMUM

TRANSISTOR COMPLEMENT		
FUNCTION	TYPE	PART NO.
Q1	1ST AMP	NPN 297061C04
Q2	2ND AMP	NPN 297061C04
Q3	DRIVER	NPN 297061C07
Q4	OUTPUT	PNP 297062C01
Q5	OUTPUT	PNP 297062C01
Q6	1ST AMP	NPN 297061C04
Q7	2ND AMP	NPN 297061C04
Q8	DRIVER	NPN 297061C07
Q9	OUTPUT	PNP 297062C01
Q10	OUTPUT	PNP 297062C01

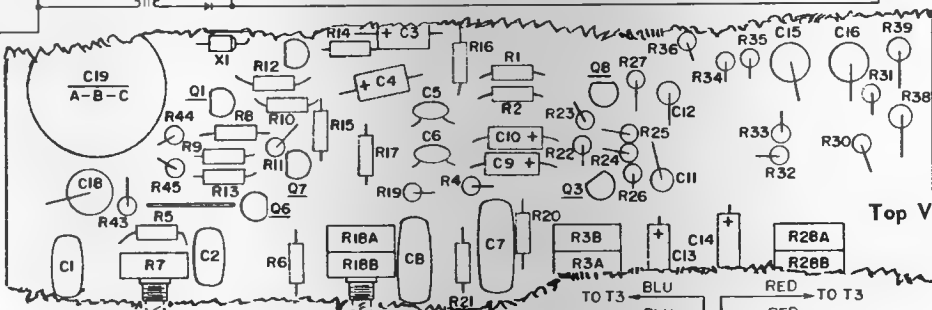


Top View of PC Board

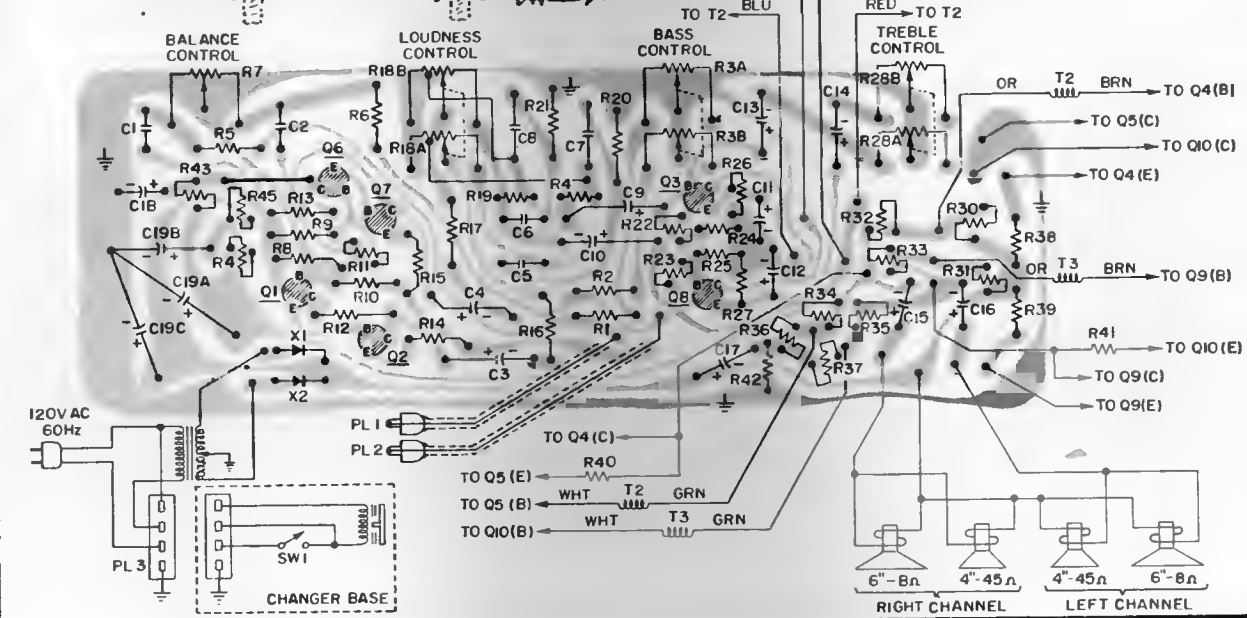

WESTINGHOUSE Models CR705A, H-975XLNA, RLF-1090A, RTF-3040A;
Chassis V-2598-1, 2, 3

(Continued on next page.)


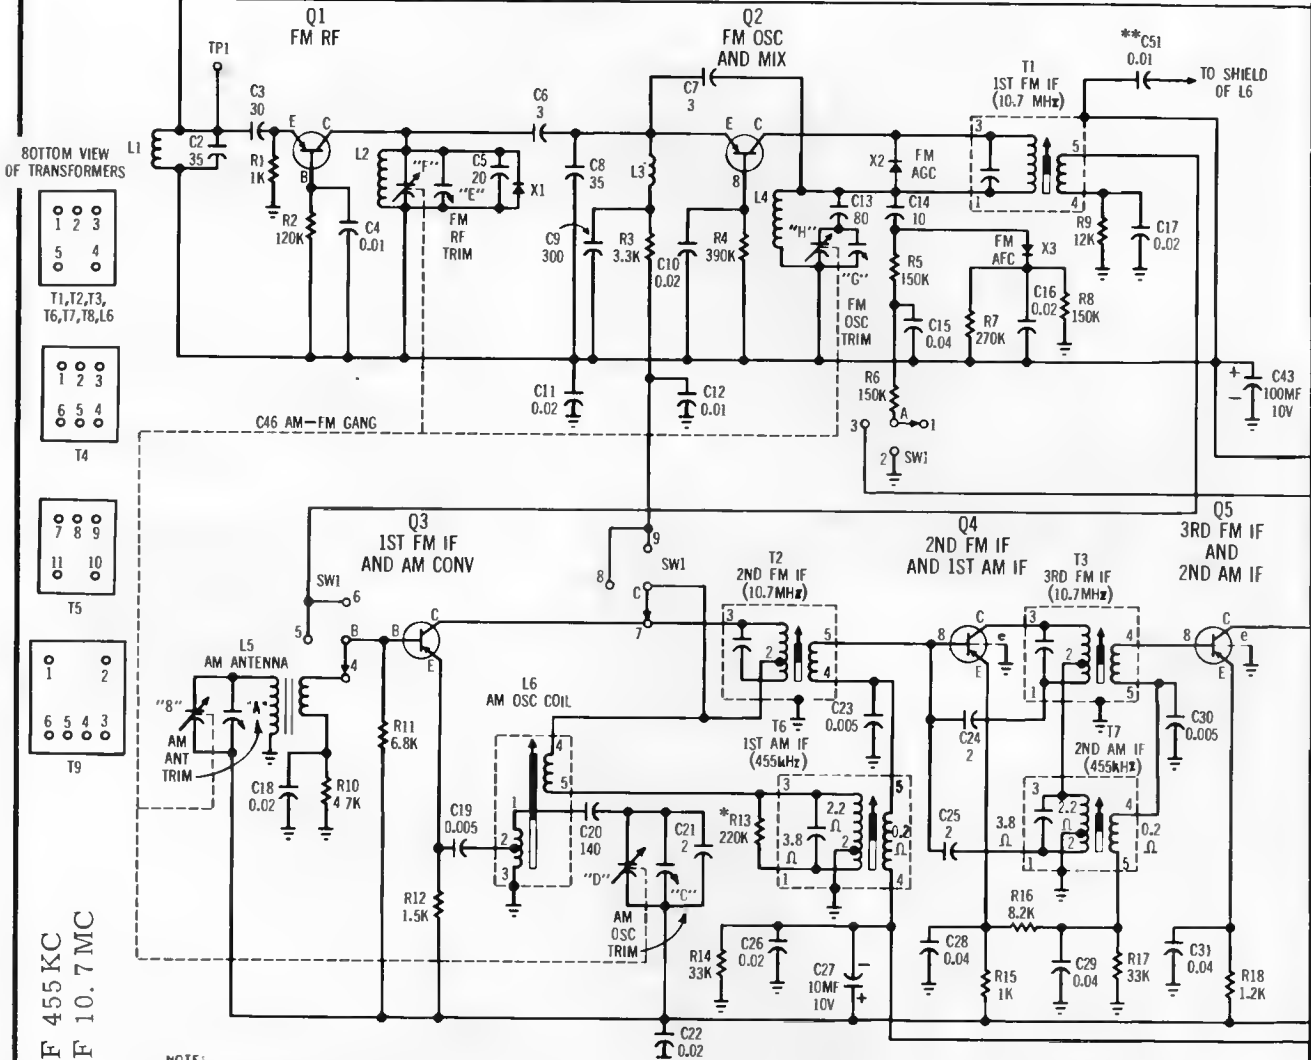


BOTTOM VIEW OF TRANSFORMERS



AM IF 455 KC
FM IF 10.7 MC

- NOTE:
1 SW1 SHOWN IN AM POSITION.
2 C51 LOCATED ON TOP OF BOARD (V2598-2)
3 BROKEN LINES LOCATED ON TOP OF BOARD.

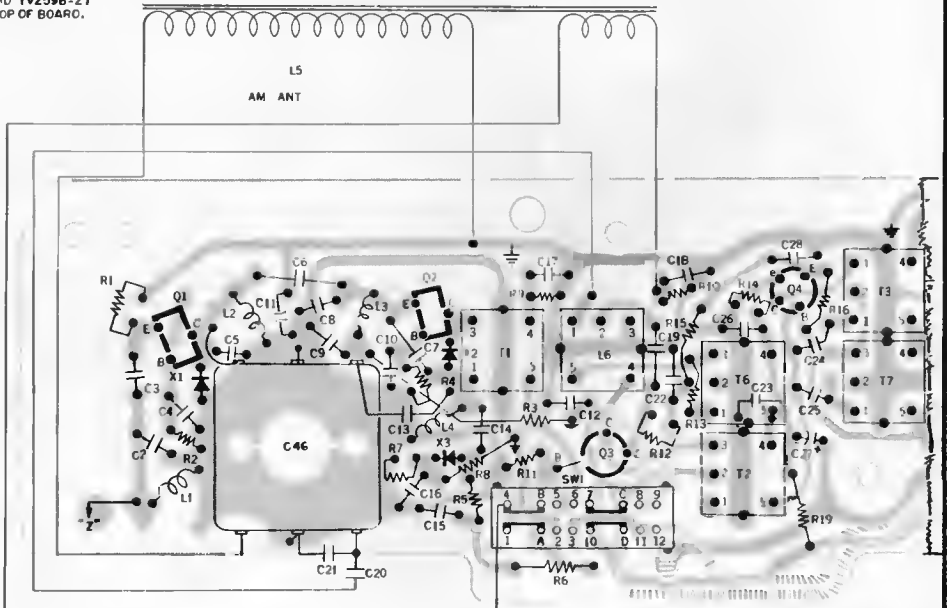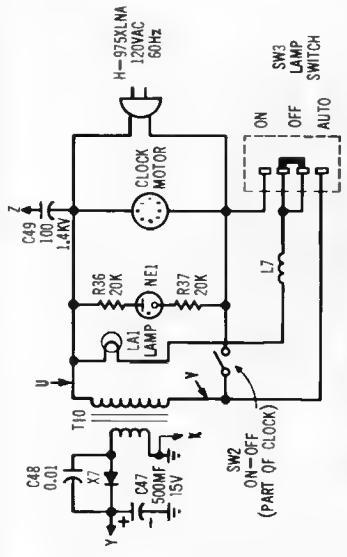


P.C. Board Bottom View.

WESTINGHOUSE Models CR705A, H-975XLNA, RLF-1090A, RTF-3040A;


Chassis V-2598-1, 2, 3

(Continued from preceding page.)


BOTTOM VIEW OF TRANSISTORS




SW1 BOTTOM VIEW AM-FM-FM AFC SWITCH SHOWN IN AM POSITION



Models:
CR705A
H-975XLNA
RLF-1090A
RTF-3040A

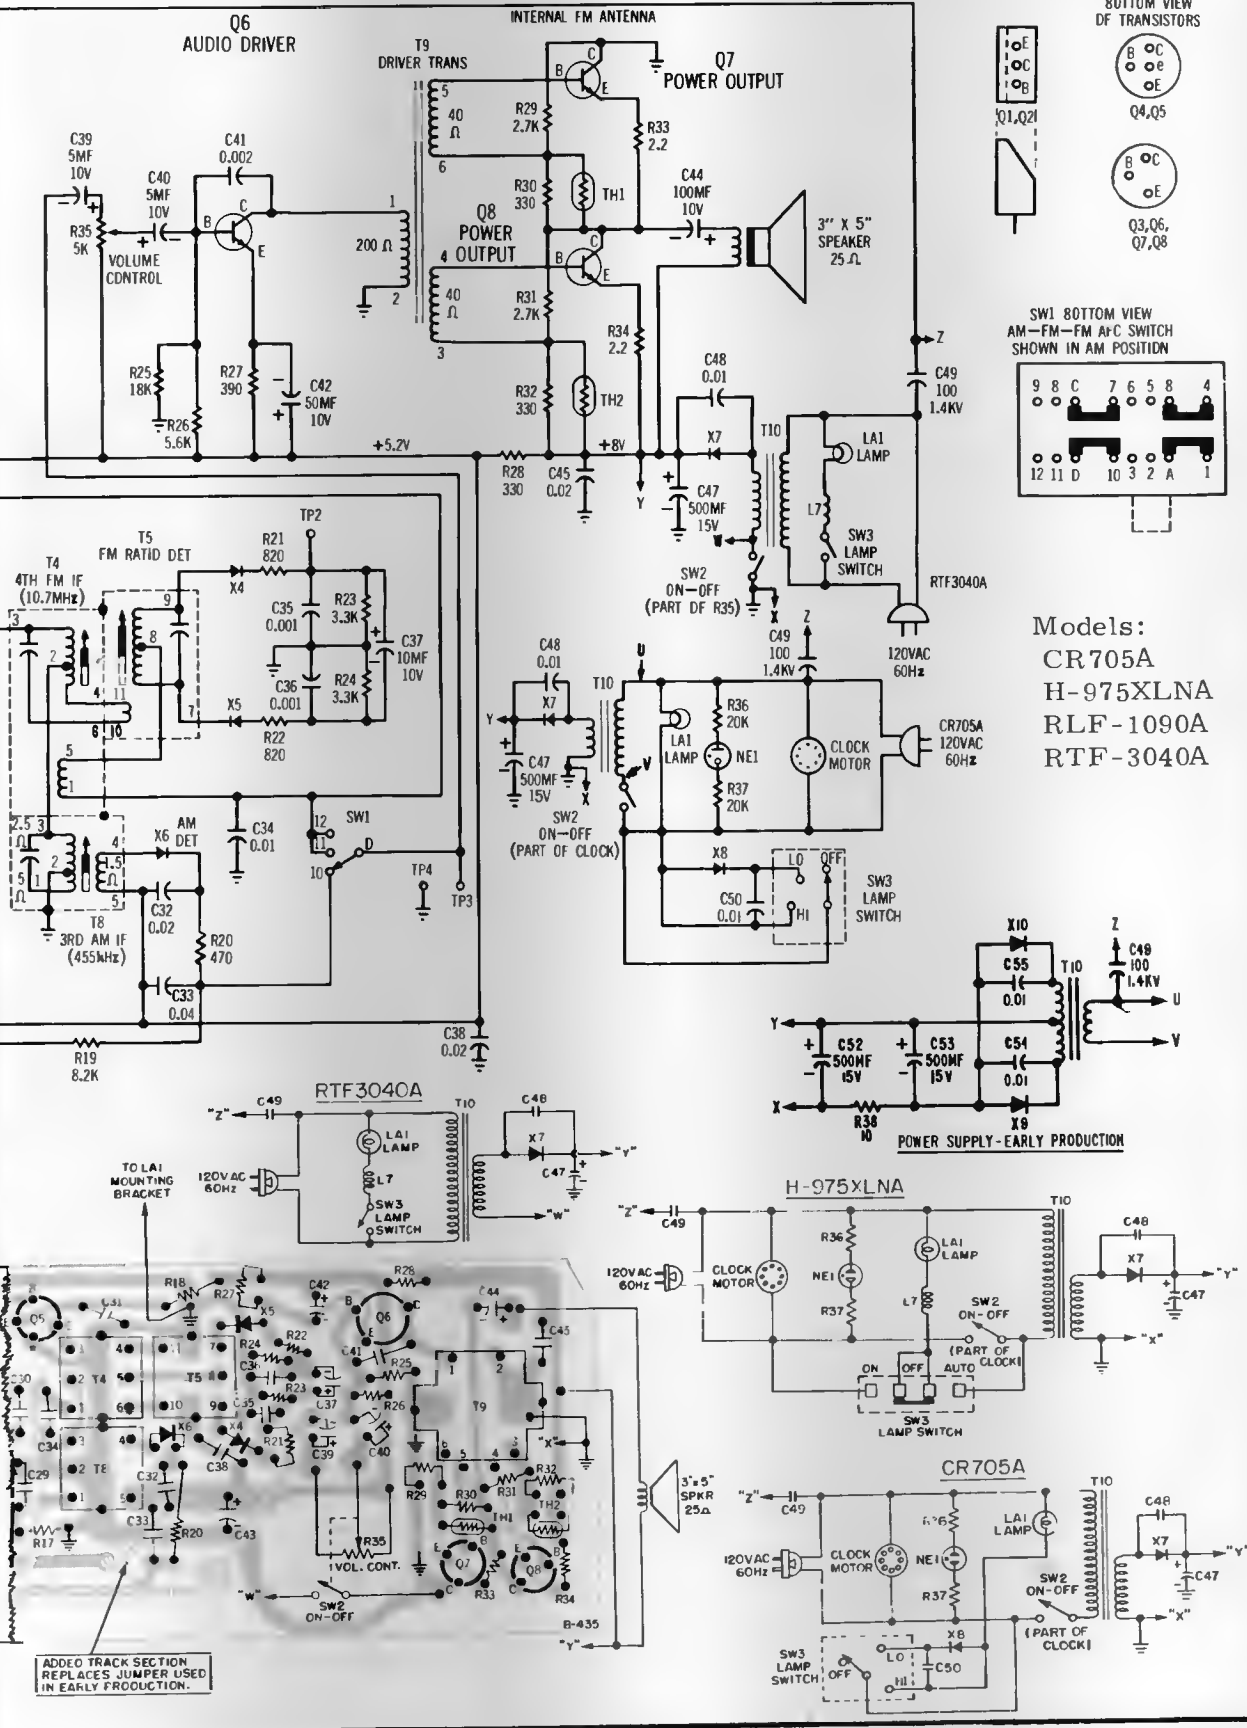


WESTINGHOUSE Model PAS7080A; Chassis V-4003C01

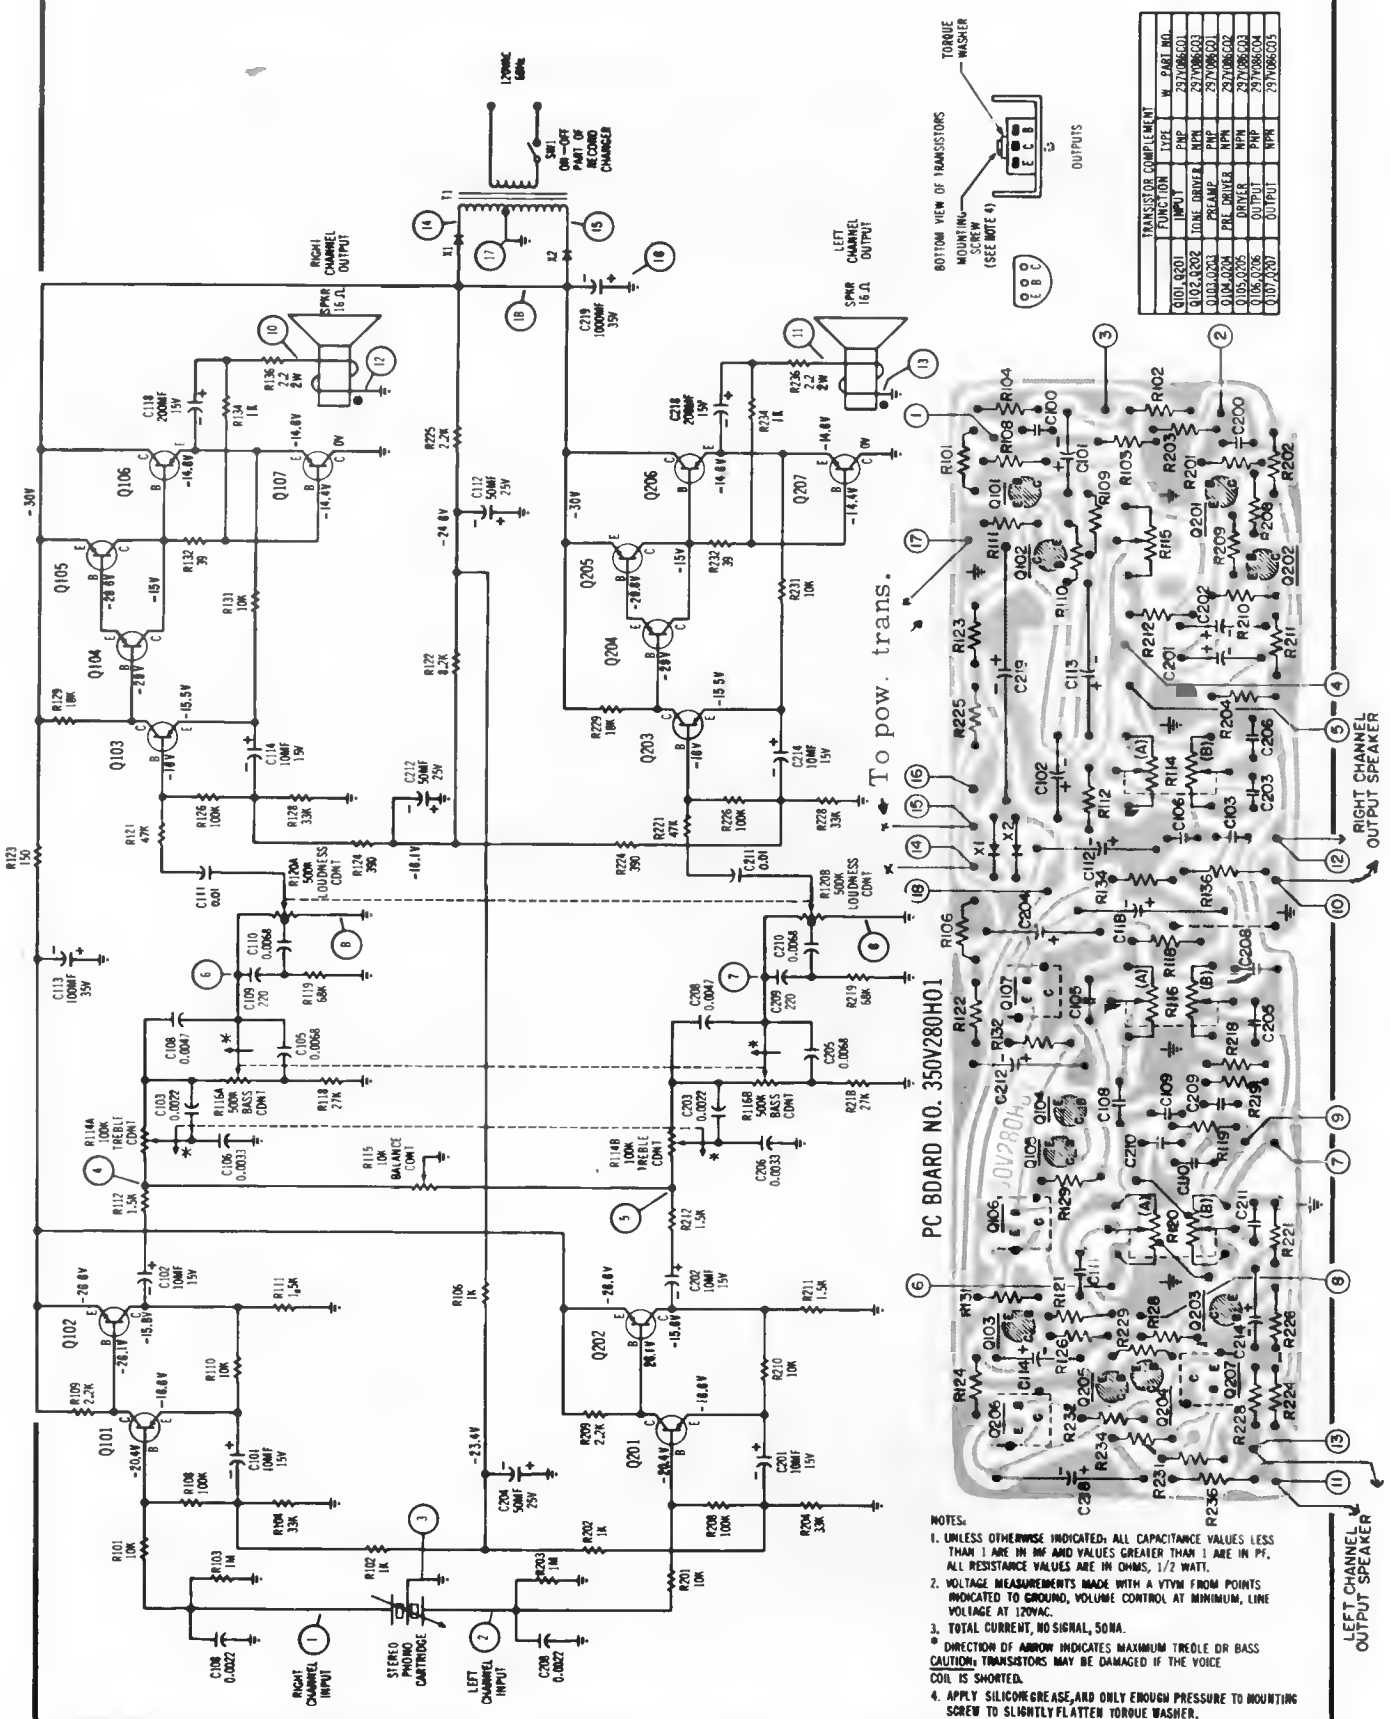

TRANSISTOR	COMPLEMENT	TYPE	M. PART NO.
Q101, Q201	INPUT	PNP	297086C01
Q102, Q202	TONE DRIVER	NPN	297086C01
Q103, Q203	PNP DRIVER	PNP	297086C01
Q104, Q204	PNP DRIVER	PNP	297086C01
Q105, Q205	PNP DRIVER	PNP	297086C01
Q106, Q206	OUTPUT	PNP	297086C01
Q107, Q207	OUTPUT	NPN	297086C01

- NOTES:
- UNLESS OTHERWISE INDICATED; ALL CAPACITANCE VALUES LESS THAN 1 ARE IN MF AND VALUES GREATER THAN 1 ARE IN PF. ALL RESISTANCE VALUES ARE IN OHMS, 1/2 WATT.
 - VOLTAGE MEASUREMENTS MADE WITH A VTVM FROM POINTS INDICATED TO GROUND, VOLUME CONTROL AT MINIMUM, LINE VOLTAGE AT 120VAC.
 - TOTAL CURRENT, NO SIGNAL, 50MA.
 - DIRECTION OF ARROW INDICATES MAXIMUM TREBLE OR BASS CAUTION: TRANSISTORS MAY BE DAMAGED IF THE VOICE COIL IS SHORTED.
 - APPLY SILICONE GREASE, AND ONLY ENOUGH PRESSURE TO MOUNTING SCREW TO SLIGHTLY FLATTEN TORQUE WASHER.

WESTINGHOUSE Model PAS7020A; Chassis V-4002C01

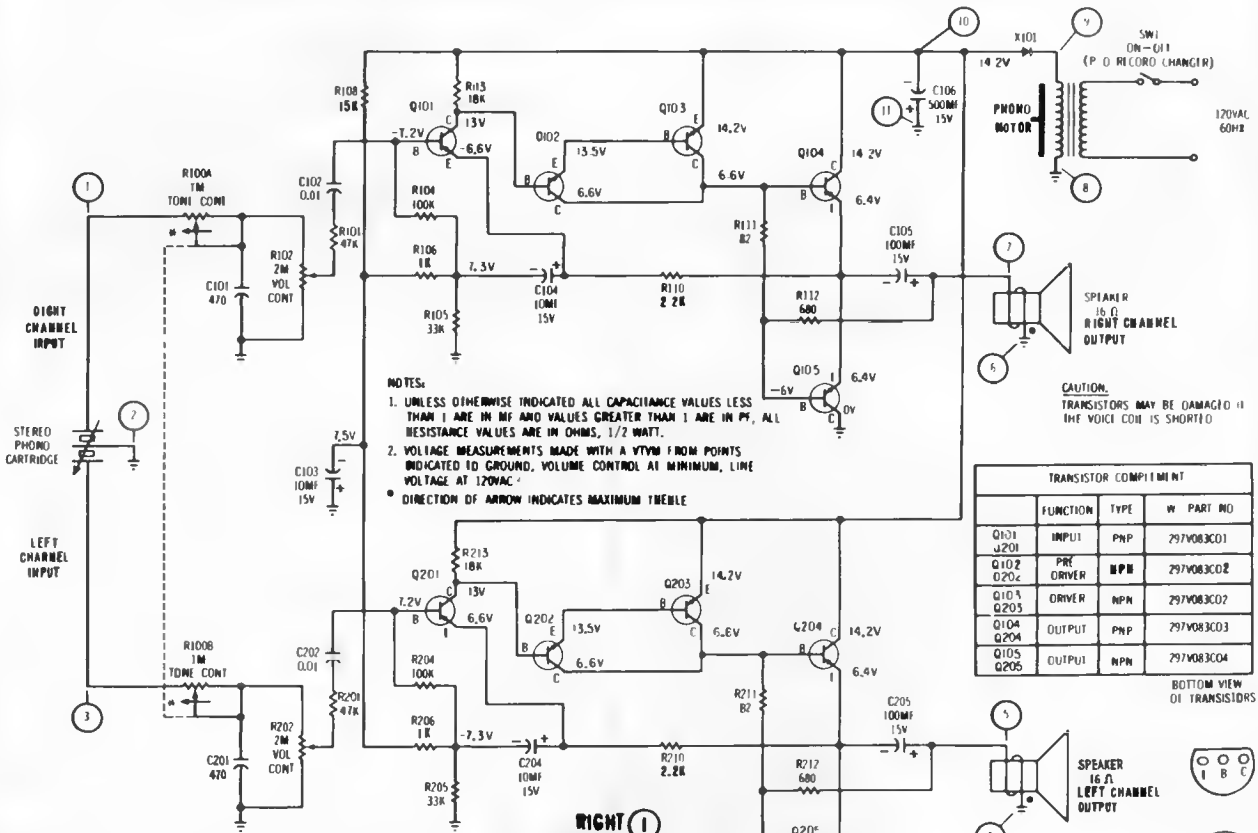


TRANSISTOR COMPILMENT				
	FUNCTION	TYPE	W PART NO	
Q101	INPUT	PNP	297V083C01	
Q201	PNP DRIVER	NPN	297V083C02	
Q102	Q202	DRIVER	NPN	297V083C02
Q103	Q203	DRIVER	NPN	297V083C02
Q104	Q204	OUTPUT	PNP	297V083C03
Q105	Q205	OUTPUT	NPN	297V083C04


BOTTOM VIEW OF TRANSISTORS



Top View of Chassis

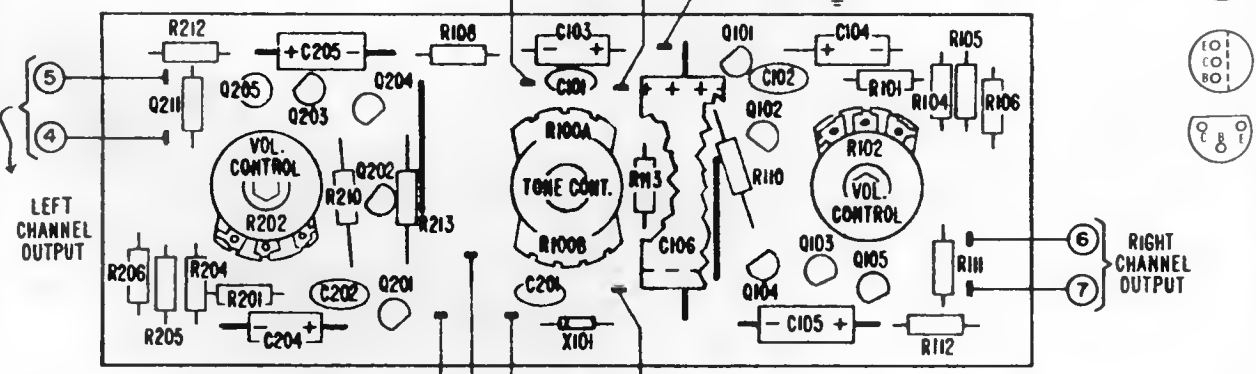

Bottom View of PC Board Showing Top Components


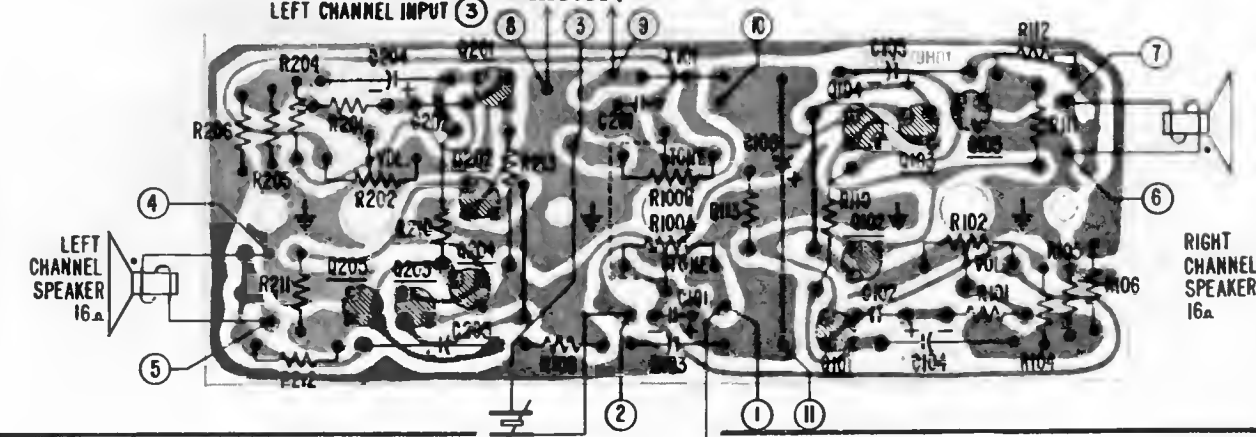


ZENITH Chassis 9ZT15, Models Z430, Z434, T2546 (Continued across page)



Q1
F.M. R.F.
(121-612)

Q2
F.M. CONV.
(121-613)


Q201
A.M.-F.M. 1ST. I.F.
(121-614)

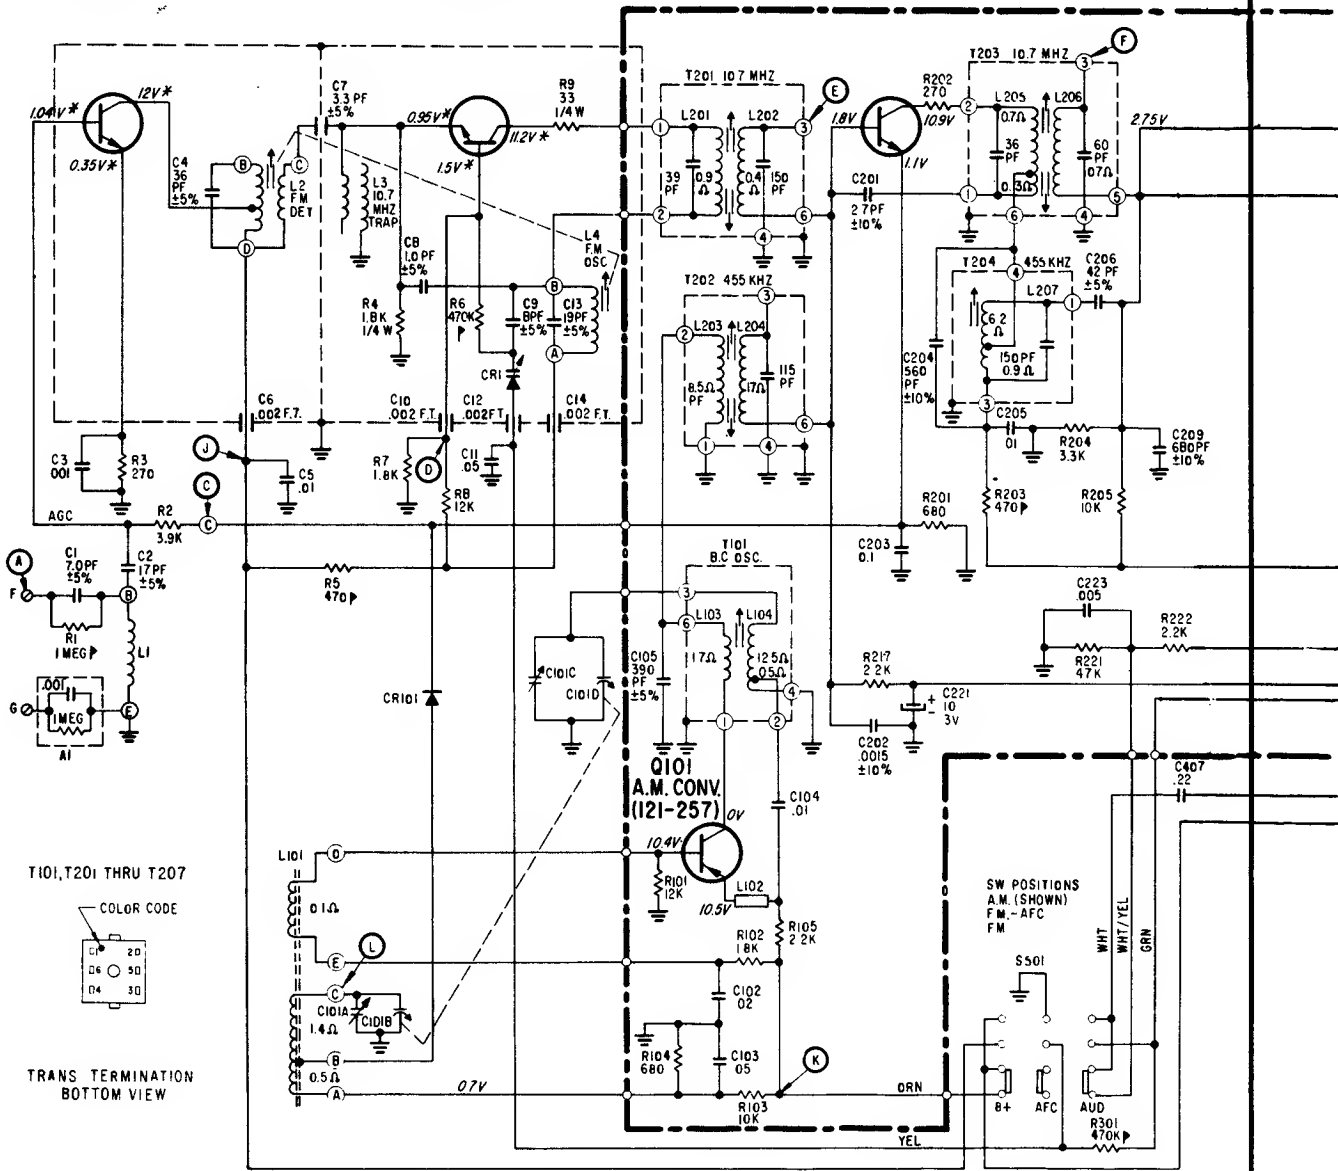


TRANS TERMINATION
BOTTOM VIEW

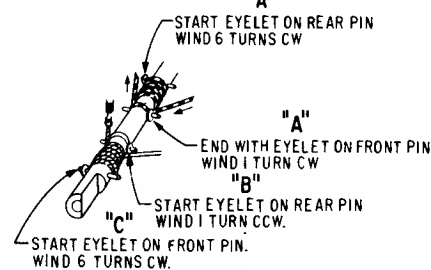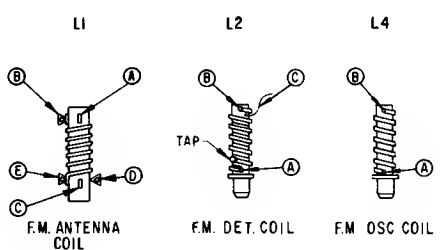


Q1, Q2, Q201, Q202, Q203, Q401, Q402




Q101



ALTERNATE
Q202, Q203



Q411





SILICON
PWR TRANSISTOR

ZENITH Chassis 9ZT15, Models Z430, Z434, T2546

(Continued from page 180)

Q202
A.M.-F.M. 2ND. I.F.
(121-546)

Q203
F.M. 3RD. I.F.
(121-546)

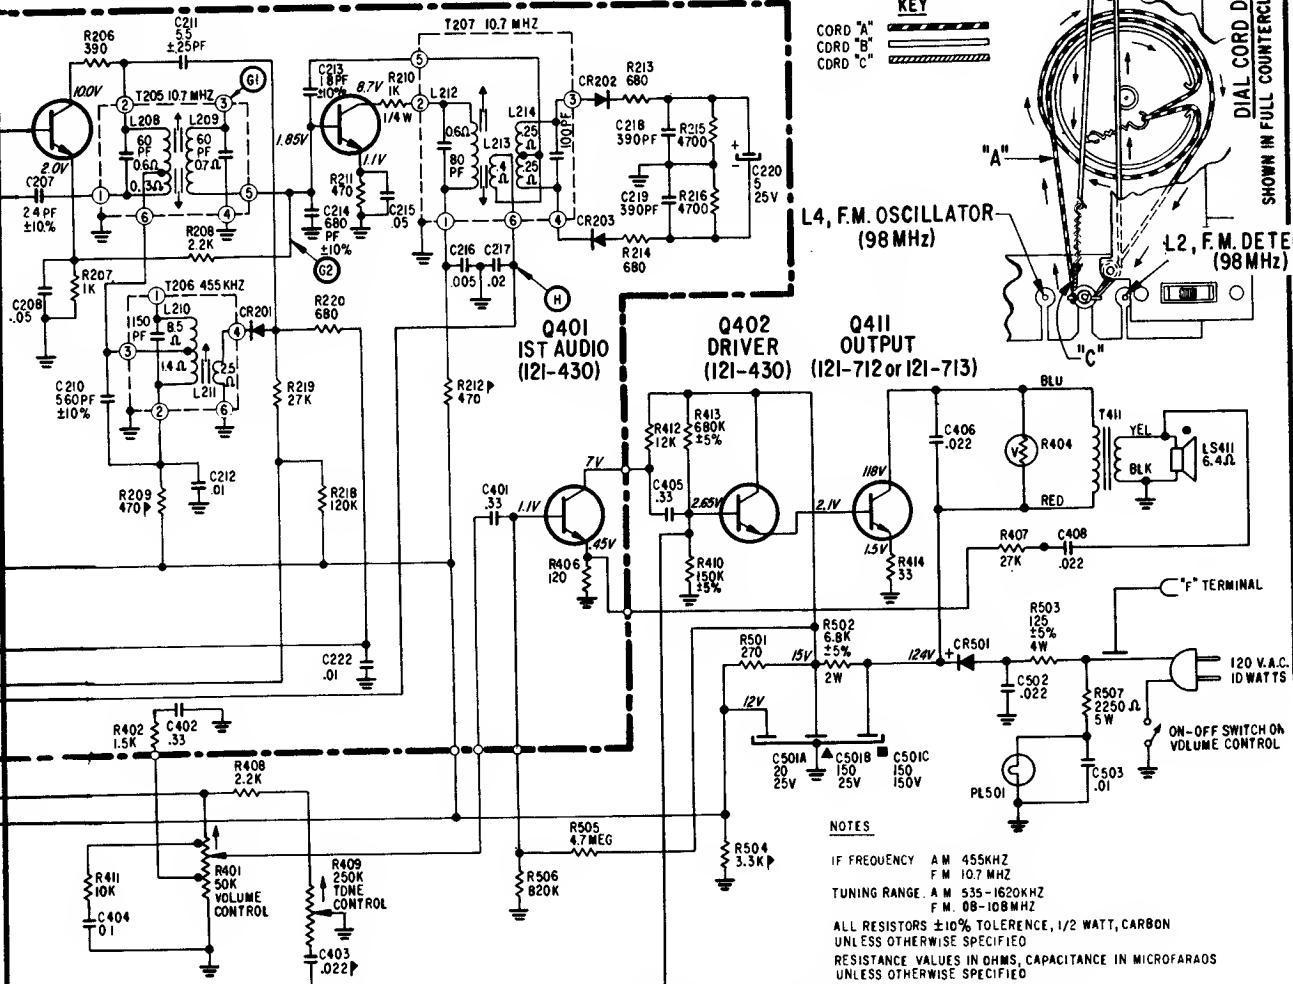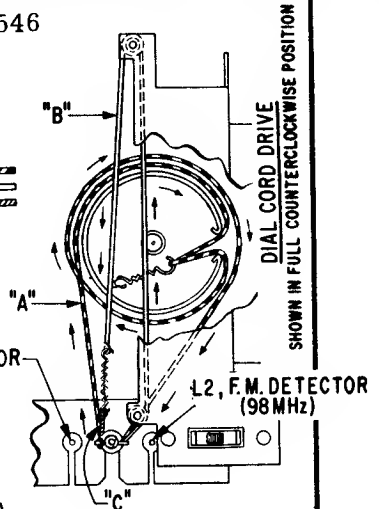


NOTES

IF FREQUENCY A M 455KHZ
F M 10.7 MHZ
TUNING RANGE. A M 535-1620KHZ
F M. 08-108MHZ

ALL RESISTORS ±10% TOLERANCE, 1/2 WATT, CARBON
UNLESS OTHERWISE SPECIFIED

RESISTANCE VALUES IN OHMS, CAPACITANCE IN MICROFARADS
UNLESS OTHERWISE SPECIFIED

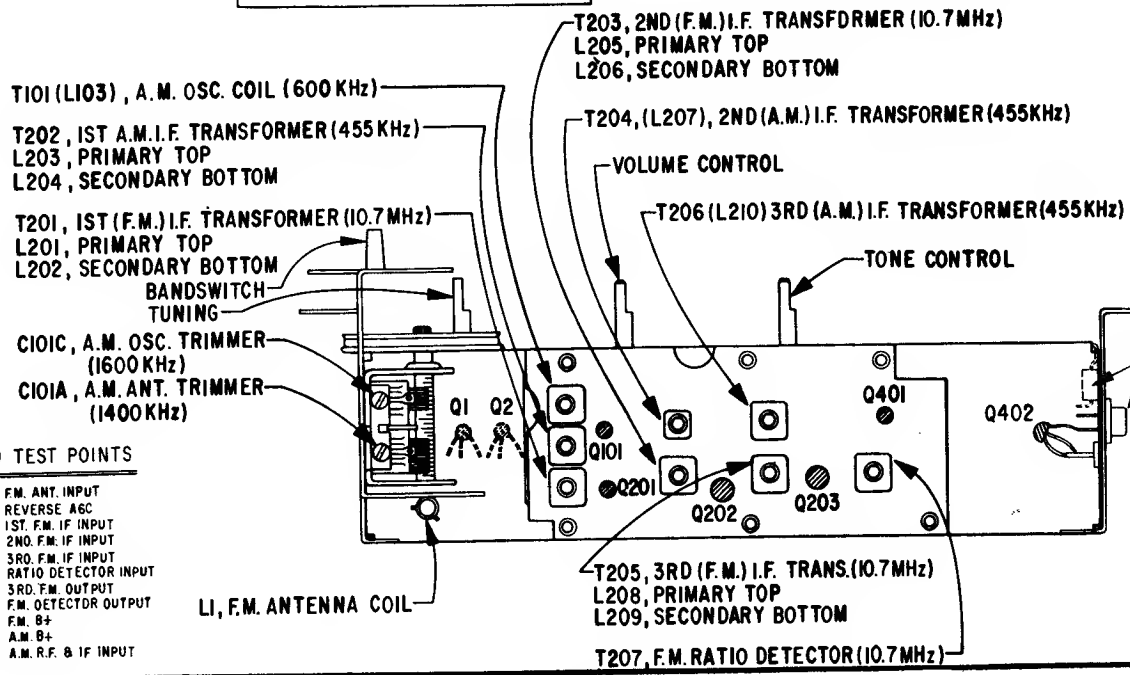


- TEST POINTS
- A F.M. ANT. INPUT
 - C REVERSE AGC
 - D 1ST. F.M. IF INPUT
 - E 2ND. F.M. IF INPUT
 - F 3RD. F.M. IF INPUT
 - G1 RATIO DETECTOR INPUT
 - G2 3RD. F.M. OUTPUT
 - H F.M. DETECTOR OUTPUT
 - J F.M. B+
 - K A.M. B+
 - L A.M. R.F. & IF INPUT


ZENITH RADIO CORPORATION

Chassis 4NT23Z2, 4NT23Z9,
4NT24Z2, 4NT24Z9,
4NT25Z2, 4NT25Z9,

Models N855C, W,
N870F, J, W, N875A, M

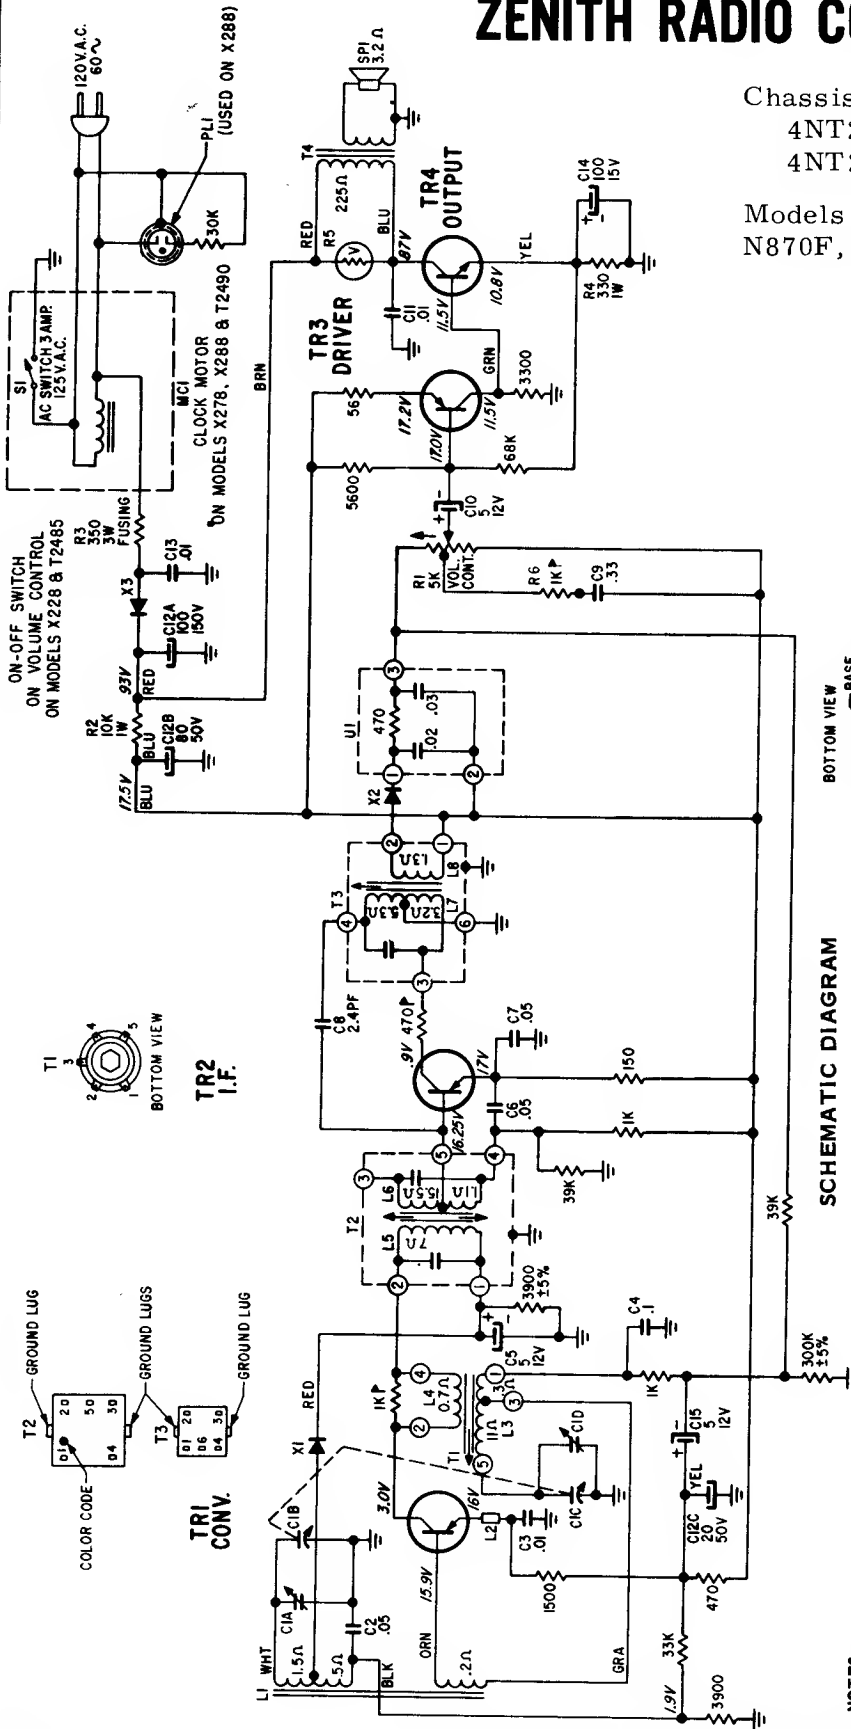


SCHEMATIC DIAGRAM

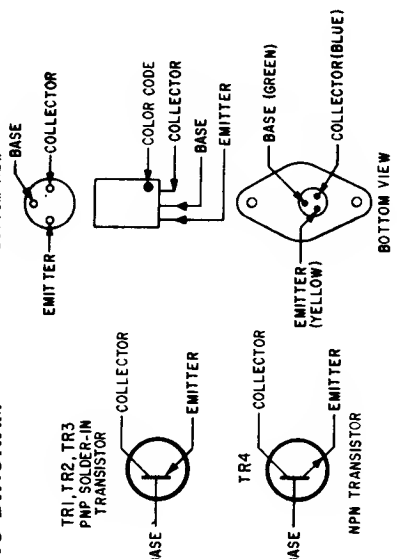




- NOTES:**
1. I.F. FREQUENCY 455 KC
 2. TUNING RANGE 535 - 1620 KC
 3. ALL RESISTORS ± 10% TOLERANCE, 1/2 WATT, CARBON UNLESS OTHERWISE SPECIFIED.
 4. RESISTANCE VALUES IN OHMS, CAPACITANCE IN MICROFARADS UNLESS OTHERWISE SPECIFIED.
 5. ALL VOLTAGES ARE D.C. UNLESS OTHERWISE SPECIFIED.
 6. D.C. VOLTAGES SHOWN ARE MEASURED WITH NO SIGNAL USING A VACUUM TUBE VOLTMETER.
 7. VIEWED FROM THE FRONT, ARROW ON VOLUME CONTROL INDICATES CLOCKWISE ROTATION.
 8. DENOTES CHASSIS
 9. FOR CAPACITOR TOLERANCES SEE LEGEND.
 10. INDICATES ± 20% TOLERANCE.

ZENITH RADIO CORPORATION


MODEL T325 W & M CHASSIS 7M05

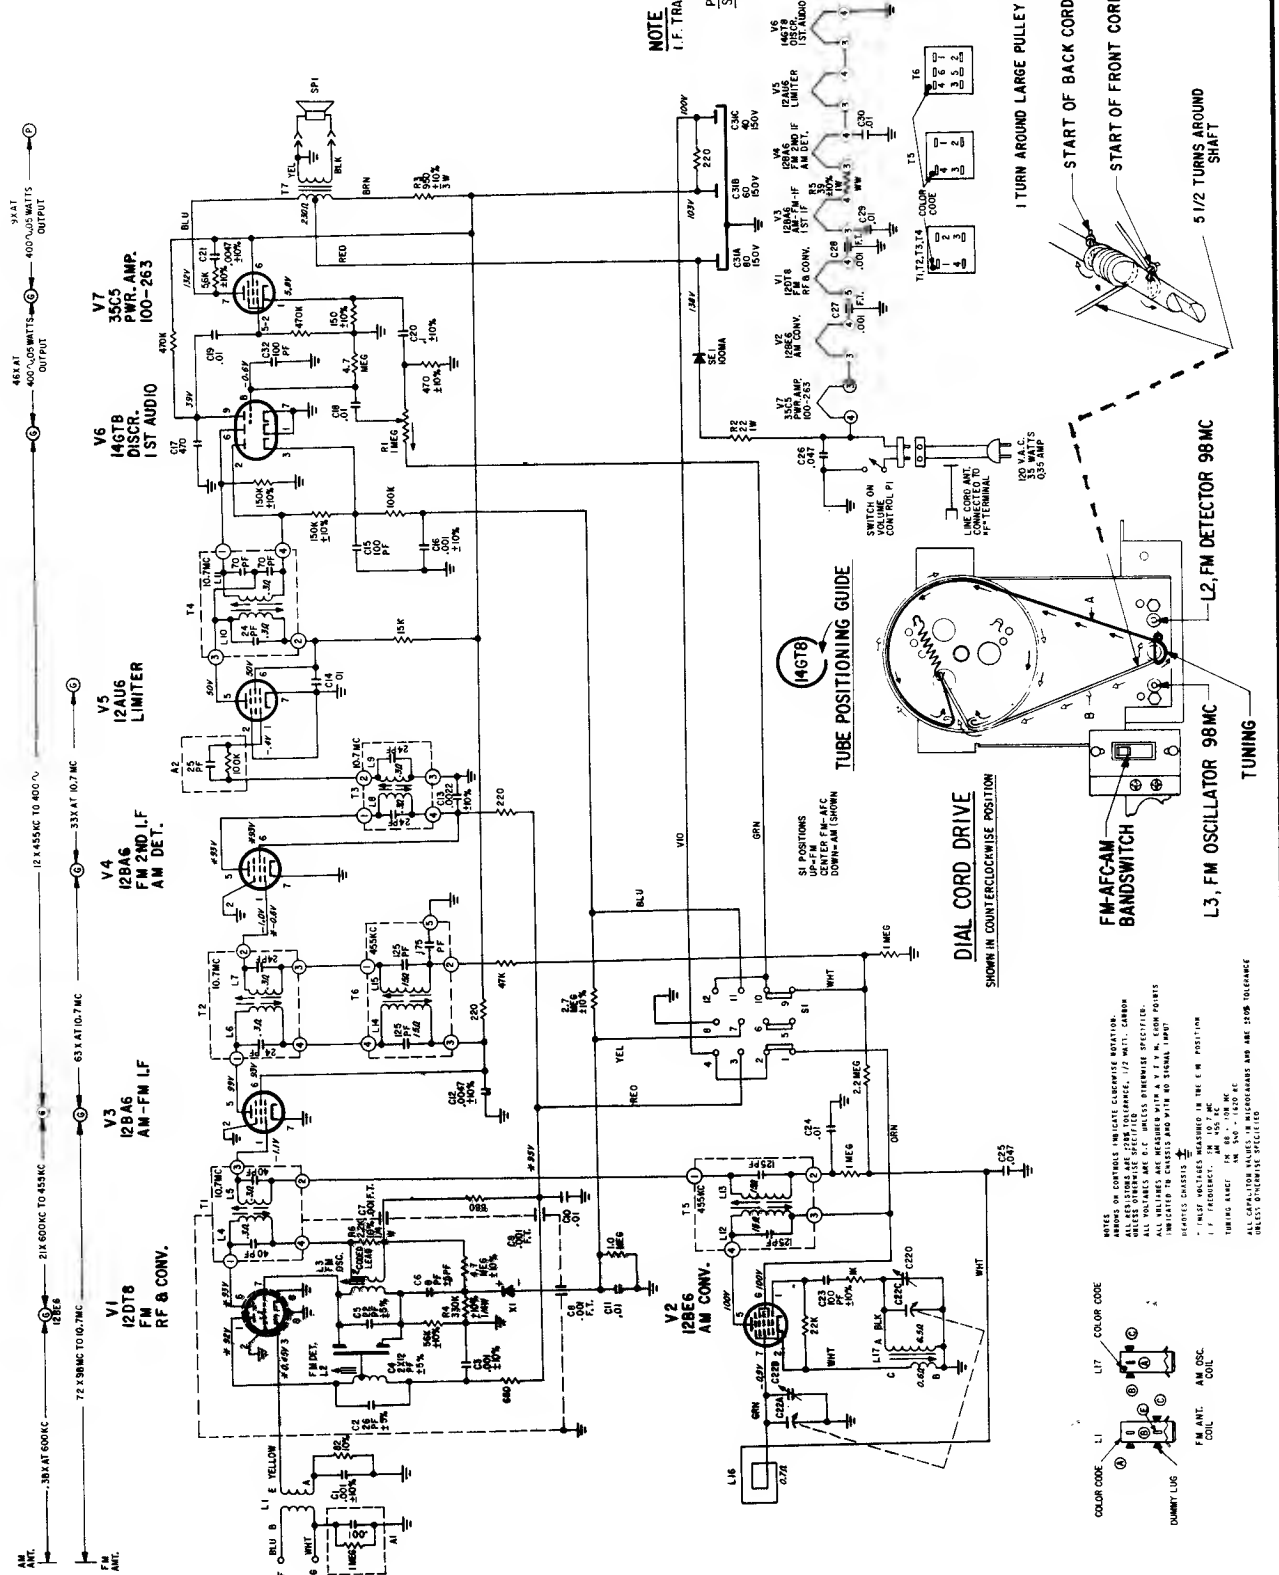

NOTE
 I.F. TRANSFORMER CORE POSITIONS
 ARE AS FOLLOWS
 PRIMARY - BOTTOM
 SECONDARY - TOP

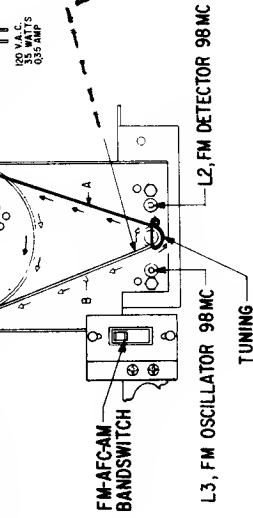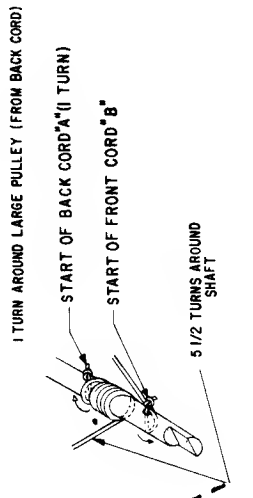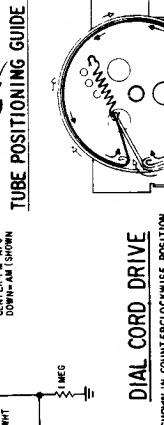



NOTES ON COMPONENTS:
 1. VALUES IN PARENTHESES ARE TOLERANCES.
 2. ALL CAPACITORS ARE IN MICROFARADS UNLESS OTHERWISE SPECIFIED.
 3. ALL RESISTORS ARE IN OHMS UNLESS OTHERWISE SPECIFIED.
 4. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
 5. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
 6. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
 7. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.




ZENITH RADIO CORPORATION

Chassis 4ZT28, 4ZT29,

Models Z212, Z214, Z260, Z265, T2504, T2511

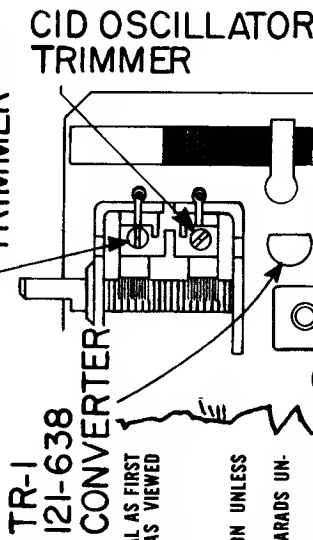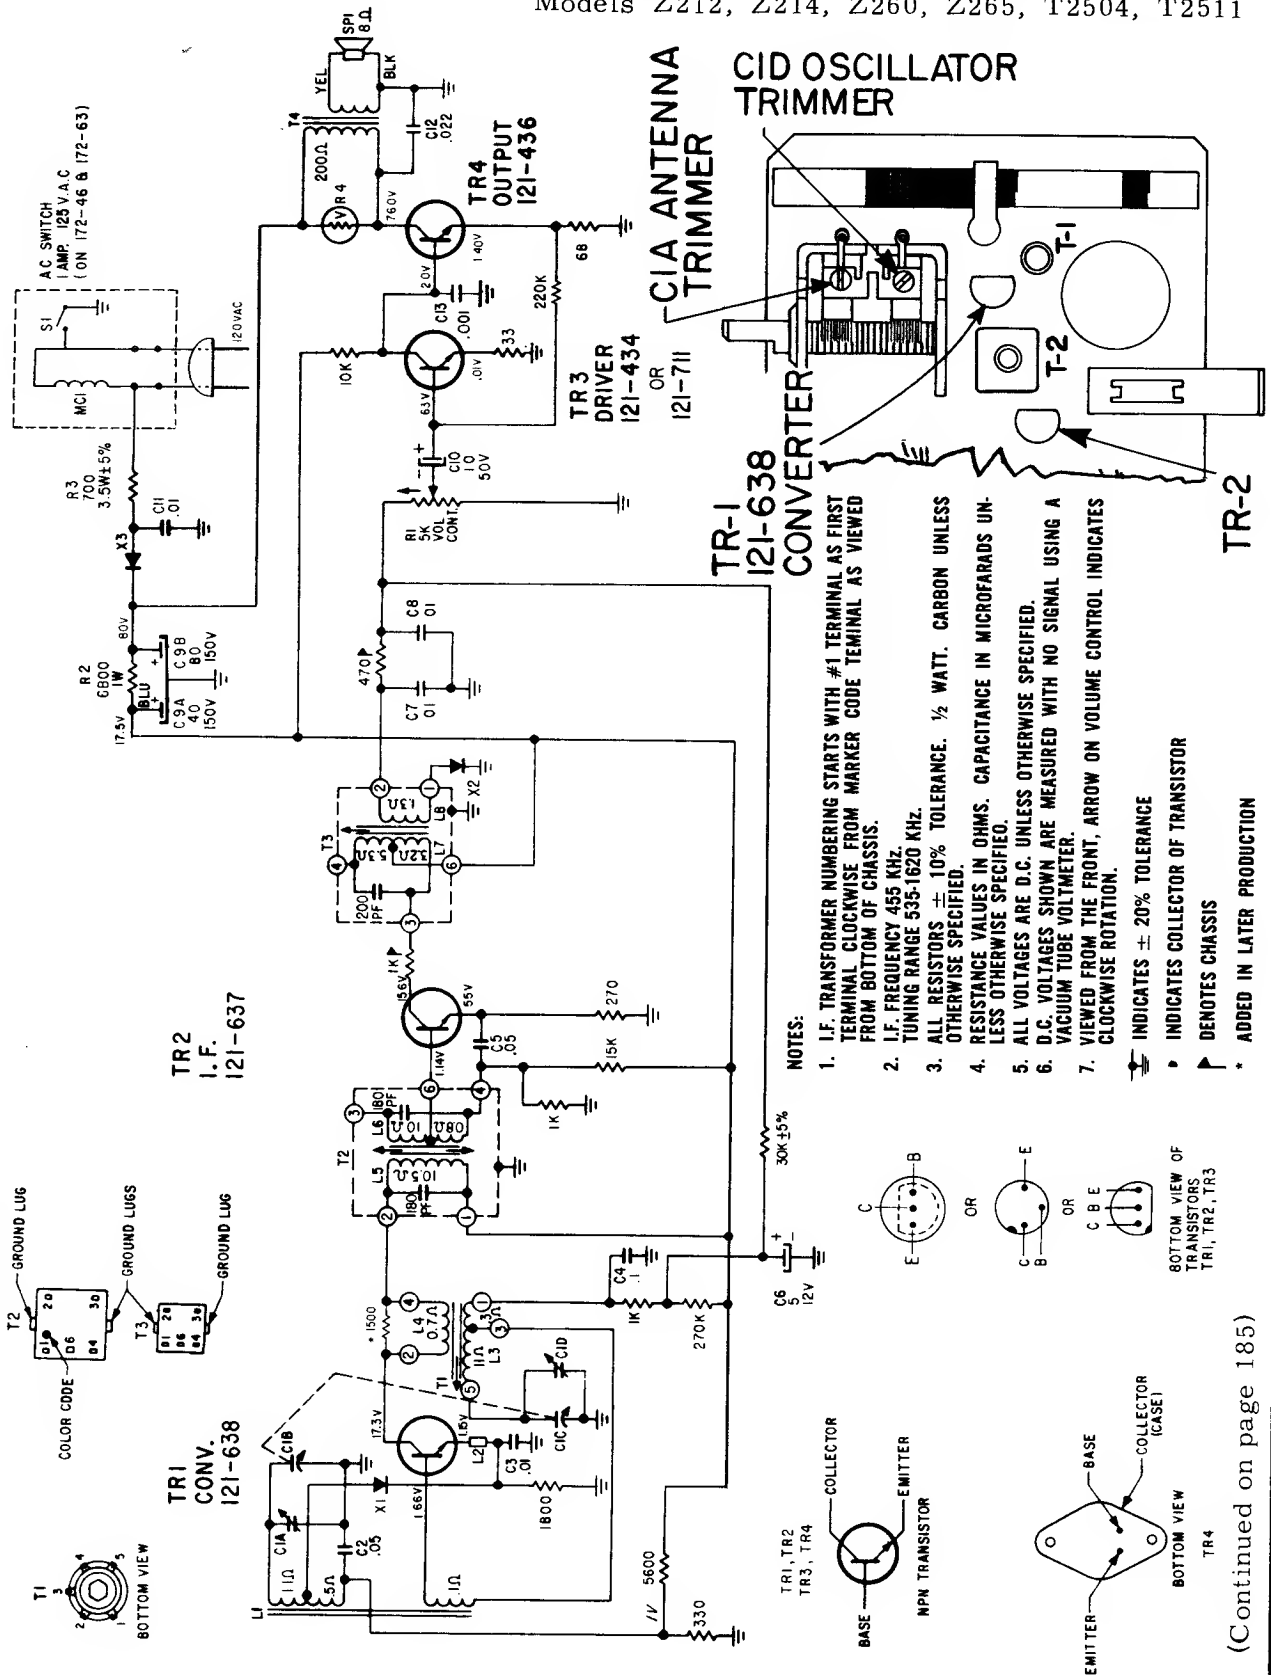

- NOTES:**
1. I.F. TRANSFORMER NUMBERING STARTS WITH #1 TERMINAL AS FIRST TERMINAL CLOCKWISE FROM MARKER CODE TERMINAL AS VIEWED FROM BOTTOM OF CHASSIS.
 2. I.F. FREQUENCY 455 KHZ.
 3. TUNING RANGE 535-1620 KHZ. OTHERWISE SPECIFIED.
 4. ALL RESISTORS ± 10% TOLERANCE. ½ WATT. CARBON UNLESS OTHERWISE SPECIFIED.
 5. RESISTANCE VALUES IN OHMS. CAPACITANCE IN MICROFARADS UNLESS OTHERWISE SPECIFIED.
 6. ALL VOLTAGES ARE D.C. UNLESS OTHERWISE SPECIFIED.
 7. D.C. VOLTAGES SHOWN ARE MEASURED WITH NO SIGNAL USING A VACUUM TUBE VOLTMETER. VIEWED FROM THE FRONT, ARROW ON VOLUME CONTROL INDICATES CLOCKWISE ROTATION.
- ⊕ INDICATES ± 20% TOLERANCE
 - ▶ INDICATES COLLECTOR OF TRANSISTOR
 - ▲ DENOTES CHASSIS
 - * ADDED IN LATER PRODUCTION

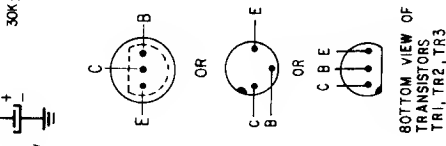


BOTTOM VIEW OF TRANSISTORS TR1, TR2, TR3

BOTTOM VIEW (CASE) TR4

(Continued on page 185)

ZENITH RADIO CORPORATION


Chassis 4ZT28, 4ZT29, Continued
(See page 184 for diagram)

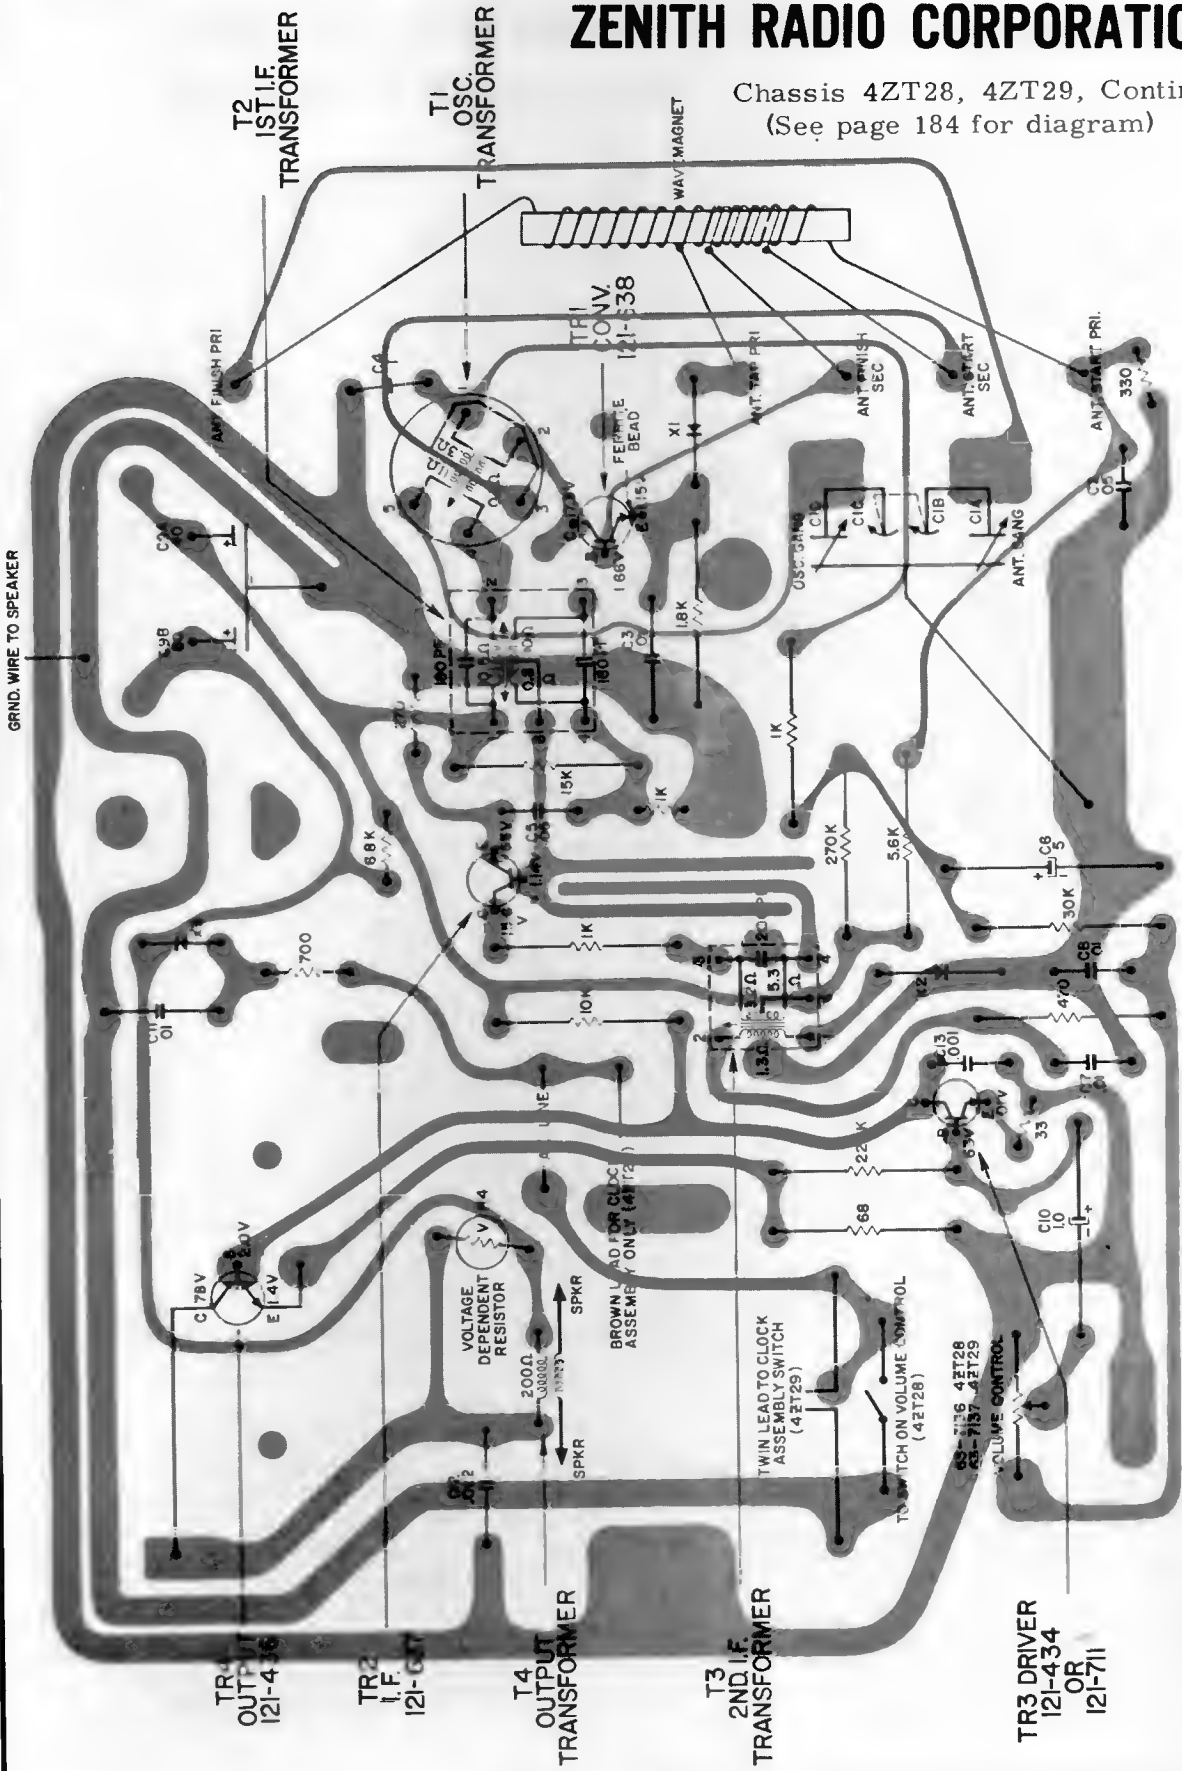

CHASSIS, WIRING AND COMPONENTS VIEWED FROM FOIL SIDE


ZENITH RADIO CORPORATION

MODEL T350 R & W CHASSIS 7M07



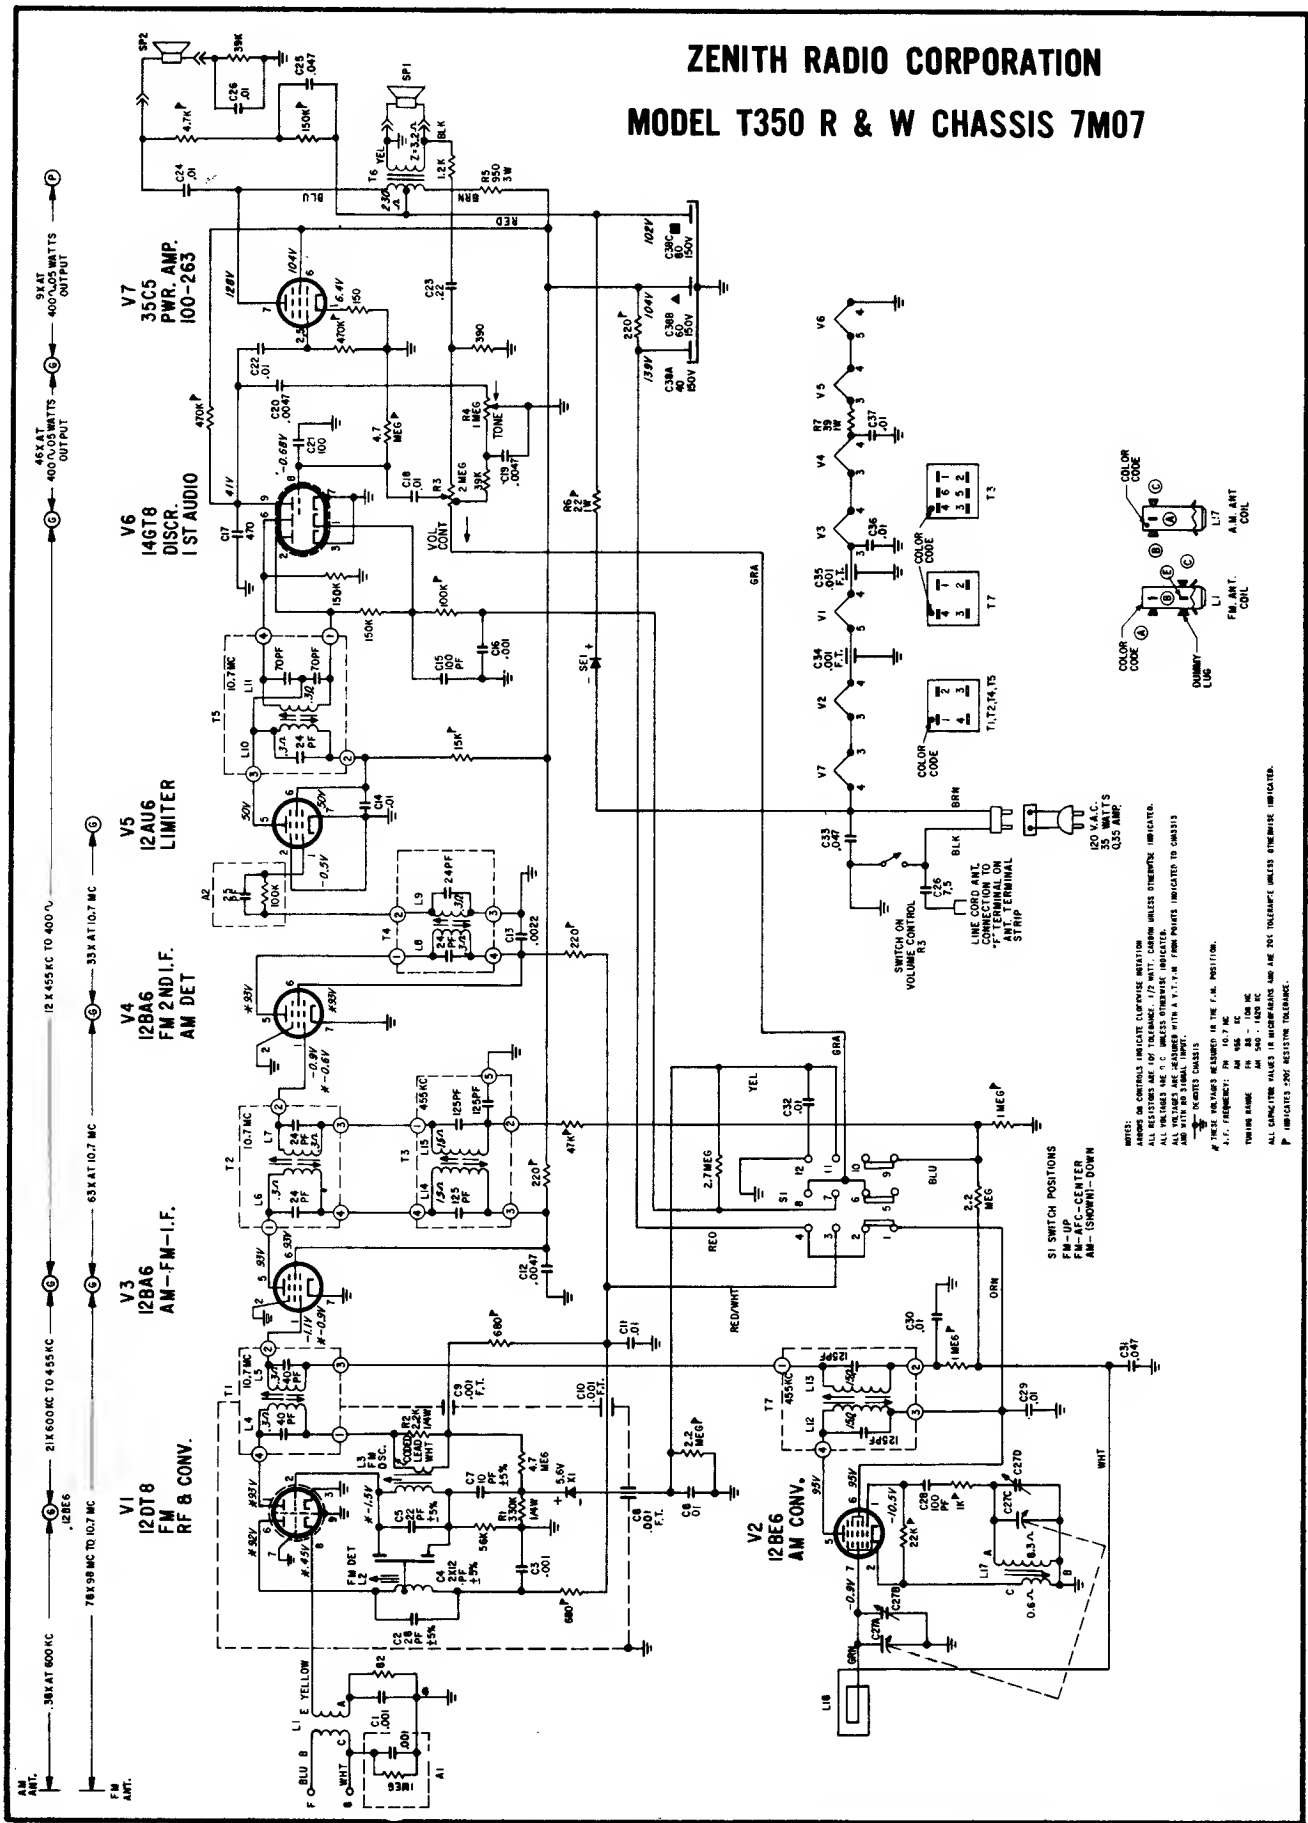


ZENITH Chassis 8NT21, Model N890

SCHEMATIC OF 8NT21 CHASSIS

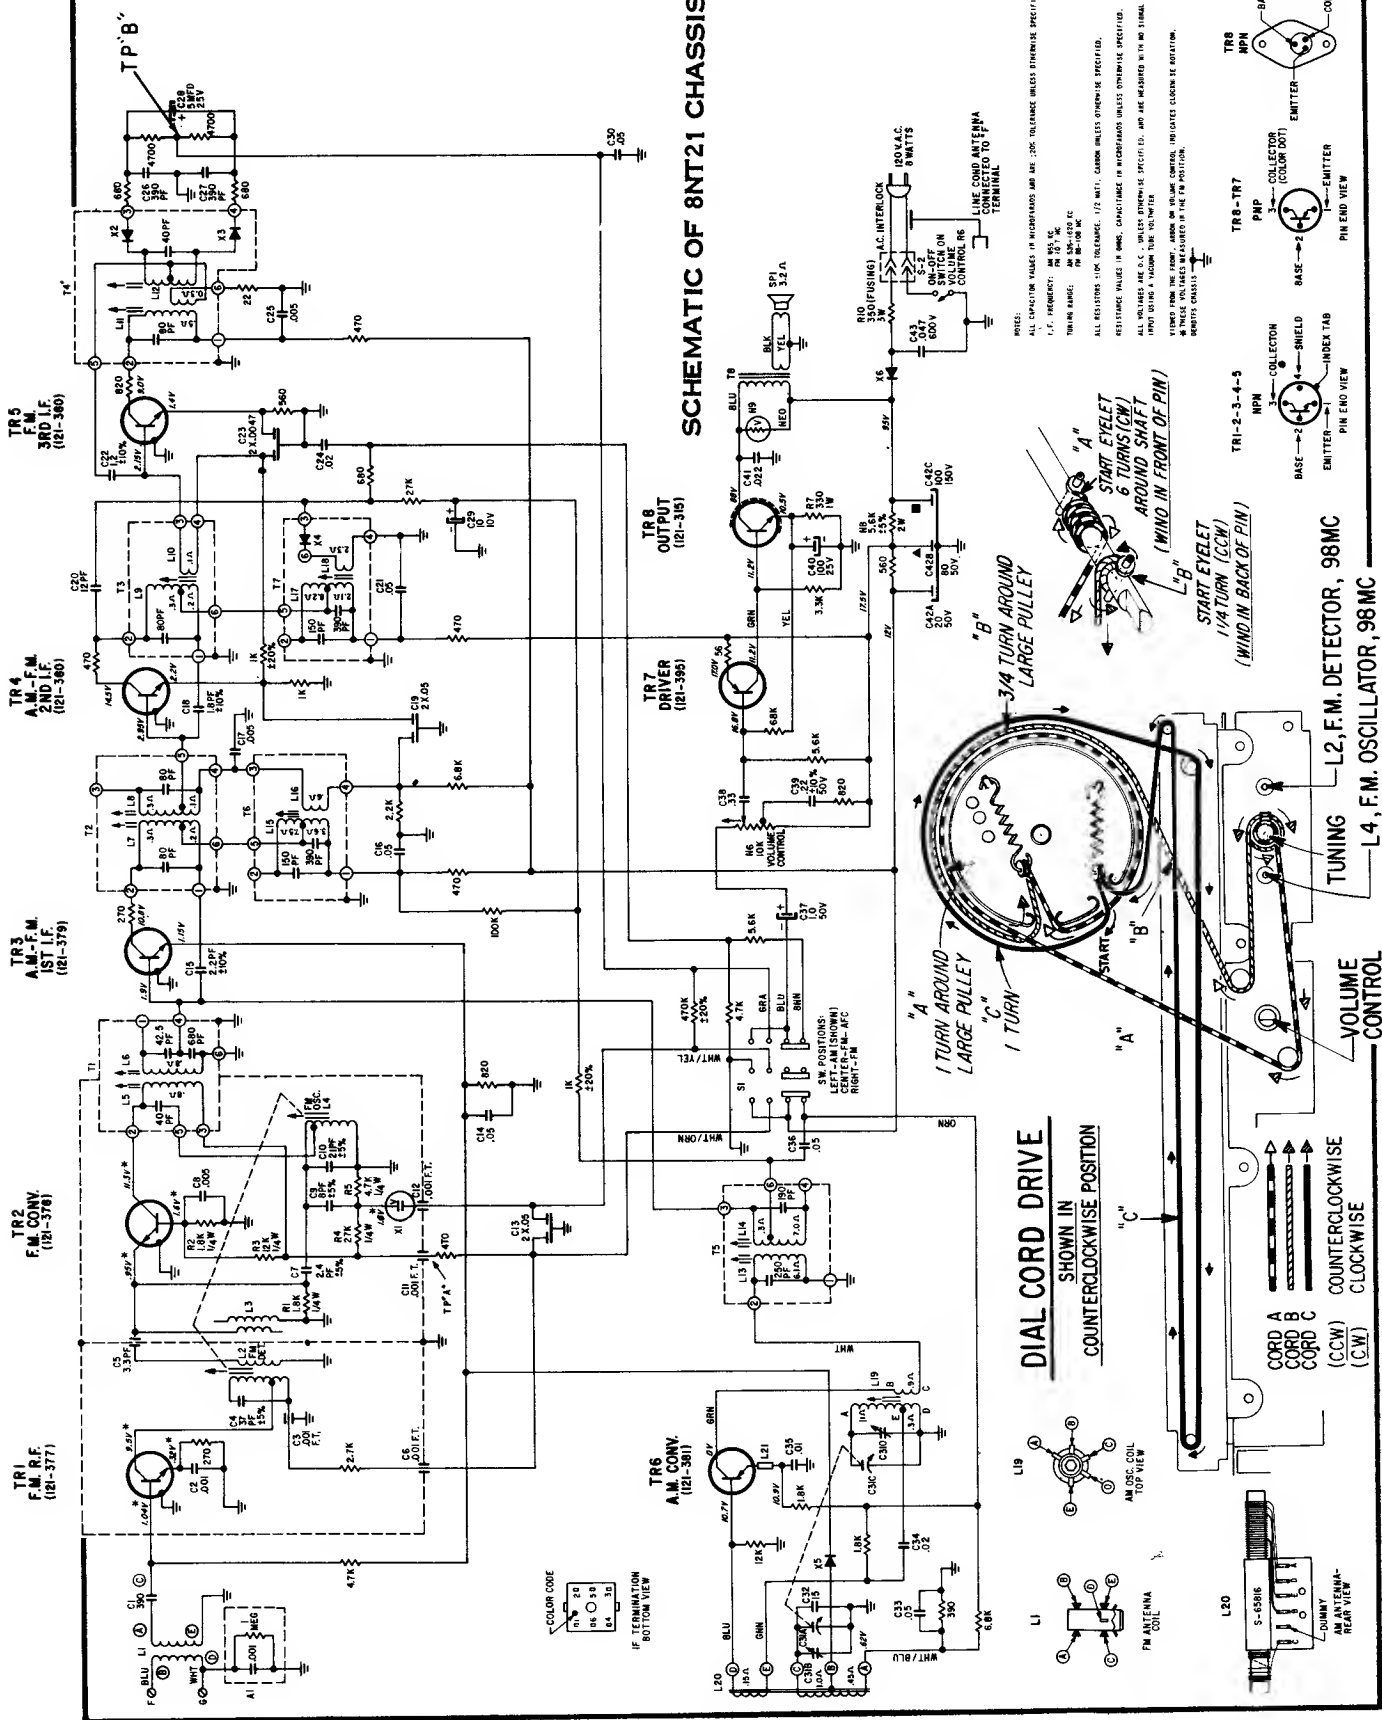


- TR1 F.M. R.F. (121-377)
- TR2 F.M. CONV. (121-378)
- TR3 A.M.-F.M. 1ST I.F. (121-379)
- TR4 A.M.-F.M. 2ND I.F. (121-380)
- TR5 F.M. 3RD I.F. (121-380)
- TR6 A.M. CONV. (121-381)
- TR7 DRIVER (121-395)
- TR8 OUTPUT (121-315)

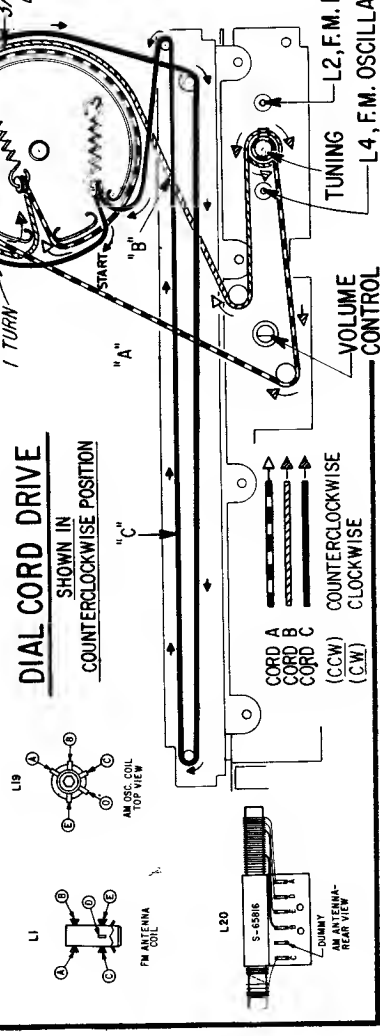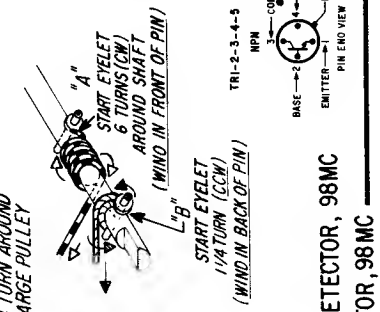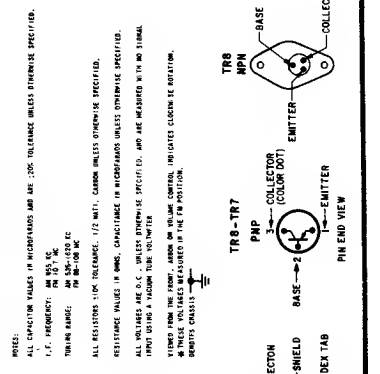


NOTES:
ALL CAPACITOR VALUES IN MICROFARADS AND ALL 100K TOLERANCE UNLESS OTHERWISE SPECIFIED.
L.F. FREQUENCIES: 455 KC.
TUNING RANGE: 48.5K-100 MC.
ALL RESISTORS: 10K TOLERANCE, 1/2 WATT, CARBON UNLESS OTHERWISE SPECIFIED.
RESISTANCE VALUES IN OHMS, CAPACITANCE IN MICROFARADS UNLESS OTHERWISE SPECIFIED.
ALL DIMENSIONS ARE D.C. UNLESS OTHERWISE SPECIFIED. DIMENSIONS AND WEIGHTS IN THIS MANUAL APPLY TO THE STANDARD MODEL UNLESS OTHERWISE SPECIFIED.
DIMENSIONS AND WEIGHTS IN THIS MANUAL APPLY TO THE STANDARD MODEL UNLESS OTHERWISE SPECIFIED.
DIMENSIONS AND WEIGHTS IN THIS MANUAL APPLY TO THE STANDARD MODEL UNLESS OTHERWISE SPECIFIED.

ZENITH Chassis 10ZT30 (Continued on page 189)

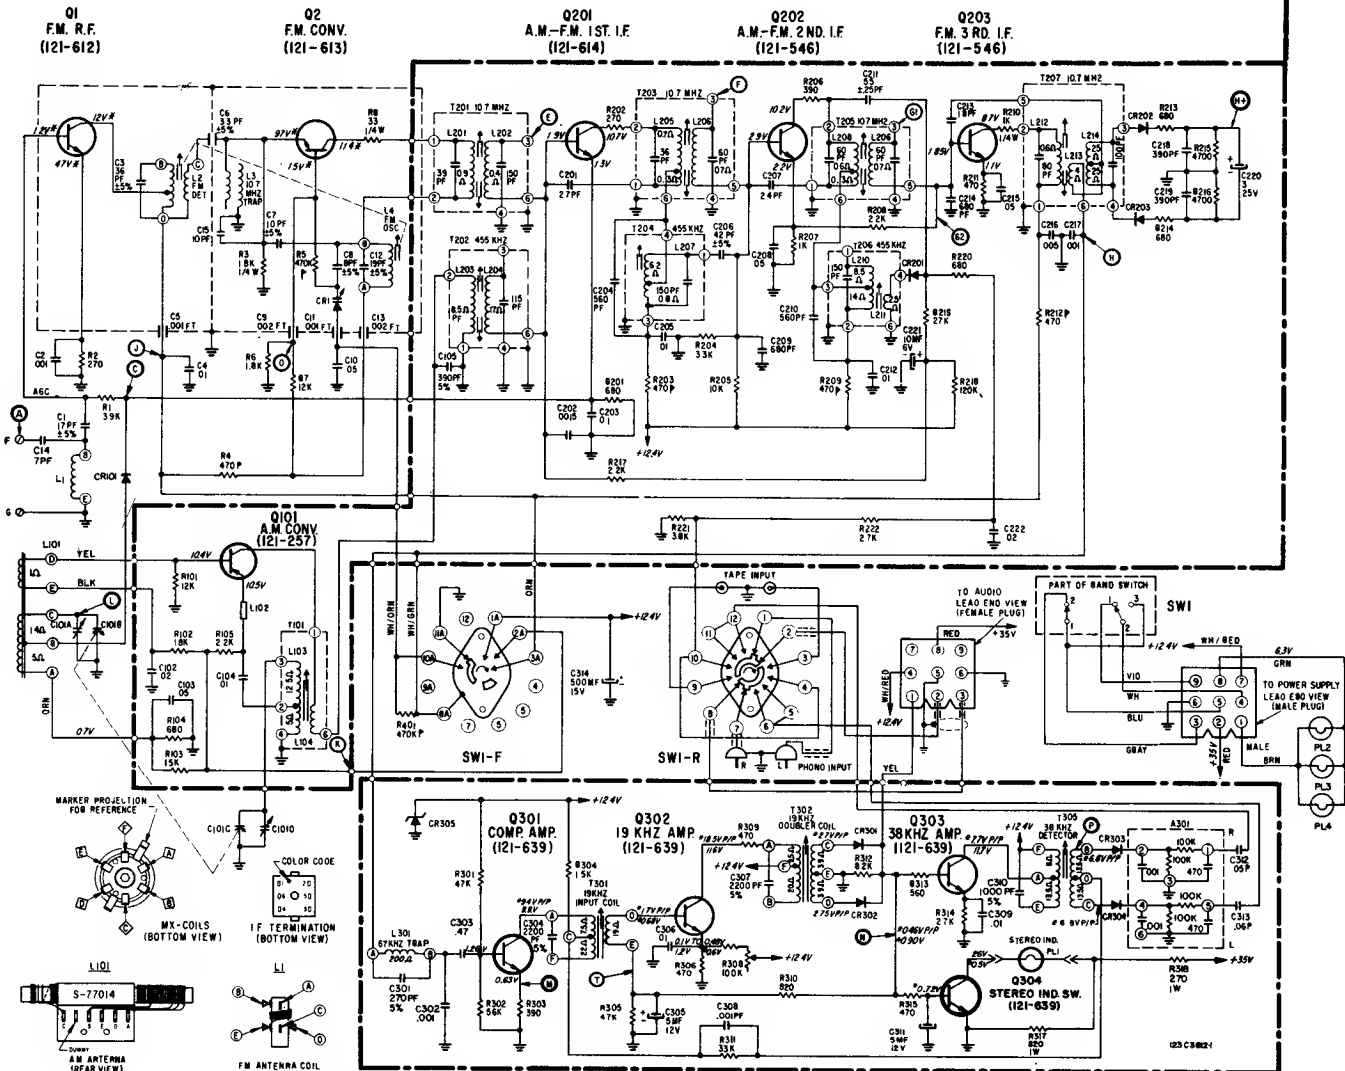

10ZT30 - SCHEMATIC

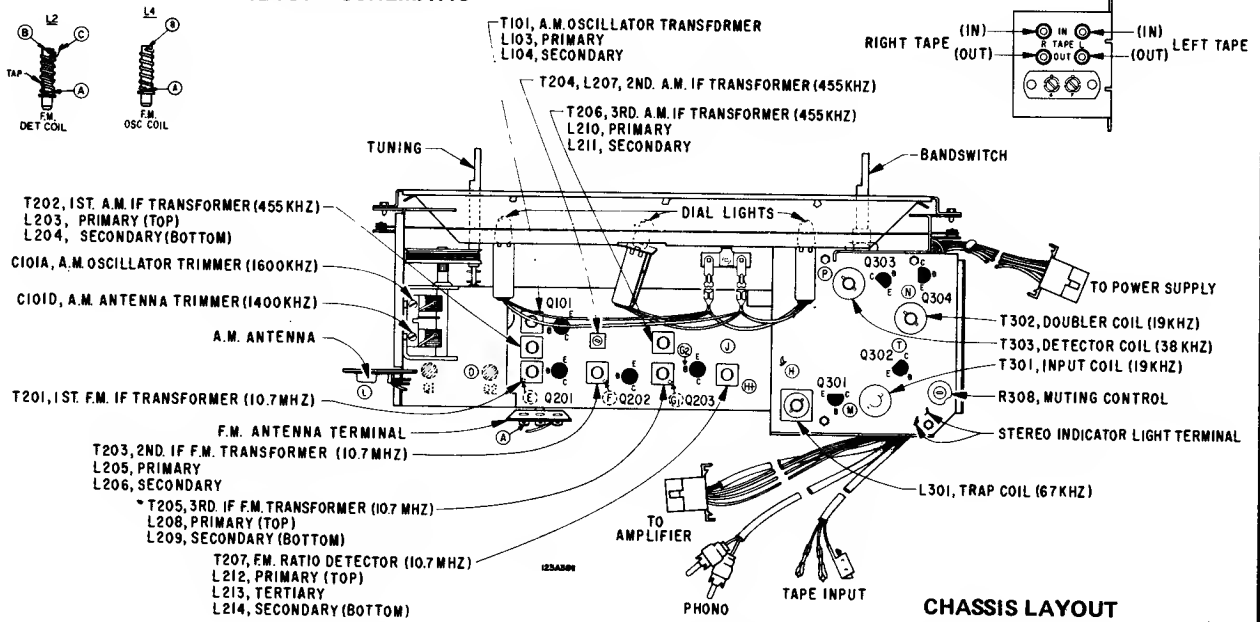


CHASSIS LAYOUT


ZENITH Chassis 10ZT30 (Continued from page 188)

10ZT30 - IF -- CHASSIS WIRING AND COMPONENTS AS VIEWED FROM FOIL SIDE

- BANDSWITCH POSITIONS**
- 1 AM (NORMAL)
 - 2 FM
 - 3 TAPE
 - 4 M
 - 5 FM ATC
 - 6 FM




0202 0203

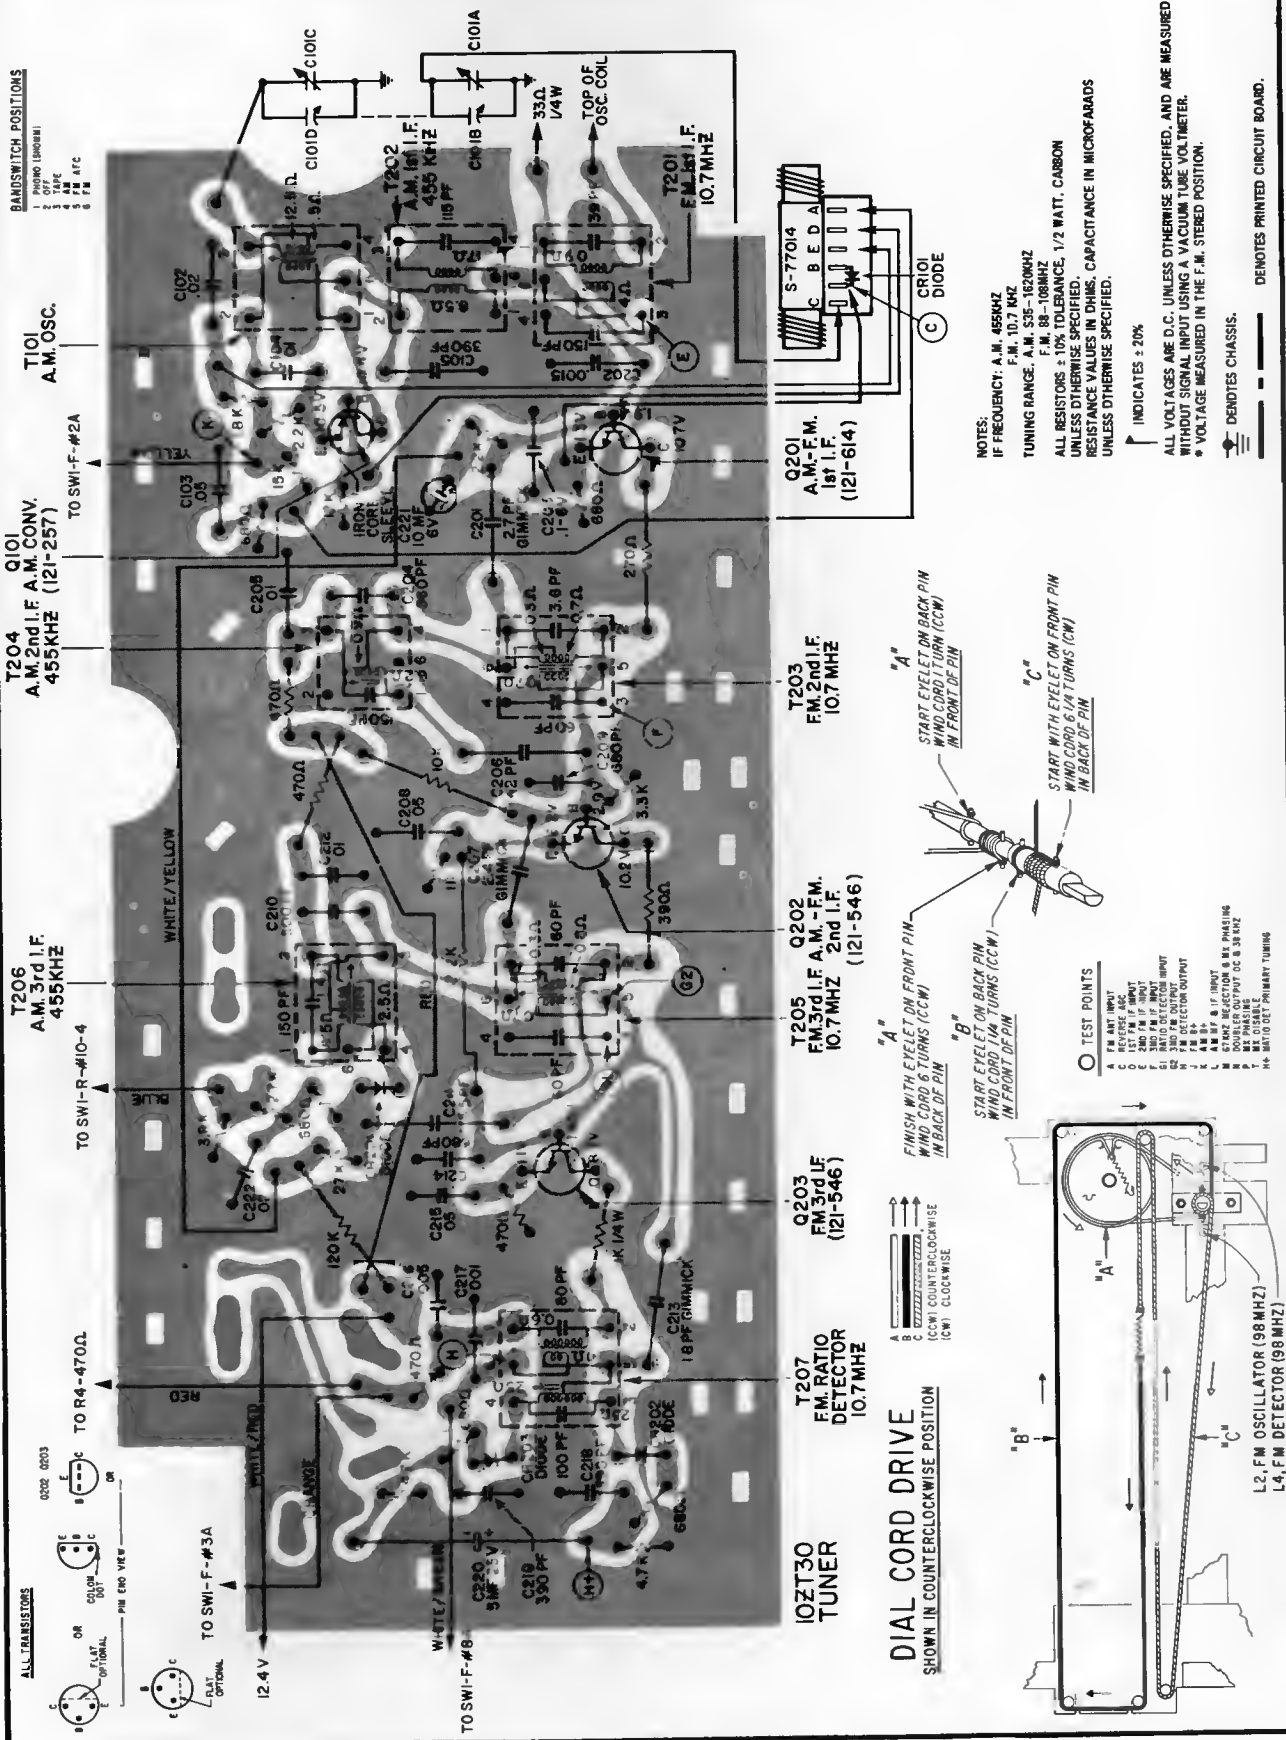


NOTES:
 IF FREQUENCY: A.M. 455KHZ
 F.M. 10.7 KHZ
 TUNING RANGE: A.M. 535-1620KHZ
 F.M. 88-108KHZ
 ALL RESISTORS ± 10% TOLERANCE, 1/2 WATT, CARBON
 UNLESS OTHERWISE SPECIFIED.
 RESISTANCE VALUES IN OHMS. CAPACITANCE IN MICROFARADS
 UNLESS OTHERWISE SPECIFIED.


↑ INDICATES ± 20%
 ALL VOLTAGES ARE D.C. UNLESS OTHERWISE SPECIFIED, AND ARE MEASURED
 WITHOUT SIGNAL INPUT USING A VACUUM TUBE VOLTMETER.
 * VOLTAGE MEASURED IN THE F.M. STEREO POSITION.
 ○ DENOTES CHASSIS.
 — DENOTES PRINTED CIRCUIT BOARD.

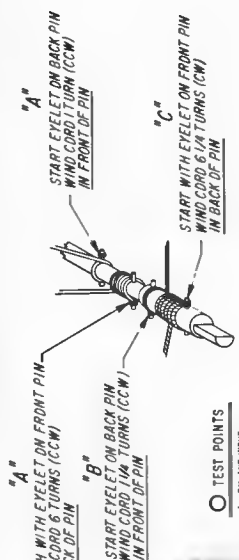


- TEST POINTS**
- FM ANT INPUT
 - REVERSE ASB
 - 2ND FM IF INPUT
 - 3RD FM IF INPUT
 - 4TH FM IF INPUT
 - FM DETECTOR OUTPUT
 - A, B, C IF INPUT
 - STANBY SECTION & B+ PHASING
 - DOUBLER OUTPUT DC & 3B RAZ
 - BK DISABLE
 - B+10 DET PRIMARY TUNING

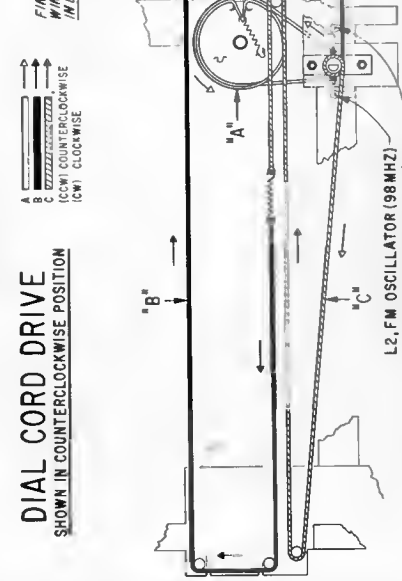

ZENITH Chassis 8NT46Z9, Models "Royal 270"

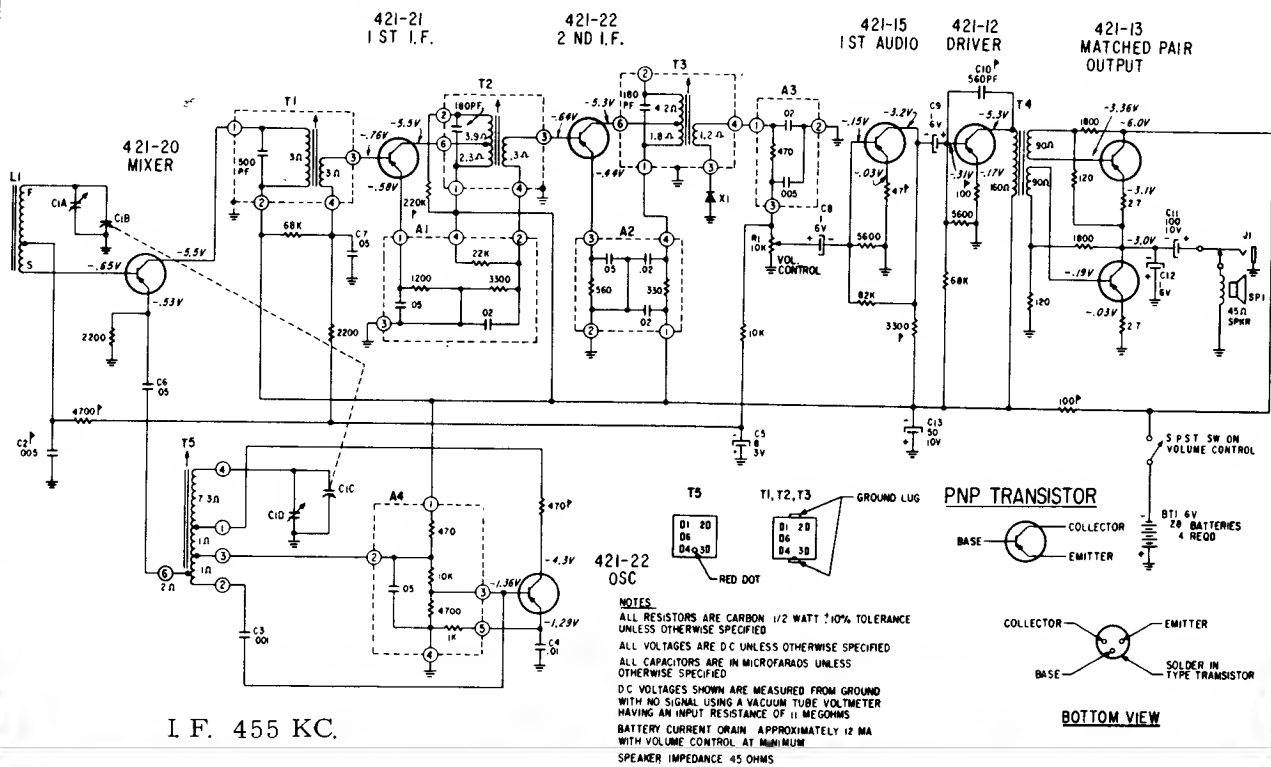

ZENITH Models X540G-1, 540L-1, X547P-1, 547X-1

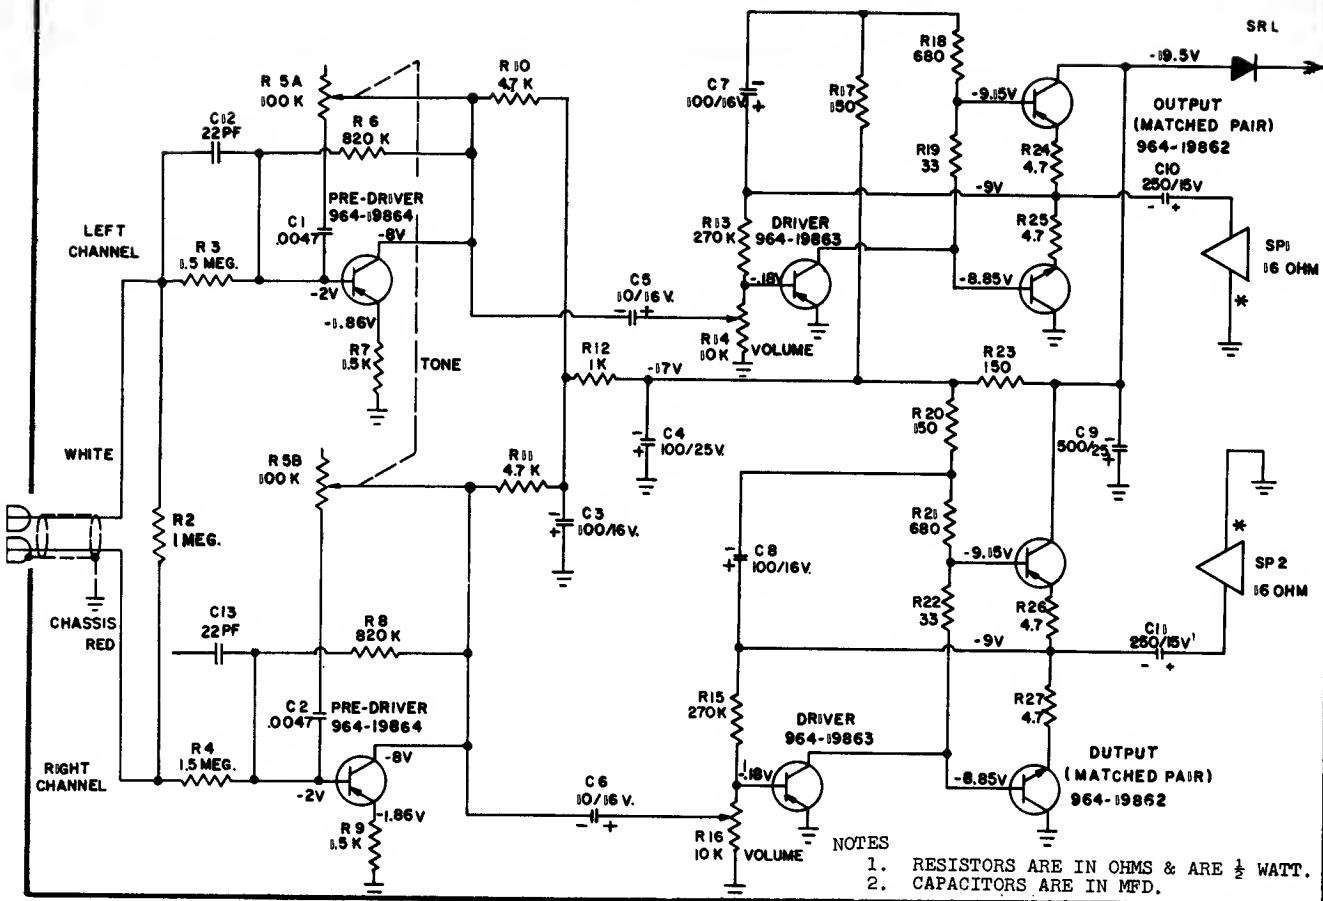

TO PWR. TRANS.

Index

Admiral Corp.		Admiral, Cont.		Arvin, Cont.		G.E. Cont.		Motorola	
2ST151	16	YH619	6	57R08	24	C1570	36	TP1D	75
2ST155	16	YHC621	6	57R17	24	C1574	36	XT4C	65
3ST351	16	YHC627	6	57R18	24	C1580	36	MP10C	62
3ST353	16	YHC631	6	57R25	24	P1735A	38	TP10D	68
3ST355	16	YHC641	6	57R28	24	P1739A	38	XT10C	65
4C253R4	9	YHC649	6	57R72	19	P1755A	39	TC11C	72
4R4	9	YR703	10	57R75	19	P1760A	40	TP11C	66
5A7,A	4	YH713	3	57R78	19	P1761A	40	TC12C	74
5D7	12	YH717	3			P1780	41	TP12C	66
5D7A to E	12	YR717	10	Emerson		P1781	41	TC13C	72
5E6,A	3	YR718	10	31L18	27	P1782	41	TC14C	74
6M4,A	6	YR721	10	31P57	26	T2100A	37	PK15C	61
8M3	5	YH723	3	31P58	26	T2205A	42	XC15C,XC16C	65
8R3,A	10	YH727	3	31P64	29	T2208A	42	TT18C	72
8S3,A,D	10	YH731	3	31P66	32	T2220	36	TT19C	74
8S3E,F,G	10	YR731	10	31P68	28	T2231	36	XP19D	80
8Y3	10	YR733	10	33C28	30	T2235	36	TT20C	72
10A3	13	Y741R	18	33C29	30	T2240	36	XP20D	80
10B3	14	YR741	10	33C30	30	T2245	36	TT21C	74
10C3	15	YR743	10	120583	27	T2250	36	TT22C	70
10T1	18	YHC777	3	121004	30	T2260	36	XP22D	81
20A6,A,B,C	16	YHC793	3	General		C2415A	34	XP23D	81
YK103	8	YHC799	3	Electric		C2416A	34	XC24D	65
YK117	8	YHC801	3	T20E,F,G	43	C2510	36	XC25D	65
YK118	8	YK803	3	TU200	46	C2511	36	MP102C	63
YK121	8	YRC803	10	TU205	46	C2520	36	PP205C-1	64
YKC133	8	YRC817	10	TU210	46	C2530	36	PP206C-1	64
YKC147	8	YRC818	10	C226h	46	C2535	36	PP207C	58
YKC148	8	YRC821	10	B233h	46	C2545	36	PP209C	58
YKC151	8	YRC831	10	A236g	46	C2555	36	TM318M	76
YH203	4	YRC833	10	G237g	46	C2560	36	TM327M	77
YH207	4	YRC841	10	C314g,h	46	C2578	36	PK403C	58
YH211	4	YRC843	10	C315g	46	C2579	36	SK455C	58
YK211GP	13	YF1361SA	16	G321g,h	46	C2589	36	SK456C	58
YK212GP	13	YMF1361SA	16	A334g,h	46	C4403A	34	SK457C	58
YK220	14	YHS1741	5	C343h	46	C4405A	34	TM527A	78
YHC223	4	YHS1771C	5	C412g,h	46	C4410A	34	TM826A	79
YK237	15	Y1921SA	16	C422h,k	46	C4420A	35	HS-2334A	58
YHC237	4	Y1925SA	16	C550G	34	C4421A	35	HS-2339F	58
YHC243	4	Y1931SA	16	G512g	46	C4430A	35	HS-2349C	58
YHC247	4	Y1935SA	16	C716g	46	C4550	36	HS-62250	61
YHC251	4	Y1938SA	16	G733h	46			HS-63213	62
YR407	10	Y1951SA	16	G832g	46	Gibson		HS-63226	63
YRC417	10	Y1958SA	16	T1130B	34	GA-95 RVT	48	HS-63230	64
Y421RA	10	Y1959SA	16	T1134B	35			HS-66209	67
Y431RA	10	YN8511	16	T1151B	34	Magnavox		HS-66212	67
Y441RA	10			T1153B	34	1P205	50	HS-66227	68
Y461RA	10	Arvin		T1170A	33	R266	49	HS-67206	70
Y471RA	10	17R17	24	T1171A	33	A508	50	HS-67211	72
YR503	3	17R18	24	T1172A	33	IR1000	51	HS-67214	74
YC521RA	10	37R28	20	T1175B	34	IR1002	52	HS-67216	65
YC531RA	10	37R29	20	T1265	36	IR1003	53	HS-68212	72
YC541RA	10	37R38	20	T1270	36			HS-68214	74
YC551RA	10	37R68	22	T1280	36	Montgomery		Olympic	
YC561RA	10	46R48	22	T1284	36	Ward		AFM26	83
YH601	6	47R28	20	C1405A	37	GEN-1119A	55	AFM32	82
YH607	6	47R29	20	T1432C	34	GEN-1129A	56	AFM33	82
YH611	6	47R38	20	C1460B	34	GEN-1158A	57	CF34	82
		55R77	25	C1480B	34	GEN-1158B	57	CF35	82
		55R87	25	C1483C	34	GEN-1158C	57	MA100	84
		57R07	24	C1565	36	GEN-1357A	54	SA501	84

INDEX Continued

<u>Philco</u>		<u>RCA, Continued</u>		<u>Sears, Roebuck</u>		<u>Sylvania, Cont.</u>		<u>Westinghouse+</u>	
S521	93	RLC22	114	2063/2065	137	TR106	158	V2577-2	167
S522	93	RLG22	118	2097	142	TR114	159	V2577-3	167
P670TBE	85	RLG23	119	2203	141	TR122	160	V2577-4	167
S759	93	VJT23	128	2230	138	TR125	161	V-2584-2	174
S760	93	VJT24	128	2231	138	328-2	157	V-2598-1	176
S761	93	RJG25	108	2232	138	350-1	161	V-2598-2	176
S762	93	RLD25	111	2263	146	354-1	156	V-2598-3	176
S764	93	VJT25	128	3060	144	355-1	156	V-2684-1	175
S771WH	86	VJT29	128	3061	144	358-1	156	V3004C01	168
S772WH	86	VJT30	128	3062	144	359-1	156	V3004C02	168
S773CB	86	VJT31	128	132.41501	138			V3004C03	168
S774WA	86	VJT33	128	132.41801	146			V3004C04	168
S-790BR	103	RLG34	120	132.42301	140	<u>Westinghouse</u>		RTA3010A	173
ST-919	88	VLP34	131	132.42701	137	RC31P78A	172	RTA3010B	173
S953WA	86	VMP34	131	132.53701	142	RS31M08A	171	RTF-3040A	176
ST958	90	RJA35	106	528.64330	144	RS31M38A	171	V-4002C01	179
ST959	90	VJT35	128			RS31M78A	171	V-4003C01	178
S980WH	86	VLP36	131			RT32N08A	167	V4005C01	166
ST984	94	RJG37	109	<u>Sharp</u>		RT32N08B	167	PAM7000A	166
ST986BK	96	VJT37	128	BP-110	147	RT32N38A	167	PAS7020A	179
ST988BK	99	VMP38	131	BP-111	148	RT41P58A	172	PAS7080A	178
ST997	104	RJD39	106	FX-111A	149	RC42N28A	167		
		VLP39	131	<u>Sony</u>		RC42R67B	168	<u>Zenith</u>	
		RJG42	110	6RC-23	152	RC42R87B	168	4NT23Z2,-9	182
		VMP47	131	8FC-69W	150	RT42R37B	168	4NT24Z2,-9	182
<u>RCA</u>		RLM68 +	121			RT42R87B	168	4NT25Z2	182
VMT1 +	134	RJG81-K	107	<u>Sylvania</u>		RC52R07B	168	4NT25Z9	182
VMT2 +	134	VJT84-K +	128	PO2-5	164	PS70E170	175	4ZT28	184
RLC2	112	VJT85-K +	128	PO3-5	165	CR705A	176	4ZT29	184
RLS3	112	RJG86	108	4/20 +	162	H-926P8GPA1	174	7M05	183
RLC4	112	VJP88-K +	127	4/30 +	162	H-972XLB	170	7M07	186
RLC5	112	VJT89-K +	128	PO5-1	162	H-974XLA	170	8NT21	187
RLS5	112	VJT90-K +	128	PO5-2	162	H-975XLNA	176	8NT46Z9	190
RLS7-K	112	VJT91-K +	128	ST10	156	RLA1010A	173	9ZT15	180
RLC8-K	112	RLM96-K +	121	SK30	156	RLA1010B	173	10ZT30	188
RLS8-K	112	RZG111	124	SK35	156	RLA1011A	173	Z212	184
RZC9-K	112	RZG120	124	SK40	156	RLA1011B	173	Z214	184
RZS9-K	112	RZG125	125	45P80	164	RLA1020A	173	Z260	184
RLG11	116	RZA205	122	45P84	165	RLA1020B	173	Z265	184
VME11	132	RZA215	123	BT44	154	RLA1021A	173	Royal 270	190
VJP12 +	127	RS-225B	127	BT46	154	RLA1021B	173	T325W,M	183
VLP12 +	127	RS-243A	131	AT50	153	RLF-1090A	176	T350R,W	186
VME12	132	RS-245A	131	U50-3	153	RLA1100B	173	Z430	180
VMP12 +	127	RS-249A	130	U50-4	153	RLA1110B	173	Z434	180
VMP14	133	RS-250A	127	U50-6	153	RLA1120A	173	X540G1,L1	190
RJG15	107	RS-256A	132	BK54	154	RLA1160A	171	X547P1,X1	190
RLG16 +	117	RZD410	122	BK55	153	RLA1161A	171	N855C,W	182
VJP16 +	127	RZD415	122	BK56	154	V-2463-5	170	N875A,M	182
VJT16	128	RZD943-K	122	AK55	153	V-2463-8	171	N870F,J,W	182
VJT18	128	RZM990-K	126	AK60	153	V-2463-9	171	N890	187
RLA19	111	RC-1227K	134	AK70	153	V-2575-2	172	T2504	184
RLG20 +	117	RC-1224C	106	TR74	157	V-2575-3	172	T2504	184
VLP20 +	130	RC-1224D	106	TR102	159	V-2576	173	T2511	184
VMP20	130					V2577-1	167	T2546	180