


40MHz DUAL TRACE OSCILLOSCOPE

CS-5140

SERVICE MANUAL

KENWOOD CORPORATION

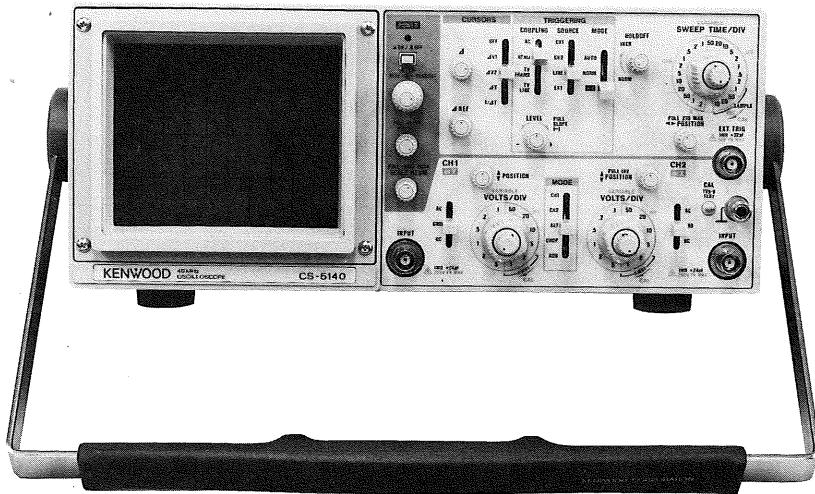

WARNING

1. The following instructions are for use by qualified personnel only. To avoid electric shock, do not perform servicing other than contained in the operating instructions unless you are qualified to do so.

2. High voltage up to 12000 volts DC is present when the oscilloscope is operating. Line voltage (100 to 240 VAC) is present on the power transformer, on-off switch, fuse holder, and line voltage selector, any time the oscilloscope is connected to an AC power source, even if turned off. Always observe caution whether the AC plug is removed from the AC power source. Contacting exposed high voltage could result in fatal electric shock.

CONTENTS

SPECIFICATIONS	3
SAFETY	6
CIRCUIT DESCRIPTION	7
BLOCK DIAGRAM	13
ADJUSTMENT	14
TROUBLESHOOTING	23
PARTS LIST	33
SCHEMATIC DIAGRAM	47
P.C. BOARD	53
DISASSEMBLY	59
SEMICONDUCTORS	60

SPECIFICATIONS

CRT		
Model		150VTM31
Type		150 mm rectangular, with internal graticule
Acceleration Voltage		12 kV
Display Area		8 × 10 div (1 div = 10 mm)
VERTICAL AXIS (CH1 and CH2)		
Sensitivity		1 mV/div to 5 V/div, ±3%
Attenuator		12 steps, 1 mV/div to 5 V/div in 1-2-5 sequence Vernier control for fully adjustable sensitivity between steps
Input Impedance		1 MΩ ± 2% approx. 24 pF
Frequency Response	DC	REAL TIME: DC to 40 MHz, -3 dB (5 mV to 5 V/div) DC to 5 MHz, -3 dB (1 mV, 2 mV/div) EQUIVALENT SAMPLING: DC to 100 MHz, -3 dB (5 mV to 5 V/div) DC to 5 MHz, -3 dB (1 mV, 2 mV/div)
	AC	REAL TIME: 5 Hz to 40 MHz, -3 dB (5 mV to 5 V/div) 5 Hz to 5 MHz, -3 dB (1 mV, 2 mV/div) EQUIVALENT SAMPLING: 5 Hz to 100 MHz, -3 dB (5 mV to 5 V/div) 5 Hz to 5 MHz, -3 dB (1 mV, 2 mV/div)
Rise Time		REAL TIME: 8.8 nsec or less (40 MHz, -3 dB) 70 nsec or less (5 MHz, -3 dB) EQUIVALENT SAMPLING: 3.5 nsec or less (100 MHz, -3 dB) 70 nsec or less (5 MHz, -3 dB)
Crosstalk		
Operating Modes	CH1	CH1 single trace
	CH2	CH2 single trace
	ALT	Two-waveforms display, alternately
	CHOP	Two-waveforms display, chopped
	ADD (CH1 + CH2)	CH1 + CH2 added display
CHOP Frequency		
Channel Polarity		
Maximum Input Voltage		
HORIZONTAL AXIS		
Input thru CH2, ×10 MAG not included		
Operating Modes		With TRIG MODE switch, X-Y operation is selectable (REAL TIME). CH1 ; Y axis CH2 ; X axis
Sensitivity		
Input Impedance		
Frequency Response	DC	DC to 500 kHz, -3 dB
	AC	5 Hz to 500 kHz, -3 dB
X-Y Phase Difference		
Maximum Input Voltage		

SPECIFICATIONS

SWEEP		
Sweep System	NORM	Triggering sweep
	AUTO	Sweep free runs in absence of trigger
Sweep Time		0.2 s/div to 10 ns/div, $\pm 3\%$, in 23 ranges, in 1-2-5 sequence Vernier control provides fully adjustable sweep time between steps. REAL TIME: 0.2s ~ 0.2 μ s/div EQUIVALENT SAMPLING: 0.1 μ s ~ 10 ns/div
Sweep Magnification		$\times 10$ (ten times) $\pm 5\%$
Linearity		$\pm 3\%$ (0.2 μ s ~ 10 ns/div at $\times 10$ MAG, $\pm 5\%$)
HOLD OFF		Adjustable by the controller
TRIGGERING		
Internal Sync	CH1	Triggered by CH1 input signal
	CH2	Triggered by CH2 input signal
	LINE	Triggered by line frequency
External Sync	EXT	Triggered by signal applied to EXT TRIG INPUT jack
External Sync Input Impedance		Approx. 1 M Ω , approx. 32 pF
Max. External Trigger Voltage		50 V (DC + AC peak)
Coupling		AC, HFREJ, TV FRAME, TV LINE
Sync sensitivity	At NORM position	
	AC	REAL TIME: Sync frequency range : 10 Hz ~ 50 MHz INT : 1 div, EXT : 0.1 Vp-p EQUIVALENT SAMPLING: Sync frequency range : 10 Hz ~ 100 MHz INT : 1.5 div, EXT : 0.2 Vp-p
	HFREJ	When the sync frequency is more than 10 kHz, the minimum amplitude (voltage) required for sync is increased.
	TV	FRAME, LINE INT : 1.5 div, EXT : 0.15 Vp-p
	AUTO: Rating shown above is provided at 50 Hz or over.	
CALIBRATION VOLTAGE		1 V $\pm 3\%$, square wave, positive polarity, 1 kHz $\pm 3\%$
INTENSITY MODULATION		
Sensitivity	+ 5 V, positive voltage decreases brightness.	
Input Impedance	Approx. 10 k Ω	
Usable Frequency Range	DC to 2 MHz	
Maximum Input Voltage	50 V (DC + AC peak)	
READOUT		
Calendar	Year/Month/Day/O'clock/Minute Clock accuracy : ± 2 min./month Battery life : About 20,000 hours (at room temperature)	
Set value	CH1/CH2 scale factor (with probe detection), V-UNCAL, ADD, INVERT Sweep scale factor (magnification conversion), SWEEP VARIABLE-UNCAL, X-Y	

SPECIFICATIONS

Cursor mode:	$\Delta V1$:	Voltage difference between Δ REF and Δ cursors on the basis of CH1 scale factor
	$\Delta V2$:	Voltage difference between Δ REF and Δ cursors on the basis of CH2 scale factor
	ΔT :	Time difference between Δ REF and Δ cursors on the basis of sweep scale factor
	$1/\Delta T$:	Frequency between Δ REF and Δ cursors on the basis of sweep scale factor
	RATIO:	Voltage ratio and time ratio between Δ REF and Δ cursors, supposing 5 div on the CRT as 100%
	PHASE:	Phase difference between Δ REF and Δ cursors, supposing 5 div on the CRT as 360°
NOTE: The X-Y mode allows $\Delta V1$ measurement only.		
Cursor measurement	Resolution	10 bits
	Measurement accuracy	$\pm 4\%$
	Measurable range	ΔV , RATIO: ± 3.6 div or more from the CRT center ΔT , $1/\Delta T$, RATIO, PHASE: ± 4.6 div or more from the CRT center
TRACE ROTATION (Electrical, adjustable from front panel)		
POWER REQUIREMENT		
Line Voltage	100 V/120 V/220 V/240 V AC $\pm 10\%$	
Line Frequency	50/60 Hz	
Power Consumption	Approx. 53 W	
DIMENSIONS (W × H × D)		319 (341) × 132 (145) × 380 (442) mm () dimensions include protrusion from basic outline dimensions
WEIGHT		
ENVIRONMENT		
Within Specifications	10°C to 35°C, 85% max. relative humidity	
Full Operation	0°C to 40°C, 85% max. relative humidity	
ACCESSORIES SUPPLIED		
Probe	PC-31 (READOUT compatible probe) × 2 Attenuation: 1/10 Input Impedance: 10 MΩ 16 pF or less	
Replacement Fuse	1.2A × 2, 0.8A × 2	
Instruction Manual	1	

* Circuit and rating are subject to change without notice due to developments in technology.

SAFETY

Before connecting the instrument to a power source, carefully read the following information, then verify that the proper power cord is used and the proper line fuse is installed for power source. The specified voltage is shown at the cover of the fuse holder on the rear panel. If the power cord is not applied for specified voltage, there is always a certain amount of danger from electric shock.

Line voltage

This instrument operates using AC power input voltages that 100/120/220/240 V at frequencies from 50 Hz to 60 Hz.

Power cord

The ground wire of the 3-wire AC power plug places the chassis and housing of the oscilloscope at earth ground. Do not attempt to defeat the ground wire connection or float the oscilloscope; to do so may pose a great safety hazard. The appropriate power cord is supplied by an option that is specified when the instrument is ordered.

The optional power cords are shown as follows in Fig. 1.

Line fuse

The fuse holder is located on the rear panel and contains the line fuse. Verify that the proper fuse is installed by replacing the line fuse.

Voltage conversion

This oscilloscope may be operated from either a 100 V to 240 V, 50/60 Hz power source. Use the following procedure to change from 100 to 240 volt operation or vice versa.

1. Replace fuse F 1 with a fuse of appropriate value, 1.2 amp for 100 VAC to 120 VAC operation, 0.8 amp for 220 VAC to 240 VAC operation.
2. When performing the reinsertion of leadwire for the voltage conversion, the appropriate power cord should be used. (See Fig. 1.)

Plug configuration	Power cord and plug type	Factory installed instrument fuse	Line cord plug fuse	Parts No. for power cord and plate
	North American 120 volt/60 Hz Rated 15 amp (12 amp max; NEC)	1.2 A, 250 V Fast blow 6 x 30 mm	None	Cord: E30-1820-05
	Universal Europe 220 volt/50 Hz Rated 16 amp	0.8 A, 250 V T. lag 5 x 20 mm	None	Cord: E30-1819-05
	U.K. 240 volt/50 Hz Rated 13 amp	0.8 A, 250 V Fast blow 6 x 30 mm	0.8 A Type C	—
	Australian 240 volt/50 Hz Rated 10 amp	0.8 A, 250 V Fast blow 6 x 30 mm	None	Cord: E30-1821-05
	North American 240 volt/60 Hz Rated 15 amp (12 amp max; NEC)	0.8 A, 250 V Fast blow 6 x 30 mm	None	—
	Switzerland 240 volt/50 Hz Rated 10 amp	0.8 A, 250 V Fast blow 6 x 30 mm	None	—

Fig. 1 Power Input Voltage Configuration

CIRCUIT DESCRIPTION

Vertical Attenuator Circuit (X73-1750-00)

The vertical attenuator rotary switch unit is a single unit comprising an attenuator circuit and range selection switch. The vertical input signal from the BNC input terminal is input to the initial stage attenuator circuit after selection of the input coupling method by the AC-GND-DC switch. The signal input to the initial stage circuit is switched to pass through either a 1/1, 1/10, or 1/100 attenuator by the vertical rotary switch, and is sent to the initial stage buffer amp.

The initial stage buffer amp is comprised of Q1, 2, 3, 4, 5, and U1 (CH2: Q101, 102, 103, 104, 105, and U101). The signal input to the initial stage buffer amp is separated into the high frequency components and low frequency components. The high and low frequency components are impedance converted by Q3 (Q103) and U1 (U101) respectively, synthesized by the base of Q5 (Q105), and output from the emitter. U1 (U101) is an OP amp with low DC offset drift, and the output of Q5 (Q105) is stabilized in relation to temperature.

This output signal is input to the second stage attenuator, is attenuated to either 1/1, 1/2, 1/4, or 1/10, and is sent to the 2nd amp. Attenuated output with good frequency characteristics can be obtained as this second stage attenuator has low impedance. When the 1 mV or 2 mV/DIV range is selected, there is a switch for setting the 2nd amp to 5X amplification. Q4 (Q104) is a constant-current source for the Q3 (Q103) load. Q1, 2, and D1 (Q101, Q102, and D101) are components to protect the circuit from excessive input.

Adjusters: VR1 (VR101) is the step attenuator balance adjuster, and VR2 (VR102) is the low frequency gain adjuster.

Vertical Pre-amp Circuit (X73-1750-00)

The signals output from the attenuator circuit are sent to the 2nd amp formed from the Q6 and Q8 (Q106 and Q108) dual transistor. The 2nd amp is a gain selection-type amp and operates either Q6 or Q8 (Q106 or Q108) by switching the current source of Q9 and Q10 (Q109 and Q110). When a range other than 1 mV or 2 mV/DIV is set, Q9 (Q109) is selected and the Q6 (Q106) amp functions. When the 1 mV or 2 mV/DIV range is set, Q10 (Q110) is selected and the Q8 (Q108) amp functions to provide amplification 5X that of normal. TH1 (TH101) is connected to the emitter of Q8 (Q108) for gain drift compensation when the range is 1 mV or 2 mV/DIV. D4 and D5 (D104 and D105) are connected to the collector of Q8 (Q108) to improve isolation with Q6 (Q106). The variable terminal of the 2-gain variable resistor attached to the attenuator is connected to the output of the 2nd amp. The method of output from the other terminal of this VR to the next stage allows for a continuous variable attenuator with good frequency characteristics.

The 2nd amp output signal passes through the Q11 and Q12 (Q111 and Q112) emitter follower and is output to the 3rd amp formed by Q14 and Q15 (Q114 and Q115). In order to realize high CMRR in this stage, a constant-current source is used for the emitter load of the differential transistors. Also, in order to minimize the effect on the feedback capacity of the transistors at high frequencies, the output stage has a cascode amplifier construction with Q16 and 17 (Q116 to Q119) connected to the base ground. On the CH2 side, the collectors of Q117 and Q119, and Q118 and Q116 are connected and the base potential of Q117, Q118, and Q116, Q119 is switched by S104 to output signals with positive and negative polarity.

The 3rd amp output signal passes through the Q18 and Q19 (Q120 and Q121) emitter follower and is sent to the equivalent time sampling circuit and the real time mode circuit. Trigger signals are output from the emitters of Q18 and 19 (Q120 and 121) and are input to the trig amp Q215 and 216 (Q217 and 218). On the CH2 side, a signal with the reverse polarity of the trigger signal is output as the X signal.

Adjusters: VR3 (VR103) is the MAG/NORM balance adjuster, VR4 (VR104) is the gain adjuster of the 1 mV/div range, VR5 (VR105) is the variable balance adjuster, VR108 is the CH2 INV balance adjuster, VR202 is the X gain adjuster, and VR8, TC1 and TC2 (VR9, TC101 and TC102) are the adjusters for compensation of frequency characteristics.

The signal input to the equivalent time sampling circuit first enters U501 (U601). U501a and U501b (U601a and U601b) form a circuit which limits operating point drift occurring when the dual polarity signal of the differential amp is converted to a single polarity signal for the single end circuit. The output of this circuit passes through transistor Q505 (Q605) for driving the delay line, and is input to the 50 Ω coaxial cable delay line. The signal delayed approximately 50 ns by the delay line passes through the Q506 (Q606) emitter follower, and is sampled and held by the sampling gate comprised by Q507, 508, and D506 to 511 (Q607, 608, and D606 to 611), according to the sampling pulse. The signal converted to low frequency by the equivalent time sampling circuit passes through the Q509 and 510 (Q609, 610) source follower, and enters the 4th amp Q513, 514, 203, and 204 (Q613, 614, 207, and 208).

Adjusters: VR501 (VR601) is the position adjuster for sampling, VR502 (VR602) is the gain adjuster for sampling, VR503 (VR603) is the 10 kHz square wave waveform adjuster for sampling, and TC501 (TC601) is the adjuster for frequency response compensation.

The signal input to the real mode circuit enters the 4th amp directly. The 4th amp is a cascode amplifier configured

CIRCUIT DESCRIPTION

from Q503, 504, 203, and 204 (Q603, 604, 207, and 208), and the collector circuit formed from Q503, 504, 513, and 514 (Q603, 604, 613, and 614) is equipped with a vertical position control.

Adjusters: VR504 is the position adjuster for the real mode, TC602 is the adjuster for CH2 frequency response compensation in the real mode, and VR605 is the CH2 gain adjuster for the real mode.

Switching between the equivalent sampling time circuit and real time mode circuit is performed by the circuit formed from Q511 and 512 (Q611 and 612).

The output sections of the amps (cascode amp) for the equivalent time sampling circuit and real time mode circuit use the same base grounded transistors Q203 and 204 (Q207 and 208).

The CH1 output terminals, collectors of Q203 and 204, are connected to the CH2 output terminals, collectors of Q207 and 208, and the emitters of Q203, 204, 207, and 208 are connected to the emitters of the transistors for channel selection, Q201, 202, 205, and 206, respectively.

The channel selection signals pass through Q201, Q202, Q205, and Q206, switch the output transistors Q203, Q204 and Q207, Q208 ON/OFF, and select the vertical mode. Also, Q209 is a transistor to reduce fluctuations in the operating point of the ADD mode and other modes.

Adjuster: VR605 is the CH2 gain adjuster.

The output of the 4th amp passes through the Q210 and 211 emitter follower and is input to the base of Q212 and 213. Q212 and 213 form a cascode amp together with the Q1, 2 of the final amp. Thus, the vertical pre-amp output signals are current output.

Adjusters: VR201 and TC201 are the adjusters for compensation of frequency characteristics.

Trigger Signal Selection Circuit (X73-1750-00)

The trigger signals output differentially from the various channels pass through the Q215 and 216 (Q217 and 218) trigger output amp and enter the trigger selection circuit formed by Q255 to 262.

The EXT trigger signal and signal for line trigger from the power supply circuit also enter this circuit.

The various trigger enable signals are input to the base of Q255 to Q258, and Q259 to Q262 are switched ON/OFF to select the trigger signal. The selected signal is sent to the sweep unit.

Vertical Final Amp (X80-1090-00)

The signal sent from the vertical pre-amp is amplified at the base ground stage of the Q1 and Q2 cascode amp, passes through the emitter follower of Q3 and Q4 and is sent to the next stage amp. Q5, 6, 7, and 8 also form a cascode amp. Thermistor TH1 for gain temperature drift compensation and R16, 17, C50, and 51 for ultra-low frequency compensation are located between the Q5 and 6 emitters. The output of this stage passes through the emitter followers of Q9 and 10, and is sent to the Q11, 13, 15, and 16 output amp for amplification to 2.5 V/div (one side).

VR1 is a variable resistor (VR) for gain adjustment and VR2 is a VR for CRT center adjustment. VR5 is a VR for adjustment of the operating point and the voltage of P37 is set to +37 V by adjustment of this adjuster.

The readout Y signal (Y R/O SIG signal) is input to Q17 and Q18. Switching between the REAL signal and Y R/O SIG signal is performed by switching Q19 and 20. D1 and 2 are included to improve isolation. The cursor gain is adjusted by VR3 and the cursor Y position is adjusted by VR4.

Adjusters: TC1 and TC2 are the adjusters for compensation of frequency characteristics.

Power Supply Circuit (X68-1480-00)

The power supply consists of a five-system regulated power supply, two-system non-regulated power supply, and scale illumination power supply system.

When the power switch is turned on, -10 V is first turned on by Q2, U1, and D8. The -10 V voltage is regulated based on D8. The other voltages of +10 V, +5 V, +65 V, and +120 V are regulated based upon -10 V. The +10 V, +5 V, and -10 V power supplies use the collector output method in order to reduce power consumption, the +65 V and +120 V power supplies use the emitter output method as there is little current.

The scale illumination circuit is a circuit for illuminating the lamps by controlling the voltage rectified by D1 by Q8.

Trace Rotation and CAL Circuit (X68-1480-00)

The trace rotation circuit consists of the emitter followers of the Q17 and 18 complementary transistors, and is the circuit supplies current to the rotation coil positioned in the CRT cone section.

The CAL circuit is comprised of U2, D26, and D27. A 1 kHz square wave is created by the U2 multi-vibrator oscillation circuit and this is switched by D26 and 27 to create the 1 Vp-p CAL signal. The frequency is adjusted by VR5 and the level is adjusted by VR6.

CIRCUIT DESCRIPTION

Blanking Circuit and High Voltage Circuit (X68-1480-00)

The unblanking signal from P26 is inverted and amplified by the blanking amp formed by Q11 to Q13 and is overlapped with the cathode voltage by the DC regeneration circuit D18 to D20. Q9 and 10 is an inverting amplifier for auto focusing, and it creates the focus voltage from the blanking signal. The focus voltage is overlapped with the high voltage at the DC regeneration circuit D14 to D16, and drives the focus electrode. The -1.5 kV power for the cathode is generated by the Q15 oscillation transistor and the high voltage convertor block (W02-0431-05). In order for the convertor oscillation circuit to obtain stable high voltage, negative feedback is applied from the cathode to the error amplifier U4 and Q14.

Trigger Circuit (X74-1470-00)

The trigger signal selected by the vertical pre-amp is input to the trigger amp Q1 and Q2 through P11. The coupling method for the Q2 output is selected by TRIGGER COUPLING switch S2. Input is to the Q3 to Q8 circuit when AC, HF REJ, or DC, and to the Q10, 11, 13, 14, and 15 circuit when TV sync, and the input is amplified to the level at which the ECL logic operates. Q10, D4 and 5 form a polarity selection circuit for TV sync. The sync tip is clamped by Q13 and D6 and the sync pulses are extracted by Q15.

The vertical sync pulses are obtained by the R52, C15, and C16 integration circuit.

The trigger slope of the signal output from the trigger amp is switched by U101a after waveform shaping by the U101b, c Schmitt circuit. The next stage horizontal sweep circuit is driven by this signal sync pulse.

The trigger pulse passes through the U103d and D103 detection circuit and is input to the Q101 and 102 flip-flop. When there is a trigger pulse, the base of Q101 goes to "H" and the collector of Q102 goes to "H". It further passes through U103c and the U102b RESET terminal goes to "L". At this time, U102b is in a state able to receive trigger pulses. When there is no trigger pulse, the U102b RESET terminal goes to "H", the RESET state is selected, and auto freerun starts.

Horizontal Sweep Circuit (X74-1470-00)

When the trigger pulse triggers flip-flop U102b, the output of U102b is inverted and Q105 is controlled through Q114. A sweep signal matching the CR time constant selected by U105 to U108 and Q107 to Q109 is then generated. This sweep signal passes through U206 and Q203 and is sent to the horizontal output selection circuit. This signal is also sent to the Q115 and 116 comparator circuit and the sweep length is determined here. The holdoff time is determined by C121 to C124 which are switched by U104a, R137, VR102 and Q110 to Q112.

<Real Time Mode>

	sec					msec					μ sec									
U105	.2	.1	50	20	10	5	2	1	.5	.2	.1	50	20	10	5	2	1	.5	.2	
A	L	H	L	H	L	H	L	H	L	H	L	H	L	H	L	H	L	H	L	
B	H	H	L	L	H	H	H	H	L	L	H	H	H	H	L	L	H	H	L	
C	L	L	H	H	H	H	L	L	H	H	H	H	L	L	H	H	H	H	L	

<Equivalent Time Sampling Mode>

	μ sec					nsec				
U107	.1	50	20	10						
A	L	L	L	H						
B	L	H	H	L						
C	H	L	H	L						

Sampling Pulse Generation Circuit (X74-1470-00)

A sawtooth wave with a period of approx. 10 ms is created by U204a, U407, and Q401 to Q403. This sweep signal and the high-speed sweep signal for 10 ns/div to 0.1 μ s/div are compared by the Q404 to Q406 comparator, and this comparator output signal passes through P68 and is sent to the vertical pre-amp unit as the sampling clock.

Blanking Circuit (X74-1470-00)

The output signal from the sweep gate flip-flop U102b enters the Q118 and 119 ECL to TTL conversion circuit. The Q118 output is sent to U204a and is used as the trigger pulse to generate the low-speed sweep signal of the equivalent time sampling circuit. The output from Q119 is sent to Q211 through the various gates, U403b, U405c, U201a, U201d, and U201c.

U202c, U202d is a CHOP oscillator which oscillates at approx. 500 kHz. This CHOP signal is mixed with the sweep gate by U201a. It is then divided by 1/2 by U204, passes through U202a and b, and is sent to the vertical amp board (X73-1750-00) from P12 as the vertical selection signal.

The R/O BL signal is prolonged for a certain period and mixed with the sweep gate signal by U201c. Then, the R/O UNBL signal is sent to Q213. The blanking signal and unblanking signal are mixed by Q212, Q214 and output from Q215. U205b is a comparator to create the R/O OFF signal.

CIRCUIT DESCRIPTION

Horizontal Output Selection Circuit (X74-1470-00)

The real sweep signal, XY signal, or low-speed sweep signal for display at the equivalent time sampling mode is selected by Q204 to Q207, Q410 and Q411, passes through Q208 and 209, and is sent to the horizontal final amp from P24.

Horizontal Final Circuit (X80-1090-00)

The horizontal signal input from P24 passes through the emitter follower of Q23, Q24, and is then sent to Q25, Q26 or Q27, Q28 (for X10 MAG). Switching between Q25, Q26 and Q27, Q28 is by the selection circuit formed from Q44 and Q45. Q29, Q30 is the base ground stage of the cascode amp and the D12 to D21 limiters are connected to the output collector. The horizontal signal is impedance converted by the Q31, Q32 emitter follower, and is amplified to approx. 6 V/div (one side) by the Q33 to Q40 and Q50 final amp.

Thermistor TH3 for compensation of gain temperature drift is mounted between the Q25 and Q26 emitters. There is also thermistor TH4 for compensation of gain temperature drift between the Q27 and Q28 emitters.

VR6 is a VR for horizontal position adjustment and VR7 is for adjustment of the NORM/MAG center. VR7 is mounted on the NORM side in order to allow for a full variable range. VR9 is a VR for adjustment of the operating point, and this is used to set the output operating point to +60 V.

The readout signal is input to Q47 and Q48. Switching between Q47, 48 and Q25, Q26 (or Q27, Q28) is performed by the RO REQUEST signal. D5 and 6 have been added to improve isolation between Q47, 48 and Q25, 26 (or Q27, Q28). VR11 is a VR for adjustment of the cursor gain and VR10 is for adjustment of the cursor position.

Overview of Equivalent Time Sampling


In order to allow the CS-5140 to monitor high frequency signals without the use of a high-band amplifier, an equivalent time sampling system is used which converts both the input signal and sweep signal at low speed for screen display. The vertical axis frequency band is 100 MHz (-3 dB). The horizontal axis is converted to approximately 0.7 ms/div in the range of 0.1 μ s/div to 10 ns/div, and displayed. The following is a description of the operational principles of the equivalent time sampling method used in this unit. (Refer to block diagram and time chart.)

After the input signal passes through the input buffer, it is sent to a trigger amp and delay line for monitoring the leading edge. A trigger pulse is created in the trigger amp, and a high-speed sawtooth wave (0.1 μ s/div to 10 ns/div) synchronized to this pulse is created by the sweep circuit. A low-speed comparison sawtooth wave (approx. 0.7 ms/div) for synchronized to this sweep signal is created by the sweep circuit for comparison. This low-speed sweep signal is also used as the horizontal axis signal for CRT display.

These two sawtooth waves are compared by the comparator, and the sampling pulse is created. Opening and closing of the diode configured sampling gate by this sampling pulse causes sampling and hold of the input signal which passed through the delay line and the buffer. At this time, the input signal is sampled at the point where it gradually shifts in time for each period of the high-speed sweep. This sampled signal is displayed in the vertical axis direction of the CRT, and the low-speed sawtooth wave for comparison is displayed in the horizontal axis direction of the CRT. The above operation allows for high frequency signals to be reproduced on the CRT as a low frequency signal with low-speed sweep while retaining the same waveform as when displayed at high-speed.


Equivalent Time Sampling

[Block Diagram]

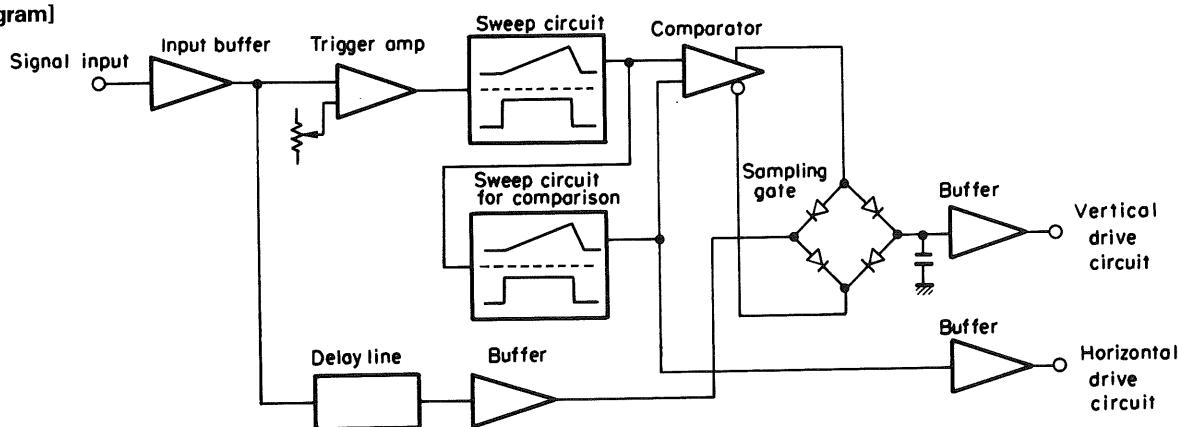

CIRCUIT DESCRIPTION

[Time Chart]

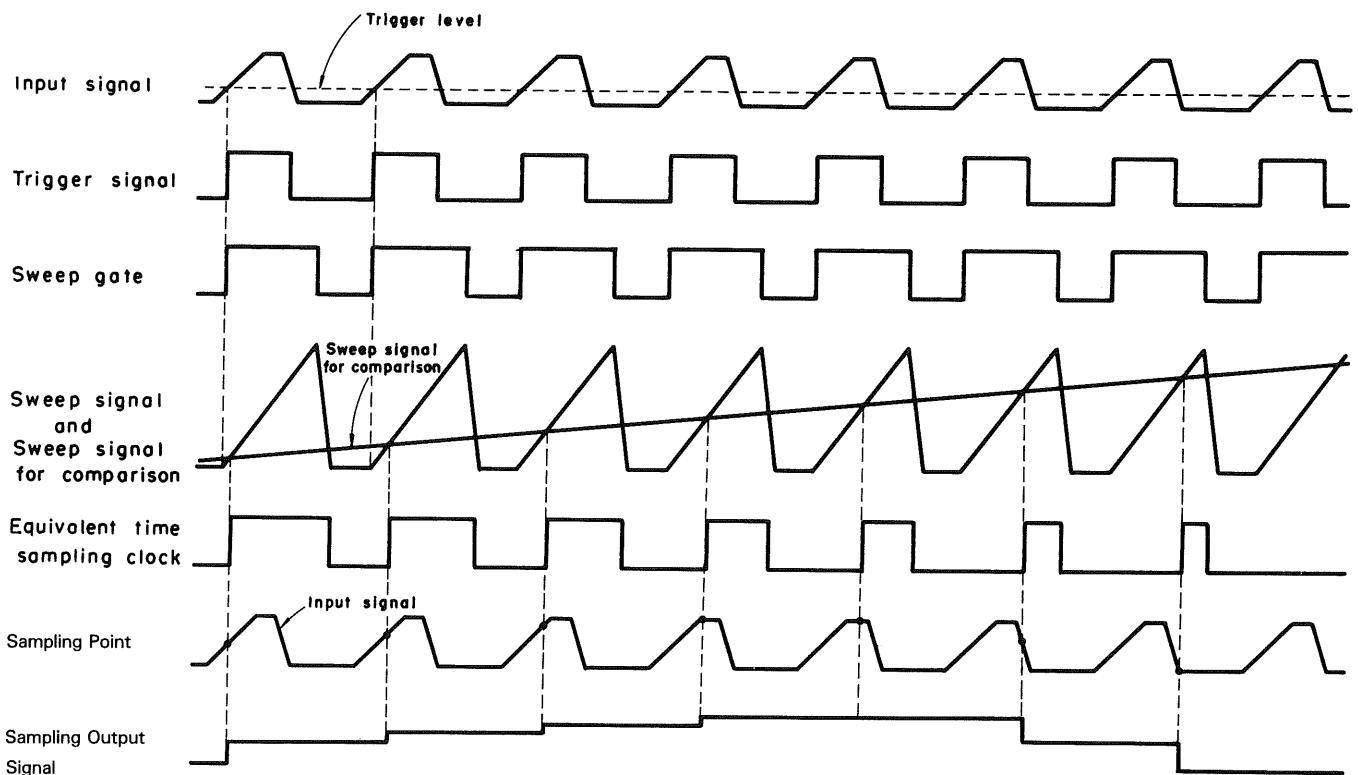

Overview of Readout R/O Unit (X77-1450-00)

The R/O unit is configured from the following three functional blocks.

1) Import section

Section which fetches switch information and clock data for the CRT readout display (Configured by ICs U17 to U24)

2) Display section

Section which creates X-axis signal and Y-axis signal for the CRT readout display (Configured by ICs and resistors U1 to U5, U7, U8, U13, and R33)

3) Cursor section

A/D conversion section and calculation section for the cursor measurement

(Configured by ICs U6, U8 to U11, U14, and U23)

Import Section

Fetching the information from the various operation switches and the clock data and sending these data to the character generator U7 are performed by the single-chip MPU U23. The reference clock is given from the 10 MHz

oscillator configured from U16 and X1. This MPU outputs the lower address A0 to A7 onto the data bus by time division.

U18 latches the lower address by the ALE signal output from the MPU.

The switch information need for screen display passes through the input ports configured by U19 to U22, and this is fetched by the MPU every 80 msec. U17 is the input port decoder, and the output signals RS0 to RS3 are output at a cycle of 80 msec.

The information from time setting switches S1 to S3 passes through MPU I/O port P1 and is fetched by the MPU every 80 msec.

If the pulses output from Pin 1 of the clock IC U24 every 1 minute apply an interrupt to the MPU, the MPU accesses U24 and fetches the clock data.


Even when the power is off, U24 is backed up by lithium battery B1, and the 32.768 kHz reference clock is properly generated by crystal oscillator X2. If the battery becomes old and the voltage is less than 2 V when the power is off, the clock will slow down as this reference clock will not be properly generated, and the BATT. DOWN indication will appear on the screen. Clock data protection when the power is switched on/off is performed by IC U25 for +5 V power detection (detection level: TYP +4.4 V).

CIRCUIT DESCRIPTION

Display Section

Character display is by the random scan method (X-Y display), and the character generator U7 is controlled by the character counter (U8 CD1 to CD7) and the dot counter (U8 DC0 to DC4) of the R/O controller U8. In the real mode, readout display is performed at a period of 13.5 msec. In the storage mode, readout display and storage display is performed by time division with a readout display period of approx. 10 msec and a storage display period of approx. 4 msec. The control signals in this case are the ROED (R/O END) signal and the RSTR (R/O START) signal from the A/D unit (X78-1030-00). (In the storage display period, RSTR becomes "H" and the readout operation stops.)

One cycle of the readout display is divided into four and this consists of the lower characters, upper characters, Δ REF cursor, and Δ cursor. This timing is switched by the U8-Pin89 ROED signal and U8-Pin46 VAO signal.

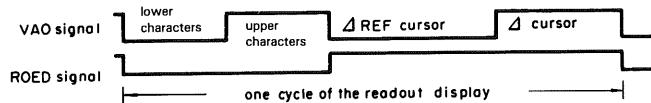

The character generator U7 contains character data with a 5×7 dot configuration. The 3 bits DD0 to DD2 are the X-axis data, the 4 bits DD3 to DD6 are the Y-axis data, and DD7 is a control bit for character start and end. The digital signals output from U7 are converted to analog signals by the X-axis signal D/A convertor U1 and the Y-axis signal D/A convertor configured by U3 and R33. These signals pass through the analog switches U4 and U5 and the buffer amp U13, and both the X-axis signal and the Y-axis signal are fed to the final unit (X80-1090-00). The character dot display is controlled by the ROUB signal (U8-Pin86), ROB signal (U8-Pin87), and ROQ signal (U8-Pin88). The real waveform display is deleted by the ROB signal, switching between the real waveform and readout is by the ROQ signal, and readout dot display is by the ROUB signal. The above three types of signals are controlled by the ROSP signal (readout off signal R/O OFF) from the Pin 83 of U8.


Cursor Section

The reference voltage for the cursor is ± 1.25 V, created by resistor division of the power supply voltage of +10 V. It passes through U11, Q1, and Q2, and is output. This reference voltage of ± 1.25 V corresponds to the full scale voltage for 10 bit cursor measurement resolution, and is fed to both terminals of the cursor VR. The voltage set by the cursor VR is fed directly to analog switch U14 in the case of X-axis measurement, and for Y-axis measurement it is attenuated to 80% before being fed to the same analog switch. U14 is for switching between Δ T and Δ V and for switching between Δ REF and Δ .


MPU U23 sends 10 bit data to D/A convertor U9, and this 10 bit data is converted to analog voltage. Comparator U10 compares this analog voltage and voltage from the cursor VR, and returns the output to MPU U23. By this process, an A/D convertor is configured by U8, U9, U10, and U23. This A/D convertor converts the analog voltage from Δ REF and Δ cursor VR to 10bit digital data. The conversion speed of this A/D conversion is 80 msec. Next, this converted 10bit digital data is used for cursor calculation by MPU U23. The analog voltage output from D/A convertor U9 is converted into Δ REF and Δ cursor signals by analog switch U6, and is held every 80 msec as the cursor display voltage by the various hold circuits.

BLOCK DIAGRAM

X 73-1750-00 (V.PRE UNIT)

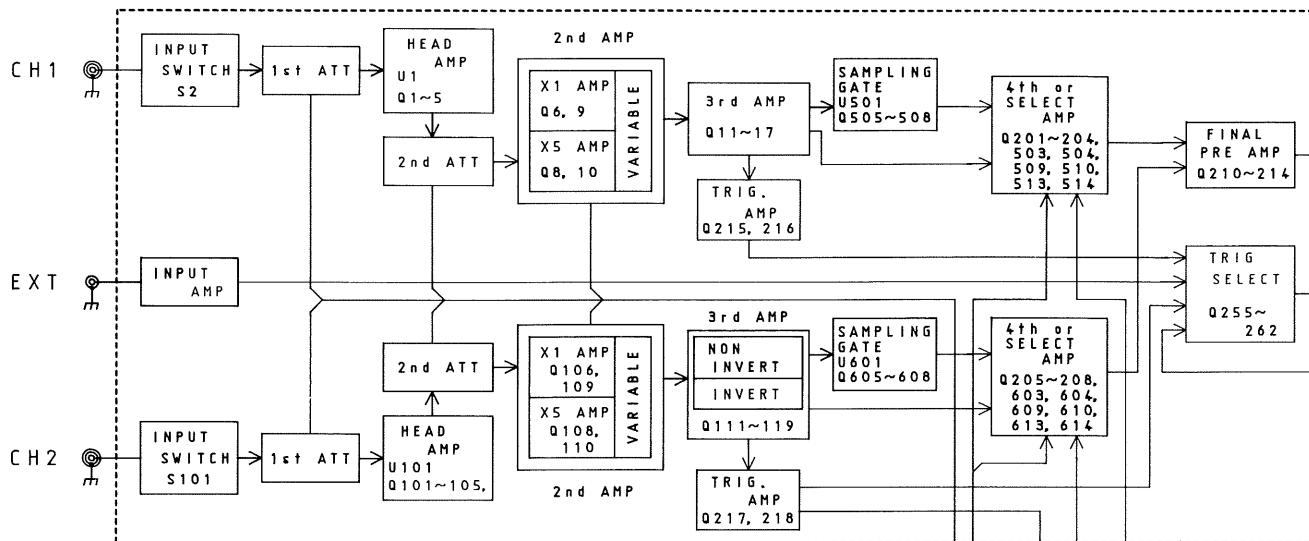


X 80-1090-00 (FINAL UNIT)

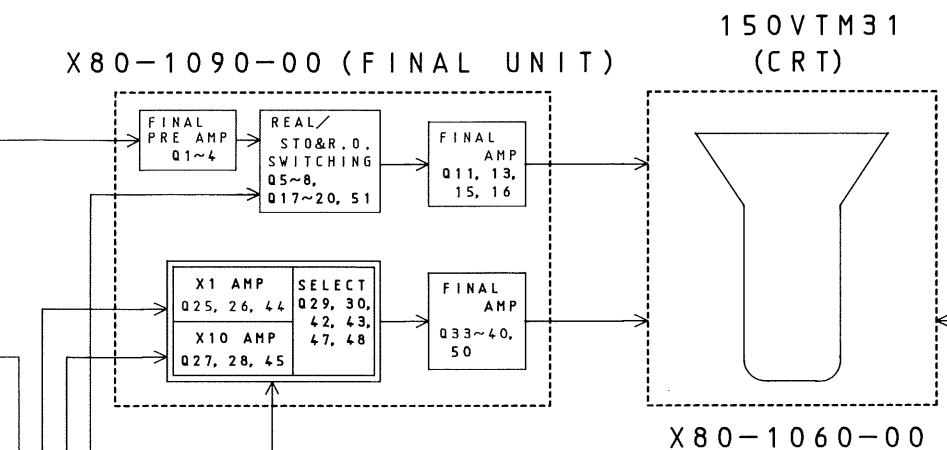


150VTM31
(CRT)

X 80-1060-00

X 68-1480-00
(POWER SUPPLY UNIT)

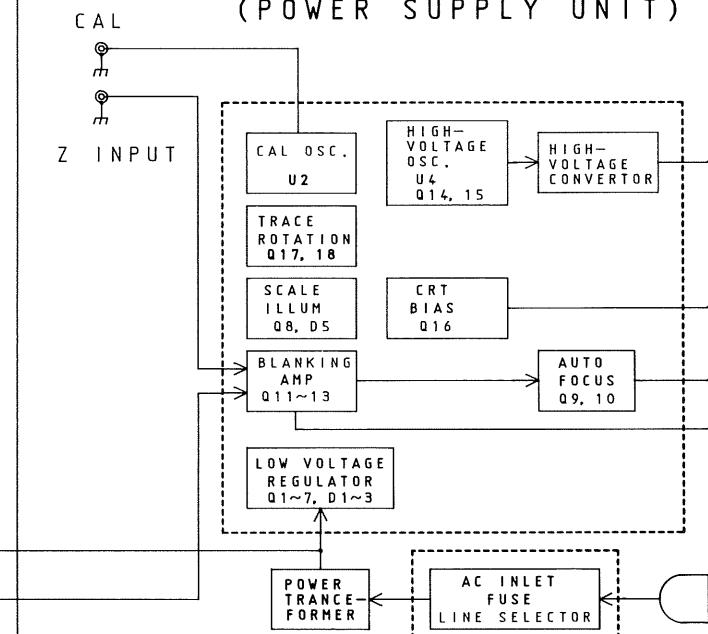


X 74-1470-00 (SWEEP UNIT)

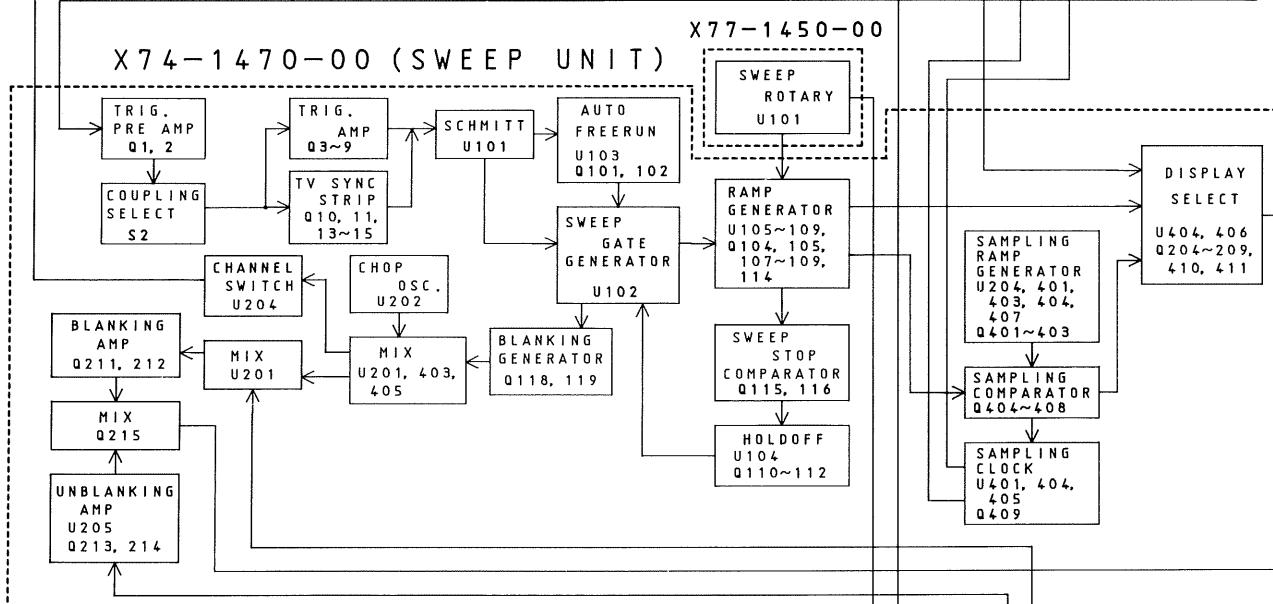

X 77-1450-00

X 77-1450-00 (R/O UNIT)

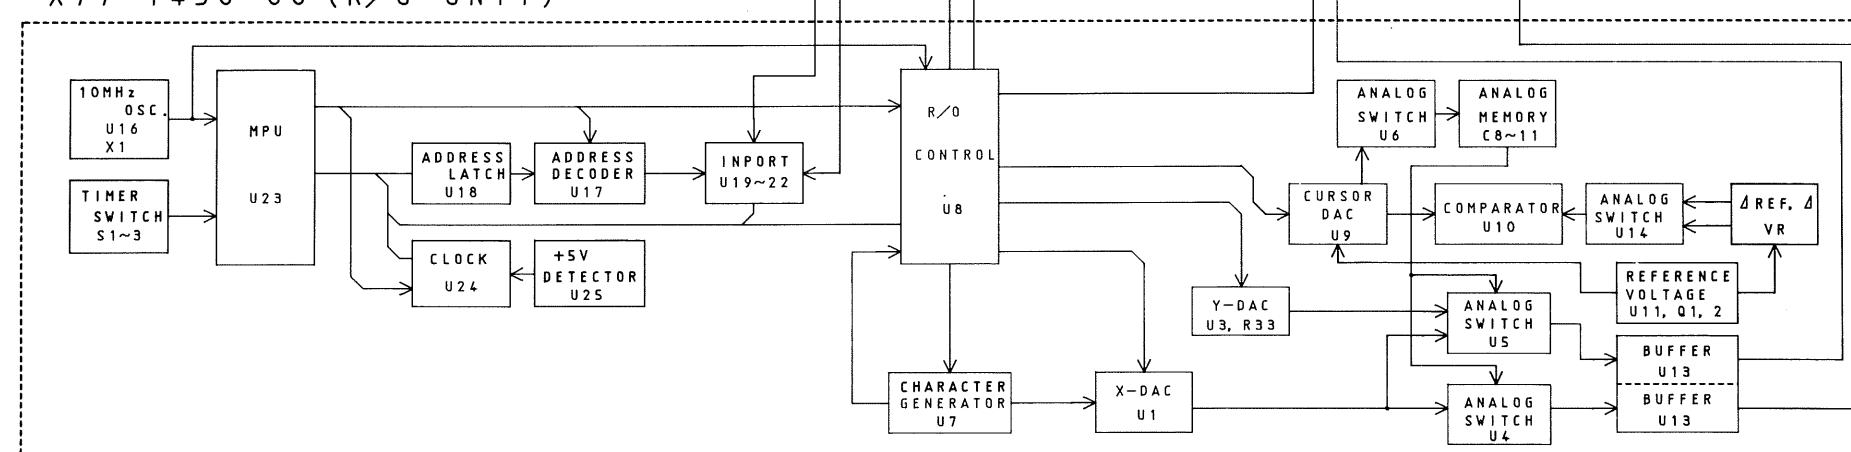

ADJUSTMENT

To obtain the best performance, periodically calibrate the unit. Sometimes, only one mode need be calibrated, while at other times, all modes should be calibrated. When one mode is calibrated, it must be noted that the other modes may be affected. When calibrating all modes, perform the calibration in the specified sequence.

The following calibration required an accurate measuring instrument and an insulated adjusting flat blade screwdriver. If they are not available, contact your dealer. For optimum adjustment, turn the power on and warm up the scope sufficiently (more than 30 minutes) before starting.

Before calibrating the scope, check the power supply voltage.

TEST EQUIPMENT REQUIRED

The following instrument or their equivalent should be used for making adjustment.

Test Equipment	Model	Minimum Specification
Digital Multi-Meter	DL-706 (KENWOOD)	Impedance: More than 10 MΩ, Measuring range: 0.01 V to 199 V
Sine-Wave Generator	651 B (YHP)	Frequency: 10 Hz to 10 MHz, constant voltage over tuning range
Sine-Wave Generator	SG-503 (Tektronix)	Frequency: 50 kHz to 100 MHz, Output impedance: 50 Ω, constant voltage over tuning range
Square-Wave Generator	PG-506 (Tektronix)	Output signal: 1 kHz, Amplitude: 10 mVp-p to 10 Vp-p, Accuracy: within ±1%, Rise time: 35ns or less 100 kHz, Rise time: 1 ns or less
Q Meter	4343B (YHP)	—
Color Pattern Generator	CG-911A (KENWOOD)	—
Oscilloscope	CS-2110 (KENWOOD)	Sensitivity: more than 5 mV Frequency response: More than 100 MHz
Time-Marker Generator	TG-501 (Tektronix)	Time mark: 0.5 s to 0.1μs repetitive waveform
High-Voltage Probe	—	Input Impedance: 1000 MΩ
Termination	—	Impedance: 50 Ω Accuracy: within 3%
Termination	—	3 watts type impedance: 50 Ω
Attenuator	—	-20 dB attenuation (50 Ω)

Table 1

PREPARATION FOR ADJUSTMENT

Control Setting

The control setting listed below must be used for each adjustment procedure.

Exceptions to these settings will be noted as they occur.

After completing a adjustment, return the controls to the following settings.

NAME OF KNOBS	POSITION
INTEN	12 o'clock
READOUT INTEN	Fully CW
FOCUS, ASTIG	Optimum position
CH1, CH2 ▲ POSITION	Mechanical center
◀ ▶ POSITION/PULL × 10MAG VARIABLE, H.VARIABLE (VOLTS/DIV, SWEEP TIME/DIV)	Mechanical center, push CAL
AC-GND-DC (CH1 and CH2)	DC (GND at no signal)
Vertical MODE	CH1
CH2 PULL INV	Push (NORM)
TRIGGERING COUPLING	AC
TRIGGERING SOURCE	CH1
TRIGGERING LEVEL	Mechanical center, push AUTO
TRIGGERING MODE	10 mV/DIV
VOLTS/DIV (CH1 and CH2)	1 ms/DIV
SWEEP TIME/DIV	NORM
HOLDOFF	

Table 2

ADJUSTMENT

1. POWER SUPPLY AND CRT SECTION ADJUSTMENTS

Item	Adjustment VR (TC)	P.C.B.	Procedure
-10 V Adjustment	VR1	X68-1480	Adjust VR1 so that the voltage at pin 2 of the connector P41 is -10 V.
Focus Center Adjustment	VR4	X68-1480	Push the FOCUS knob in (for the FOCUS operation) and then set it to the mechanical center position. Pull the knob out (for the ASTIG operation), display a spot on the screen, and adjust the ASTIG control and VR4 to minimize the dimension of the spot.
Intensity Adjustment	VR2	X68-1480	Display the spot on the CRT screen, and adjust VR2 so that the spot disappears when the INTEN knob is set to the 10-o'clock position.
CRT Center Adjustment	VR2	X80-1090	Short circuit the line between Q1's collector and Q2's collector. Adjust VR2 so that the luminescent line is moved to the center of the CRT screen.
Vertical Center Voltage Adjustment	VR5	X80-1090	With the line between Q1's collector and Q2's collector short-circuited, adjust VR5 so that the voltage at pin 1 of the connector P42 becomes 37 V.
Horizontal Center Voltage Adjustment	VR9	X80-1090	Activate the X-Y operation mode, and set so that the spot moves to the center of the CRT. Adjust VR9 so that the voltage at pin 1 of the connector P43 becomes 60 V.

2. VERTICAL SECTION ADJUSTMENTS

Item	Adjustment VR (TC)	P.C.B.	Procedure
CH1 100 Hz Square Wave Adjustment	VR2	X73-1750	CH1 VOLTS/DIV: 10 mV Adjust the output of the square wave oscillator so that the amplitude on the CRT screen becomes 6 div. Adjust VR2 so that the waveform becomes flat.
CH2 100 Hz Square Wave Adjustment	VR102	X73-1750	Adjust in the same way as for CH1.
CH1 Waveform Shaping	TC903 TC904	X73-1750 X73-1750	AC-GND-DC: DC Apply 1 kHz square wave to CH1 INPUT (with the amplitude extending over 4 to 6 div). Set CH1 VOLTS/DIV to 0.1 V range (and 1 V range), and adjust TC903 (and TC904) so that the waveform becomes flat in both ranges.
CH2 Waveform Shaping	TC913 TC914	X73-1750 X73-1750	Adjust in the same way as for CH1.
CH1 Input Capacity Adjustment	TC901 TC902	X73-1750 X73-1750	AC-GND-DC: DC CH1 VOLTS/DIV: 10 mV Connect the capacity meter to the CH1 INPUT, and measure the input capacity in the 10 mV range. Adjust TC901 and TC902, alternately, so that the input capacity in the 0.1 V and the 1 V ranges equals the same capacity as in the 10 mV range. Input capacity: 24 pF ± 3 pF
CH2 Input Capacity Adjustment	TC911 TC912	X73-1750 X73-1750	Adjust in the same way as for CH1. Input Capacity: 24 pF ± 3 pF
CH1 Step ATT Balance Adjustment	VR1 VR3	X73-1750 X73-1750	SWEEP TIME/DIV: 1 ms Adjust VR1 so that the position of the luminescent line does not change even when the vertical attenuator is selected between 1 and 2 mV range. Switch the range between 2 and 5 mV ranges, and perform the same adjustment using VR3.

ADJUSTMENT

Item	Adjustment VR (TC)	P.C.B.	Procedure
CH1 Variable Balance Adjustment	VR5	X73-1750	<p>VOLTS/DIV: 10 mV SWEEP TIME/DIV: 1 ms</p> <p>Adjust VR5 so that the position of the luminescent line does not change even if the VARIABLE knob is rotated.</p> <p>Vary the settings of the VOLTS/DIV and VARIABLE controls and see if the trace position also moves; if it does, adjust VR1, 3 and 5 again.</p>
CH2 Step ATT Balance Adjustment	VR101 VR103	X73-1750 X73-1750	Adjust in the same way as for CH1.
CH2 Variable Balance Adjustment	VR105	X73-1750	Adjust in the same way as for CH1.
CH2 INV Balance Adjustment	VR108	X73-1750	<p>CH2 POSITION: Mechanical center position (12-o'clock position) CH2 VOLTS/DIV: 1 mV SWEEP TIME/DIV: 1 ms</p> <p>Adjust VR108 so that the position of the luminescent line does not change even if the polarity of CH2 is switched over between NORM and INV positions (with the CH2 POSITION knob set to PUSH and PULL status).</p>
CH2 Position Center Adjustment	VR601 VR604	X73-1750 X73-1750	<p>CH2 POSITION: Mechanical center position CH2 VOLTS/DIV: 10 mV SWEEP TIME/DIV: 1 ms</p> <p>Adjust VR604 so that the trace is located on the center of the screen. Set the SWEEP TIME to 0.1 μs and adjust VR601 so that the trace is located on the center of the screen.</p>
CH1 Position Center Adjustment	VR501 VR504	X73-1750 X73-1750	<p>Adjust in the same way as for CH2.</p> <p>Adjust VR504 when the SWEEP TIME/DIV is set to 1 ms. And adjust VR501 when the setting is 0.1 μs.</p>
CH1 Sampling 10 kHz Square Wave Adjustment	VR503	X73-1750	<p>CH1 VOLTS/DIV: 10 mV SWEEP TIME/DIV: 0.1 μs</p> <p>Input a 10 kHz square wave signal into CH1 INPUT, and adjust oscillator so that the CRT samplitude becomes 6 div.</p> <p>Turn a TRIG LEVEL knob fully clockwise or counterclockwise and release the synchronization.</p> <p>Adjust VR503 so that the waveform on the CRT becomes flat.</p>
CH2 Sampling 10 kHz Square Wave Adjustment	VR603	X73-1750	<p>CH2 VOLTS/DIV: 10 mV SWEEP TIME/DIV: 0.1 μs</p> <p>Input a 10 kHz square wave signal into CH2 INPUT, and adjust in the same way as for CH1.</p>
CH1 Gain Adjustment	VR1	X80-1090	<p>CH1 VOLTS/DIV: 10 mV</p> <p>Input a square wave signal having an amplitude of 50 mV, and adjust VR1 so that the CRT amplitude becomes 5 div.</p>
CH1 1 mV Range Gain Adjustment	VR4	X73-1750	<p>CH1 VOLTS/DIV: 1 mV</p> <p>Input a square wave signal having an amplitude of 5 mV, and adjust VR4 so that the CRT amplitude becomes 5 div.</p>
CH1 Sampling Gain Adjustment	VR502	X73-1750	<p>CH1 VOLTS/DIV: 10 mV SWEEP TIME/DIV: 10 ns</p> <p>Input a square wave signal having an amplitude of 50 mV into CH1 INPUT. Turn a TRIG LEVEL knob fully clockwise or counterclockwise and release the synchronization.</p> <p>Adjust VR502 so that the CRT amplitude becomes 5 div.</p>
CH2 Gain Adjustment	VR605	X73-1750	Adjust in the same way as for CH1.
CH2 1 mV Range Gain Adjustment	VR104	X73-1750	Adjust in the same way as for CH1.

ADJUSTMENT

Item	Adjustment VR (TC)	P.C.B.	Procedure
CH2 Sampling Gain Adjustment	VR602	X73-1750	<p>CH2 VOLTS/DIV: 10 mV SWEEP TIME/DIV: 10 ns Input a square wave signal having an amplitude of 50 mV into CH2 INPUT, and adjust in the same way as for CH1.</p>
X Gain Adjustment	VR202	X73-1750	<p>CH2 VOLTS/DIV: 10 mV TRIGGERING MODE: X-Y Input the square wave signal having an amplitude of 50 mV into CH2 INPUT, and adjust VR202 so that the CRT amplitude in the horizontal direction becomes 5 div.</p>

3. TRIGGER SECTION ADJUSTMENTS

Item	Adjustment VR (TC)	P.C.B.	Procedure
Trigger Level Center Adjustment	VR1	X74-1470	<p>TRIGGERING MODE : AUTO SOURCE : CH1 COUPLING : AC LEVEL : Mechanical center CH1 VOLTS/DIV : 10 mV Input a 1 kHz sine wave into CH1 INPUT, and adjust the oscillator so that the CRT amplitude becomes 6 div. Adjust VR1 so that start point of the luminescent line is at the center of the CRT (vertical direction).</p>

4. HORIZONTAL SECTION ADJUSTMENTS

Item	Adjustment VR (TC)	P.C.B.	Procedure
1 ms Range Sweep Time Adjustment	VR201	X74-1470	<p>SWEEP TIME/DIV: 1 ms Input a 1 ms marker signal into CH1 INPUT. Adjust VR201 so that the peak of the marker signal matches the CRT scale divided in 1 div.</p>
10 ms Range Sweep Time Adjustment	VR101	X74-1470	<p>SWEEP TIME/DIV: 10 ms Input a 10 ms marker signal into CH1 INPUT, and adjust in the same way as for 1 ms adjustment.</p>
0.2 μ s Range Sweep Time Adjustment	TC102	X74-1470	<p>SWEEP TIME/DIV: 0.2 μs Input a 0.2 μs marker signal into CH1 INPUT, and adjust in the same way as for 1 ms adjustment.</p>
1 μ s Range Sweep Time Adjustment	TC101	X74-1470	<p>SWEEP TIME/DIV: 1 μs Input a 1 μs marker signal into CH1 INPUT, and adjust in the same way as for 1 ms adjustment.</p>
Leading Edge Adjustment	VR401	X74-1470	<p>SWEEP TIME/DIV: 10 ns Input a 1 MHz square wave signal into CH1 INPUT, and adjust oscillator so that the CRT amplitude becomes 6 div. Adjust a TRIG LEVEL to synchronize the signal so that the leading edge on the CRT becomes longer. Adjust VR401 so that the length of the leading edge becomes 0.5 div.</p>
20 ns Range Sweep Time Adjustment	VR403	X74-1470	<p>SWEEP TIME/DIV: 20 ns Input a 20 ns marker signal into CH1 INPUT, and adjust in the same way as for 1 ms adjustment.</p>

ADJUSTMENT

Item	Adjustment VR (TC)	P.C.B.	Procedure
X10 MAG Gain Adjustment	VR8	X80-1090	<p>SWEEP TIME/DIV: 1 ms</p> <p>Input a 1 ms marker signal into CH1 INPUT, and match the peak of the marker signal with the CRT scale divided in 1 div.</p> <p>Pull the PULL X10 MAG knob (to set to the X10 MAG status), and adjust VR8 so that the interval between peaks becomes 10 div.</p>
X10 MAG Center Adjustment	VR7	X80-1090	<p>SWEEP TIME/DIV: 1 ms</p> <p>Input a 5 ms marker signal into CH1 INPUT.</p> <p>Pull the PULL X10 MAG knob (to set to the X10 MAG status), and adjust the horizontal POSITION so that the peak of the waveform is at the vertical scale line at the center of the CRT.</p> <p>Push the PULL X10 MAG knob (to release the X10 MAG mode) and adjust VR7 so that the peak of the waveform matches the vertical scale line at the center of the CRT.</p>
X10 MAG Linearity Adjustment	TC4	X80-1090	<p>SWEEP TIME/DIV: 0.2 μs</p> <p>PULL X10 MAG: PULL</p> <p>Input a 20 ns marker signal into CH1 INPUT, and match the first peak of the waveform with the vertical scale line at the left end of the CRT.</p> <p>Adjust TC4 so that the peaks of the marker signal waveform match the CRT scale divided in 1 div.</p>
Horizontal Position Center Adjustment	VR6	X80-1090	<p>SWEEP TIME/DIV: 1 ms</p> <p>Horizontal POSITION: Mechanical center</p> <p>Adjust VR6 so that the start point of the luminescent line matches the vertical scale line at the left end of the CRT.</p>
Sampling Horizontal Position Center Adjustment	VR404	X74-1470	<p>SWEEP TIME/DIV: 1 ms</p> <p>Adjust the horizontal POSITION knob so that the sweep start point moves to the vertical scale line at the left end of the CRT.</p> <p>Set the SWEEP TIME/DIV to 0.1 μs and adjust VR404 so that the start point of the luminescent line matches the vertical scale line at the left end of the CRT.</p>
X Position Center Adjustment	VR202	X74-1470	<p>SWEEP TIME/DIV: 1 ms</p> <p>Adjust the horizontal POSITION knob so that the sweep start point moves to the vertical scale line at the left end of CRT.</p> <p>Switch to the X-Y mode and adjust VR202 to bring the spot to the center of CRT screen.</p>

ADJUSTMENT

5. OVERSHOOT AND CAL ADJUSTMENTS

Item	Adjustment VR (TC)	P.C.B.	Procedure
Sampling Overshoot Adjustment	<For CH1> VR8 TC1 TC2 TC501 <For CH2> VR109 TC101 TC102 TC601	X73-1750 X73-1750 X73-1750 X73-1750 X73-1750 X73-1750 X73-1750 X73-1750	<ul style="list-style-type: none"> • Input a 1 MHz square wave signal into CH1 INPUT (with a CRT amplitude of 6 div.). * Adjust TC501 so that the overshoot becomes minimum. * Adjust TC2 so that the overshoot becomes maximum. * Turn VR8 fully clockwise. * Adjust TC1 so that the overshoot appears. * Adjust TC501 so that the ringing becomes 0.2 div. * Adjust TC1 so that the overshoot becomes 0.7 div. <p>After adjustment, check if the frequency responses of 10 mV and 50 mV ranges are more than 115 MHz (-3 dB).</p> <ul style="list-style-type: none"> • Input a 1 MHz square wave signal into CH2 INPUT (with a CRT amplitude of 6 div.). * Adjust TC601 so that the overshoot becomes minimum. * Adjust TC102 so that the overshoot becomes maximum. * Turn VR109 fully clockwise. * Adjust TC101 so that the overshoot becomes maximum. * Adjust TC601 so that the overshoot becomes 0.7 div. <p>After adjustment, check if the frequency responses of 10 mV and 50 mV ranges are more than 115 MHz (-3 dB).</p>
Overshoot Adjustment	TC1 TC2 <For CH1> VR201 TC201 <For CH2> TC602	X80-1090 X80-1090 X73-1750 X73-1750 X73-1750	CH1, 2 VOLTS/DIV : 10 mV CH1, 2 AC-GND-DC : DC SWEEP TIME/DIV : 1 μ s PULL X10 MAG : PULL <ul style="list-style-type: none"> • Input a 1 MHz square wave signal into CH1 INPUT (with a CRT amplitude of 6 div.). * Adjust TC1 and 2 (X80) so that the middle frequency band of the waveform becomes flat. * Adjust TC201 (X73) so that the overshoot becomes 0.1 div. * Adjust VR201 (X73) so that the ringing becomes 0.1 div. <ul style="list-style-type: none"> • Input the 1 MHz square wave signal into CH2 INPUT (with the CRT amplitude of 6 div.). * Adjust TC602 (X73) so that the overshoot becomes 0.1 div. <p>After adjustment, check if the frequency response is more than 43 MHz (-3 dB).</p>
CAL Adjustment	VR5 VR6	X68-1480 X68-1480	Connect an oscilloscope having a measurement band of 100 MHz (-3 dB) or more to CAL terminal, and set the VOLTS/DIV to 0.2 V and the SWEEP TIME/DIV to 0.1 ms. (The oscilloscope should be calibrated beforehand.) Adjust VR5 so that one period becomes 1 ms (10 div.). Adjust VR6 so that the amplitude becomes 1 V (5 div.).


ADJUSTMENT

6. CURSOR SECTION ADJUSTMENTS


Item	Adjustment VR (TC)	P.C.B.	Procedure
Cursor Y Gain Ad- justment	VR3 VR4	X80-1090 X80-1090	<p>CURSORS : Δ V1 Δ : Turn fully clockwise Δ REF : Turn fully counterclockwise CH1 VOLTS/DIV : 10 mV</p> <ul style="list-style-type: none"> • Adjust VR3 so that the interval between cursors becomes 8 div. To facilitate the adjustment of VR3, adjust VR4 to move the cursor in the Y direction. • Then, input a square wave signal having an amplitude of 50 mV into CH1 INPUT. After confirming that the CRT amplitude is 5 div., adjust the Δ and Δ REF knobs to move the cursor on the waveform. Confirm that the cursor data indication is $50.0 \text{ mV} \pm 3\%$. ($48.5 - 51.5 \text{ mV}$) If it is not within the above allowable range, adjust the Δ REF knob so that the data indication becomes 50.0 mV, and readjust VR3 and VR4 (X80-1090) so that the cursor is on the square wave.
Cursor Y Position Adjustment	VR4	X80-1090	<p>CURSORS : Δ V1 Δ : Turn fully clockwise Δ REF : Turn fully counterclockwise</p> <p>Adjust VR4 so that the two cursors move to the upper and lower ends of the horizontal scale line in the CRT. If it is impossible, adjust the interval between cursors and the horizontal scale line becomes the same for both upper and lower ends.</p>
Cursor X Gain and Position Adjustment	VR10 VR11	X80-1090 X80-1090	<p>CURSORS : Δ T Δ : Turn fully clockwise Δ REF : Turn fully counterclockwise</p> <ul style="list-style-type: none"> • Adjust VR11 so that the interval between two cursors becomes 10 div. Adjust VR10 so that the two cursors move onto the vertical scale lines at the left and right ends of CRT. • Then set the SWEEP TIME/DIV to 1 ms, and input the 1 ms marker signal into the CH1 INPUT. After checking that the sweep time is displayed correctly, adjust the Δ REF and Δ knobs so that the cursors move to the second peak and 10th peak of the waveform, respectively. Check that the cursor data indication is $8.00 \text{ ms} \pm 3\%$ ($7.76 - 8.24 \text{ ms}$). If the displayed value is out of the range above, turn the Δ REF control until the data display indicates 8.00 ms, then adjust VR10 and VR11 so as to align the cursors with the 2nd and 10th peaks of the waveform. • Turn the Δ knob fully clockwise again, and turn the Δ REF knob fully counterclockwise. If the cursor positions and the vertical scale lines (at the left end and at the right end) are shifted, adjust VR10 so that the interval becomes the same value for both left and right ends.
R/O Cursor Length Adjustment	VR1	X77-1450	<p>CURSORS : Δ V1</p> <p>Adjust VR1 to bring the left end of the cursor on the vertical scale line at the first division to the right of the left side of CRT screen.</p>

ADJUSTMENT

POWER SUPPLY UNIT (X68-1480-00)

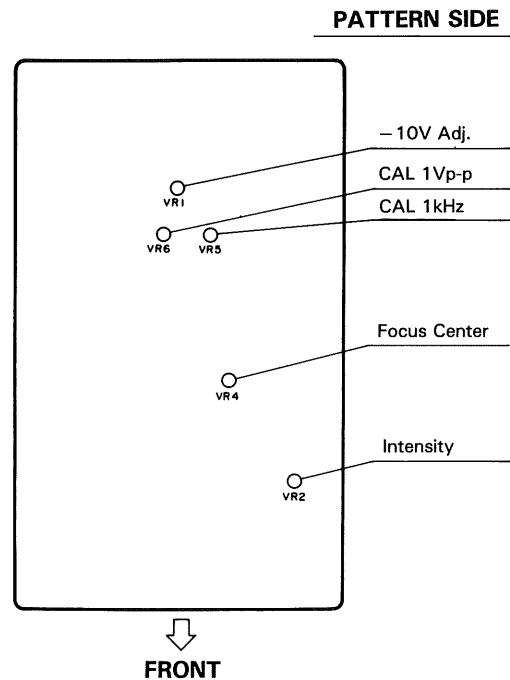


FINAL UNIT (X80-1090-00)

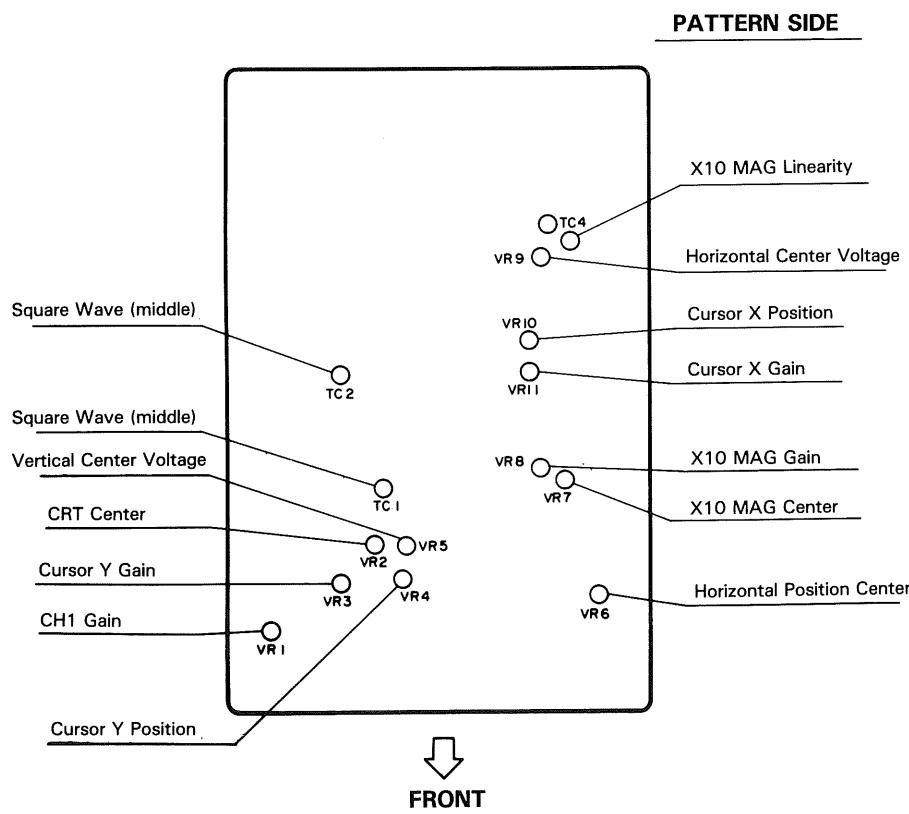

ADJUSTMENT


V.PRE UNIT (X73-1750-00)

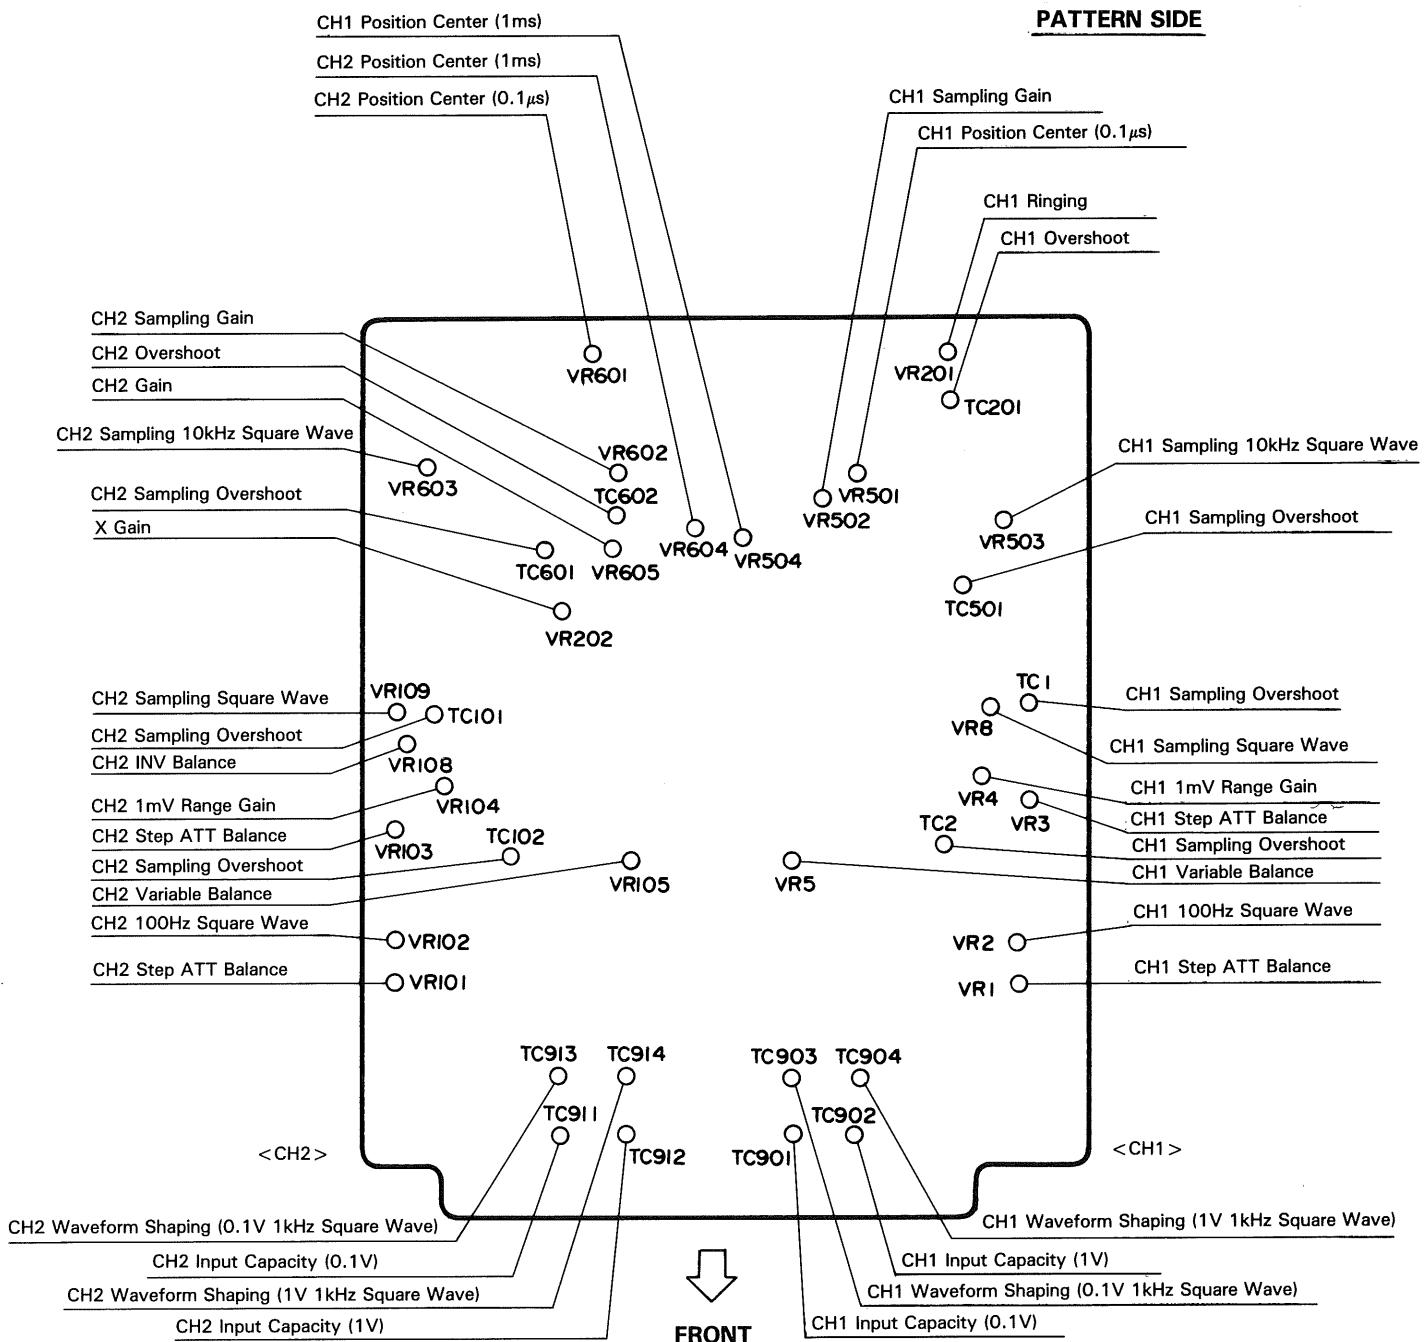

ADJUSTMENT


SWEEP UNIT (X74-1470-00)

PATTERN SIDE


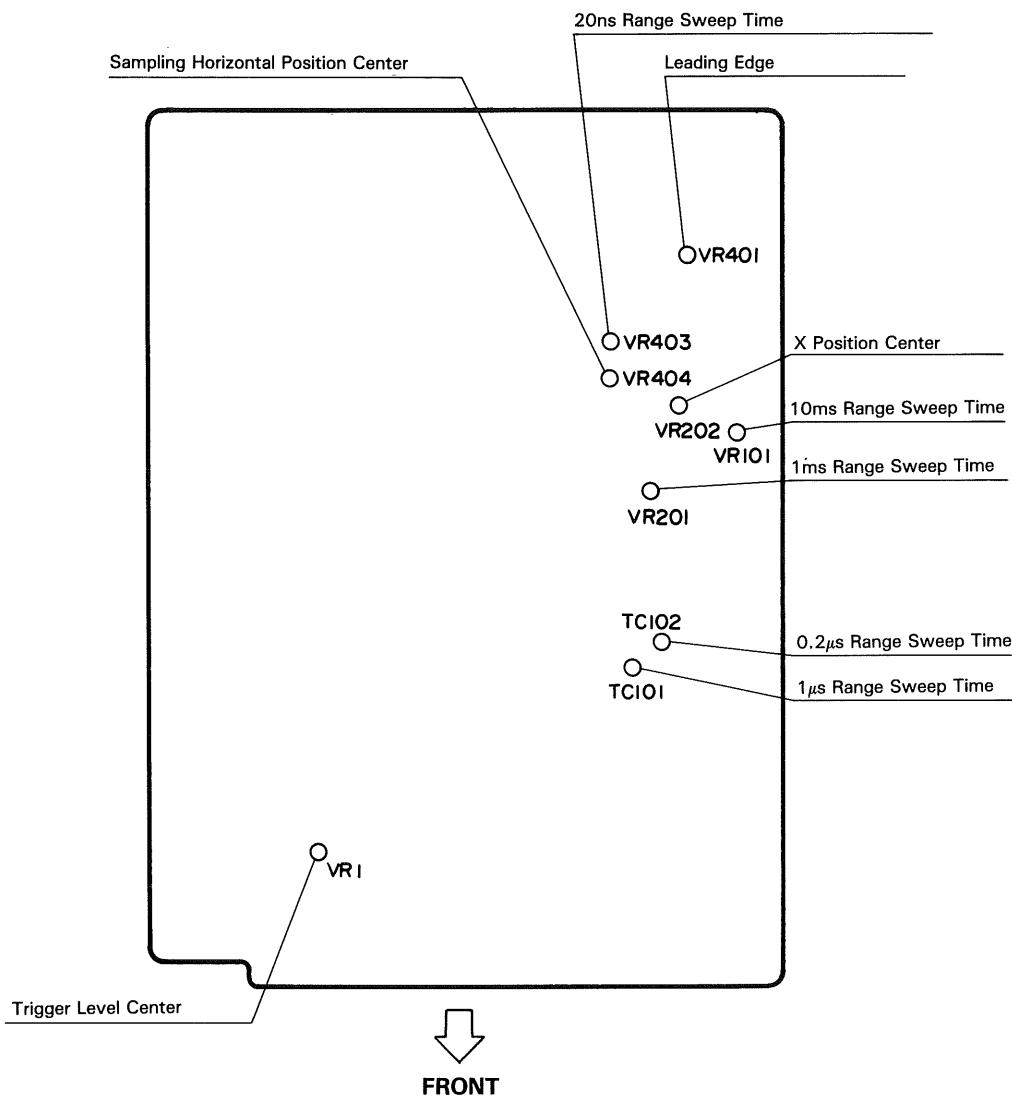


R/O UNIT (X77-1450-00)


PATTERN SIDE

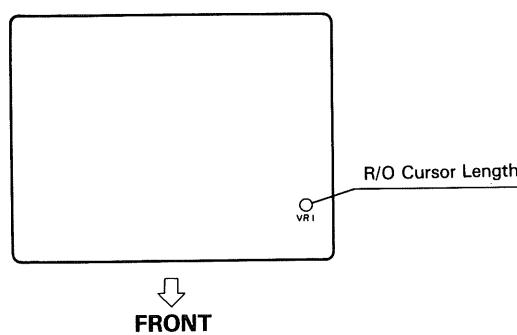


TROUBLESHOOTING

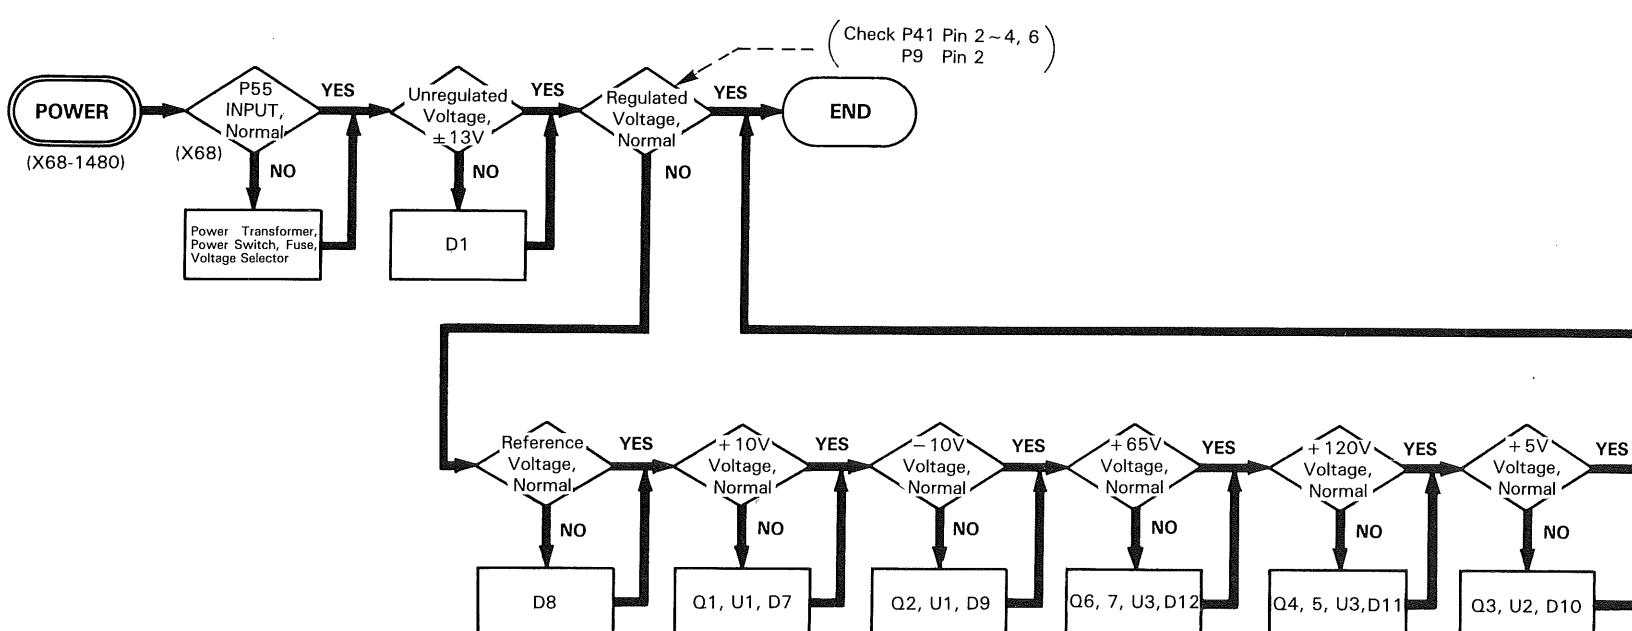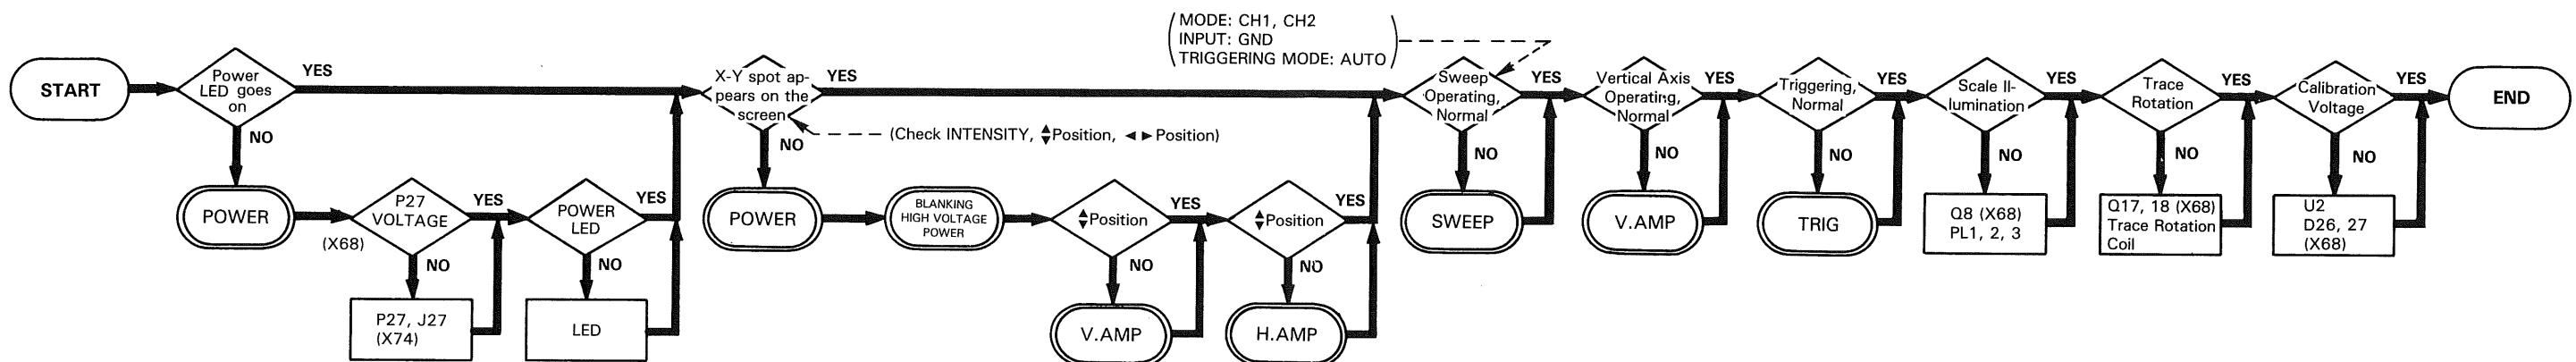


TROUBLESHOOTING

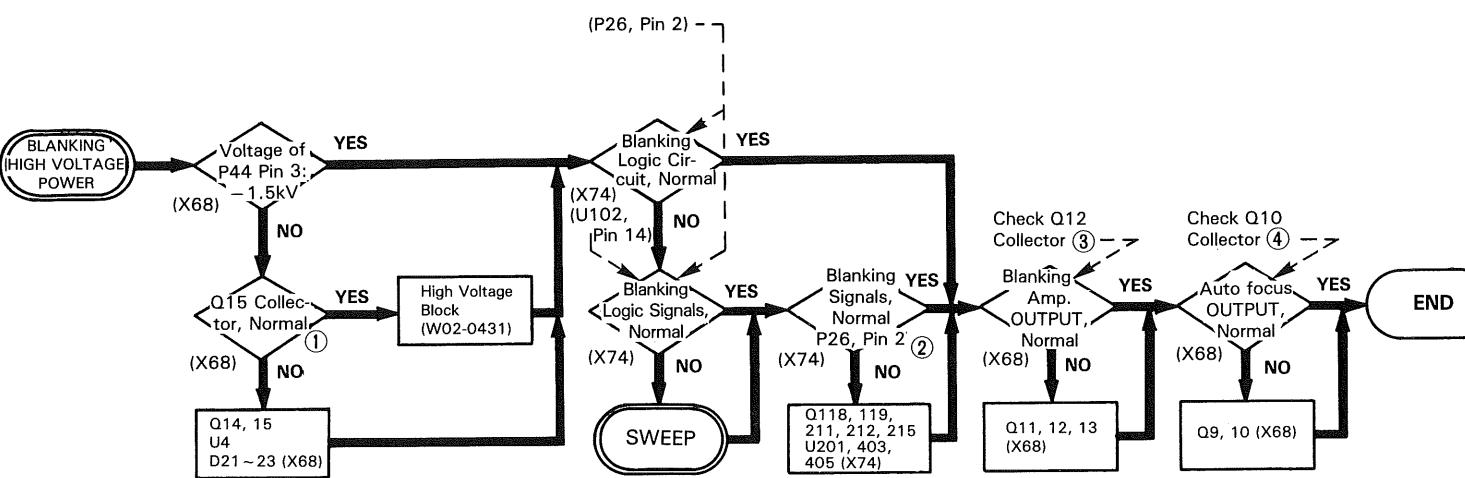


① (X68) Q15 Collector Waveform

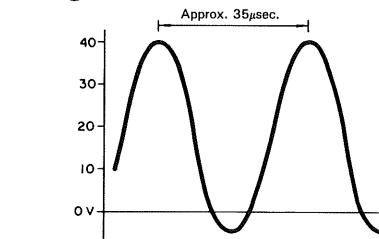


② (X74) P26, Pin 2 Waveform

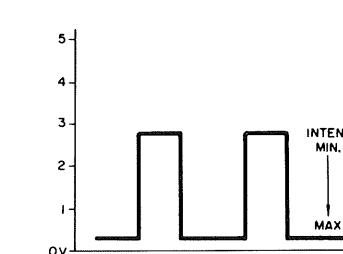


③ (X68) Q12 Collector Waveform

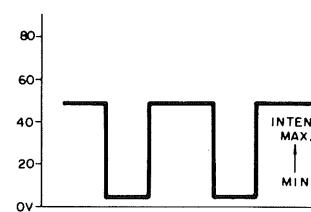


④ (X68) Q10 Collector Waveform

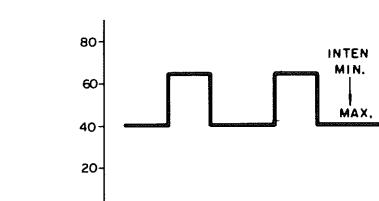


⑤ (X73) Q6a Base: CH1
Q106a Base: CH2 Waveform

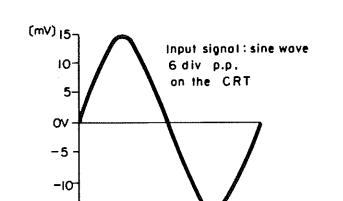


⑥ Q20, 21 Base: CH1
Q122, 123 Base: CH2 Waveform

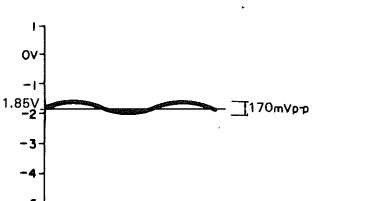



⑦ (X73) Q210, 211 Base Waveform

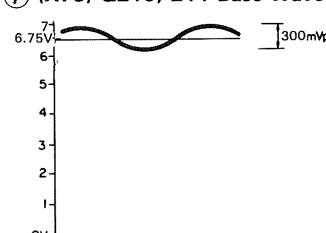




⑧ (X80) Q3, 4 Base Waveform

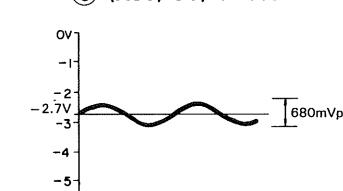



⑨ (X80) P42, Pin 1, 3 Waveform

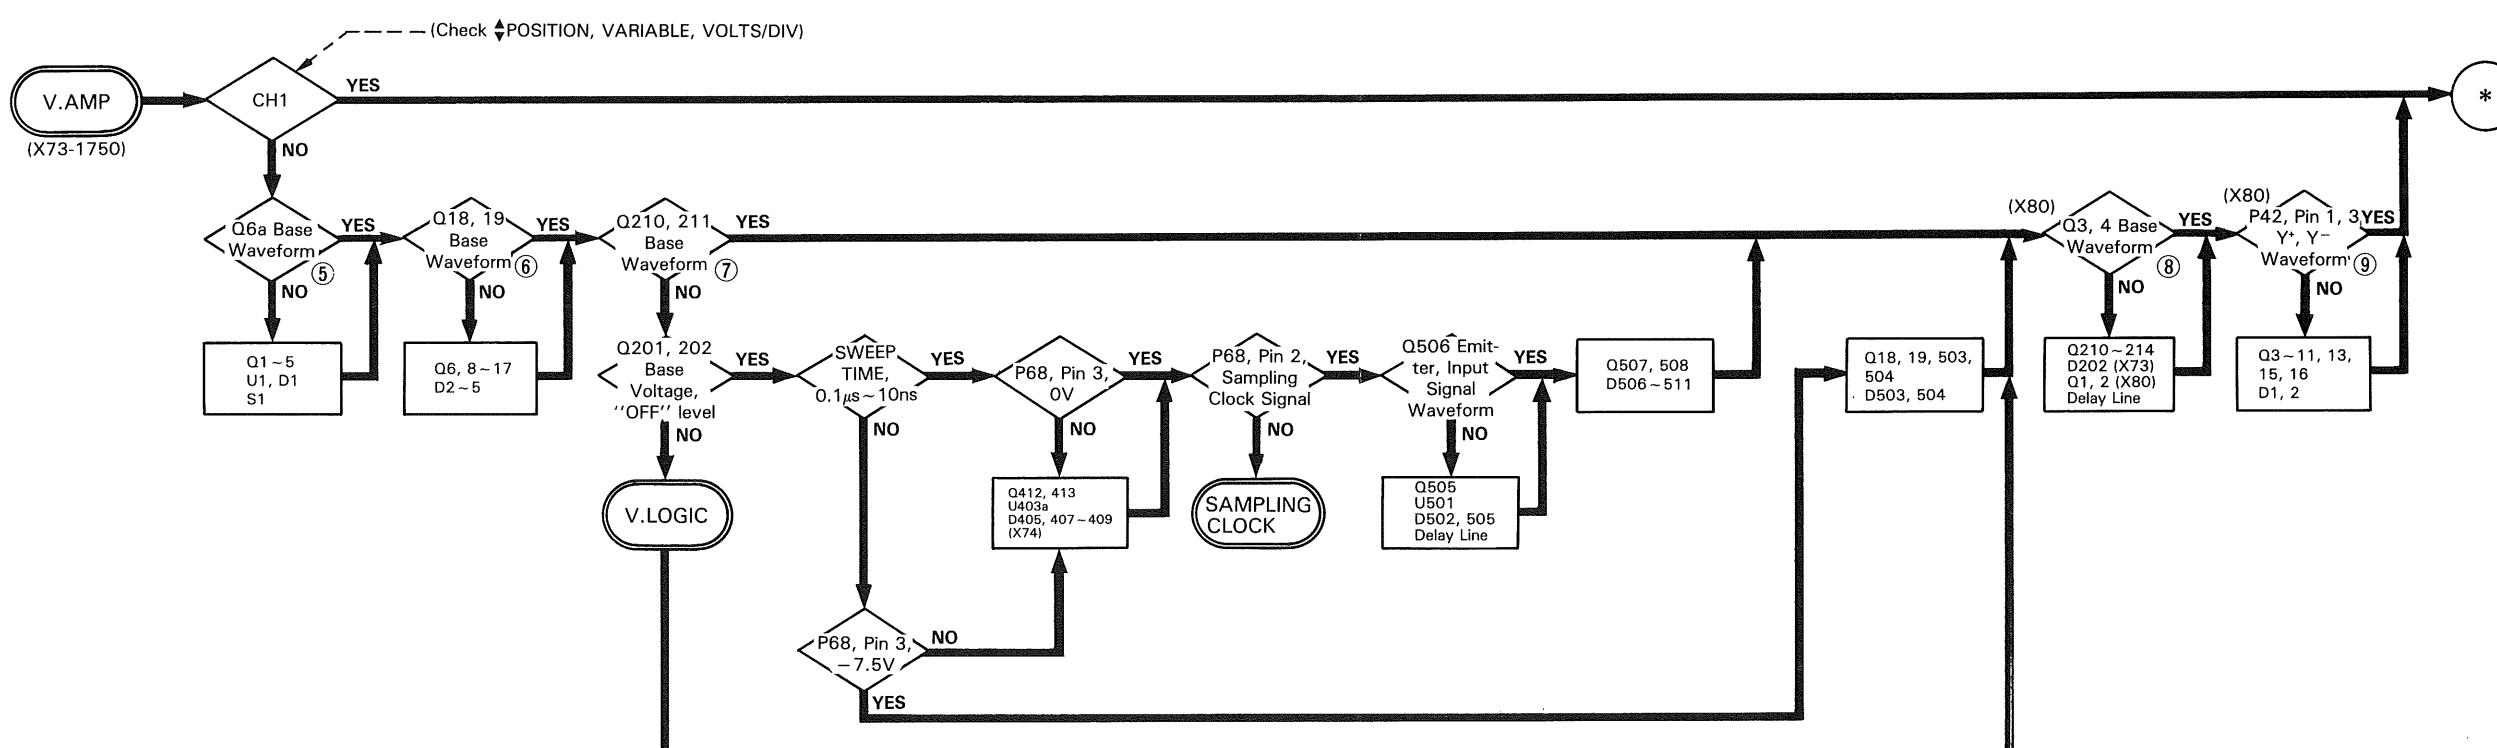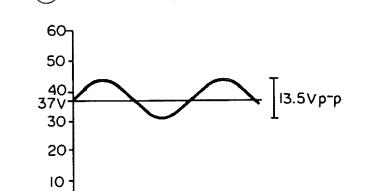




TROUBLESHOOTING

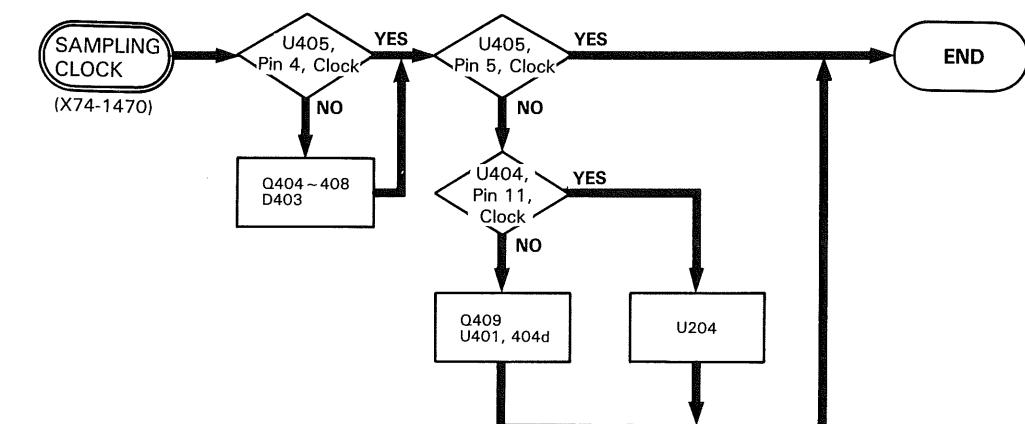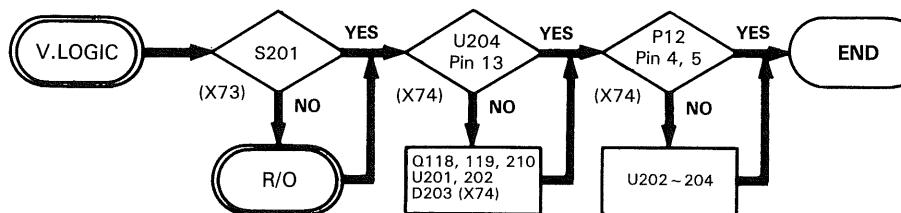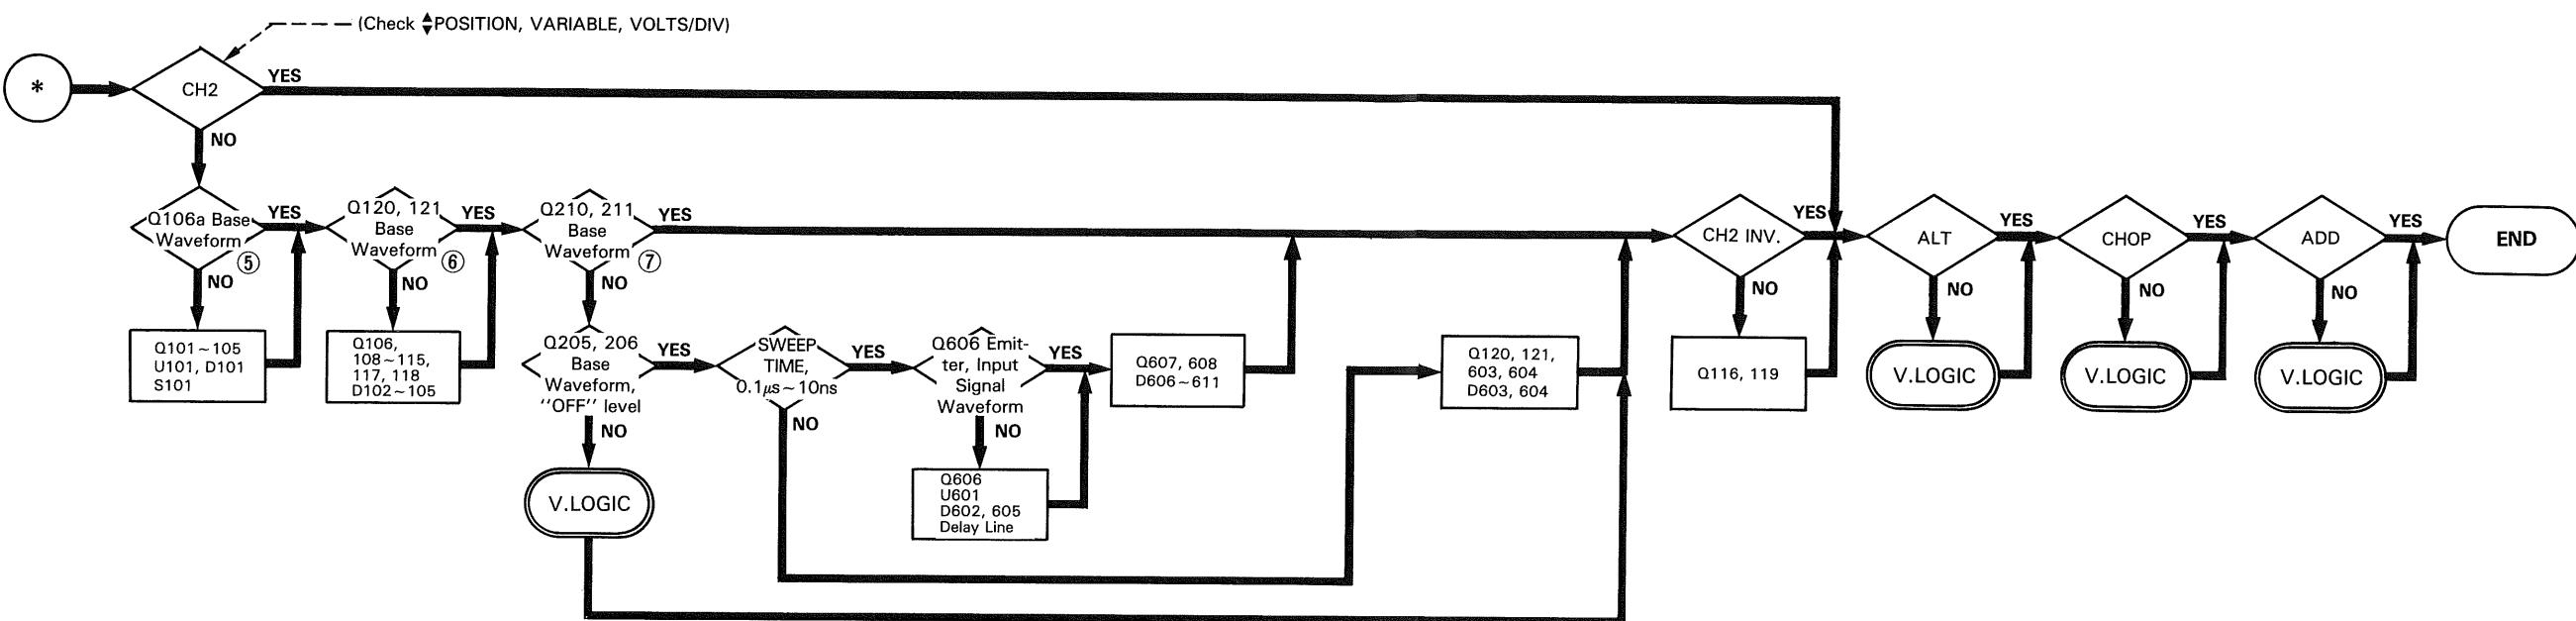


TROUBLESHOOTING

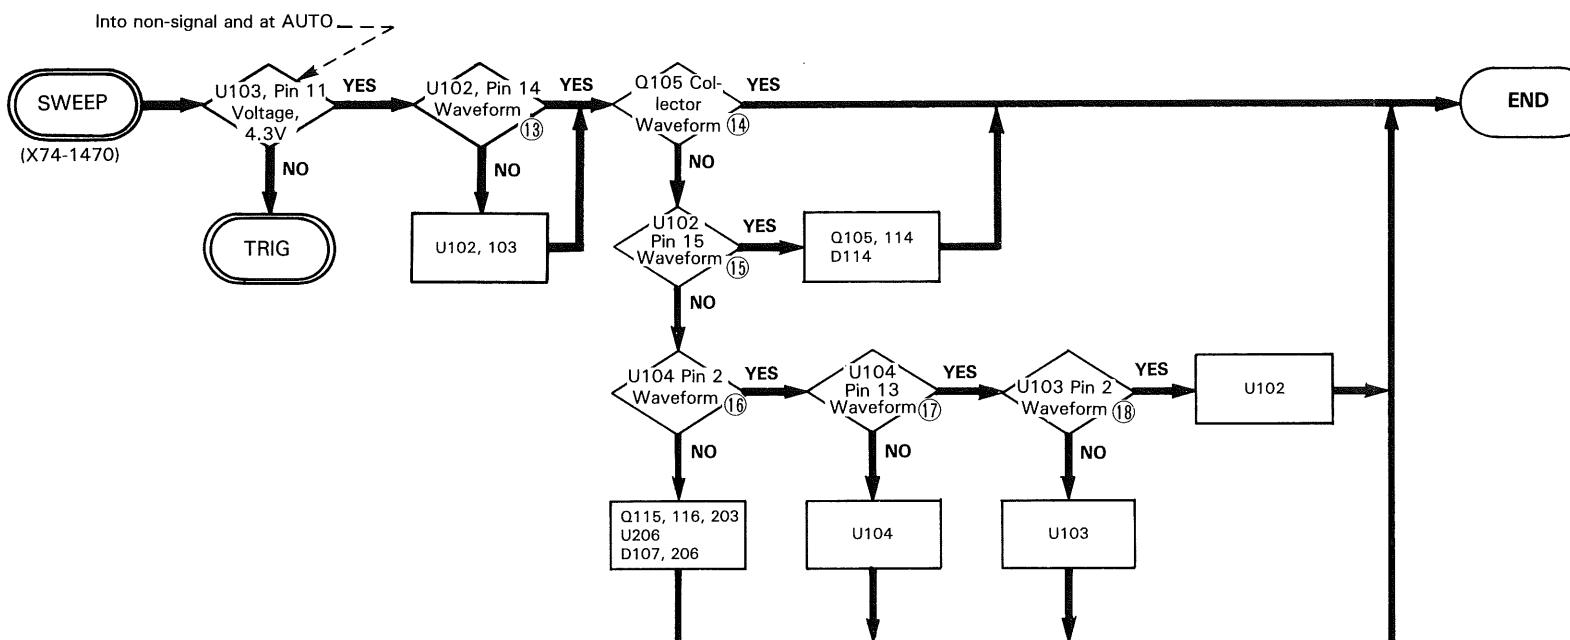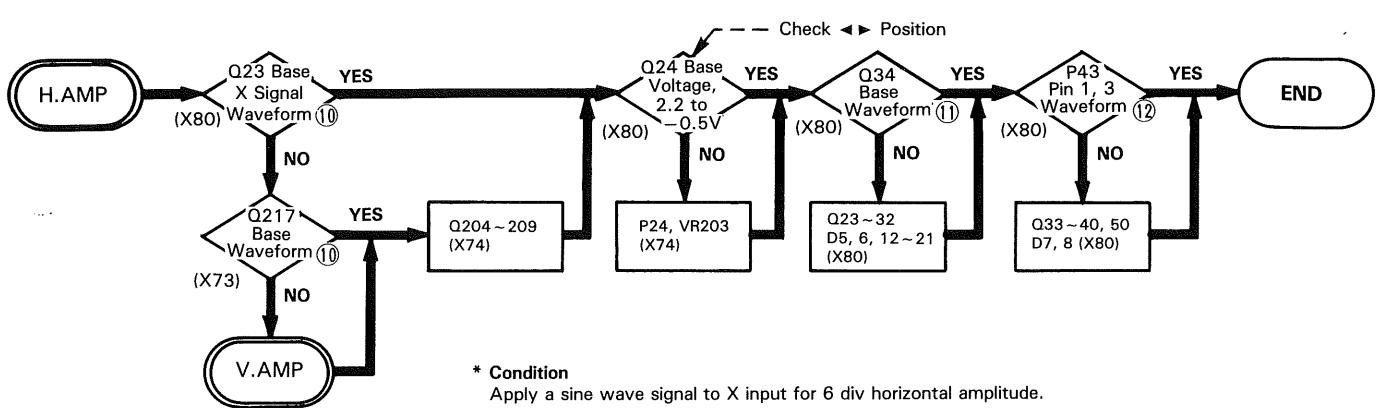

WAVEFORM OF CIRCUIT DIAGRAM

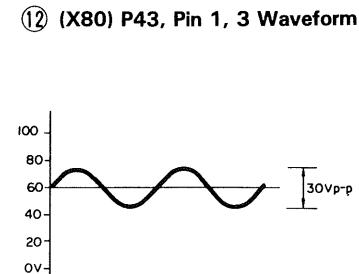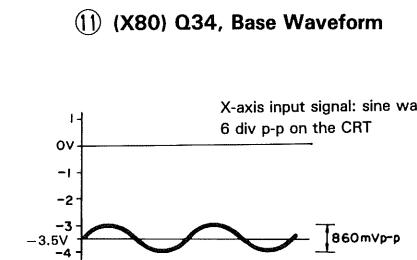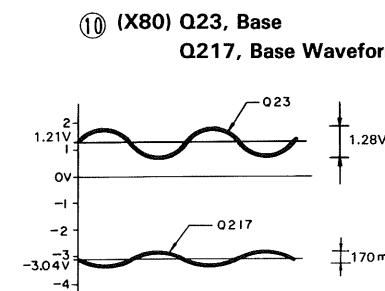


⑬ (X74) U102, Pin 14 Waveform

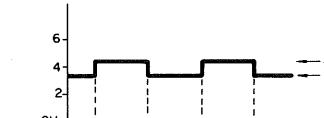


⑭ (X74) Q105, Collector Waveform




⑮ (X74) U102, Pin 15 Waveform

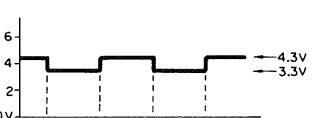


⑯ (X74) U104, Pin 2 Waveform

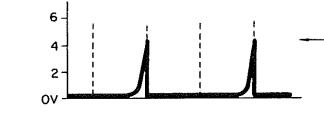

⑰ (X74) U104, Pin 13 Waveform

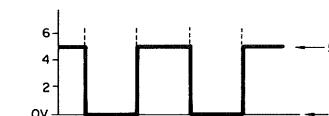


⑱ (X74) U103, Pin 2 Waveform

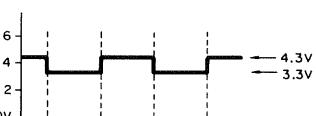


	P12 (X74)	U204 (X74)		U202 (X74)	U201 (X74)	CH. Switch Signal P12 (X73)	
	Pin 1 CHOP	Pin 10 PR	Pin 14 CLR	Pin 11	Pin 6	Pin 1 CH1-E	Pin 2 CH2-E
CH1	H	H	L	H		L	H
CH2	H	L	H	H		H	L
ALT	H	H	H	H			
CHOP	L	H	H				
ADD	H	L	L	H		L	L
X-Y	-	-	L	H	-	L	H


TROUBLESHOOTING

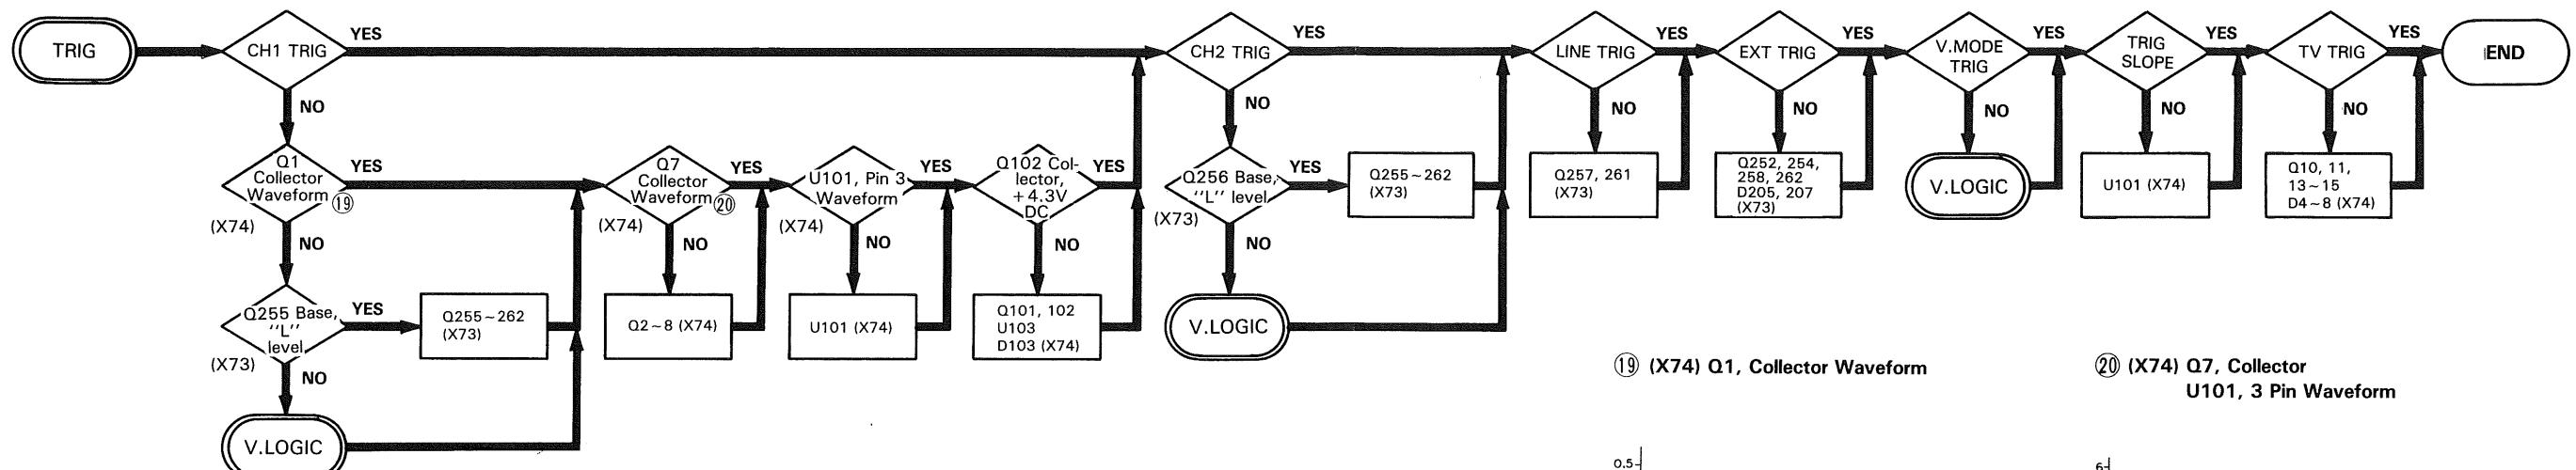

(19) (X74) Q1, Collector Waveform


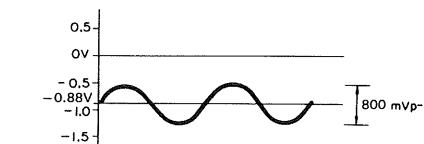


(20) (X74) Q7, Collector
U101, 3 Pin Waveform


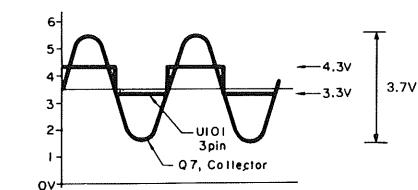


TROUBLESHOOTING

READOUT SECTION TROUBLESHOOTING R/O UNIT (X77-1450-00)

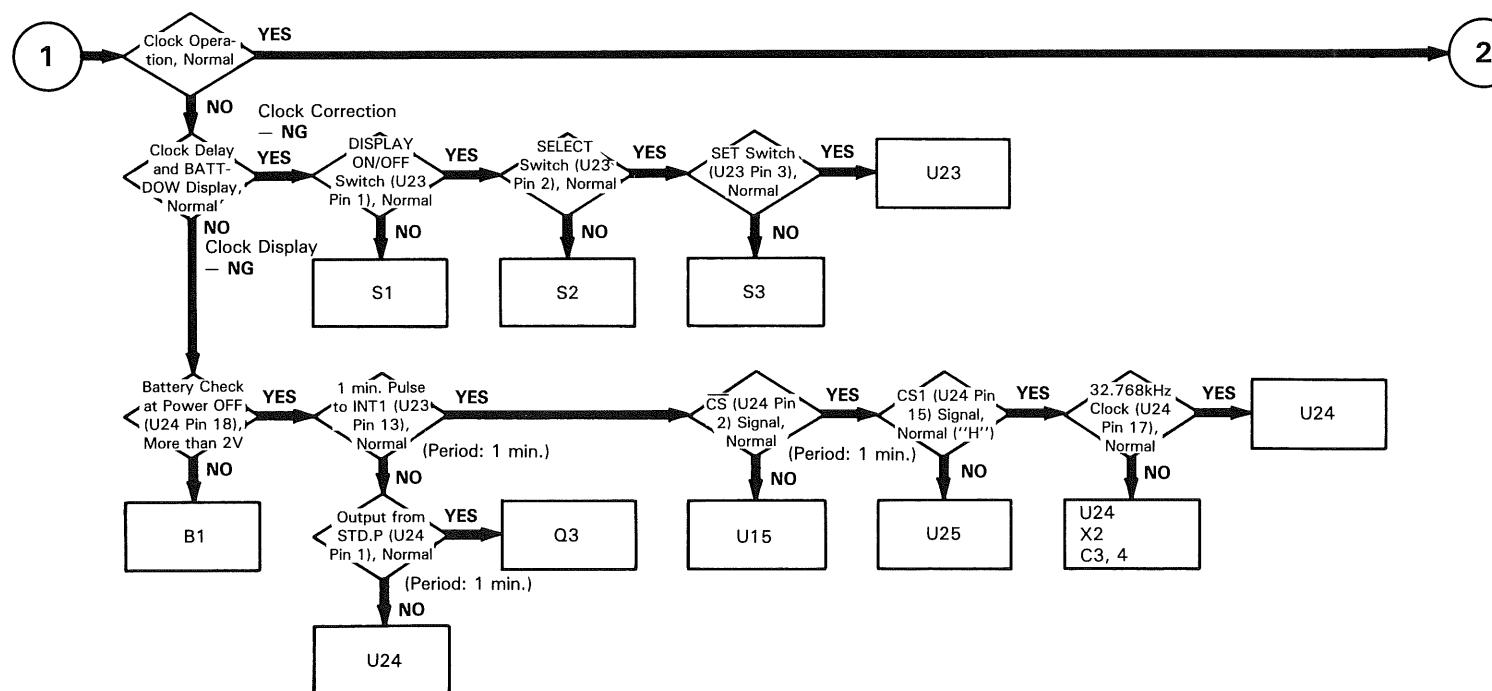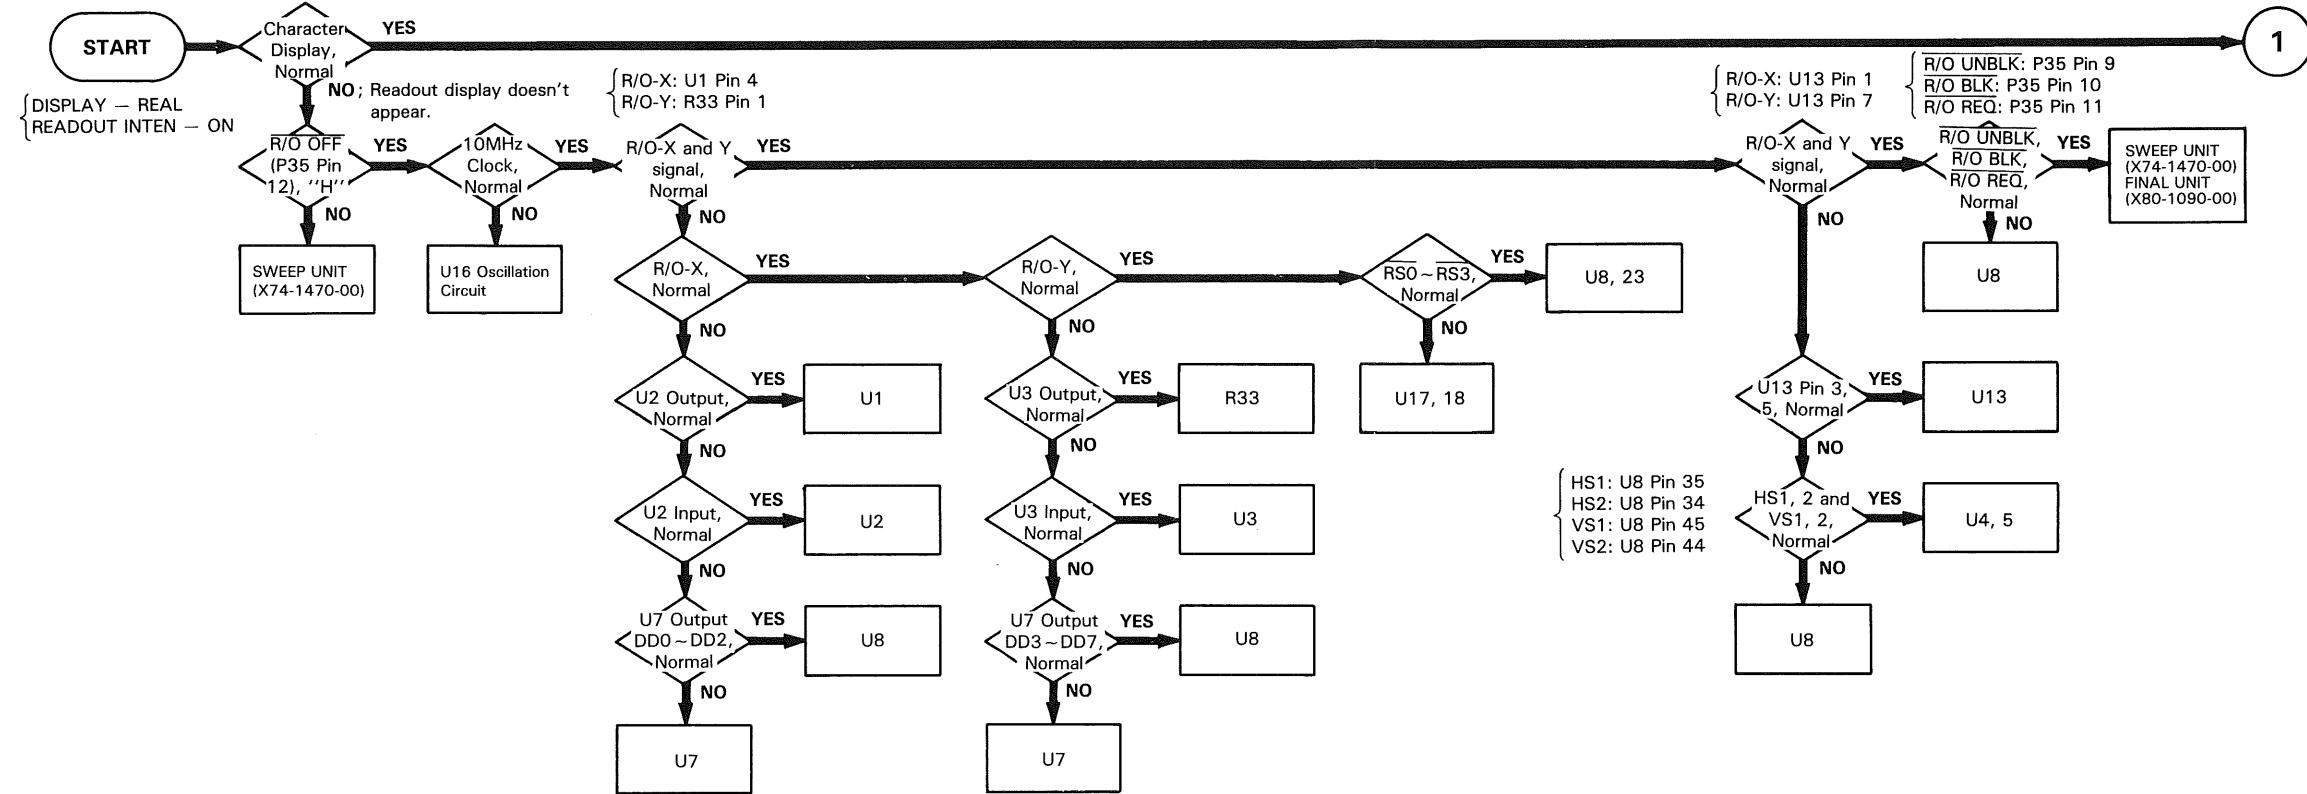

TROUBLESHOOTING

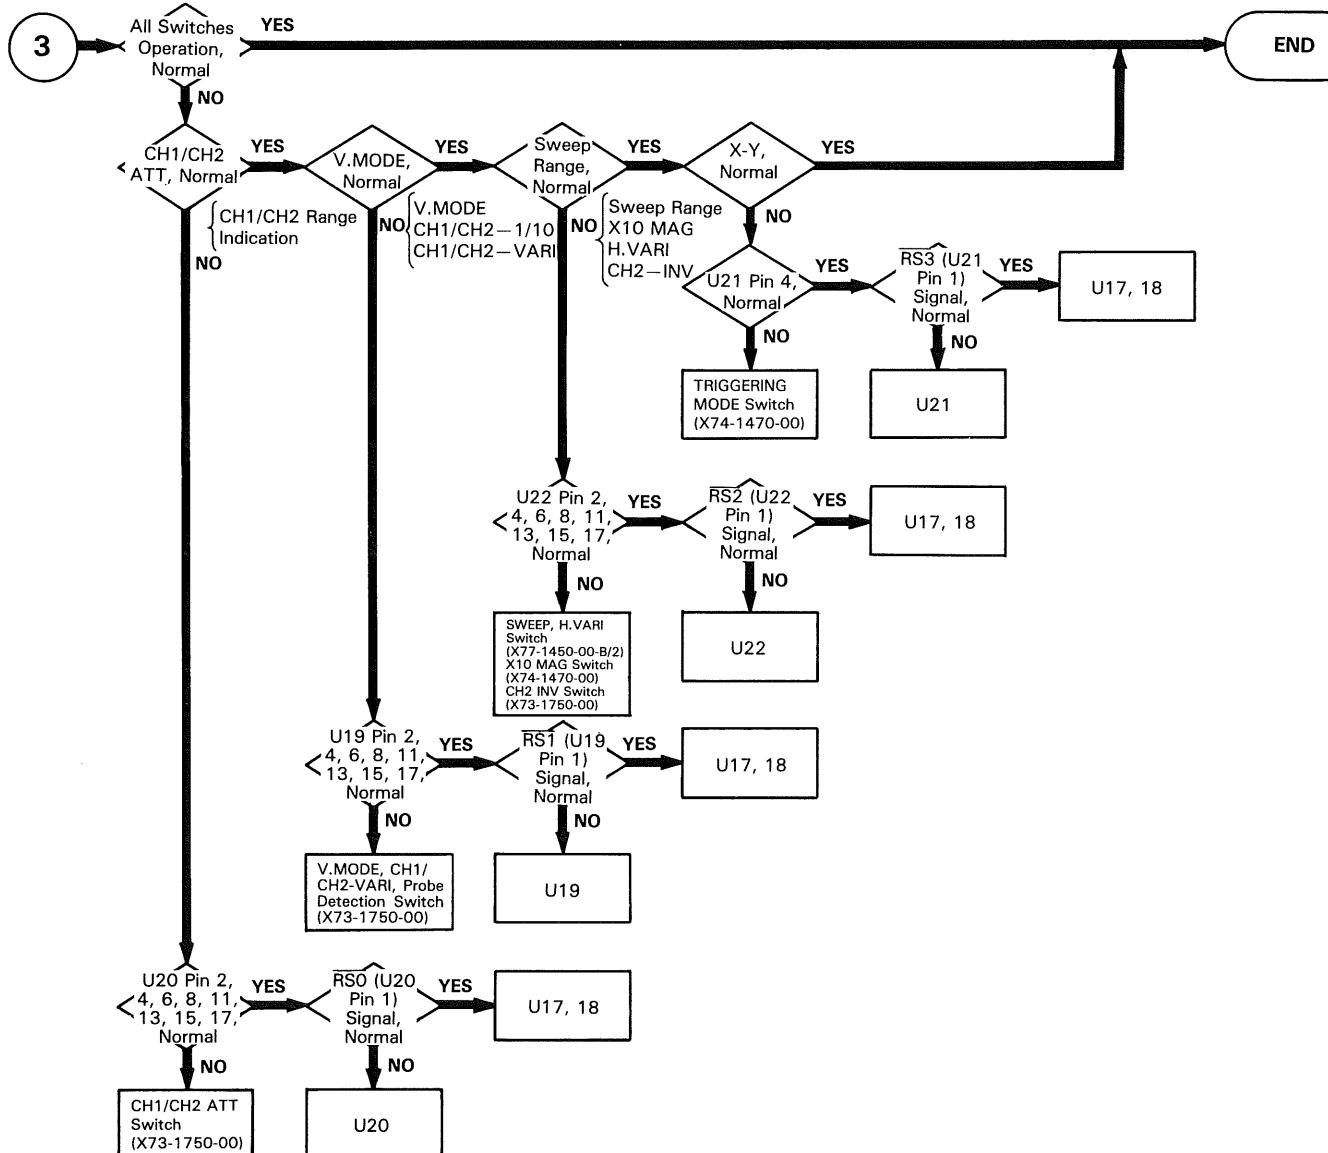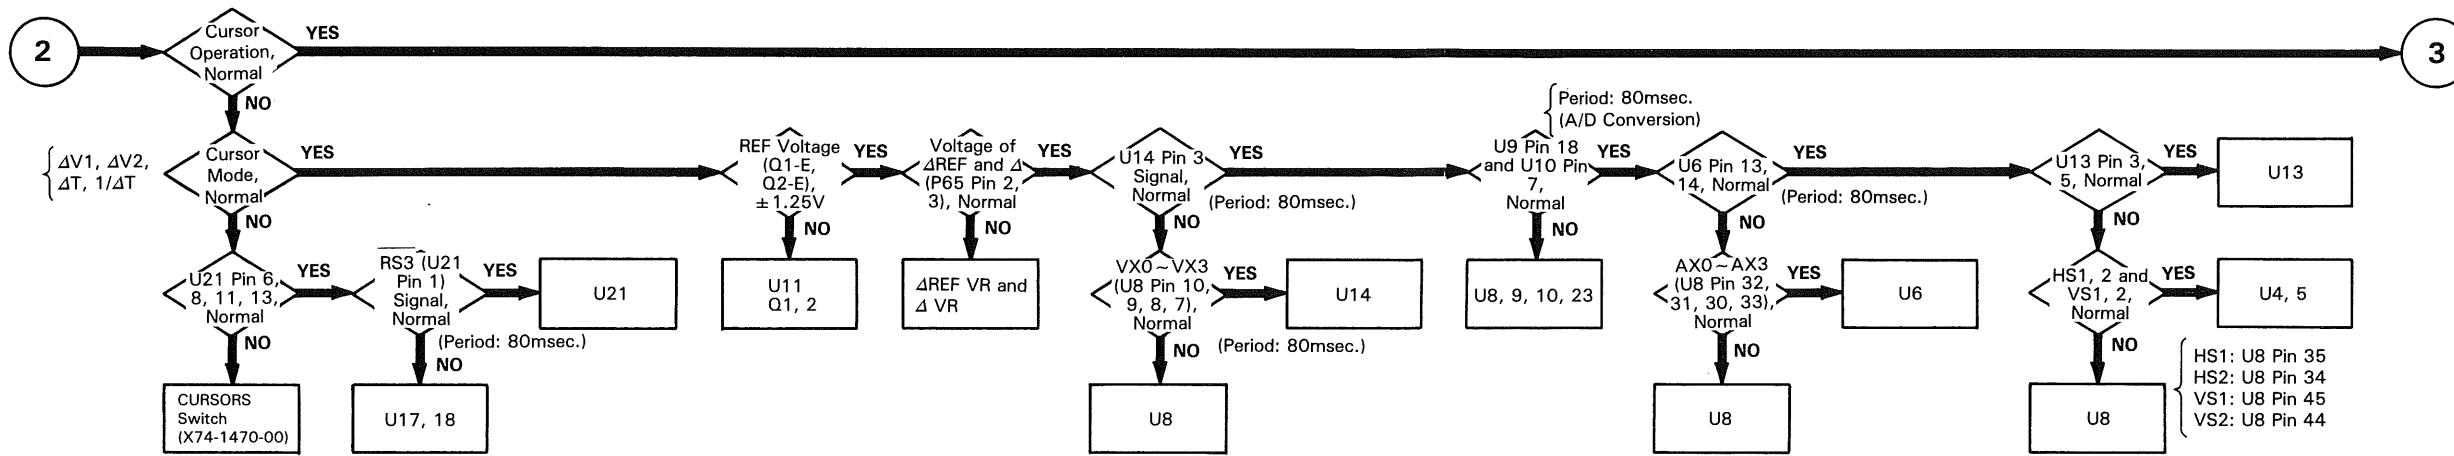

TROUBLESHOOTING

READOUT SIGNAL TABLE

(1) CH1 (CH2) Vertical Attenuator

VOLTS/DIV	U20 Pin 13 (17) "ATT3"	U20 Pin 6 (2) "ATT2"	U20 Pin 11 (15) "ATT1"	U20 Pin 8 (4) "ATT0"	Display
1 mV	I	I	I	I	CH1 (CH2) 1 mV
2 mV	I	I	I	O	CH1 (CH2) 2 mV
5 mV	I	I	O	I	CH1 (CH2) 5 mV
10 mV	I	I	O	O	CH1 (CH2) 10 mV
20 mV	I	O	I	I	CH1 (CH2) 20 mV
50 mV	I	O	I	O	CH1 (CH2) 50 mV
0.1 V	I	O	O	I	CH1 (CH2) 0.1 V
0.2 V	I	O	O	O	CH1 (CH2) 0.2 V
0.5 V	O	I	I	I	CH1 (CH2) 0.5 V
1 V	O	I	I	O	CH1 (CH2) 1 V
2 V	O	I	O	I	CH1 (CH2) 2 V
5 V	O	I	O	O	CH1 (CH2) 5 V

(3) CH1 (CH2) Probe

Probe	U19 Pin 6 (13) "CH1 (CH2)/PROBE"	Display
1/1	1	VOLTS/DIV × 1 Indication
1/10	0	VOLTS/DIV × 10 Indication

(4) CH2 Polarity

Polarity (PULL INV)	U22 Pin 17 "CH2/INV"	Display
Normal	1	Space
Invert	0	↓

(5) Vertical MODE

MODE	U19 Pin 17 "V.MODE 3"	U19 Pin 2 "V.MODE 2"	U19 Pin 15 "V.MODE 1"	U19 Pin 4 "V.MODE 0"	Display
CH1	1	1	1	1	CH1
CH2	1	1	1	O	CH2
ALT	1	1	0	1	CH1 CH2
CHOP	1	0	1	1	CH1 CH2
ADD	0	1	1	1	CH1 + CH2

(6) Sweep Range

SWEEP TIME/DIV	U22 Pin 4 "SWEEP 4"	U22 Pin 13 "SWEEP 3"	U22 Pin 6 "SWEEP 2"	U22 Pin 11 "SWEEP 1"	U22 Pin 8 "SWEEP 0"	Display
0.2 S	I	I	O	I	I	0.2 S
0.1 S	I	I	O	I	O	0.1 S
50 mS	I	I	O	O	I	50 mS
20 mS	I	I	O	O	O	20 mS
10 mS	I	O	I	I	I	10 mS
5 mS	I	O	I	I	O	5 mS
2 mS	I	O	I	O	I	2 mS
1 mS	I	O	I	O	O	1 mS
0.5 mS	I	O	O	I	I	0.5 mS
0.2 mS	I	O	O	I	O	0.2 mS
0.1 mS	I	O	O	O	I	0.1 mS
50 μ S	I	O	O	O	O	50 μ S
20 μ S	O	I	I	I	I	20 μ S
10 μ S	O	I	I	I	O	10 μ S
5 μ S	O	I	I	O	I	5 μ S
2 μ S	O	I	I	O	O	2 μ S
1 μ S	O	I	O	I	I	1 μ S
0.5 μ S	O	I	O	I	O	0.5 μ S
0.2 μ S	O	I	O	O	I	0.2 μ S
0.1 μ S	O	I	O	O	O	0.1 μ S
50 nS	O	O	I	I	I	50 nS
20 nS	O	O	I	I	O	20 nS
10 nS	O	O	I	O	I	10 nS

(2) CH1 (CH2) Vertical Gain VARIABLE

V. VARIABLE	U19 Pin 8 (11) "CH1 (CH2)/VARI"	Display
CAL	1	Space
UNCAL	0	>

(7) Horizontal Magnification

Magnification (PULL × 10 MAG)	U22 Pin 15 "H-MAG"	Display
Normal	1	SWEEP TIME/DIV × 1 Indication
× 10 MAG	0	SWEEP TIME/DIV × 1/10 Indication

(8) Sweep Time VARIABLE

H. VARIABLE	U22 Pin 2 "H-VARI"	Display
CAL	1	Space
UNCAL	0	>

(9) Horizontal MODE

H. MODE	U21 Pin 4 "X-Y"	Display
Sweep	1	Space
X-Y	0	X-Y

(10) Cursor MODE


CURSORS	U21 Pin 13 "CURSOR-MODE 3"	U21 Pin 6 "CURSOR-MODE 2"	U21 Pin 11 "CURSOR-MODE 1"	U21 Pin 8 "CURSOR-MODE 0"	Display
OFF	1	1	1	1	No Cursor Line
ΔV1	I	I	I	O	Two Horizontal Cursor Lines
ΔV2	I	I	O	I	Two Horizontal Cursor Lines
ΔT	I	O	I	I	Two Vertical Cursor Lines
1/ΔT	O	I	I	I	Two Vertical Cursor Lines

(11) Calendar and Clock Display

DATE	Operation and Function
DISPLAY (ON/OFF)	1 : ON — Display 0 : OFF — Vanishment
SELECT SET	Selection of the corrected section (Year, Month, Day, O'clock and Minute) Correction of the calendar and clock display

TROUBLESHOOTING

CTM5020 PIN ASSIGNMENT (100-pin FPT) (with RAM)

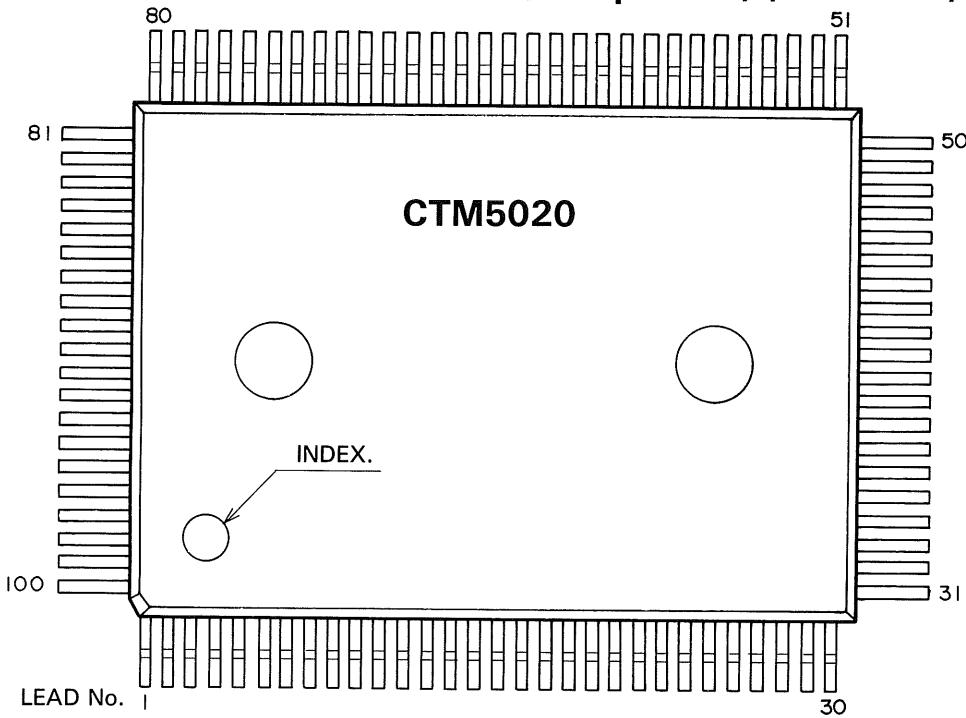

CTM5020 PIN DESCRIPTION

Pin No.	I/O	Pin Name	Function
1	I	CONT	Selection between X-Y mode and normal mode
2	I	A13	Address bus A13
3	-	VDD	+5 V power supply
4	I	A14	Address bus A14
5	I	A15	Address bus A15
6	O	INTO	1/2 period of ROSF signal
7	O	VX3	Selection signal of analog switch to input the cursor VR voltage
8	O	VX2	Selection signal of analog switch to input the cursor VR voltage
9	O	VX1	Selection signal of analog switch to input the cursor VR voltage
10	O	VX0	Selection signal of analog switch to input the cursor VR voltage
11	O	DA0	Outport (8004H) D0 D/A data (LSB)
12	O	DA1	Outport (8004H) D1 D/A data
13	O	DA2	Outport (8004H) D2 D/A data
14	O	DA3	Outport (8004H) D3 D/A data
15	-	VSS	GND
16	O	DA4	Outport (8004H) D4 D/A data
17	O	DA5	Outport (8004H) D5 D/A data
18	O	DA6	Outport (8004H) D6 D/A data
19	O	DA7	Outport (8004H) D7 D/A data
20	O	DA8	Outport (8005H) D0 D/A data
21	O	DA9	Outport (8005H) D1 D/A data (MSB)
22	O	ROR	Readout monitor terminal

Pin No.	I/O	Pin Name	Function
23	I	ROA	Readout monitor terminal
24	O	LEVX	Outport (8005H) D7
25	I	TCL	Test pin
26	I	TSD0	Test pin
27	I	TSD1	Test pin
28	-	VDD	+5 V power supply
29	I	TSD2	Test pin
30	O	AX2	Selection signal of analog switch to output the cursor voltage
31	O	AX1	Selection signal of analog switch to output the cursor voltage
32	O	AX0	Selection signal of analog switch to output the cursor voltage
33	O	AX3	Selection signal of analog switch to output the cursor voltage
34	O	HS2	Selection signal of analog switch for the readout X-axis signal
35	O	HS1	Selection signal of analog switch for the readout X-axis signal
36	O	TDIO	Test pin
37	I	TWE	Test pin
38	I	TCK1	Test pin
39	I	TST1	Test pin
40	-	VSS	GND
41	I	TST2	Test pin
42	I	TADD	Test pin

TROUBLESHOOTING

Pin No.	I/O	Pin Name	Function
43	I	TCK2	Test pin
44	O	VS2	Selection signal of analog switch for the readout Y-axis signal
45	O	VS1	Selection signal of analog switch for the readout Y-axis signal
46	O	VA0	Character Y-axis DAC data
47	O	VA4	Character Y-axis DAC data
48	O	VA3	Character Y-axis DAC data
49	O	VA2	Character Y-axis DAC data
50	O	VA1	Character Y-axis DAC data
51	O	GETD	Character X-axis data latch clock
52	O	CA0	Character counter data
53	-	VDD	+ 5 V power supply
54	O	CA4	Character counter data
55	O	CA3	Character counter data
56	O	CA2	Character counter data
57	O	CA1	Character counter data
58	O	CD3	Character ROM address
59	O	CD2	Character ROM address
60	O	CD4	Character ROM address
61	O	CD1	Character ROM address
62	O	CD5	Character ROM address
63	O	DC4	Dot counter data
64	O	CD7	Character ROM address
65	-	VSS	GND
66	O	DC3	Dot counter data
67	O	DC2	Dot counter data
68	O	CD6	Character ROM address
69	O	DC1	Dot counter data
70	O	DC0	Dot counter data
71	O	CDO	Character ROM address

Pin No.	I/O	Pin Name	Function
72	I	DD7	Character ROM Y-axis DAC data
73	I	DD6	Character ROM Y-axis DAC data
74	I	DD5	Character ROM Y-axis DAC data
75	I	DD4	Character ROM Y-axis DAC data
76	I	DD3	Character ROM Y-axis DAC data
77	I	SING	Terminal for <u>SINGLE</u> signal
78	-	VDD	+ 5 V power supply
79	I	R10M	10 MHz clock
80	I	10M	10 MHz clock
81	I	HLDI	Holdoff input
82	I	SGA	Sweep gate
83	I	ROSP	Readout off
84	I	ROD	Character counter reset
85	O	HLDL	Holdoff output
86	O	ROUB	Readout unblanking
87	O	ROB	Readout blanking
88	O	ROQ	Readout request
89	O	ROED	Readout end
90	-	VSS	GND
91	I	D7	Data bus D7
92	I	D5	Data bus D5
93	I	D3	Data bus D3
94	I	D1	Data bus D1
95	I	ALE	Address/Data latch
96	I	D6	Data bus D6
97	I	D4	Data bus D4
98	I	D2	Data bus D2
99	I	D0	Data bus D0
100	I	WR	Write timing signal

PARTS LIST

CS-5140 UNIT

Y70-1580-61

REF. NO	PARTS NO	NAME & DESCRIPTION
	B41-0710-04	CAUTION LABEL (HIGH VOLTAGE)
	B50-7622-00	INSTRUCTION MANUAL
E31-0717-05	WIRE ASS'Y (POWER, GND P71)	
E31-2808-15	WIRE ASS'Y (EXT-IN P3)	
E31-2834-05	WIRE ASS'Y (X-VARI. P37)	
E31-2837-05	WIRE ASS'Y (SWEEP CODE P38)	
E31-2848-05	WIRE ASS'Y (Z-IN P54)	
E31-2858-05	WIRE ASS'Y (CURSOR V.R. P65)	
E31-2860-05	WIRE ASS'Y (SAMPLE CLOCK P68)	
E31-2861-05	WIRE ASS'Y (INLET-FILTER P69)	
E31-2901-05	LEAD WIRE WITH HARNESSSES (D)	
F05-1224-05	FUSE 1.2A(6X30MM) FOR 100-120V	
F05-8013-05	FUSE 0.8A(5X20MM) FOR 220-240V	
F05-8015-05	FUSE 0.8A(6X30MM) FOR 220-240V	
H01-5879-14	CARTON BOX	
H10-2828-12	FOAMED STYRENE PAD (FRONT)	
H10-2829-12	FOAMED STYRENE PAD (REAR)	
H12-0564-04	PAD	
H20-1719-04	VINYL COVER	
H25-0029-04	POLYETHYLENE BAG (FUSE)	
J61-0408-05	WIRE WRAPPING BAND	
J61-0509-05	WIRE WRAPPING BAND	
N08-0611-04	SCREW (FOR CORD WRAP)	
N09-0623-04	SCREW, SEMS M3X8	
N09-0705-05	SCREW, HEX SOCKET FLAT HD M4X8	
N09-0739-05	SCREW, SEMS TAP TITE M3X8	
N09-0744-04	SCREW, SEMS M3X12	
N10-2030-41	NUT, HEX	
N17-1030-46	TOOTHED LOCK WASHER FOR M3	
N30-3012-41	SCREW, PAN HD M3X12	
N30-4008-41	SCREW, PAN HD M4X8	
N32-3006-41	SCREW, FLAT HD M3X6	
N32-3008-41	SCREW, FLAT HD M3X8	
N34-3012-41	SCREW, TRUSS M3X12	
N88-3008-41	SCREW, FLAT HD TAP TITE M3X8	
RD14BB2E220J	RES. CARBON 22 5% 1/4W	
212-3017-05	TUBE (PLASTIC)	
1 A01-1179-02	CASE (TOP)	
2 A01-1180-12	CASE (BOTTOM)	
3 A13-0914-02	FRAME (L)	
4 A13-0915-12	FRAME (CENTER)	
5 A13-0916-02	FRAME (R.UPPER)	
6 A13-0917-02	FRAME (R.LOWER)	
7 A20-2822-11	MOLDED PANEL	
8 A21-1124-13	DECORATIVE PANEL	
9 A22-0854-02	SUB PANEL	
10 A23-1676-02	REAR PANEL	
11 B07-0716-03	FILTER FRAME	
12 B19-0749-04	FILTER	
13 B30-0951-25	SCALE ILLUMI LAMP ASS'Y	
14 B40-2765-04	NAME PLATE (SERIAL NO)	
15 B40-2899-13	NAME PLATE (MODEL)	
16 B41-0797-14	CAUTION LABEL	
17 D21-0915-04	EXTENSION SHAFT	
18 D22-0501-04	JOINT & COUPLING	
19 E04-0259-05	BNC RECEPTACLE	
20 E04-0260-05	BNC RECEPTACLE (READOUT)	
21A E18-0365-05	AC SELECTOR FOR 6X30MM FUSE	
21B E18-0366-05	AC SELECTOR FOR 5X20MM FUSE	
22 E21-0660-04	TERMINAL (CAL)	
23 E21-0667-05	METAL TERMINAL	
24 E23-0513-05	SOLDER LUG (BNC)	
25 E23-0552-04	EARTH TERMINAL	
26A E30-1818-05	JIS POWER CORD	
26B E30-1819-05	CEE POWER CORD	
26C E30-1820-05	UL/CSA POWER CORD	
26D E30-1821-05	SAA POWER CORD	
26E E30-1644-15	BS POWER CORD	
27 F07-0936-04	HANDLE COVER	
28 F09-0512-04	EDGING	
29 F10-1602-03	SCREENING PLATE	
30 F11-1206-03	CRT SHIELD	
31 F15-0733-04	FELT	
32 F20-0658-04	INSULATION SHEET	
33 F20-0667-04	INSULATION SHEET	
34 F20-0668-14	INSULATION PLATE	
35 G01-0909-04	COIL SPRING (CAL SHIELD)	
36 G02-0606-14	SPRING FOR HANDLE	
37 J02-0089-05	RUBBER LEG	
38 J10-0418-02	BEZEL	
39 J19-1651-04	BLACKET	
40 J19-1652-04	BLACKET FOR P.C.B.	
41 J21-2906-05	GEAR FOR HANDLE	
42 J21-2907-05	RING FOR HANDLE	

REF. NO	PARTS NO	NAME & DESCRIPTION
43	J21-4594-03	BRACKET FOR CRT
44	J30-0621-04	SPACER
45	J42-0533-04	BUSHING (FREE)
46	J59-0403-05	NYLON RIVET
47	J61-0516-05	SUPPORT (T TYPE)
48	K01-0524-15	HANDLE
49	K21-0892-03	KNOB (VOLTS/DIV)
50	K21-0893-03	KNOB (SWEEP TIME/DIV)
51	K21-0894-04	KNOB (VARIABLE)
52	K23-0808-03	KNOB
53	K23-0809-03	KNOB (FOR LEVER SWITCH)
54	K27-0537-04	KNOB (FOR PUSH SWITCH)
55	K27-0538-04	POWER TRANSFORMER
56	L01-9695-05	ROTATION COIL
57	L39-0526-15	DELAY LINE
58	L76-0112-05	WASHER
59	N19-0710-05	V.R. 1KB (CURSOR)
60	R29-1501-05	CORD WRAP
61	W01-0503-04	POWER SUPPLY UNIT
62	X6B-1480-00	V.PRE UNIT
63	X73-1750-00	SWEEP UNIT
64	X74-1470-00	R/O UNIT
65	X77-1450-00	LINE FILTER UNIT
66	X80-1060-00	FINAL UNIT
67	X80-1090-00	CRT
68	150VTM31	

POWER SUPPLY UNIT

X68-1480-00

REF. NO	PARTS NO	NAME & DESCRIPTION
F01-0813-05	F01-0813-05	HEAT SINK (CONVERTER)
F01-0858-03	F01-0858-03	HEAT SINK (POWER TR)
F10-1601-04	F10-1601-04	SHIELD PLATE
F15-0727-04	F15-0727-04	HOLDER (NEON LAMP)
J25-5182-22	J25-5182-22	P.C.B. (UNMOUNTED)
N09-0623-04	N09-0623-04	SCREW, SEMS M3X8
N09-0731-05	N09-0731-05	SCREW M3X12
N14-0626-04	N14-0626-04	NUT
W02-0431-05	W02-0431-05	HIGH VOLTAGE BLOCK
C001 C90-0970-05	CAP. ELECTRO 3900	25V
C002 C90-0970-05	CAP. ELECTRO 3900	25V
C003 CE04EW1C472M	CAP. ELECTRO 4700	20% 16V
C004 CE04WE470M	CAP. ELECTRO 47	20% 250V
C005 C90-0969-05	CAP. ELECTRO 560	100V
C006 CE04EW1E101M	CAP. ELECTRO 100	20% 25V
C007 CE04EW1E101M	CAP. ELECTRO 100	20% 25V
C008 CE04EW1E101M	CAP. ELECTRO 100	20% 25V
C009 CE04EW1A221M	CAP. ELECTRO 220	20% 10V
C010 CE04W2C010M	CAP. ELECTRO 1	20% 160V
C011 CE04EW2A100M	CAP. ELECTRO 10	20% 100V
C012 C90-0978-05	CAP. ELECTRO 47	50V
C013 C92FM1H104K	CAP. MYLAR 0.1	10% 50V
C014 CK45FB2H472K	CAP. CERAMIC 4700P	10% 500V
C015 CC45FCH2H010C	CAP. CERAMIC 1P	0.25P 500V
C016 CC45FCH2H020C	CAP. CERAMIC 2P	0.25P 500V
C017 CE04W2C2R2M	CAP. ELECTRO 2.2	20% 160V
C018 C92FM1H104K	CAP. MYLAR 0.1	10% 50V
C019 CK45FB2H472K	CAP. CERAMIC 4700P	10% 500V
C020 CC45FCH2H010C	CAP. CERAMIC 1P	0.25P 500V
C021 CC45FCH2H010C	CAP. CERAMIC 1P	0.25P 500V
C022 C91-0571-05	CAP. CERAMIC 0.01	2KV
C023 C91-0571-05	CAP. CERAMIC 0.01	2KV
C024 CK45FB2H102K	CAP. CERAMIC 1000P	10% 500V
C025 C91-0571-05	CAP. CERAMIC 0.01	2KV
C026 CK45FB2H102K	CAP. CERAMIC 1000P	10% 500V
C027 C91-0571-05	CAP. CERAMIC 0.01	2KV
C028 C91-0571-05	CAP. CERAMIC 0.01	2KV
C029 C91-0571-05	CAP. CERAMIC 0.01	2KV
C030 C91-0571-05	CAP. CERAMIC 0.01	2KV
C031 CK45E3D102P	CAP. CERAMIC 1000P	2KV
C032 C92FM1H154K	CAP. MYLAR 0.15	10% 50V
C033 C92FM1H154K	CAP. MYLAR 0.15	10% 50V
C034 CC45FSL1H471J	CAP. CERAMIC 470P	5% 50V
C035 CK45FB1H472K	CAP. CERAMIC 4700P	10% 50V
C036 CE04EW1E101M	CAP. ELECTRO 100	20% 25V
C037 CE04EW1E101M	CAP. ELECTRO 100	20% 25V
C038 CC45FCH1H220J	CAP. CERAMIC 22P	5% 50V
C041 C92FM1H103J	CAP. MYLAR 0.01	5% 50V
C042 CE04W2C2R2M	CAP. ELECTRO 2.2	20% 160V
C043 CE04W2C2R2M	CAP. ELECTRO 2.2	20% 160V
C044 CE04EW1E101M	CAP. ELECTRO 100	20% 25V
C045 CE04EW1E101M	CAP. ELECTRO 100	20% 25V
C046 CE04EW1E101M	CAP. ELECTRO 100	20% 25V
C047 C91-0571-05	CAP. CERAMIC 0.01	2KV
C048 C91-0571-05	CAP. CERAMIC 0.01	2KV

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION		
C051	CE04EW1H101M	CAP. ELECTRO	100 20% 50V	R004	R92-1402-05	RES. SPR2L15 24 5%	5% 1/6W
C052	NO USE			R005	RD14BB2C103J	RES. CARBON 10K	5% 1/6W
C053	CK45FB2H101K	CAP. CERAMIC	100P 10% 500V	R006	RN14BK2C2002F	RES. METAL FILM 20K	1% 1/6W
C054	CK45FB2H472K	CAP. CERAMIC	4700P 10% 500V	R007	RN14BK2C2002F	RES. METAL FILM 20K	1% 1/6W
C055	CK45FB2H472K	CAP. CERAMIC	4700P 10% 500V	R008	RD14BB2C103J	RES. CARBON 10K	5% 1/6W
C056	NO USE			R009	RD14BB2C102J	RES. CARBON 1K	5% 1/6W
C057	CE04HW1H010M	CAP. ELECTRO	1 20% 50V	R010	RD14BB2C472J	RES. CARBON 4.7K	5% 1/6W
D001	S4VB40F1	DIODE, BRIDGE		R011	RD14BB2C472J	RES. CARBON 4.7K	5% 1/6W
D002	S2VB40F1	DIODE, BRIDGE		R012	R92-1401-05	RES. SPR2L15 15	5%
D003	S1VB40	DIODE, BRIDGE		R013	RD14BB2C221J	RES. CARBON 220	5% 1/6W
D006	MTZ24JC	DIODE, ZENER	24V	R014	RD14BB2C103J	RES. CARBON 10K	5% 1/6W
D007	MTZ10JC	DIODE, ZENER	10V	R015	RN14BK2C1002F	RES. METAL FILM 10K	1% 1/6W
D008	MTZ5.1JB	DIODE, ZENER	5.0V	R016	RN14BK2C2002F	RES. METAL FILM 20K	1% 1/6W
D009	MTZ10JC	DIODE, ZENER	10V	R017	R92-1404-05	RES. SPR2L15 4.7K	5%
D010	MTZ5.1JB	DIODE, ZENER	5.0V	R018	R92-1405-05	RES. SPR1/2L10 18K	5%
D011	ISS132	DIODE		R019	RD14BB2C102J	RES. CARBON 1K	5% 1/6W
D012	ISS132	DIODE		R020	RD14BB2C102J	RES. CARBON 1K	5% 1/6W
D013	ISS83	DIODE		R021	RN14BK2C2403F	RES. METAL FILM 240K	1% 1/6W
D014	ISS83	DIODE		R022	RN14BK2C2002F	RES. METAL FILM 20K	1% 1/6W
D015	1SR35-200	DIODE		R023	RD14BB2C103J	RES. CARBON 10K	5% 1/6W
D016	1SR35-200	DIODE		R024	R92-1403-05	RES. SPR2L15 1K	5%
D017	ISS83	DIODE		R025	R92-1406-05	RES. SPR1/2L10 13K	5%
D018	ISS83	DIODE		R026	RD14BB2C102J	RES. CARBON 1K	5% 1/6W
D019	1SR35-200	DIODE		R027	RD14BB2C102J	RES. CARBON 1K	5% 1/6W
D020	1SR35-200	DIODE		R028	RN14BK2C1303F	RES. METAL FILM 130K	1% 1/6W
D021	ISS132	DIODE		R029	RN14BK2C2002F	RES. METAL FILM 20K	1% 1/6W
D022	ISS132	DIODE		R030	RD14BB2C103J	RES. CARBON 10K	5% 1/6W
D023	ISS132	DIODE		R033	RD14BB2C471J	RES. CARBON 470	5% 1/6W
D024	ISS132	DIODE		R034	RD14BB2C220J	RES. CARBON 22	5% 1/6W
D025	ISS132	DIODE		R035	RD14BB2C332J	RES. CARBON 3.3K	5% 1/6W
D026	ISS132	DIODE		R036	RD14BB2C124J	RES. CARBON 120K	5% 1/6W
D027	ISS132	DIODE		R037	RD14BB2C102J	RES. CARBON 1K	5% 1/6W
D028	ISS132	DIODE		R038	RD14BB2C683J	RES. CARBON 68K	5% 1/6W
D029	ISS132	DIODE		R039	RD14BB2C114J	RES. CARBON 110K	5% 1/6W
L001	L40-1011-13	FERRI INDUCTOR	100UH	R040	RD14BB2C912J	RES. CARBON 9.1K	5% 1/6W
L002	L40-1011-13	FERRI INDUCTOR	100UH	R041	RD14BB2E470J	RES. CARBON 47	5% 1/4W
L003	L40-1021-03	FERRI INDUCTOR	1MH	R042	RD14BB2C334J	RES. CARBON 330K	5% 1/6W
NL001	NE-2B	NEON LAMP		R043	RD14BB2C823J	RES. CARBON 82K	5% 1/6W
NL002	NE-2B	NEON LAMP		R044	RD14BB2C332J	RES. CARBON 3.3K	5% 1/6W
NL003	NE-2B	NEON LAMP		R045	RD14BB2C124J	RES. CARBON 120K	5% 1/6W
NL004	NE-2B	NEON LAMP		R046	RD14BB2C751J	RES. CARBON 750	5% 1/6W
P009	E40-0673-05	PIN CONNECTOR	6P	R047	RD14BB2C334J	RES. CARBON 330K	5% 1/6W
P026	E40-0273-05	PIN CONNECTOR	2P	R048	RD14BB2C683J	RES. CARBON 68K	5% 1/6W
P027	E40-0473-05	PIN CONNECTOR	4P	R049	RD14BB2C152J	RES. CARBON 1.5K	5% 1/6W
P041	E40-0673-05	PIN CONNECTOR	6P	R050	RD14BB2C113J	RES. CARBON 11K	5% 1/6W
P044	E40-0503-05	PIN CONNECTOR	5P	R051	RD14BB2E470J	RES. CARBON 47	5% 1/4W
P045	NO USE			R052	R92-1034-05	RES. METAL FILM 47M	5% 1/2W
P046	E40-0273-05	PIN CONNECTOR	2P	R053	R92-1034-05	RES. METAL FILM 47M	5% 1/2W
P047	E40-0273-05	PIN CONNECTOR	2P	R054	R92-1125-05	RES. METAL FILM 7.5M	1% 1W
P048	E40-0273-05	PIN CONNECTOR	2P	R055	R92-1125-05	RES. METAL FILM 7.5M	1% 1W
P049	E40-0273-05	PIN CONNECTOR	2P	R056	RN14BK2C1003F	RES. METAL FILM 100K	1% 1/6W
P050	E40-0473-05	PIN CONNECTOR	4P	R057	RD14BB2C104J	RES. CARBON 100K	5% 1/6W
P051	NO USE			R058	RD14BB2C102J	RES. CARBON 1K	5% 1/6W
P052	E40-0473-05	PIN CONNECTOR	4P	R059	RD14BB2C562J	RES. CARBON 5.6K	5% 1/6W
P053	NO USE			R060	RD14BB2C821J	RES. CARBON 820	5% 1/6W
P054	E40-0273-05	PIN CONNECTOR	2P	R061	RD14BB2E473J	RES. CARBON 47K	5% 1/4W
P055	E40-1173-05	PIN CONNECTOR	11P	R062	R92-1153-05	RES. METAL FILM 5.1M	5% 1W
Q001	2SB1133(S)	TR. SI. PNP		R063	R92-1193-05	RES. METAL FILM 8.2M	5% 1W
Q002	2SD1666(S)	TR. SI. NPN		R064	RD14BB2C753J	RES. CARBON 75K	5% 1/6W
Q003	2SB1133(S)	TR. SI. PNP		R065	RD14BB2C473J	RES. CARBON 47K	5% 1/6W
Q004	2SC3749(N)	TR. SI. NPN		R066	RD14BB2C153J	RES. CARBON 15K	5% 1/6W
Q005	2SC2271(D)	TR. SI. NPN		R067	RD14BB2C393J	RES. CARBON 39K	5% 1/6W
Q006	2SC3749(N)	TR. SI. NPN		R068	RD14BB2C513J	RES. CARBON 51K	5% 1/6W
Q007	2SC2271(D)	TR. SI. NPN		R069	RD14BB2C433J	RES. CARBON 43K	5% 1/6W
Q008	2SD1666(S)	TR. SI. NPN		R070	RD14BB2C132J	RES. CARBON 1.3K	5% 1/6W
Q009	2SA1208(S)	TR. SI. PNP		R071	RD14BB2C182J	RES. CARBON 1.8K	5% 1/6W
Q010	2SC2910(S)	TR. SI. NPN		R072	RD14BB2C271J	RES. CARBON 270	5% 1/6W
Q011	2SA1210(S)	TR. SI. PNP		R073	RD14BB2C102J	RES. CARBON 1K	5% 1/6W
Q012	2SC2912(S)	TR. SI. NPN		R074	ND USE		
Q013	2SA1005(K)	TR. SI. PNP		R075	RD14BB2C471J	RES. CARBON 470	5% 1/6W
Q014	2SA1175(F)	TR. SI. PNP		R076	RD14BB2C301J	RES. CARBON 300	5% 1/6W
Q015	2SD613(E)	TR. SI. NPN		R077	RD14BB2C362J	RES. CARBON 3.6K	5% 1/6W
Q016	2SC2271(D)	TR. SI. NPN		R078	RD14BB2C203J	RES. CARBON 20K	5% 1/6W
Q017	2SC1384(R)	TR. SI. NPN		R079	RD14BB2C203J	RES. CARBON 20K	5% 1/6W
Q018	2SA684(R)	TR. SI. PNP		R080	RD14BB2C100J	RES. CARBON 10	5% 1/6W
R001	R92-1402-05	RES. SPR2L15	24 5% 1/6W	R081	RD14BB2C103J	RES. CARBON 10K	5% 1/6W
R002	RD14BB2C221J	RES. CARBON	220 5% 1/6W	R082	RD14BB2C222J	RES. CARBON 2.2K	5% 1/6W
R003	RD14BB2C221J	RES. CARBON	220 5% 1/6W	R083	RD14BB2C473J	RES. CARBON 47K	5% 1/6W
				R084	RD14BB2C102J	RES. CARBON 1K	5% 1/6W
				R085	RD14BB2C102J	RES. CARBON 1K	5% 1/6W
				R086	RD14BB2C104J	RES. CARBON 100K	5% 1/6W
				R087	RD14BB2C272J	RES. CARBON 2.7K	5% 1/6W
				U001	NJM4558D	IC, OP AMP	
				U002	NJM4558D	IC, OP AMP	
				U003	NJM4558D	IC, OP AMP	
				U004	NJM4558D	IC, OP AMP	

PARTS LIST

REF. NO	PARTS NO.	NAME & DESCRIPTION
VR001	R12-1538-05	RES. SEMI FIXED 1KB
VR002	R12-5526-05	RES. SEMI FIXED 100KB
VR003	NO USE	
VR004	R12-8001-05	RES. SEMI FIXED 2.2MB
VR005	R12-4416-05	RES. SEMI FIXED 50KB
VR006	R12-1538-05	RES. SEMI FIXED 1KB

V.PRE UNIT

X73-1750-00

REF. NO	PARTS NO	NAME & DESCRIPTION
E31-2809-05	WIRE ASS'Y (CH2 INV)	
E31-2810-05	WIRE ASS'Y (CH2 POSI)	
E31-2811-05	WIRE ASS'Y (CH1 POSI)	
E31-2904-05	WIRE ASS'Y	
F10-1590-14	SHIELD PLATE	
F10-1603-04	SHIELD PLATE	
J25-5174-12	P.C.B. (UNMOUNTED)	
R01-2519-05	V.R. (CH1 POSI) SKB	
R01-2520-05	V.R. (CH2 POSI) SKB.SW	
C001	C91-0501-05	CAP. METAL FILM 0.047 10% 630V
C002	C91-0502-05	CAP. METAL FILM 0.01 20% 630V
C003	CK45FB1H102K	CAP. CERAMIC 1000P 10% 50V
C004	CE04HW1E220M	CAP. ELECTRO 22 20% 25V
C005	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C006	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C007	CC45FCH1H330J	CAP. CERAMIC 33P 5% 50V
C008	CC45FCH1H100D	CAP. CERAMIC 10P 0.5P 50V
C009	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C010	CC45FSL1H471J	CAP. CERAMIC 470P 5% 50V
C011	CC45FCH1H070D	CAP. CERAMIC 7P 0.5P 50V
C012	CC45FCH1H070D	CAP. CERAMIC 7P 0.5P 50V
C013	CC45FCH1H050C	CAP. CERAMIC 5P 0.25P 50V
C014	CC45FSL1H221J	CAP. CERAMIC 220P 5% 50V
C015	CC45FSL1H471J	CAP. CERAMIC 470P 5% 50V
C016	C91-0769-05	CAP. AXIAL 0.01 20% 16V
C017	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C018	CC45FCH1H020C	CAP. CERAMIC 2P 0.25P 50V
C019	CC45FSL1H681J	CAP. CERAMIC 680P 5% 50V
C101	C91-0501-05	CAP. METAL FILM 0.047 10% 630V
C102	C91-0502-05	CAP. METAL FILM 0.01 20% 630V
C103	CK45FB1H102K	CAP. CERAMIC 1000P 10% 50V
C104	CE04HW1E220M	CAP. ELECTRO 22 20% 25V
C105	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C106	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C107	CC45FCH1H330J	CAP. CERAMIC 33P 5% 50V
C108	CC45FCH1H100D	CAP. CERAMIC 10P 0.5P 50V
C109	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C110	CC45FSL1H471J	CAP. CERAMIC 470P 5% 50V
C111	CC45FCH1H070D	CAP. CERAMIC 7P 0.5P 50V
C112	CC45FCH1H070D	CAP. CERAMIC 7P 0.5P 50V
C113	CC45FCH1H050C	CAP. CERAMIC 5P 0.25P 50V
C114	CC45FSL1H221J	CAP. CERAMIC 220P 5% 50V
C115	CC45FSL1H471J	CAP. CERAMIC 470P 5% 50V
C116	C91-0769-05	CAP. AXIAL 0.01 20% 16V
C119	CC45FSL1H681J	CAP. CERAMIC 680P 5% 50V
C120	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C121	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C122	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C202	CC45FCH1H180J	CAP. CERAMIC 18P 5% 50V
C203	CC45FCH1H180J	CAP. CERAMIC 18P 5% 50V
C204	CC45FCH1H150J	CAP. CERAMIC 15P 5% 50V
C205	NO USE	
C206	CC45FCH1H150J	CAP. CERAMIC 15P 5% 50V
C207	NO USE	
C208	CC45FSL1H151J	CAP. CERAMIC 150P 5% 50V
C211	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C214	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C215	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C216	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C217	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C218	NO USE	
C219	CE04HW1E220M	CAP. ELECTRO 22 20% 25V
C220	CQ92FM1H473K	CAP. MYLAR 0.047 10% 50V
C230	CE04EW1C330M	CAP. ELECTRO 33 20% 16V
C231	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C232	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C501	CC45FCH1H220J	CAP. CERAMIC 22P 5% 50V
C502	CC45FCH1H101J	CAP. CERAMIC 100P 5% 50V

REF. NO	PARTS NO	NAME & DESCRIPTION
C503	CC45FCH1H101J	CAP. CERAMIC 100P 5% 50V
C504	CQ92FM1H104K	CAP. MYLAR 0.1 10% 50V
C505	CE04EW1C330M	CAP. ELECTRO 33 20% 16V
C506	NO USE	
C507	CC45FCH1H680J	CAP. CERAMIC 68P 5% 50V
C508	CC45FCH1H100D	CAP. CERAMIC 10P 0.5P 50V
C509	CC45FCH1H040C	CAP. CERAMIC 4P 0.25P 50V
C510	CC45FCH1H030C	CAP. CERAMIC 3P 0.25P 50V
C511	CC45FCH1H030C	CAP. CERAMIC 3P 0.25P 50V
C512	CC45FCH1H101J	CAP. CERAMIC 100P 5% 50V
C520	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C601	CC45FCH1H220J	CAP. CERAMIC 22P 5% 50V
C602	CC45FCH1H101J	CAP. CERAMIC 100P 5% 50V
C603	CC45FCH1H101J	CAP. CERAMIC 100P 5% 50V
C604	CQ92FM1H104K	CAP. MYLAR 0.1 10% 50V
C605	CE04EW1C330M	CAP. ELECTRO 33 20% 16V
C606	NO USE	
C607	CC45FCH1H680J	CAP. CERAMIC 68P 5% 50V
C608	CC45FCH1H100D	CAP. CERAMIC 10P 0.5P 50V
C609	CC45FCH1H040C	CAP. CERAMIC 4P 0.25P 50V
C610	NO USE	
C611	CC45FCH1H030C	CAP. CERAMIC 3P 0.25P 50V
C612	CC45FCH1H101J	CAP. CERAMIC 100P 5% 50V
C700	CE04EW1C471M	CAP. ELECTRO 470 20% 16V
C701	CQ92FM1H104K	CAP. MYLAR 0.1 10% 50V
C702	CE04EW1C330M	CAP. ELECTRO 33 20% 16V
C703	CQ92FM1H104K	CAP. MYLAR 0.1 10% 50V
C706	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C707	NO USE	
C708	CK45FF1H1032	CAP. CERAMIC 0.01 20% 50V
C709	CE04EW1C330M	CAP. ELECTRO 33 20% 16V
C710	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C711	NO USE	
C712	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C750	CE04EW1C471M	CAP. ELECTRO 470 20% 16V
C751	NO USE	
C752	CQ92FM1H104K	CAP. MYLAR 0.1 10% 50V
C753	CE04EW1C330M	CAP. ELECTRO 33 20% 16V
C754	NO USE	
C755	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C756	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C757	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C758	NO USE	
C759	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C760	CE04EW1C330M	CAP. ELECTRO 33 20% 16V
C761	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C762	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C763	CQ92FM1H104K	CAP. MYLAR 0.1 10% 50V
C764	CQ92FM1H104K	CAP. MYLAR 0.1 10% 50V
C771	CE04EW1C330M	CAP. ELECTRO 33 20% 16V
C805	CQ92FM1H104K	CAP. MYLAR 0.1 10% 50V
C806	CE04EW1C221M	CAP. ELECTRO 220 20% 16V
C901	CE04EW1C330M	CAP. ELECTRO 33 20% 16V
C902	CK45F1H1032	CAP. CERAMIC 0.01 50V
C903	CK45F1H1032	CAP. CERAMIC 0.01 50V
D001	1SS132	DIODE
D002	1SS132	DIODE
D003	1SS132	DIODE
D004	MA700	DIODE
D005	MA700	DIODE
D006	MT25.1JB	DIODE, ZENER 5.0V
D101	1SS132	DIODE
D102	1SS132	DIODE
D103	1SS132	DIODE
D104	MA700	DIODE
D105	MA700	DIODE
D106	MT25.1JB	DIODE, ZENER 5.0V
D201	MT26.2JB	DIODE, ZENER 6.1V
D202	1SS132	DIODE
D203	1SS132	DIODE
D204	1SS132	DIODE
D205	1SS132	DIODE
D206	1SS132	DIODE
D207	MT26.2JB	DIODE, ZENER 6.1V
D208	NO USE	
D209	2SA1005(K)	TR. SI, PNP

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION	
D214	2SA1005(K)	TR. SI, PNP	Q117	2SA1206(K)	TR. SI, PNP	
D501	1SS132	DIODE	Q118	2SA1206(K)	TR. SI, PNP	
D502	1SS132	DIODE	Q119	2SA1206(K)	TR. SI, PNP	
D503	1SS132	DIODE	Q120	2SC2671(H)	TR. SI, NPN	
D504	1SS132	DIODE	Q121	2SC2671(H)	TR. SI, NPN	
D505	MTZ6.2JB	DIODE, ZENER	6.1V	Q201	2SC2785(F)	TR. SI, NPN
D506	MA700	DIODE	Q202	2SC2785(F)	TR. SI, NPN	
D507	MA700	DIODE	Q203	2SC3354(S,T)	TR. SI, NPN	
D508	MA700	DIODE	Q204	2SC3354(S,T)	TR. SI, NPN	
D509	MA700	DIODE	Q205	2SC2785(F)	TR. SI, NPN	
D510	MA700	DIODE	Q206	2SC2785(F)	TR. SI, NPN	
D511	MA700	DIODE	Q207	2SC3354(S,T)	TR. SI, NPN	
D512	MA700	DIODE	Q208	2SC3354(S,T)	TR. SI, NPN	
D513	MA700	DIODE	Q209	NO USE		
D601	1SS132	DIODE	Q210	2SC3354(S,T)	TR. SI, NPN	
D602	1SS132	DIODE	Q211	2SC3354(S,T)	TR. SI, NPN	
D603	1SS132	DIODE	Q212	2SA1206(K)	TR. SI, PNP	
D604	1SS132	DIODE	Q213	2SA1206(K)	TR. SI, PNP	
D605	MTZ6.2JB	DIODE, ZENER	6.1V	Q214	NO USE	
D606	MA700	DIODE	Q215	2SC3354(S,T)	TR. SI, NPN	
D607	MA700	DIODE	Q216	2SC3354(S,T)	TR. SI, NPN	
D608	MA700	DIODE	Q217	2SC3354(S,T)	TR. SI, NPN	
D609	MA700	DIODE	Q218	2SC3354(S,T)	TR. SI, NPN	
D610	MA700	DIODE	Q252	2SK404(F)	FET. N-CHANNEL	
D611	MA700	DIODE	Q253	NO USE		
D612	MA700	DIODE	Q254	2SC3354(S,T)	TR. SI, NPN	
D613	MA700	DIODE	Q255	2SC2785(F)	TR. SI, NPN	
P003	E40-0273-05	PIN CONNECTOR	2P	Q256	2SC2785(F)	TR. SI, NPN
P004	E40-0573-05	PIN CONNECTOR	5P	Q257	2SC2785(F)	TR. SI, NPN
P005	NO USE		Q258	2SC2785(F)	TR. SI, NPN	
P006	E40-0373-05	PIN CONNECTOR	3P	Q259	2SC3354(S,T)	TR. SI, NPN
P007	E40-0373-05	PIN CONNECTOR	3P	Q260	2SC3354(S,T)	TR. SI, NPN
P008	E40-0473-05	PIN CONNECTOR	4P	Q261	2SC3354(S,T)	TR. SI, NPN
P009	E40-0673-05	PIN CONNECTOR	6P	Q262	2SC3354(S,T)	TR. SI, NPN
P010	E40-0273-05	PIN CONNECTOR	2P	Q503	2SC3354(S,T)	TR. SI, NPN
P011	E40-0673-05	PIN CONNECTOR	6P	Q504	2SC3354(S,T)	TR. SI, NPN
P012	E40-0273-05	PIN CONNECTOR	2P	Q505	2SC2671(H)	TR. SI, NPN
P013	E40-0373-05	PIN CONNECTOR	3P	Q506	2SA1206(K)	TR. SI, PNP
P014	NO USE		Q507	2SA1206(K)	TR. SI, PNP	
P015	E40-0573-05	PIN CONNECTOR	5P	Q508	2SA1206(K)	TR. SI, PNP
P016	E40-0773-05	PIN CONNECTOR	7P	Q509	2SK117(Y)	FET. N-CHANNEL
P017	E40-0673-05	PIN CONNECTOR	6P	Q510	2SK117(Y)	FET. N-CHANNEL
P056	E40-0573-05	PIN CONNECTOR	5P	Q511	2SC2785(F)	TR. SI, NPN
P066	E40-0473-05	PIN CONNECTOR	4P	Q512	2SC2785(F)	TR. SI, NPN
P067	E40-0473-05	PIN CONNECTOR	4P	Q513	2SC2785(F)	TR. SI, NPN
P068	E40-0473-05	PIN CONNECTOR	4P	Q514	2SC2785(F)	TR. SI, NPN
Q001	2SC3354(S,T)	TR. SI, NPN	Q603	2SC3354(S,T)	TR. SI, NPN	
Q002	2SC3354(S,T)	TR. SI, NPN	Q604	2SC3354(S,T)	TR. SI, NPN	
Q003	2SK404(F)	FET. N-CHANNEL	Q605	2SC2671(H)	TR. SI, NPN	
Q004	2SC3354(S,T)	TR. SI, NPN	Q606	2SA1206(K)	TR. SI, PNP	
Q005	2SC2671(H)	TR. SI, NPN	Q607	2SA1206(K)	TR. SI, PNP	
Q006	2SC4072	TR. SI, NPN	Q608	2SA1206(K)	TR. SI, PNP	
Q007	NO USE		Q609	2SK117(Y)	FET. N-CHANNEL	
Q008	2SC3381(GR)	TR. SI, NPN	Q610	2SK117(Y)	FET. N-CHANNEL	
Q009	2SC3354(S,T)	TR. SI, NPN	Q611	2SC2785(F)	TR. SI, NPN	
Q010	2SC3354(S,T)	TR. SI, NPN	Q612	2SC2785(F)	TR. SI, NPN	
Q011	2SC2671(H)	TR. SI, NPN	Q613	2SC2785(F)	TR. SI, NPN	
Q012	2SC2671(H)	TR. SI, NPN	Q614	2SC2785(F)	TR. SI, NPN	
Q013	2SC3354(S,T)	TR. SI, NPN	R001	RD14BB2C100J	RES. CARBON	
Q014	2SC2671(H)	TR. SI, NPN	R002	NO USE	10 5% 1/6W	
Q015	2SC2671(H)	TR. SI, NPN	R003	RD14BB2C105J	RES. CARBON	
Q016	2SA1206(K)	TR. SI, PNP	R004	RD14BB2C101J	RES. CARBON	
Q017	2SA1206(K)	TR. SI, PNP	R005	RD14BB2C100J	RES. CARBON	
Q018	2SC2671(H)	TR. SI, NPN	R006	RN14BK2C1803F	RES. METAL FILM	
Q019	2SC2671(H)	TR. SI, NPN	R007	RN14BK2C8203F	RES. METAL FILM	
Q101	2SC3354(S,T)	TR. SI, NPN	R008	RD14BB2C684J	RES. CARBON	
Q102	2SC3354(S,T)	TR. SI, NPN	R009	RD14BB2C102J	RES. CARBON	
Q103	2SK404(F)	FET. N-CHANNEL	R010	RD14BB2C132J	RES. CARBON	
Q104	2SC3354(S,T)	TR. SI, NPN	R011	RD14BB2C392J	RES. CARBON	
Q105	2SC2671(H)	TR. SI, NPN	R012	RD14BB2C622J	RES. CARBON	
Q106	2SC4072	TR. SI, NPN	R013	RD14BB2C100J	RES. CARBON	
Q107	NO USE		R014	RD14BB2C181J	RES. CARBON	
Q108	2SC3381(GR)	TR. SI, NPN	R015	RD14BB2C751J	RES. CARBON	
Q109	2SC3354(S,T)	TR. SI, NPN	R016	RD14BB2C103J	RES. CARBON	
Q110	2SC3354(S,T)	TR. SI, NPN	R017	RD14BB2C562J	RES. CARBON	
Q111	2SC2671(H)	TR. SI, NPN	R018	RD14BB2C105J	RES. CARBON	
Q112	2SC2671(H)	TR. SI, NPN	R019	RD14BB2C472J	RES. CARBON	
Q113	2SC3354(S,T)	TR. SI, NPN	R020	RD14BB2C100J	RES. CARBON	
Q114	2SC2671(H)	TR. SI, NPN	R021	RD14BB2C103J	RES. CARBON	
Q115	2SC2671(H)	TR. SI, NPN	R022	RD14BB2C621J	RES. CARBON	
Q116	2SA1206(K)	TR. SI, PNP	R023	RD14BB2C150J	RES. CARBON	
			R024	RD14BB2C100J	RES. CARBON	
			R025	RD14BB2C202J	RES. CARBON	
			R026	RN14BK2C2700F	RES. METAL FILM	

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
R027	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R128	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R028	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R129	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R029	RD14BB2C223J	RES. CARBON 22K 5% 1/6W	R130	RD14BB2C680J	RES. CARBON 68 5% 1/6W
R030	RD14BB2C680J	RES. CARBON 68 5% 1/6W	R131	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R031	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R132	RD14BB2C201J	RES. CARBON 200 5% 1/6W
R032	RD14BB2C201J	RES. CARBON 200 5% 1/6W	R133	RD14BB2C301J	RES. CARBON 300 5% 1/6W
R033	RD14BB2C301J	RES. CARBON 300 5% 1/6W	R134	RN14BK2C2200F	RES. METAL FILM 220 1% 1/6W
R034	RN14BK2C2200F	RES. METAL FILM 220 1% 1/6W	R135	RN14BK2C2200F	RES. METAL FILM 220 1% 1/6W
R035	RN14BK2C2200F	RES. METAL FILM 220 1% 1/6W	R136	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R036	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R137	RD14BB2C560J	RES. CARBON 56 5% 1/6W
R037	RD14BB2C560J	RES. CARBON 56 5% 1/6W	R138	RD14BB2C431J	RES. CARBON 430 5% 1/6W
R038	RD14BB2C431J	RES. CARBON 430 5% 1/6W	R139	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R039	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R140	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R040	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W	R141	RD14BB2C621J	RES. CARBON 620 5% 1/6W
R041	RD14BB2C621J	RES. CARBON 620 5% 1/6W	R142	RD14BB2C821J	RES. CARBON 820 5% 1/6W
R042	RD14BB2C821J	RES. CARBON 820 5% 1/6W	R143	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R043	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W	R144	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W
R044	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W	R145	RN14BK2C2401F	RES. METAL FILM 2.4K 1% 1/6W
R045	RN14BK2C2401F	RES. METAL FILM 2.4K 1% 1/6W	R146	RN14BK2C2401F	RES. METAL FILM 2.4K 1% 1/6W
R046	RN14BK2C2401F	RES. METAL FILM 2.4K 1% 1/6W	R147	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R047	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R148	RD14BB2C241J	RES. CARBON 240 5% 1/6W
R048	RD14BB2C241J	RES. CARBON 240 5% 1/6W	R149	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R049	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R150	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R050	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R151	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R051	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R152	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W
R052	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W	R153	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W
R053	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W	R154	RD14BB2C331J	RES. CARBON 330 5% 1/6W
R054	RD14BB2C331J	RES. CARBON 330 5% 1/6W	R155	RD14BB2C331J	RES. CARBON 330 5% 1/6W
R055	RD14BB2C331J	RES. CARBON 330 5% 1/6W	R156	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R056	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R157	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R057	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R158	RN14BK2C4701F	RES. METAL FILM 4.7K 1% 1/6W
R058	RN14BK2C4701F	RES. METAL FILM 4.7K 1% 1/6W	R159	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W
R059	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W	R160	RN14BK2C2700F	RES. METAL FILM 270 1% 1/6W
R060	RN14BK2C2700F	RES. METAL FILM 270 1% 1/6W	R161	RD14BB2C112J	RES. CARBON 1.1K 5% 1/6W
R061	RD14BB2C112J	RES. CARBON 1.2K 5% 1/6W	R162	RD14BB2C112J	RES. CARBON 1.1K 5% 1/6W
R062	RD14BB2C112J	RES. CARBON 1.2K 5% 1/6W	R163	RN14BK2C1800F	RES. METAL FILM 180 1% 1/6W
R063	RN14BK2C1800F	RES. METAL FILM 180 1% 1/6W	R164	RD14BB2C303J	RES. CARBON 30K 5% 1/6W
R064	RD14BB2C303J	RES. CARBON 30K 5% 1/6W	R165	RN14BK2C5100F	RES. METAL FILM 510 1% 1/6W
R065	RN14BK2C5100F	RES. METAL FILM 510 1% 1/6W	R166	RN14BK2C5100F	RES. METAL FILM 510 1% 1/6W
R066	RN14BK2C5100F	RES. METAL FILM 510 1% 1/6W	R167	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R067	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R168	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R068	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R169	RN14BK2C4701F	RES. METAL FILM 4.7K 1% 1/6W
R069	RN14BK2C4701F	RES. METAL FILM 4.7K 1% 1/6W	R170	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W
R070	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W	R171	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R071	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R172	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R072	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R173	RN14BK2C4701F	RES. METAL FILM 4.7K 1% 1/6W
R073	RN14BK2C6800F	RES. METAL FILM 680 1% 1/6W	R174	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W
R074	RN14BK2C6800F	RES. METAL FILM 680 1% 1/6W	R175	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R075	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R176	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R076	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R177	RN14BK2C6800F	RES. METAL FILM 680 1% 1/6W
R077	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R178	RN14BK2C6800F	RES. METAL FILM 680 1% 1/6W
R078	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R179	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R079	RD14BB2C202J	RES. CARBON 2K 5% 1/6W	R180	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R080	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R181	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R081	RD14BB2C202J	RES. CARBON 2K 5% 1/6W	R182	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R082	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R183	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R087	RD14BB2C391J	RES. CARBON 390 5% 1/6W	R184	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R101	RD14BB2C100J	RES. CARBON 10 5% 1/6W	R185	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R102	NO USE		R186	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R103	RD14BB2C105J	RES. CARBON 1M 5% 1/6W	R187	RD14BB2C391J	RES. CARBON 390 5% 1/6W
R104	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R188	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R105	RD14BB2C100J	RES. CARBON 10 5% 1/6W	R201	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R106	RN14BK2C1803F	RES. METAL FILM 180K 1% 1/6W	R202	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R107	RN14BK2C8203F	RES. METAL FILM 820K 1% 1/6W	R203	RD14BB2C752J	RES. CARBON 7.5K 5% 1/6W
R108	RD14BB2C684J	RES. CARBON 680K 5% 1/6W	R204	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W
R109	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R205	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R110	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W	R206	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R111	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W	R207	RD14BB2C752J	RES. CARBON 7.5K 5% 1/6W
R112	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W	R208	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W
R113	RD14BB2C100J	RES. CARBON 10 5% 1/6W	R209	RN14BK2C1201F	RES. METAL FILM 1.2K 1% 1/6W
R114	RD14BB2C181J	RES. CARBON 180 5% 1/6W	R210	RN14BK2C1201F	RES. METAL FILM 1.2K 1% 1/6W
R115	RD14BB2C751J	RES. CARBON 750 5% 1/6W	R211	RN14BK2C1201F	RES. METAL FILM 1.2K 1% 1/6W
R116	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R212	RN14BK2C1201F	RES. METAL FILM 1.2K 1% 1/6W
R117	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W	R213	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R118	RD14BB2C105J	RES. CARBON 1M 5% 1/6W	R214	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W
R119	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R215	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R120	RD14BB2C100J	RES. CARBON 10 5% 1/6W	R216	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R121	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R217	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W
R122	RD14BB2C621J	RES. CARBON 620 5% 1/6W	R218	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W
R123	RD14BB2C150J	RES. CARBON 15 5% 1/6W	R219	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R124	RD14BB2C100J	RES. CARBON 10 5% 1/6W	R220	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R125	RD14BB2C202J	RES. CARBON 2K 5% 1/6W	R221	NO USE	
R126	RN14BK2C2700F	RES. METAL FILM 270 1% 1/6W	R222	RN14BK2C1800F	RES. METAL FILM 180 1% 1/6W
R127	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R223	RN14BK2C1800F	RES. METAL FILM 180 1% 1/6W
			R224	RN14BK2C1500F	RES. METAL FILM 150 1% 1/6W
			R225	RN14BK2C1201F	RES. METAL FILM 1.2K 1% 1/6W
			R226	RN14BK2C5101F	RES. METAL FILM 5.1K 1% 1/6W
			R227	RN14BK2C1000F	RES. METAL FILM 100 1% 1/6W

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION					REF. NO	PARTS NO	NAME & DESCRIPTION				
R228	RD14BB2C512J	RES. CARBON	5.1K	5%	1/6W		R532	RD14BB2C751J	RES. CARBON	750	5%	1/6W	
R229	RD14BB2C512J	RES. CARBON	5.1K	5%	1/6W		R533	RD14BB2C470J	RES. CARBON	47	5%	1/6W	
R230	RD14BB2C183J	RES. CARBON	18K	5%	1/6W		R534	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	
R231	RD14BB2C562J	RES. CARBON	5.6K	5%	1/6W		R535	RD14BB2C352J	RES. CARBON	3.3K	5%	1/6W	
R232	RD14BB2C183J	RES. CARBON	18K	5%	1/6W		R536	RD14BB2C202J	RES. CARBON	2K	5%	1/6W	
							R537	NO USE					
							R538	RD14BB2C153J	RES. CARBON	15K	5%	1/6W	
R233	RD14BB2C562J	RES. CARBON	5.6K	5%	1/6W		R539	RD14BB2C271J	RES. CARBON	270	5%	1/6W	
R234	RD14BB2C470J	RES. CARBON	47	5%	1/6W		R542	RN14BK2C2200F	RES. METAL FILM	220	1%	1/6W	
R235	RD14BB2C162J	RES. CARBON	1.6K	5%	1/6W		R543	RN14BK2C2200F	RES. METAL FILM	220	1%	1/6W	
R236	RD14BB2C162J	RES. CARBON	1.6K	5%	1/6W		R544	RD14BB2C331J	RES. CARBON	330	5%	1/6W	
R237	RD14BB2C201J	RES. CARBON	200	5%	1/6W								
R238	RD14BB2C470J	RES. CARBON	47	5%	1/6W		R547	RD14BB2C220J	RES. CARBON	22	5%	1/6W	
R240	RD14BB2C470J	RES. CARBON	47	5%	1/6W		R548	RD14BB2C220J	RES. CARBON	22	5%	1/6W	
R241	RD14BB2C470J	RES. CARBON	47	5%	1/6W		R549	RD14BB2C432J	RES. CARBON	4.3K	5%	1/6W	
R242	RD14BB2C162J	RES. CARBON	1.6K	5%	1/6W		R550	RD14BB2C432J	RES. CARBON	4.3K	5%	1/6W	
R243	RD14BB2C162J	RES. CARBON	1.6K	5%	1/6W		R551	RN14BK2C4701F	RES. METAL FILM	4.7K	1%	1/6W	
R244	RD14BB2C101J	RES. CARBON	100	5%	1/6W		R552	RN14BK2C2701F	RES. METAL FILM	2.7K	1%	1/6W	
R247	RD14BB2C151J	RES. CARBON	150	5%	1/6W		R553	RN14BK2C1801F	RES. METAL FILM	1.8K	1%	1/6W	
R248	RD14BB2C101J	RES. CARBON	100	5%	1/6W		R554	RN14BK2C4300F	RES. METAL FILM	430	1%	1/6W	
R249	RD14BB2C101J	RES. CARBON	100	5%	1/6W		R555	RN14BK2C2401F	RES. METAL FILM	2.4K	1%	1/6W	
R250	NO USE						R556	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	
R251	RD14BB2C220J	RES. CARBON	22	5%	1/6W		R557	RD14BB2C100J	RES. CARBON	10	5%	1/6W	
R252	RD14BB2C105J	RES. CARBON	1M	5%	1/6W		R558	RD14BB2C100J	RES. CARBON	10	5%	1/6W	
R253	RD14BB2C684J	RES. CARBON	680K	5%	1/6W		R559	RD14BB2C302J	RES. CARBON	3K	5%	1/6W	
R254	RD14BB2C751J	RES. CARBON	750	5%	1/6W		R560	RD14BB2C331J	RES. CARBON	330	5%	1/6W	
R255	NO USE						R561	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	
R256	RD14BB2C391J	RES. CARBON	390	5%	1/6W		R562	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	
R257	RD14BB2C272J	RES. CARBON	2.7K	5%	1/6W		R563	RD14BB2C132J	RES. CARBON	1.3K	5%	1/6W	
R258	NO USE												
R259	RD14BB2C101J	RES. CARBON	100	5%	1/6W		R570	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	
R260	RD14BB2C101J	RES. CARBON	100	5%	1/6W								
R261	RD14BB2C101J	RES. CARBON	100	5%	1/6W		R605	RD14BB2C391J	RES. CARBON	390	5%	1/6W	
R262	RD14BB2C101J	RES. CARBON	100	5%	1/6W		R606	RD14BB2C391J	RES. CARBON	390	5%	1/6W	
R263	RD14BB2C101J	RES. CARBON	100	5%	1/6W		R607	RD14BB2C331J	RES. CARBON	330	5%	1/6W	
R264	RD14BB2C101J	RES. CARBON	100	5%	1/6W		R608	RD14BB2C331J	RES. CARBON	330	5%	1/6W	
R265	RD14BB2C101J	RES. CARBON	100	5%	1/6W		R609	RD14BB2C152J	RES. CARBON	1.5K	5%	1/6W	
R266	RD14BB2C101J	RES. CARBON	100	5%	1/6W		R610	RD14BB2C393J	RES. CARBON	39K	5%	1/6W	
R267	RD14BB2C822J	RES. CARBON	8.2K	5%	1/6W		R611	RD14BB2C511J	RES. CARBON	510	5%	1/6W	
R268	RD14BB2C242J	RES. CARBON	2.4K	5%	1/6W		R612	RN14BK2C3602F	RES. METAL FILM	36K	1%	1/6W	
R269	RD14BB2C100J	RES. CARBON	10	5%	1/6W		R613	RN14BK2C3602F	RES. METAL FILM	36K	1%	1/6W	
R270	NO USE						R614	RN14BK2C1802F	RES. METAL FILM	18K	1%	1/6W	
R271	RD14BB2C333J	RES. CARBON	33K	5%	1/6W		R615	RN14BK2C3302F	RES. METAL FILM	33K	1%	1/6W	
R272	RD14BB2C302J	RES. CARBON	3K	5%	1/6W		R616	RN14BK2C3302F	RES. METAL FILM	33K	1%	1/6W	
R273	RD14BB2C161J	RES. CARBON	160	5%	1/6W		R617	RN14BK2C3600F	RES. METAL FILM	360	1%	1/6W	
							R618	RD14BB2C4R7J	RES. CARBON	4.7	5%	1/6W	
R280	R90-0643-05	RES. NETWORK	100KX7				R619	RD14BB2C751J	RES. CARBON	750	5%	1/6W	
R281	R90-0642-05	RES. NETWORK	100KX6				R620	RD14BB2C273J	RES. CARBON	27K	5%	1/6W	
R282	R90-0644-05	RES. NETWORK	4.7KX5				R621	RD14BB2C333J	RES. CARBON	33K	5%	1/6W	
R283	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W								
R284	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W		R622	RN14BK2C1001F	RES. METAL FILM	1K	1%	1/6W	
R294	RD14BB2C103J	RES. CARBON	10K	5%	1/6W		R623	RD14BB2C621J	RES. CARBON	620	5%	1/6W	
R295	RD14BB2C103J	RES. CARBON	10K	5%	1/6W		R624	RD14BB2C470J	RES. CARBON	47	5%	1/6W	
R296	RD14BB2C391J	RES. CARBON	390	5%	1/6W		R625	RD14BB2C620J	RES. CARBON	62	5%	1/6W	
R299	RD14BB2C101J	RES. CARBON	100	5%	1/6W		R626	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W	
R505	RD14BB2C391J	RES. CARBON	390	5%	1/6W		R627	RD14BB2C220J	RES. CARBON	22	5%	1/6W	
R506	RD14BB2C391J	RES. CARBON	390	5%	1/6W		R628	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W	
R507	RD14BB2C331J	RES. CARBON	330	5%	1/6W		R629	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	
R508	RD14BB2C331J	RES. CARBON	330	5%	1/6W		R630	RD14BB2C470J	RES. CARBON	47	5%	1/6W	
R509	RD14BB2C272J	RES. CARBON	2.7K	5%	1/6W		R631	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W	
R510	RD14BB2C393J	RES. CARBON	39K	5%	1/6W		R632	RD14BB2C751J	RES. CARBON	750	5%	1/6W	
R511	RD14BB2C911J	RES. CARBON	910	5%	1/6W		R633	RD14BB2C470J	RES. CARBON	47	5%	1/6W	
R512	RN14BK2C3602F	RES. METAL FILM	36K	1%	1/6W		R634	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	
R513	RN14BK2C3602F	RES. METAL FILM	36K	1%	1/6W		R635	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W	
R514	RN14BK2C1802F	RES. METAL FILM	18K	1%	1/6W		R636	RD14BB2C202J	RES. CARBON	2K	5%	1/6W	
R515	RN14BK2C3302F	RES. METAL FILM	33K	1%	1/6W		R637	RD14BB2C220J	RES. CARBON	22	5%	1/6W	
R516	RN14BK2C3302F	RES. METAL FILM	33K	1%	1/6W		R638	RD14BB2C153J	RES. CARBON	15K	5%	1/6W	
R517	RN14BK2C3600F	RES. METAL FILM	360	1%	1/6W		R639	RD14BB2C271J	RES. CARBON	270	5%	1/6W	
R518	RD14BB2C4R7J	RES. CARBON	4.7	5%	1/6W		R642	RN14BK2C2200F	RES. METAL FILM	220	1%	1/6W	
R519	RD14BB2C751J	RES. CARBON	750	5%	1/6W		R643	RN14BK2C2200F	RES. METAL FILM	220	1%	1/6W	
R520	RD14BB2C273J	RES. CARBON	27K	5%	1/6W		R644	RD14BB2C331J	RES. CARBON	330	5%	1/6W	
R521	RD14BB2C333J	RES. CARBON	33K	5%	1/6W		R647	RD14BB2C220J	RES. CARBON	22	5%	1/6W	
R522	RN14BK2C1001F	RES. METAL FILM	1K	1%	1/6W		R648	RD14BB2C220J	RES. CARBON	22	5%	1/6W	
R523	RD14BB2C621J	RES. CARBON	620	5%	1/6W		R649	RD14BB2C432J	RES. CARBON	4.3K	5%	1/6W	
R524	RD14BB2C470J	RES. CARBON	47	5%	1/6W		R650	RD14BB2C432J	RES. CARBON	4.3K	5%	1/6W	
							R651	RD14BK2C4701F	RES. METAL FILM	4.7K	1%	1/6W	
							R652	RN14BK2C2701F	RES. METAL FILM	2.7K	1%	1/6W	
R525	RD14BB2C620J	RES. CARBON	62	5%	1/6W		R653	RN14BK2C1801F	RES. METAL FILM	1.8K	1%	1/6W	
R526	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W		R654	RN14BK2C4300F	RES. METAL FILM	430	1%	1/6W	
R527	RD14BB2C220J	RES. CARBON	22	5%	1/6W		R655	RN14BK2C2401F	RES. METAL FILM	2.4K	1%	1/6W	
R528	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W		R656	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	
R529	RD14BB2C102J	RES. CARBON	1K	5%	1/6W		R657	RD14BB2C100J	RES. CARBON	10	5%	1/6W	
R530	RD14BB2C470J	RES. CARBON	47	5%	1/6W		R658	RN14BK2C100J	RES. CARBON	10	5%	1/6W	
R531	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W		R659	RD14BB2C302J	RES. CARBON	3K	5%	1/6W	

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION			
R660	RD14BB2C331J	RES. CARBON	330	5%	1/6W
R661	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R662	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R663	RD14BB2C132J	RES. CARBON	1.3K	5%	1/6W
R670	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R701	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R702	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R703	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R704	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R705	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R706	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R707	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R708	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R709	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R710	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R711	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R712	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R713	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R720	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R721	RD14BB2C101J	RES. CARBON	100	5%	1/6W
S001	S02-4507-05	ROTARY SWITCH, V.R. (V.ATT)			
S002	S32-4007-05	LEVER SWITCH 4-3			
S101	S02-4507-05	ROTARY SWITCH, V.R. (V.ATT)			
S102	S32-4007-05	LEVER SWITCH 4-3			
S201	S33-2501-05	LEVER SWITCH 2-5			
TC001	C05-0444-05	CAP. TRIMMER	10P		
TC002	C05-0446-05	CAP. TRIMMER	30P		
TC101	C05-0444-05	CAP. TRIMMER	10P		
TC102	C05-0446-05	CAP. TRIMMER	30P		
TC201	C05-0447-05	CAP. TRIMMER	50P		
TC501	C05-0445-05	CAP. TRIMMER	20P		
TC502	C05-0443-05	CAP. TRIMMER	6P		
TC601	C05-0445-05	CAP. TRIMMER	20P		
TC602	C05-0443-05	CAP. TRIMMER	6P		
TH001	SDT20	THERMISTOR			
TH002	SDT20	THERMISTOR			
TH101	SDT20	THERMISTOR			
TH102	SDT20	THERMISTOR			
TH501	SDT1000	THERMISTOR			
TH601	SDT1000	THERMISTOR			
U001	LF411CN	IC, DUAL JFET INPUT OP AMP			
U101	LF411CN	IC, DUAL JFET INPUT OP AMP			
U501	NJM4558D	IC, OP AMP			
U601	NJM4558D	IC, OP AMP			
VR001	R12-4416-05	RES. SEMI FIXED 50KB			
VR002	R12-0571-05	RES. SEMI FIXED 500B			
VR003	R12-4416-05	RES. SEMI FIXED 50KB			
VR004	R12-0569-05	RES. SEMI FIXED 100B			
VR005	R12-0570-05	RES. SEMI FIXED 200B			
VR006	S02-4507-05	ROTARY SWITCH, V.R. (V.ATT)			
VR007	S02-4507-05	ROTARY SWITCH, V.R. (V.ATT)			
VR008	R12-0569-05	RES. SEMI FIXED 100B			
VR101	R12-4416-05	RES. SEMI FIXED 50KB			
VR102	R12-0571-05	RES. SEMI FIXED 500B			
VR103	R12-4416-05	RES. SEMI FIXED 50KB			
VR104	R12-0569-05	RES. SEMI FIXED 100B			
VR105	R12-0570-05	RES. SEMI FIXED 200B			
VR106	S02-4507-05	ROTARY SWITCH, V.R. (V.ATT)			
VR107	S02-4507-05	ROTARY SWITCH, V.R. (V.ATT)			
VR108	R12-0570-05	RES. SEMI FIXED 200B			
VR109	R12-0569-05	RES. SEMI FIXED 100B			
VR201	R12-0570-05	RES. SEMI FIXED 200B			
VR202	R12-0570-05	RES. SEMI FIXED 200B			
VR501	R12-4416-05	RES. SEMI FIXED 50KB			
VR502	R12-1538-05	RES. SEMI FIXED 1KB			
VR503	R12-3453-05	RES. SEMI FIXED 10KB			
VR504	R12-0569-05	RES. SEMI FIXED 100B			

REF. NO	PARTS NO	NAME & DESCRIPTION			
VR601	R12-4416-05	RES. SEMI FIXED 50KB			
VR602	R12-1538-05	RES. SEMI FIXED 1KB			
VR603	R12-3453-05	RES. SEMI FIXED 10KB			
VR604	R12-0569-05	RES. SEMI FIXED 100B			
VR605	R12-2520-05	RES. SEMI FIXED 5KB			

SWEET UNIT

|X74-1470-00

REF. NO	PARTS NO	NAME & DESCRIPTION			
E31	2828-05	WIRE ASS'Y (H.POSI)			
E31	2829-05	WIRE ASS'Y (TRIG LEVEL)			
E40	0216-05	PIN CONNECTOR 2P (FOR D207)			
J25	5177-12	P.C.B. (UNMOUNTED)			
C001	CC45FC1H101J	CAP. CERAMIC 100P 5% 50V			
C002	CQ92FM1H104J	CAP. MYLAR 0.1 5% 50V			
C003	CC45FC1H101J	CAP. CERAMIC 100P 5% 50V			
C004	CQ92FM1H473J	CAP. MYLAR 0.047 5% 50V			
C005	CK45FB1H222K	CAP. CERAMIC 2200P 10% 50V			
C006	CK45FF1H103Z	CAP. CERAMIC 0.01 50V			
C007	CC45FC1H101J	CAP. CERAMIC 100P 5% 50V			
C008	NO USE				
C009	CK45FF1H103Z	CAP. CERAMIC 0.01 50V			
C010	CE04HW1E220M	CAP. ELECTRO 22 20% 25V			
C011	CC45FC1H101J	CAP. CERAMIC 100P 5% 50V			
C012	CK45FF1H103Z	CAP. CERAMIC 0.01 50V			
C013	CQ92FM1H104J	CAP. MYLAR 0.1 5% 50V			
C014	CE04HW1H010M	CAP. ELECTRO 1 20% 50V			
C015	CK45FB1H102K	CAP. CERAMIC 1000P 10% 50V			
C016	CK45FB1H222K	CAP. CERAMIC 2200P 10% 50V			
C017	CK45FF1H103Z	CAP. CERAMIC 0.01 50V			
C018	CK45FF1H103Z	CAP. CERAMIC 0.01 50V			
C054	CK45FF1H103Z	CAP. CERAMIC 0.01 50V			
C101	CC45FC1H100D	CAP. CERAMIC 10P 0.5P 50V			
C102	CC45FC1H330J	CAP. CERAMIC 33P 5% 50V			
C103	CE04EW1E100M	CAP. ELECTRO 10 20% 25V			
C104	CE04EW1C100M	CAP. ELECTRO 10 20% 16V			
C105	CK45FF1H103Z	CAP. CERAMIC 0.01 50V			
C106	NO USE				
C107	CC45FC1H470J	CAP. CERAMIC 47P 5% 50V			
C108	CC45FS1H221J	CAP. CERAMIC 220P 5% 50V			
C109	CC45FC1H270J	CAP. CERAMIC 27P 5% 50V			
C110	CK45FF1H103Z	CAP. CERAMIC 0.01 50V			
C111	CK45FB1H102K	CAP. CERAMIC 1000P 10% 50V			
C112	CK45FF1H103Z	CAP. CERAMIC 0.01 50V			
C113	C91-1246-05	CAP. FILM 4.7 5%			
C114	C93AP2A392J	CAP. MYLAR 3900P 5% 100V			
C115	C91-1247-05	CAP. FILM 0.047 2%			
C116	CM93BD2A391J	CAP. MICA 390P 5% 100V			
C117	NO USE				
C118	CE04HW1H010M	CAP. ELECTRO 1 20% 50V			
C119	CE04HW1H010M	CAP. ELECTRO 1 20% 50V			
C120	CE04HW1H010M	CAP. ELECTRO 1 20% 50V			
C121	CE04EW1C100M	CAP. ELECTRO 10 20% 16V			
C122	C91-1245-05	CAP. CERAMIC 0.1 12V			
C123	CQ92FM1H103J	CAP. MYLAR 0.01 5% 50V			
C124	CC45FS1H221J	CAP. CERAMIC 220P 5% 50V			
C125	CC45FS1H331J	CAP. CERAMIC 330P 5% 50V			
C201	CC45FC1H220J	CAP. CERAMIC 22P 5% 50V			
C202	CC45FC1H1910J	CAP. CERAMIC 91P 5% 50V			
C203	CK45FF1H103Z	CAP. CERAMIC 0.01 50V			
C204	NO USE				
C205	CC45FS1H221J	CAP. CERAMIC 220P 5% 50V			
C206	CK45FF1H103Z	CAP. CERAMIC 0.01 50V			
C207	CC45FC1H680J	CAP. CERAMIC 68P 5% 50V			
C208	CC45FC1H070D	CAP. CERAMIC 7P 0.5P 50V			
C209	CC45FC1H070D	CAP. CERAMIC 7P 0.5P 50V			
C210	CK45FF1H103Z	CAP. CERAMIC 0.01 50V			
C211	CK45FF1H103Z	CAP. CERAMIC 0.01 50V			
C212	CK45FF1H103Z	CAP. CERAMIC 0.01 50V			
C401	CQ92FM1H104J	CAP. MYLAR 0.1 5% 50V			
C402	CQ92FM1H104J	CAP. MYLAR 0.1 5% 50V			
C403	CC45FC1H101J	CAP. CERAMIC 100P 5% 50V			
C404	CC45FC1H100D	CAP. CERAMIC 10P 0.5P 50V			
C405	NO USE				
C406	CK45FF1H103Z	CAP. CERAMIC 0.01 50V			
C407	CC45FC1H100D	CAP. CERAMIC 10P 0.5P 50V			
C408	CC45FC1H680J	CAP. CERAMIC 68P 5% 50V			
C501	CE04EW1C102M	CAP. ELECTRO 1000 20% 16V			

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION					REF. NO	PARTS NO	NAME & DESCRIPTION				
C502	NO USE						D901	MA700	DIODE				
C503	CE04EW1C102M	CAP. ELECTRO	1000	20%	16V		P010	E40-0273-05	PIN CONNECTOR	2P			
C504	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		P011	E40-0673-05	PIN CONNECTOR	6P			
C505	CE04EW1C221M	CAP. ELECTRO	220	20%	16V		P012	E40-0573-05	PIN CONNECTOR	5P			
C506	NO USE						P024	E40-0473-05	PIN CONNECTOR	4P			
C507	CE04EW1C330M	CAP. ELECTRO	33	20%	16V		P025	E40-0473-05	PIN CONNECTOR	4P			
C508	CE04EW1C330M	CAP. ELECTRO	33	20%	16V		P026	E40-0273-05	PIN CONNECTOR	2P			
C509	CE04EW1C330M	CAP. ELECTRO	33	20%	16V		P027	E40-0473-05	PIN CONNECTOR	4P			
C510	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		P028	E40-0673-05	PIN CONNECTOR	6P			
C511	CE04EW1C330M	CAP. ELECTRO	33	20%	16V		P029	E40-0573-05	PIN CONNECTOR	5P			
C512	CE04EW1C330M	CAP. ELECTRO	33	20%	16V		P030	E40-0473-05	PIN CONNECTOR	4P			
C513	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		P033	E40-0473-05	PIN CONNECTOR	4P			
C514	NO USE						P034	NO USE					
C515	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		P035	E40-0673-05	PIN CONNECTOR	6P			
C516	C91-1245-05	CAP. CERAMIC	0.1		12V		P036	E40-0473-05	PIN CONNECTOR	4P			
C517	NO USE						P037	E40-0773-05	PIN CONNECTOR	7P			
C518	CE04EW1A470M	CAP. ELECTRO	47	20%	10V		P038	E40-0873-05	PIN CONNECTOR	8P			
C519	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		P068	E40-0473-05	PIN CONNECTOR	4P			
C520	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		Q001	2SA1206(K)	TR. SI. PNP				
C521	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		Q002	2SA1005(K)	TR. SI. PNP				
C522	NO USE						Q003	2SK241(Y)	FET. N-CHANNEL				
C523	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		Q004	2SK241(Y)	FET. N-CHANNEL				
C524	CE04EW1A470M	CAP. ELECTRO	47	20%	10V		Q005	2SC2671(H)	TR. SI. NPN				
C525	CE04EW1A470M	CAP. ELECTRO	47	20%	10V		Q006	2SC2671(H)	TR. SI. NPN				
C526	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		Q007	2SA1005(K)	TR. SI. PNP				
C527	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		Q008	2SA1005(K)	TR. SI. PNP				
C528	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		Q009	2SC2785(F)	TR. SI. NPN				
C529	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		Q010	2SC2785(F)	TR. SI. NPN				
C530	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		Q011	2SC2785(F)	TR. SI. NPN				
C531	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		Q012	NO USE					
C532	CE04EW1A470M	CAP. ELECTRO	47	20%	10V		Q013	2SC2785(F)	TR. SI. NPN				
C533	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		Q014	2SC2785(F)	TR. SI. NPN				
C534	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		Q015	2SC2785(F)	TR. SI. NPN				
C535	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		Q101	2SC2785(F)	TR. SI. NPN				
C536	CE04EW1C330M	CAP. ELECTRO	33	20%	16V		Q102	2SC2785(F)	TR. SI. NPN				
C537	CE04EW1C330M	CAP. ELECTRO	33	20%	16V		Q103	NO USE					
C538	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		Q104	2SA1005(K)	TR. SI. PNP				
C539	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		Q105	2SC3354(S,T)	TR. SI. NPN				
C540	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		Q106	2SC2785(F)	TR. SI. NPN				
C541	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		Q107	2SC2786(K)	TR. SI. NPN				
C542	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		Q108	2SC2786(K)	TR. SI. NPN				
C543	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		Q109	2SC2786(K)	TR. SI. NPN				
C544	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		Q110	2SC2785(F)	TR. SI. NPN				
C545	CK45FF1H103Z	CAP. CERAMIC	0.01		50V		Q111	2SC2785(F)	TR. SI. NPN				
C901	CK45F1H103Z	CAP. CERAMIC	0.01		50V		Q112	2SC2785(F)	TR. SI. NPN				
D001	1SS132	DIODE					Q113	NO USE					
D002	1SS132	DIODE					Q114	2SA1005(K)	TR. SI. PNP				
D003	1SS132	DIODE					Q115	2SC2786(K)	TR. SI. NPN				
D004	1SS132	DIODE					Q116	2SC2786(K)	TR. SI. NPN				
D005	1SS132	DIODE					Q117	NO USE					
D006	1SS132	DIODE					Q118	2SA1175(F)	TR. SI. PNP				
D007	1SS132	DIODE					Q119	2SA1175(F)	TR. SI. PNP				
D008	1SS132	DIODE					Q203	2SC3354(S,T)	TR. SI. NPN				
D101	1SS132	DIODE					Q204	2SA1175(F)	TR. SI. PNP				
D102	1SS132	DIODE					Q205	2SA1175(F)	TR. SI. PNP				
D103	1SS132	DIODE					Q206	2SA1175(F)	TR. SI. PNP				
D106	1SS132	DIODE					Q207	2SA1175(F)	TR. SI. PNP				
D107	1SS132	DIODE					Q208	2SC2785(F)	TR. SI. NPN				
D108	NO USE						Q209	2SC2785(F)	TR. SI. NPN				
D109	1SS132	DIODE					Q210	2SA1175(F)	TR. SI. PNP				
D110	1SS132	DIODE					Q211	2SC2785(F)	TR. SI. NPN				
D111	1SS132	DIODE					Q212	2SC2786(K)	TR. SI. NPN				
D112	MA700	DIODE					Q213	2SC2785(F)	TR. SI. NPN				
D113	MA700	DIODE					Q214	2SC2786(K)	TR. SI. NPN				
D114	MA700	DIODE					Q215	2SC2786(K)	TR. SI. NPN				
D115	MA700	DIODE					Q216	2SC2785(F)	TR. SI. NPN				
D201	1SS132	DIODE					Q401	2SC2785(F)	TR. SI. NPN				
D202	1SS132	DIODE					Q402	2SC2785(F)	TR. SI. NPN				
D203	1SS132	DIODE					Q403	2SC2785(F)	TR. SI. NPN				
D204	1SS132	DIODE					Q404	2SC2671(H)	TR. SI. NPN				
D205	1SS132	DIODE					Q405	2SC2671(H)	TR. SI. NPN				
D206	MA700	DIODE					Q406	2SC3354(S,T)	TR. SI. NPN				
D207	B30-0957-05	LED (LN322GPT, POWER)					Q407	2SA1206(K)	TR. SI. PNP				
D208	MA700	DIODE					Q408	2SA1175(F)	TR. SI. PNP				
D401	1SS132	DIODE					Q409	2SC2785(F)	TR. SI. NPN				
D402	1SS132	DIODE					Q410	2SA1175(F)	TR. SI. PNP				
D403	MA700	DIODE					Q411	2SA1175(F)	TR. SI. PNP				
D404	1SS132	DIODE					Q412	2SA1175(F)	TR. SI. PNP				
D405	1SS132	DIODE					Q413	2SC2785(F)	TR. SI. NPN				
D406	1SS132	DIODE											
D407	1SS132	DIODE											
D408	1SS132	DIODE											
D409	1SS132	DIODE											

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION					REF. NO	PARTS NO	NAME & DESCRIPTION				
R001	RD14BB2C220J	RES. CARBON	22	5%	1/6W		R130	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	
R002	RD14BB2C561J	RES. CARBON	560	5%	1/6W		R131	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	
R003	RN14BK2C4301F	RES. METAL FILM	4.3K	1%	1/6W		R132	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	
R004	RN14BK2C5101F	RES. METAL FILM	5.1K	1%	1/6W		R133	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	
R005	RD14BB2C621J	RES. CARBON	620	5%	1/6W		R134	RD14BB2C104J	RES. CARBON	100K	5%	1/6W	
R006	RD14BB2C202J	RES. CARBON	2K	5%	1/6W		R135	RD14BB2C104J	RES. CARBON	100K	5%	1/6W	
R007	RD14BB2C202J	RES. CARBON	2K	5%	1/6W		R136	RD14BB2C104J	RES. CARBON	100K	5%	1/6W	
R008	RD14BB2C102J	RES. CARBON	1K	5%	1/6W		R137	RD14BB2C622J	RES. CARBON	6.2K	5%	1/6W	
R009	RD14BB2C362J	RES. CARBON	3.6K	5%	1/6W		R138	NO USE					
R010	RD14BB2C105J	RES. CARBON	1M	5%	1/6W		R139	RD14BB2C911J	RES. CARBON	910	5%	1/6W	
R011	RD14BB2C101J	RES. CARBON	100	5%	1/6W		R140	RN14BK2C2001F	RES. METAL FILM	2K	1%	1/6W	
R012	RD14BB2C101J	RES. CARBON	100	5%	1/6W		R141	RN14BK2C3001F	RES. METAL FILM	3K	1%	1/6W	
R013	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W		R142	RD14BB2C331J	RES. CARBON	330	5%	1/6W	
R014	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W		R143	RN14BK2C6201F	RES. METAL FILM	6.2K	1%	1/6W	
R015	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W		R144	RN14BK2C4202F	RES. METAL FILM	24K	1%	1/6W	
R016	RD14BB2C391J	RES. CARBON	390	5%	1/6W		R145	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W	
R017	RD14BB2C392J	RES. CARBON	3.9K	5%	1/6W		R146	RN14BK2C2701F	RES. METAL FILM	2.7K	1%	1/6W	
R018	RD14BB2C220J	RES. CARBON	22	5%	1/6W		R147	RD14BB2C470J	RES. CARBON	47	5%	1/6W	
R019	RD14BB2C220J	RES. CARBON	22	5%	1/6W		R148	RD14BB2C221J	RES. CARBON	220	5%	1/6W	
R020	RD14BB2C820J	RES. CARBON	82	5%	1/6W		R149	RD14BB2C271J	RES. CARBON	270	5%	1/6W	
R021	RD14BB2C820J	RES. CARBON	82	5%	1/6W		R150	RD14BB2C471J	RES. CARBON	470	5%	1/6W	
R022	RN14BK2C82R0F	RES. METAL FILM	82.0	1%	1/6W		R151	RD14BB2C132J	RES. CARBON	1.3K	5%	1/6W	
R023	NO USE						R152	RD14BB2C392J	RES. CARBON	3.9K	5%	1/6W	
R024	RN14BK2C2400F	RES. METAL FILM	240	1%	1/6W		R153	RD14BB2C820J	RES. CARBON	82	5%	1/6W	
R025	RN14BK2C2400F	RES. METAL FILM	240	1%	1/6W		R154	R90-0647-05	RES. NETWORK(SWEEP 1)				
R026	RN14BK2C2701F	RES. METAL FILM	2.7K	1%	1/6W		R155	R90-0651-05	RES. NETWORK(SWEEP 2)				
R027	RN14BK2C5601F	RES. METAL FILM	5.6K	1%	1/6W		R156	RD14BB2C101J	RES. CARBON	100	5%	1/6W	
R028	RD14BB2C470J	RES. CARBON	47	5%	1/6W		R157	RD14BK2C2002F	RES. METAL FILM	20K	1%	1/6W	
R029	RD14BB2C470J	RES. CARBON	47	5%	1/6W		R158	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W	
R030	RN14BK2C8200F	RES. METAL FILM	820	1%	1/6W		R159	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	
R031	RN14BK2C8200F	RES. METAL FILM	820	1%	1/6W		R160	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	
R032	RN14BK2C1602F	RES. METAL FILM	16K	1%	1/6W		R161	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	
R033	RN14BK2C5601F	RES. METAL FILM	5.6K	1%	1/6W		R201	RD14BB2C221J	RES. CARBON	220	5%	1/6W	
R034	RN14BK2C3900F	RES. METAL FILM	390	1%	1/6W		R202	RD14BB2C221J	RES. CARBON	220	5%	1/6W	
R035	RD14BB2C101J	RES. CARBON	100	5%	1/6W		R203	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W	
R036	RD14BB2C101J	RES. CARBON	100	5%	1/6W		R204	RD14BB2C511J	RES. CARBON	510	5%	1/6W	
R037	RD14BB2C473J	RES. CARBON	47K	5%	1/6W		R205	RN14BK2C5601F	RES. METAL FILM	5.6K	1%	1/6W	
R038	RD14BB2C273J	RES. CARBON	27K	5%	1/6W		R206	RD14BB2C132J	RES. CARBON	1.3K	5%	1/6W	
R039	RD14BB2C202J	RES. CARBON	2K	5%	1/6W		R207	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W	
R040	RD14BB2C473J	RES. CARBON	47K	5%	1/6W		R208	RN14BK2C5600F	RES. METAL FILM	560	1%	1/6W	
R041	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W		R209	RD14BB2C822J	RES. CARBON	8.2K	5%	1/6W	
R042	RD14BB2C202J	RES. CARBON	2K	5%	1/6W		R210	RD14BB2C243J	RES. CARBON	24K	5%	1/6W	
R043	RD14BB2C224J	RES. CARBON	220K	5%	1/6W		R211	RD14BB2C243J	RES. CARBON	24K	5%	1/6W	
R044	RD14BB2C104J	RES. CARBON	100K	5%	1/6W		R212	RD14BB2C822J	RES. CARBON	8.2K	5%	1/6W	
R045	RD14BB2C102J	RES. CARBON	1K	5%	1/6W		R213	RD14BB2C243J	RES. CARBON	24K	5%	1/6W	
R046	NO USE						R214	RD14BB2C243J	RES. CARBON	24K	5%	1/6W	
R047	RD14BB2C103J	RES. CARBON	10K	5%	1/6W		R215	RN14BK2C3901F	RES. METAL FILM	3.9K	1%	1/6W	
R048	RD14BB2C754J	RES. CARBON	750	5%	1/6W		R216	RN14BK2C5101F	RES. METAL FILM	5.1K	1%	1/6W	
R049	RD14BB2C244J	RES. CARBON	240K	5%	1/6W		R217	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W	
R050	RD14BB2C622J	RES. CARBON	6.2K	5%	1/6W		R218	RD14BB2C152J	RES. CARBON	1.5K	5%	1/6W	
R051	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W		R219	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W	
R052	RD14BB2C153J	RES. CARBON	15K	5%	1/6W		R220	RD14BB2C470J	RES. CARBON	47	5%	1/6W	
R053	RD14BB2C242J	RES. CARBON	2.4K	5%	1/6W		R221	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	
R054	RD14BB2C132J	RES. CARBON	1.3K	5%	1/6W		R222	RD14BB2C271J	RES. CARBON	270	5%	1/6W	
R055	RD14BB2C161J	RES. CARBON	160	5%	1/6W		R223	NO USE					
R056	RD14BB2C473J	RES. CARBON	47K	5%	1/6W		R224	RD14BB2C101J	RES. CARBON	100	5%	1/6W	
R057	RD14BB2C103J	RES. CARBON	10K	5%	1/6W		R225	RD14BB2C272J	RES. CARBON	2.7K	5%	1/6W	
R058	RD14BB2C272J	RES. CARBON	2.7K	5%	1/6W		R226	RD14BB2C562J	RES. CARBON	5.6K	5%	1/6W	
R059	RD14BB2C681J	RES. CARBON	680	5%	1/6W		R227	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	
R101	RD14BB2C202J	RES. CARBON	2K	5%	1/6W		R228	RD14BB2C221J	RES. CARBON	220	5%	1/6W	
R102	RD14BB2C511J	RES. CARBON	510	5%	1/6W		R229	RD14BB2C473J	RES. CARBON	47K	5%	1/6W	
R103	RN14BK2C511J	RES. CARBON	510	5%	1/6W		R230	RD14BB2C221J	RES. CARBON	220	5%	1/6W	
R104	RD14BB2C103J	RES. CARBON	10K	5%	1/6W		R231	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	
R105	RD14BB2C103J	RES. CARBON	10K	5%	1/6W		R232	RD14BB2C101J	RES. CARBON	100	5%	1/6W	
R106	RD14BB2C511J	RES. CARBON	510	5%	1/6W		R235	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W	
R107	RD14BB2C751J	RES. CARBON	750	5%	1/6W		R236	RD14BB2C392J	RES. CARBON	3.9K	5%	1/6W	
R108	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W		R237	RD14BB2C681J	RES. CARBON	680	5%	1/6W	
R109	RD14BB2C751J	RES. CARBON	750	5%	1/6W		R238	RD14BB2C242J	RES. CARBON	2.4K	5%	1/6W	
R110	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W		R239	RD14BB2C392J	RES. CARBON	3.9K	5%	1/6W	
R111	R90-0629-05	RES. NETWORK	1KX8	5%			R240	RD14BB2C681J	RES. CARBON	680	5%	1/6W	
R112	RD14BB2C104J	RES. CARBON	100K	5%	1/6W		R241	RD14BB2C242J	RES. CARBON	2.4K	5%	1/6W	
R113	RD14BB2C103J	RES. CARBON	10K	5%	1/6W		R242	RD14BB2C272J	RES. CARBON	2.7K	5%	1/6W	
R114	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W		R243	RD14BB2C302J	RES. CARBON	3K	5%	1/6W	
R115	RD14BB2C362J	RES. CARBON	3.6K	5%	1/6W		R244	RD14BB2C470J	RES. CARBON	47	5%	1/6W	
R116	RD14BB2C682J	RES. CARBON	6.8K	5%	1/6W		R245	RD14BB2C470J	RES. CARBON	47	5%	1/6W	
R117	RD14BB2C103J	RES. CARBON	10K	5%	1/6W		R246	RD14BB2C561J	RES. CARBON	560	5%	1/6W	
R122	RD14BB2C102J	RES. CARBON	1K	5%	1/6W		R247	RD14BB2C162J	RES. CARBON	1.6K	5%	1/6W	
R123	RN14BK2C420F	RES. METAL FILM	24K	1%	1/6W		R248	RD14BB2C432J	RES. CARBON	4.3K	5%	1/6W	
R124	RN14BK2C1503F	RES. METAL FILM	150K	1%	1/6W		R249	RD14BB2C470J	RES. CARBON	47	5%	1/6W	
R125	RN14BK2C2703F	RES. METAL FILM	270K	1%	1/6W		R250	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	
R126	RD14BB2C101J	RES. CARBON	100	5%	1/6W		R251	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	
R127	RD14BB2C103J	RES. CARBON	10K	5%	1/6W		R252	RD14BB2C683J	RES. CARBON	68K	5%	1/6W	
R128	RD14BB2C103J	RES. CARBON	10K	5%	1/6W		R253	RD14BB2C303J	RES. CARBON	30K	5%	1/6W	
R129	RD14BB2C103J	RES. CARBON	10K	5%	1/6W		R254	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W	
							R255	RD14BB2C474J	RES. CARBON	470K	5%	1/6W	
							R256	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W	

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION			
R257	R90-0645-05	RES.	NETWORK	10KX4	5%
R258	R90-0645-05	RES.	NETWORK	10KX4	5%
R259	RD14BB2C103J	RES.	CARBON	10K	5% 1/6W
R260	RD14BB2C101J	RES.	CARBON	100	5% 1/6W
R261	RD14BB2C101J	RES.	CARBON	100	5% 1/6W
R401	RD14BB2C472J	RES.	CARBON	4.7K	5% 1/6W
R402	RD14BB2C124J	RES.	CARBON	120K	5% 1/6W
R403	RD14BB2C473J	RES.	CARBON	47K	5% 1/6W
R404	RN14BK2C4701F	RES.	METAL FILM	4.7K	1% 1/6W
R405	RN14BK2C6801F	RES.	METAL FILM	6.8K	1% 1/6W
R406	RD14BB2C424J	RES.	CARBON	2.4K	5% 1/6W
R407	RD14BB2C223J	RES.	CARBON	22K	5% 1/6W
R408	RD14BB2C102J	RES.	CARBON	1K	5% 1/6W
R409	RD14BB2C102J	RES.	CARBON	1K	5% 1/6W
R410	RD14BB2C332J	RES.	CARBON	3.3K	5% 1/6W
R411	RD14BB2C182J	RES.	CARBON	1.8K	5% 1/6W
R412	RD14BB2C222J	RES.	CARBON	2.2K	5% 1/6W
R413	RD14BB2C332J	RES.	CARBON	3.3K	5% 1/6W
R414	RN14BK2C1002F	RES.	METAL FILM	10K	1% 1/6W
R415	RN14BK2C1301F	RES.	METAL FILM	1.3K	1% 1/6W
R416	RD14BB2C470J	RES.	CARBON	47	5% 1/6W
R417	RD14BB2C471J	RES.	CARBON	470	5% 1/6W
R418	RD14BB2C470J	RES.	CARBON	47	5% 1/6W
R419	RN14BK2C5600F	RES.	METAL FILM	560	1% 1/6W
R420	RN14BK2C8200F	RES.	METAL FILM	820	1% 1/6W
R421	RD14BB2C103J	RES.	CARBON	10K	5% 1/6W
R422	RD14BB2C473J	RES.	CARBON	47K	5% 1/6W
R423	RD14BB2C471J	RES.	CARBON	470	5% 1/6W
R424	RD14BB2C472J	RES.	CARBON	4.7K	5% 1/6W
R425	RD14BB2C103J	RES.	CARBON	10K	5% 1/6W
R426	RD14BB2C471J	RES.	CARBON	470	5% 1/6W
R427	RD14BB2C822J	RES.	CARBON	8.2K	5% 1/6W
R428	RD14BB2C103J	RES.	CARBON	10K	5% 1/6W
R429	RD14BB2C103J	RES.	CARBON	10K	5% 1/6W
R430	RD14BB2C102J	RES.	CARBON	1K	5% 1/6W
R431	RD14BB2C202J	RES.	CARBON	2K	5% 1/6W
R432	RD14BB2C472J	RES.	CARBON	4.7K	5% 1/6W
R433	RD14BB2C822J	RES.	CARBON	8.2K	5% 1/6W
R434	RD14BB2C243J	RES.	CARBON	24K	5% 1/6W
R435	RD14BB2C243J	RES.	CARBON	24K	5% 1/6W
R436	RD14BB2C473J	RES.	CARBON	47K	5% 1/6W
R437	RD14BB2C621J	RES.	CARBON	620	5% 1/6W
R438	RD14BB2C471J	RES.	CARBON	470	5% 1/6W
R439	RD14BB2C512J	RES.	CARBON	5.1K	5% 1/6W
R440	RD14BB2C562J	RES.	CARBON	5.6K	5% 1/6W
R441	RD14BB2C432J	RES.	CARBON	4.3K	5% 1/6W
R442	RD14BE2C472J	RES.	CARBON	4.7K	5% 1/6W
R443	RD14BB2C123J	RES.	CARBON	12K	5% 1/6W
R444	NO USE				
R445	RD14BB2C103J	RES.	CARBON	10K	5% 1/6W
R446	RD14BB2C103J	RES.	CARBON	10K	5% 1/6W
R447	RD14BB2C102J	RES.	CARBON	1K	5% 1/6W
R448	RD14BB2C103J	RES.	CARBON	10K	5% 1/6W
R901	RD14BB2C683J	RES.	CARBON	68K	5% 1/6W
S001	S33-2501-05	LEVER	SWITCH	2-5	
S002	S32-4009-05	LEVER	SWITCH	4-4	
S003	S37-2005-05	LEVER	SWITCH	2-4 (TRIG SOURCE)	
S004	S32-2012-05	LEVER	SWITCH	2-3	
TC101	C05-0449-05	CAP.	TRIMMER	100P	
TC102	C05-0445-05	CAP.	TRIMMER	20P	
U101	MC10107L	IC.	TRIPLE 2 INPUT EXC OR/NOR		
U102	MC10H131L	IC.	DUAL D-FFS		
U103	MC10102L	IC.	QUAD 2 INPUT NOR GATE		
U104	TC74HC123P	IC.	DUAL MONOSTABLE MULTI		
U105	MC14051BCP	IC.	ANALOG MULTIPLEXER		
U106	MC14051BCP	IC.	ANALOG MULTIPLEXER		
U107	MC14051BCP	IC.	ANALOG MULTIPLEXER		
U108	MC14051BCP	IC.	ANALOG MULTIPLEXER		
U109	TL071CP	IC.	JFET-INPUT OP AMP		
U201	SN74ALS00AN	IC.	QUAD 2 INPUT NAND GATE		
U202	HD74HC00P	IC.	QUAD 2 INPUT NAND GATE		
U203	HD74HC00P	IC.	QUAD 2 INPUT NAND GATE		
U204	HD74HC112P	IC.	DUAL FLIP-FLOPS		
U205	NJM4558D	IC.	OP AMP		
U206	2SK332(F)	FET.	N-CHANNEL		
U401	TC74HC123P	IC.	DUAL MONOSTABLE MULTI		
U402	NO USE				
U403	HD74HC08P	IC.	QUAD 2 INPUT AND GATE		
U404	HD74HC02P	IC.	QUAD 2 INPUT NOR GATE		
U405	HD74HC32P	IC.	QUAD 2 INPUT OR GATE		
U406	HD74HC32P	IC.	QUAD 2 INPUT OR GATE		
U407	NJM4558D	IC.	OP AMP		

REF. NO	PARTS NO	NAME & DESCRIPTION									
VR001	R12-4416-05	RES. SEMI FIXED 50KB									
VR002	R01-3514-05	V.R. 20KB (TRIG)									
VR101	R12-2520-05	RES. SEMI FIXED 5KB									
VR102	R01-3514-05	V.R. 100KB,SW (HOLD OFF)									
VR201	R12-1538-05	RES. SEMI FIXED 1KB									
VR202	R12-0570-05	RES. SEMI FIXED 200B									
VR203	R01-3514-05	V.R. 20KB (H.POSI)									
VR401	R12-4416-05	RES. SEMI FIXED 50KB									
VR402	R12-1538-05	RES. SEMI FIXED 1KB									
VR403	R12-1538-05	RES. SEMI FIXED 1KB									
VR404	R12-1538-05	RES. SEMI FIXED 1KB									
R/O UNIT											
X77-1450-00											
REF. NO	PARTS NO	NAME & DESCRIPTION									
B001	J25-5199-32 W09-0407-05	P.C.B. (UNMOUNTED) LITHIUM BATTERY									
C001	CC45FCH1H101J	CAP. CERAMIC	100P	5%	50V						
C002	C91-1245-05	CAP. CERAMIC	0.1		12V						
C003	CC45FCH1H220J	CAP. CERAMIC	22P	5%	50V						
C004	CC45FCH1H220J	CAP. CERAMIC	22P	5%	50V						
C005	CE04JW1C220M	CAP. ELECTRO	22	20%	16V						
C006	CC45FSL1H331J	CAP. CERAMIC	330P	5%	50V						
C007	CC45FCH1H680J	CAP. CERAMIC	68P	5%	50V						
C008	CF92FV1H334J	CAP. POLYESTER	0.33	5%	50V						
C009	CF92FV1H334J	CAP. POLYESTER	0.33	5%	50V						
C010	CF92FV1H334J	CAP. POLYESTER	0.33	5%	50V						
C011	CF92FV1H334J	CAP. POLYESTER	0.33	5%	50V						
C012	NO USE										
C013	CC45FCH1H101J	CAP. CERAMIC	100P	5%	50V						
C016	CK45FF1H103Z	CAP. CERAMIC	0.01		50V						
C017	CK45FF1H103Z	CAP. CERAMIC	0.01		50V						
C018	CK45FF1H103Z	CAP. CERAMIC	0.01		50V						
C019	CE04EW1C220M	CAP. ELECTRO	22	20%	16V						
C020	CK45FF1H103Z	CAP. CERAMIC	0.01		50V						
C021	CK45FF1H103Z	CAP. CERAMIC	0.01		50V						
C022	CK45FF1H103Z	CAP. CERAMIC	0.01		50V						
C023	CK45FF1H103Z	CAP. CERAMIC	0.01		50V						
C024	CK45FF1H103Z	CAP. CERAMIC	0.01		50V						
C025	CE04EW1C220M	CAP. ELECTRO	22	20%	16V						
C026	CK45FF1H103Z	CAP. CERAMIC	0.01		50V						
C027	CK45FF1H103Z	CAP. CERAMIC	0.01		50V						
C028	CK45FF1H103Z	CAP. CERAMIC	0.01		50V						
C029	CK45FF1H103Z	CAP. CERAMIC	0.01		50V						
C030	CE04EW1E220M	CAP. ELECTRO	22	20%	25V						
C031	CK45FF1H103Z	CAP. CERAMIC	0.01		50V						
C032	C91-1245-05	CAP. CERAMIC	0.1		12V						
C033	CK45FF1H103Z	CAP. CERAMIC	0.01		50V						
C034	CK45FF1H103Z	CAP. CERAMIC	0.01		50V						
C035	CK45FF1H103Z	CAP. CERAMIC	0.01		50V						
C036	CK45FF1H103Z	CAP. CERAMIC	0.01		50V						
C037	CE04EW1C220M	CAP. ELECTRO	22	20%	16V						
C038	CK45FF1H103Z	CAP. CERAMIC	0.01		50V						
C039	CK45FF1H103Z	CAP. CERAMIC	0.01		50V						
C040	C91-1245-05	CAP. CERAMIC	0.1		12V						
C041	NO USE										
C042	CK45FF1H103Z	CAP. CERAMIC	0.01		50V						
C043	CK45FF1H103Z	CAP. CERAMIC	0.01		50V						
C046	C91-1245-05	CAP. CERAMIC	0.1		12V						
C047	CK45FF1H103Z	CAP. CERAMIC	0.01		50V						
C048	CE04EW1C220M	CAP. ELECTRO	22	20%	16V						
C049	CE04EW1C220M	CAP. ELECTRO	22	20%	16V						
C050	C91-1245-05	CAP. CERAMIC	0.1		12V						
C051	C91-0769-05	CAP. AXIAL	0.01	20%	16V						
C052	C91-0769-05	CAP. AXIAL	0.01	20%	16V						
C053	C91-0769-05	CAP. AXIAL	0.01	20%	16V						
C054	CE04EW1A222M	CAP. ELECTRO	2200	20%	10V						
C055	C91-1245-05	CAP. CERAMIC	0.1		12V						
C056	C91-1245-05	CAP. CERAMIC	0.1		12V						
C057	C91-1245-05	CAP. CERAMIC	0.1		12V						
C058	C91-1245-05	CAP. CERAMIC	0.1		12V						
C059	C91-1245-05	CAP. CERAMIC	0.1		12V						
C060	C91-1245-05	CAP. CERAMIC	0.1		12V						
C061	C91-1245-05	CAP. CERAMIC	0.1		12V						
C062	C91-1245-05	CAP. CERAMIC	0.1		12V						
C063	NO USE										
C064	CK45FF1H103Z	CAP. CERAMIC	0.01		50V						
C065	NO USE										

R/O UNIT

X77-1450-00

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION				REF. NO	PARTS NO	NAME & DESCRIPTION			
C066	CC45FCH1H470J	CAP. CERAMIC	47P	5%	50V	R101	R90-0652-05	RES. NETWORK	10KX6	5%	
C067	CC45FCH1H470J	CAP. CERAMIC	47P	5%	50V	R102	R90-0652-05	RES. NETWORK	10KX6	5%	
C068	CC45FCH1H470J	CAP. CERAMIC	47P	5%	50V	R103	R90-0655-05	CR NETWORK			
C069	ND USE					S001	S40-1522-05	SLIDE SWITCH (TIMER)			
C070	C91-1250-05	CAP. NETWORK	6PX5			S002	S40-1521-05	TACT SWITCH (TIMER)			
C071	C91-1249-05	CAP. NETWORK	14PX13			S003	S40-1521-05	TACT SWITCH (TIMER)			
C072	C91-1249-05	CAP. NETWORK	14PX13			I S101	S29-1503-05	ROTARY SWITCH (WITH V.R.)			
C101	CK45FF1H103Z	CAP. CERAMIC	0.01		50V	U001	DAC0808LCN	IC, 8 BIT D/A CONVERTER			
C102	CK45FF1H103Z	CAP. CERAMIC	0.01		50V	U002	HD74HC564P	IC, OCTAL D FLIP-FLOP			
C103	CK45FF1H103Z	CAP. CERAMIC	0.01		50V	U003	HD74HC244P	IC, OCTAL BUFFER			
D001	MA700	DIODE				U004	HD14052BP	IC, DUAL ANALOG MULTIPLEXER			
D002	1SS132	DIODE				U005	HD14052BP	IC, DUAL ANALOG MULTIPLEXER			
D003	MA700	DIODE				U006	HD14051BP	IC, ANALOG MULTIPLEXER			
D006	MA700	DIODE				U007	MBM2764*S	IC, CHARACTER GENERATOR			
L001	L40-1011-04	FERRI INDUCTOR	100UH	(7H)		U008	CTM5020	IC, GATE ARRAY (R/O CONTROLLER)			
P015	E40-0573-05	PIN CONNECTOR	5P			U009	AM6012DC	IC, 12 BIT D/A CONVERTER			
P016	E40-1373-05	PIN CONNECTOR	13P			U010	LM311N	IC, VOLTAGE COMPARATOR			
P033	E40-1273-05	PIN CONNECTOR	12P			U011	NJM4558D	IC, OP AMP			
P034	NO USE					U012	ND USE				
P035	E40-1273-05	PIN CONNECTOR	12P			U013	TL072CP	IC, JFET-INPUT OP AMP			
P036	NO USE					U014	HD14051BP	IC, ANALOG MULTIPLEXER			
P037	E40-0773-05	PIN CONNECTOR	7P			U015	HD74HC10P	IC, TRIPLE 3 INPUT NAND GATE			
P038	E40-0873-05	PIN CONNECTOR	8P			U016	SN74LS04N	IC, HEX INVERTER			
P057	E40-0573-05	PIN CONNECTOR	5P			U017	HD74HC138P	IC, 3 TO 8 DECODER MULTIPLEXER			
P064	E40-0873-05	PIN CONNECTOR	8P			U018	HD74HC373P	IC, OCTAL D-LATCHES			
P065	E40-0473-05	PIN CONNECTOR	4P			U019	SN74LS244N	IC, OCTAL BUFFER			
Q001	2SC2785(F)	TR. SI, NPN				U020	SN74LS244N	IC, OCTAL BUFFER			
Q002	2SA1175(F)	TR. SI, PNP				U021	SN74LS244N	IC, OCTAL BUFFER			
Q003	2SC2785(F)	TR. SI, NPN				U022	SN74LS244N	IC, OCTAL BUFFER			
R001	RD14BB2C101J	RES. CARBON	100	5%	1/6W	U023	CTM5030	IC, CPU (8051AH)			
R002	RD14BB2C101J	RES. CARBON	100	5%	1/6W	U024	MSM6242BRs	IC, TIMER			
R003	RD14BB2C153J	RES. CARBON	15K	5%	1/6W	U025	PST518B	IC, RESET			
R004	RD14BB2C473J	RES. CARBON	47K	5%	1/6W	U026	TA79L012P	IC, VOLTAGE REGULATOR (-12V)			
R005	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	U101	HD74HC02P	IC, QUAD 2 INPUT NOR GATE			
R006	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	VR001	R12-1538-05	RES. SEMI FIXED 1KB			
R007	RD14BB2C104J	RES. CARBON	100K	5%	1/6W	VR101	S29-1503-05	ROTARY SWITCH (WITH V.R.)			
R008	RN14BK2C1002F	RES. METAL FILM	10K	1%	1/6W	X001	L78-0107-05	CERAMIC RESONATOR (10MHZ)			
R009	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	X02A	L77-1025-05	CRYSTAL RESONATOR (32.768KHZ)			
R010	RN14BK2C6200F	RES. METAL FILM	620	1%	1/6W	X02B	L77-1299-05	CRYSTAL (SUB L77-1025-05)			
R011	RN14BK2C6200F	RES. METAL FILM	620	1%	1/6W						
R012	RN14BK2C9101F	RES. METAL FILM	9.1K	1%	1/6W						
R013	RN14BK2C1801F	RES. METAL FILM	1.8K	1%	1/6W						
R014	RN14BK2C4701F	RES. METAL FILM	4.7K	1%	1/6W						
R015	RD14BB2C102J	RES. CARBON	1K	5%	1/6W						
R016	RD14BB2C331J	RES. CARBON	330	5%	1/6W						
R017	RN14BK2C4701F	RES. METAL FILM	4.7K	1%	1/6W						
R018	RD14BB2C102J	RES. CARBON	1K	5%	1/6W						
R019	RD14BB2C331J	RES. CARBON	330	5%	1/6W						
R020	RN14BK2C3602F	RES. METAL FILM	36K	1%	1/6W						
R021	RD14BB2C622J	RES. CARBON	6.2K	5%	1/6W						
R022	RN14BK2C7501F	RES. METAL FILM	7.5K	1%	1/6W						
R023	RN14BK2C7501F	RES. METAL FILM	7.5K	1%	1/6W						
R024	RN14BK2C3602F	RES. METAL FILM	36K	1%	1/6W						
R025	RD14BB2C622J	RES. CARBON	6.2K	5%	1/6W						
R026	RD14BB2C473J	RES. CARBON	47K	5%	1/6W						
R027	RD14BB2C473J	RES. CARBON	47K	5%	1/6W						
R028	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W						
R029	RN14BK2C1002F	RES. METAL FILM	10K	1%	1/6W						
R030	RN14BK2C1101F	RES. METAL FILM	1.1K	1%	1/6W						
R031	RN14BK2C4701F	RES. METAL FILM	4.7K	1%	1/6W						
R032	RD14BB2C512J	RES. CARBON	5.1K	5%	1/6W						
R033	R90-0654-05	RES. NETWORK	COMPLEX.	Y							
R034	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W						
R035	RD14BB2C5R6J	RES. CARBON	5.6	5%	1/6W						
R039	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W	P069	E40-0530-05	PIN CONNECTOR	5P		
R040	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W	P073	E40-0330-05	PIN CONNECTOR	3P		
R041	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	R001	RD14BY2H225J	RES. CARBON	2.2M	5%	1/2W
R042	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W	R002	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R043	R90-0653-05	RES. NETWORK	10KX8	5%		R003	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R044	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W	S001	S40-2524-05	PUSH SWITCH (POWER)			
R045	ND USE					VR001	R23-3502-05	V.R. (INTEN)	20KB	X 2	
R046	RD14BB2C101J	RES. CARBON	100	5%	1/6W	VR002	R23-7501-05	V.R. (FOCUS, ASTIG)	500KB	X 2	
R047	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W	VR003	R23-3503-05	V.R. (ILLUM, ROTAT)	20KR	X 2	
R050	RD14BB2C301J	RES. CARBON	300	5%	1/6W						
R051	RD14BB2C301J	RES. CARBON	300	5%	1/6W						
R052	RD14BB2C301J	RES. CARBON	300	5%	1/6W						

PARTS LIST

FINAL UNIT

X80-1090-00


REF. NO	PARTS NO	NAME & DESCRIPTION
F01-0859-04	HEAT SINK	
F01-0860-04	HEAT SINK	
J25-5183-12	P.C.B. (UNMOUNTED)	
N09-0626-04	SCREW, SEMS M3X10	
C001 CK45F1H1032	CAP. CERAMIC 0.01 50V	
C002 CK45F1H1032	CAP. CERAMIC 0.01 50V	
C003 CK45FB1H102K	CAP. CERAMIC 1000P 10% 50V	
C006 CK45F1H1032	CAP. CERAMIC 0.01 50V	
C007 CE04EW1C330M	CAP. ELECTRO 33 20% 16V	
C008 NO USE		
C009 CC45FCH1H390J	CAP. CERAMIC 39P 5% 50V	
C010 NO USE		
C011 CC45FCH1H151J	CAP. CERAMIC 150P 5% 50V	
C012 NO USE		
C013 CK45FE2H472P	CAP. CERAMIC 4700P 500V	
C014 CK45FE2H472P	CAP. CERAMIC 4700P 500V	
C019 CK45F1H1032	CAP. CERAMIC 0.01 50V	
C020 CK45F1H1032	CAP. CERAMIC 0.01 50V	
C021 CK45F1H1032	CAP. CERAMIC 0.01 50V	
C022 CK45F1H1032	CAP. CERAMIC 0.01 50V	
C023 CK45F1H1032	CAP. CERAMIC 0.01 50V	
C028 C91-1232-05	CAP. CERAMIC 5.6P 10% 50V	
C029 CC45FCH2H010C	CAP. CERAMIC 1P 0.25P 500V	
C030 CC45FCH2H010C	CAP. CERAMIC 1P 0.25P 500V	
C031 CK45B2H472K	CAP. CERAMIC 4700P 10% 500V	
C032 CK45B2H472K	CAP. CERAMIC 4700P 10% 500V	
C033 CQ92FM1H104K	CAP. MYLAR 0.1 10% 50V	
C034 CQ92FM1H104K	CAP. MYLAR 0.1 10% 50V	
C035 CK45F1H1032	CAP. CERAMIC 0.01 50V	
C039 CK45F1H1032	CAP. CERAMIC 0.01 50V	
C040 NO USE		
C041 CK45F1H1032	CAP. CERAMIC 0.01 50V	
C045 CE04EW1C471M	CAP. ELECTRO 470 20% 16V	
C046 CE04EW1C471M	CAP. ELECTRO 470 20% 16V	
C047 CE04EW2A470M	CAP. ELECTRO 47 20% 100V	
C048 CE04W2C100M	CAP. ELECTRO 10 20% 160V	
C049 CK45FE2H472P	CAP. CERAMIC 4700P 500V	
C050 CE04EW0J682M	CAP. ELECTRO 6800 20% 6.3V	
C051 CE04EW0J682M	CAP. ELECTRO 6800 20% 6.3V	
C052 CK45F1H1032	CAP. CERAMIC 0.01 50V	
C053 CK45F1H1032	CAP. CERAMIC 0.01 50V	
C054 NO USE		
C055 CC45FSL1H471J	CAP. CERAMIC 470P 5% 50V	
C056 NO USE		
C057 CQ92FM1H102K	CAP. MYLAR 1000P 10% 50V	
C058 CQ92FM1H104K	CAP. MYLAR 0.1 10% 50V	
C059 CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V	
C901 CC45FCH1H050C	CAP. CERAMIC 5P 0.25P 50V	
C902 CC45FCH1H150J	CAP. CERAMIC 15P 5% 50V	
C903 CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V	
D001 MA700	DIODE	
D002 MA700	DIODE	
D003 MA700	DIODE	
D004 ISS132	DIODE	
D005 MA700	DIODE	
D006 MA700	DIODE	
D007 ISS132	DIODE	
D008 ISS132	DIODE	
D009 ISS132	DIODE	
D010 ISS132	DIODE	
D011 MA700	DIODE	
D012 ISS132	DIODE	
D013 ISS132	DIODE	
D014 ISS132	DIODE	
D015 ISS132	DIODE	
D016 ISS132	DIODE	
D017 ISS132	DIODE	
D018 ISS132	DIODE	
D019 ISS132	DIODE	
D020 ISS132	DIODE	
D021 ISS132	DIODE	
L001 L40-4782-70	FERRI INDUCTOR 0.47UF	
L002 L40-6882-70	FERRI INDUCTOR 0.68UF	
L003 L40-6882-70	FERRI INDUCTOR 0.68UF	
L004 L40-4782-70	FERRI INDUCTOR 0.47UF	
P008 E40-0473-05	PIN CONNECTOR 4P	

REF. NO	PARTS NO	NAME & DESCRIPTION
P024 E40-0873-05	PIN CONNECTOR 8P	
P041 E40-0673-05	PIN CONNECTOR 6P	
P042 E40-0373-05	PIN CONNECTOR 3P	
P043 E40-0373-05	PIN CONNECTOR 3P	
Q001 2SA1206(K)	TR. SI. PNP	
Q002 2SA1206(K)	TR. SI. PNP	
Q003 2SC3354(S)	TR. SI. NPN	
Q004 2SC3354(S)	TR. SI. NPN	
Q005 2SC3354(S)	TR. SI. NPN	
Q006 2SC3354(S)	TR. SI. NPN	
Q007 2SC3354(S)	TR. SI. NPN	
Q008 2SC3354(S)	TR. SI. NPN	
Q009 2SC3354(S)	TR. SI. NPN	
Q010 2SC3354(S)	TR. SI. NPN	
Q011 2SC3779(D)	TR. SI. NPN	
Q012 NO USE		
Q013 2SC3779(D)	TR. SI. NPN	
Q014 NO USE		
Q015 2SC3596(E)	TR. SI. NPN	
Q016 2SC3596(E)	TR. SI. NPN	
Q017 2SC3315(D)	TR. SI. NPN	
Q018 2SC3315(D)	TR. SI. NPN	
Q019 2SA1005(K)	TR. SI. PNP	
Q020 2SA1005(K)	TR. SI. PNP	
Q023 2SC2785(F)	TR. SI. NPN	
Q024 2SC2785(F)	TR. SI. NPN	
Q025 2SC3354(S)	TR. SI. NPN	
Q026 2SC3354(S)	TR. SI. NPN	
Q027 2SC3354(S)	TR. SI. NPN	
Q028 2SC3354(S)	TR. SI. NPN	
Q029 2SA1175(F)	TR. SI. PNP	
Q030 2SA1175(F)	TR. SI. PNP	
Q031 2SC2785(F)	TR. SI. NPN	
Q032 2SC2785(F)	TR. SI. NPN	
Q033 2SC3354(S)	TR. SI. NPN	
Q034 2SC3354(S)	TR. SI. NPN	
Q035 2SC3354(S)	TR. SI. NPN	
Q036 2SC3354(S)	TR. SI. NPN	
Q037 2SC2911(S)	TR. SI. NPN	
Q038 2SA1209(S)	TR. SI. PNP	
Q039 2SC2911(S)	TR. SI. NPN	
Q040 2SA1209(S)	TR. SI. PNP	
Q041 NO USE		
Q042 2SA1005(K)	TR. SI. PNP	
Q043 2SA1005(K)	TR. SI. PNP	
Q044 2SC2786(K)	TR. SI. NPN	
Q045 2SC2786(K)	TR. SI. NPN	
Q046 NO USE		
Q047 2SC3315(D)	TR. SI. NPN	
Q048 2SC3315(D)	TR. SI. NPN	
Q049 2SC2785(F)	TR. SI. NPN	
Q050 2SA1005(K)	TR. SI. PNP	
Q051 2SC2785(F)	TR. SI. NPN	
R001 RN14BK2C47R0F	RES. METAL FILM 47.0 1% 1/6W	
R002 RN14BK2C47R0F	RES. METAL FILM 47.0 1% 1/6W	
R003 RD14BB2C470J	RES. CARBON 47 5% 1/6W	
R004 RD14BB2C470J	RES. CARBON 47 5% 1/6W	
R005 RD14BB2C751J	RES. CARBON 750 5% 1/6W	
R006 RN14BK2C1501F	RES. METAL FILM 1.5K 1% 1/6W	
R007 RN14BK2C1501F	RES. METAL FILM 1.5K 1% 1/6W	
R008 RD14BB2C101J	RES. CARBON 100 5% 1/6W	
R009 RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	
R010 RD14BB2C101J	RES. CARBON 100 5% 1/6W	
R011 RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	
R012 RD14BB2C470J	RES. CARBON 47 5% 1/6W	
R013 RD14BB2C470J	RES. CARBON 47 5% 1/6W	
R014 RD14BB2E470J	RES. CARBON 47 5% 1/4W	
R015 RD14BB2E470J	RES. CARBON 47 5% 1/4W	
R016 RD14BB2C302J	RES. CARBON 3K 5% 1/6W	
R017 RD14BB2C302J	RES. CARBON 3K 5% 1/6W	
R018 RD14BB2C201J	RES. CARBON 200 5% 1/6W	
R019 RD14BB2C201J	RES. CARBON 200 5% 1/6W	
R020 NO USE		
R021 RD14BB2C361J	RES. CARBON 360 5% 1/6W	
R022 RD14BB2C433J	RES. CARBON 43K 5% 1/6W	
R023 NO USE		
R024 RD14BB2C220J	RES. CARBON 22 5% 1/6W	
R025 RD14BB2C220J	RES. CARBON 22 5% 1/6W	
R026 RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W	
R027 RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	
R028 RD14BB2C101J	RES. CARBON 100 5% 1/6W	
R029 RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	
R030 RD14BB2C101J	RES. CARBON 100 5% 1/6W	
R031 RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	


PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
R032	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	R160	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R033	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R161	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R034	NO USE		R162	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W
R035	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R163	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W
R036	NO USE		R164	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R037	RN14BK2E62R0F	RES. METAL FILM 62.0 1% 1/4W	R165	RD14BB2C301J	RES. CARBON 300 5% 1/6W
R038	RN14BK2E62R0F	RES. METAL FILM 62.0 1% 1/4W	R166	RD14BB2C201J	RES. CARBON 200 5% 1/6W
R039	RD14BB2C621J	RES. CARBON 620 5% 1/6W	R167	RD14BB2C201J	RES. CARBON 200 5% 1/6W
			R168	RD14BB2C201J	RES. CARBON 200 5% 1/6W
			R169	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W
			R170	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W
			R171	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
RO42	RD14BB2C430J	RES. CARBON 43 5% 1/6W	R172	NO USE	
RO43	NO USE		R173	RD14BB2C331J	RES. CARBON 330 5% 1/6W
RO44	RD14BB2C203J	RES. CARBON 20K 5% 1/6W	R174	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W
RO45	RD14BB2E220J	RES. CARBON 22 5% 1/4W	R175	RD14BB2C821J	RES. CARBON 820 5% 1/6W
RO46	RD14BB2E220J	RES. CARBON 22 5% 1/4W	R176	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
RO47	RD14BB2C471J	RES. CARBON 470 5% 1/6W	R177	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
RO48	RD14BB2C681J	RES. CARBON 680 5% 1/6W	R178	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W
RO49	RD14BB2C681J	RES. CARBON 680 5% 1/6W	R179	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
RO50	RD14BB2C471J	RES. CARBON 470 5% 1/6W	R180	RD14BB2C163J	RES. CARBON 16K 5% 1/6W
RO51	R92-1411-05	RES. SPRSL30 1.2K 5%	R181	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W
RO52	R92-1412-05	RES. SPRSL30 1.8K 5%	R182	RD14BB2C112J	RES. CARBON 1.1K 5% 1/6W
RO53	R92-1412-05	RES. SPRSL30 1.8K 5%	R183	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W
RO54	R92-1411-05	RES. SPRSL30 1.2K 5%	R184	RD14BB2C821J	RES. CARBON 820 5% 1/6W
RO60	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R185	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
RO78	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R186	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
RO79	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R187	RD14BB2C471J	RES. CARBON 470 5% 1/6W
RO80	RD14BB2C112J	RES. CARBON 1.1K 5% 1/6W	R188	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
RO81	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R189	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
RO82	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R190	NO USE	
RO83	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R191	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W
RO84	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R192	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W
			R193	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W
RO87	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W	R194	NO USE	
RO88	RN14BK2C5600F	RES. METAL FILM 560 1% 1/6W	R195	RD14BB2C471J	RES. CARBON 470 5% 1/6W
RO89	RN14BK2C5600F	RES. METAL FILM 560 1% 1/6W	R196	RN14BK2C6801F	RES. METAL FILM 6.8K 1% 1/6W
RO90	RD14BB2C361J	RES. CARBON 360 5% 1/6W	R197	RN14BK2C1501F	RES. METAL FILM 1.5K 1% 1/6W
RO91	RD14BB2C361J	RES. CARBON 360 5% 1/6W	R198	RN14BK2C1300F	RES. METAL FILM 130 1% 1/6W
RO92	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R199	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W
RO93	RD14BB2C221J	RES. CARBON 220 5% 1/6W	R200	RD14BB2C911J	RES. CARBON 910 5% 1/6W
RO94	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W	R201	RD14BB2C301J	RES. CARBON 300 5% 1/6W
RO95	RN14BK2C4301F	RES. METAL FILM 4.3K 1% 1/6W	R202	RD14BB2C301J	RES. CARBON 300 5% 1/6W
RO96	RN14BK2C5601F	RES. METAL FILM 5.6K 1% 1/6W	R203	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
RO97	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R204	NO USE	
RO98	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R205	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
RO99	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R206	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R100	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R207	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R101	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W	R208	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R102	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W	R209	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R103	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W	R210	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R104	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W	R211	RN14BK2C6801F	RES. METAL FILM 6.8K 1% 1/6W
R105	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R212	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W
R106	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R213	RN14BK2C4700F	RES. METAL FILM 470 1% 1/6W
R107	RN14BK2C1101F	RES. METAL FILM 1.1K 1% 1/6W	R901	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R108	RN14BK2C1101F	RES. METAL FILM 1.1K 1% 1/6W	R902	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R109	NO USE		R903	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R110	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	TC001	C05-0445-05	CAP. TRIMMER 20P
R111	RD14BB2C364J	RES. CARBON 360K 5% 1/6W	TC002	C05-0449-05	CAP. TRIMMER 100P
R112	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W	TC003	NO USE	
R113	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W	TC004	C05-0445-05	CAP. TRIMMER 20P
R114	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W	TH001	SDT20	THERMISTOR
R115	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W	TH002	NO USE	
R116	RN14BK2H3902F	RES. METAL FILM 39K 1% 1/2W	TH003	SDT1000	THERMISTOR
R117	RN14BK2H3902F	RES. METAL FILM 39K 1% 1/2W	TH004	SDT100	THERMISTOR
R118	RD14BB2C470J	RES. CARBON 47 5% 1/6W	VR001	R12-1539-05	RES. SEMI FIXED 2KB
R119	RD14BB2C470J	RES. CARBON 47 5% 1/6W	VR002	R12-0569-05	RES. SEMI FIXED 100B
R120	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	VR003	R12-0571-05	RES. SEMI FIXED 500B
R121	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	VR004	R12-1538-05	RES. SEMI FIXED 1KB
R122	RN14BK2C4301F	RES. METAL FILM 4.3K 1% 1/6W	VR005	R12-0569-05	RES. SEMI FIXED 100B
R123	RN14BK2C1003F	RES. METAL FILM 100K 1% 1/6W	VR006	R12-4416-05	RES. SEMI FIXED 50KB
R124	RN14BK2C1201F	RES. METAL FILM 1.2K 1% 1/6W	VR007	R12-0570-05	RES. SEMI FIXED 200B
R125	RN14BK2C1201F	RES. METAL FILM 1.2K 1% 1/6W	VR008	R12-0569-05	RES. SEMI FIXED 100B
R126	RD14BB2C101J	RES. CARBON 100 5% 1/6W	VR009	R12-0570-05	RES. SEMI FIXED 200B
R127	RD14BB2C101J	RES. CARBON 100 5% 1/6W	VR010	R12-1538-05	RES. SEMI FIXED 1KB
R128	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W	VR011	R12-0571-05	RES. SEMI FIXED 500B
R129	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W			
R130	RD14BB2C103J	RES. CARBON 10K 5% 1/6W			
R131	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W			
R132	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W			
R150	RD14BB2C101J	RES. CARBON 100 5% 1/6W			
R156	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
R157	RD14BB2C470J	RES. CARBON 47 5% 1/6W			



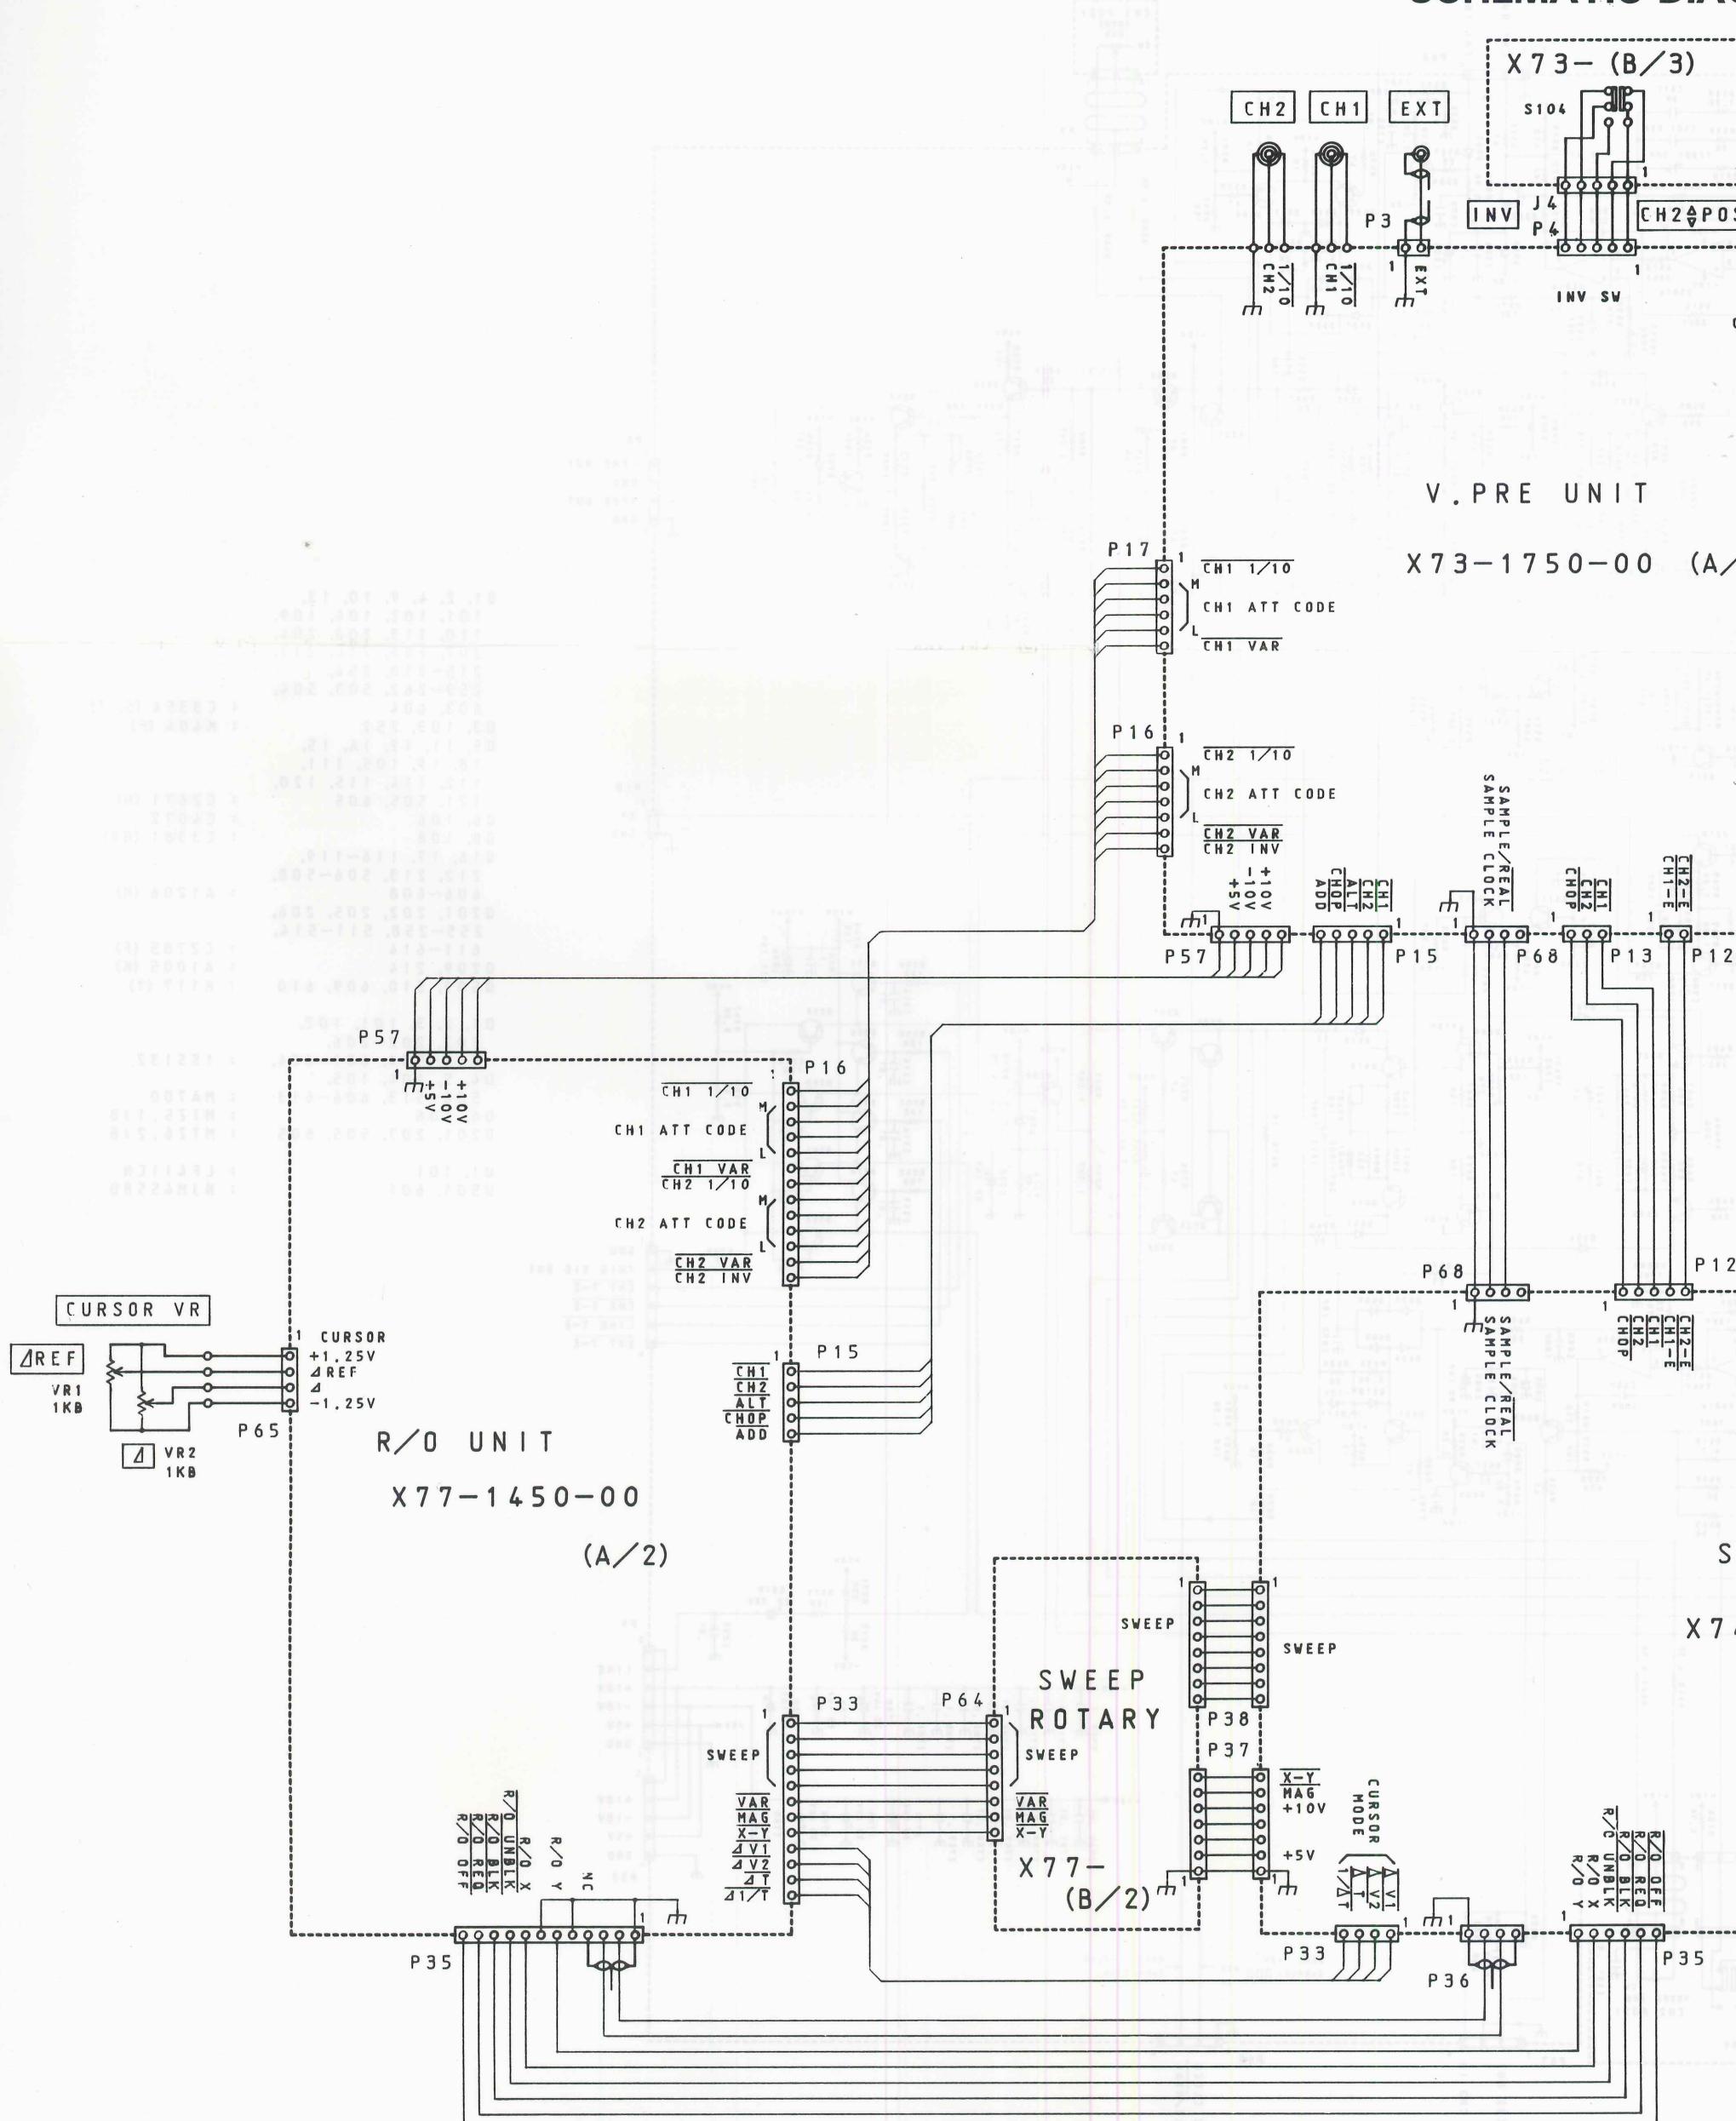


ELECTRICAL DIAGRAM

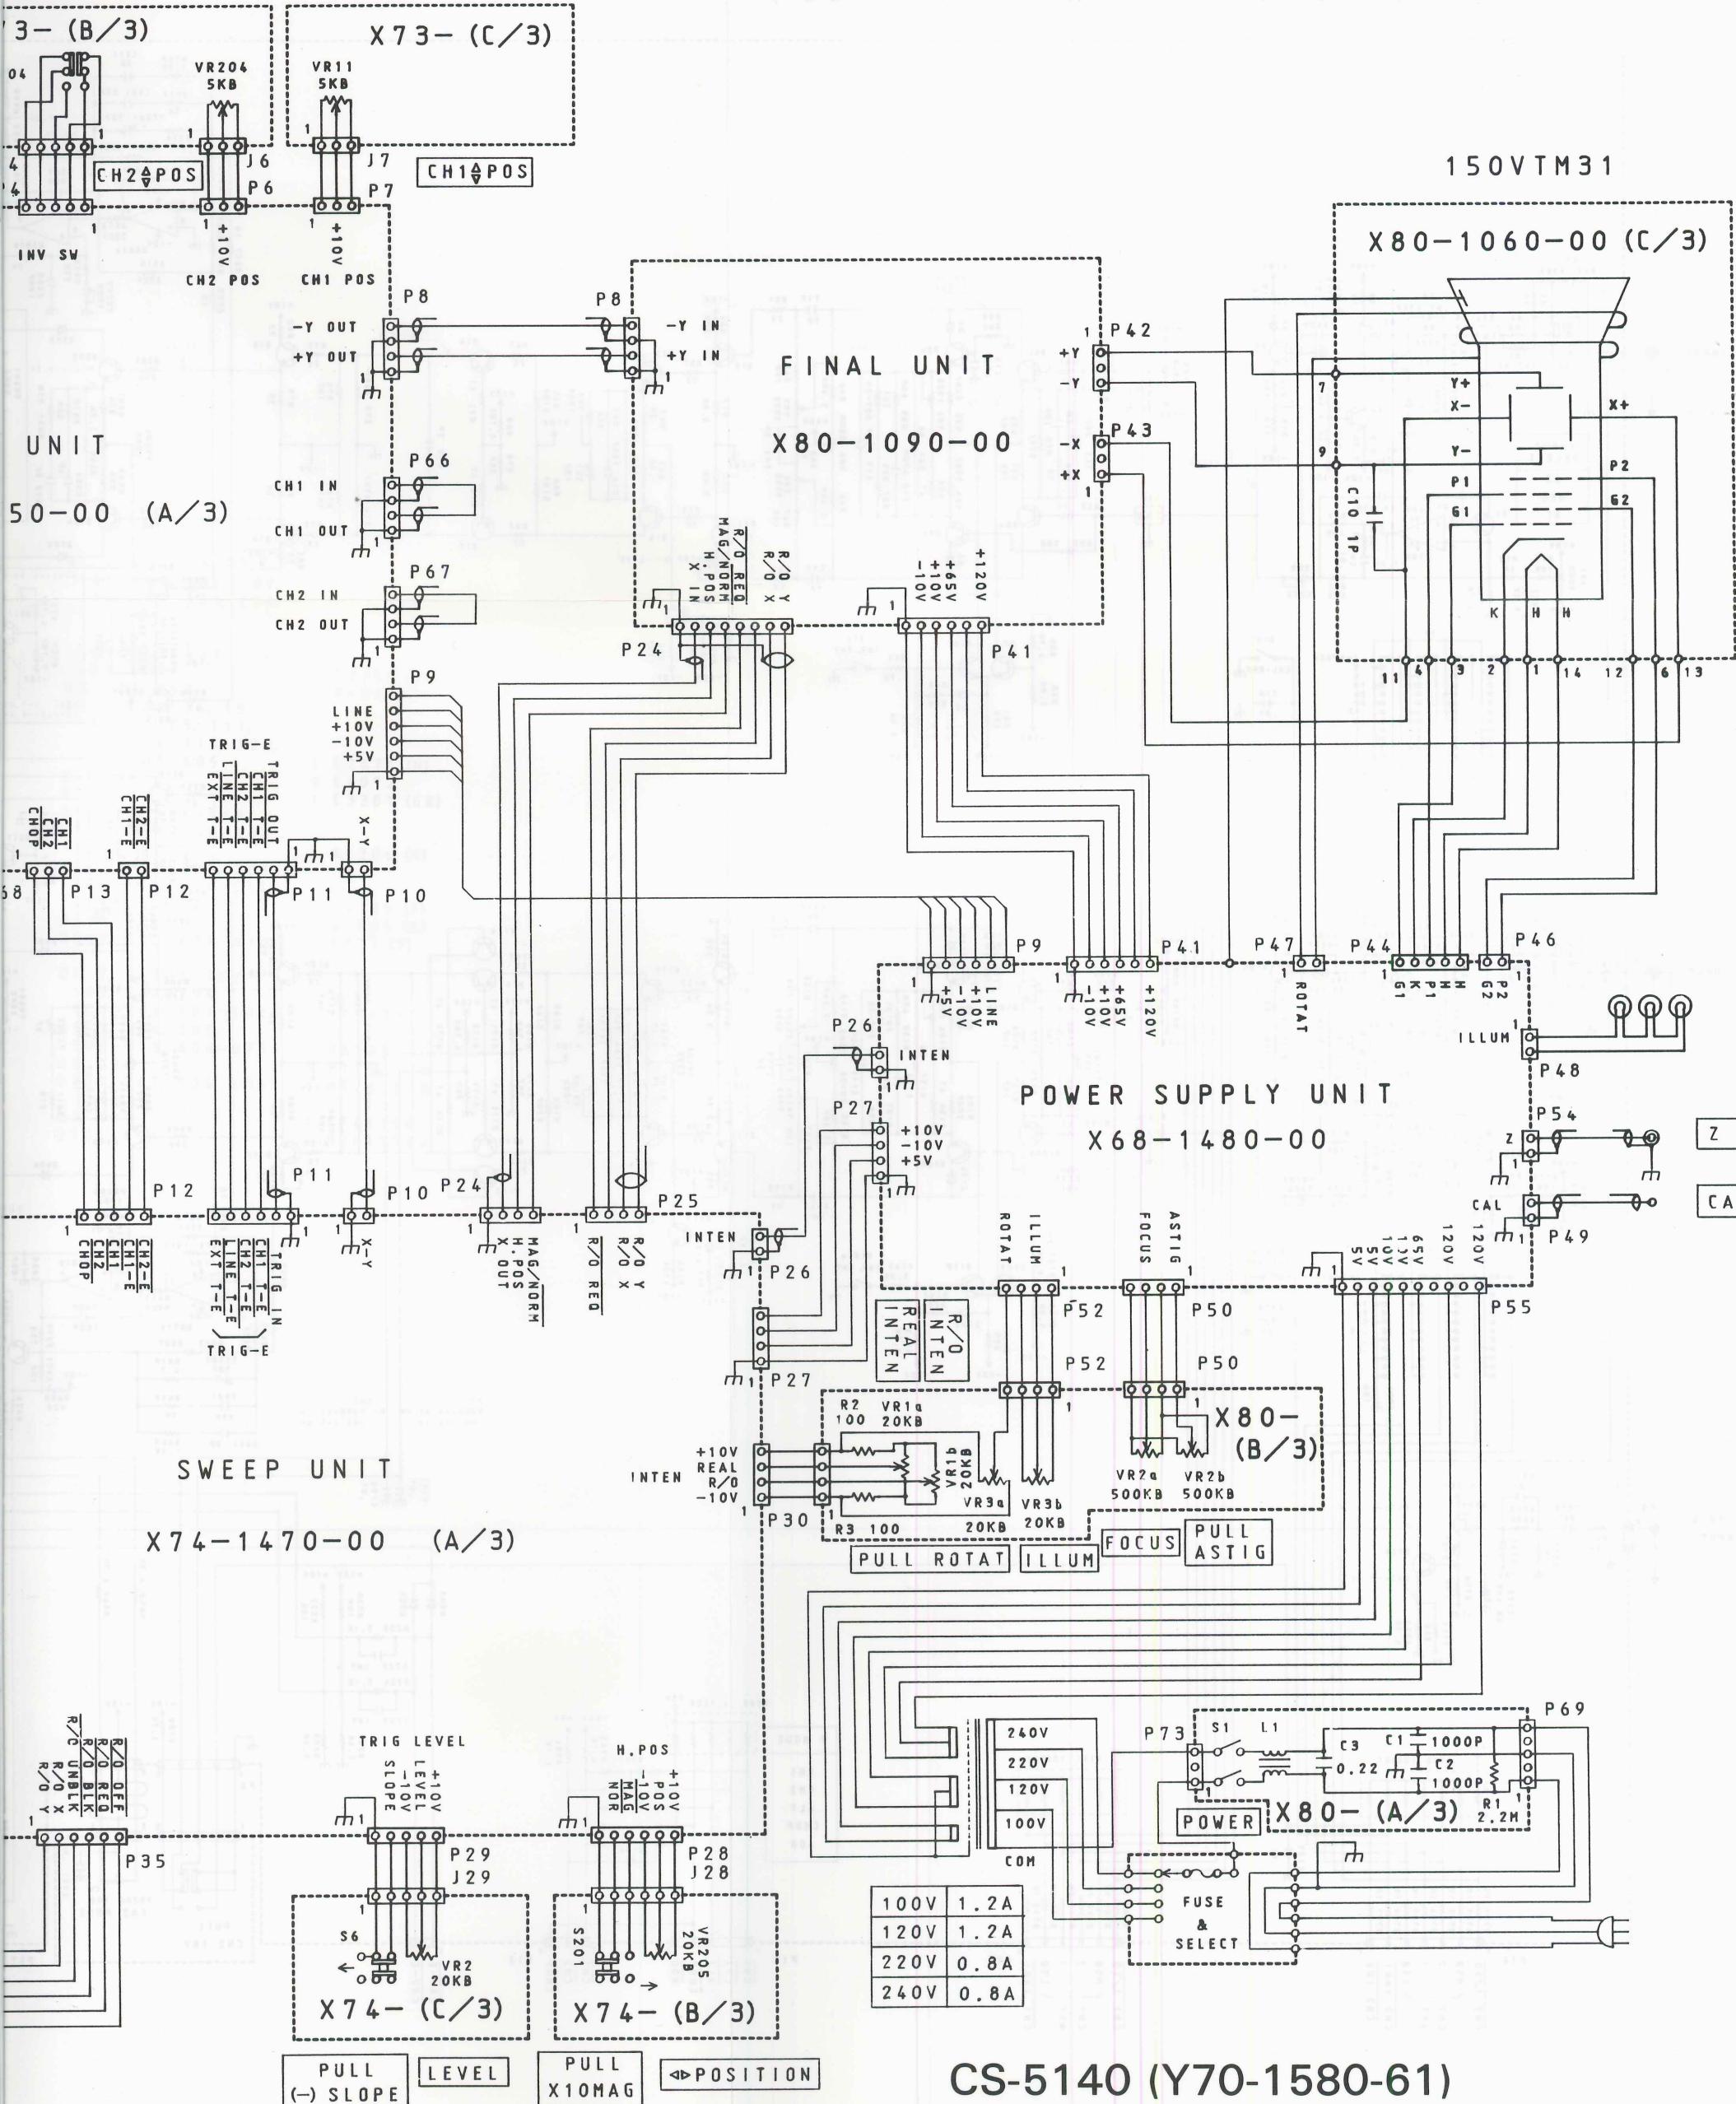


CS-5140 (Y70-1580-61)

V. PRE UNIT (X73-1750-00)

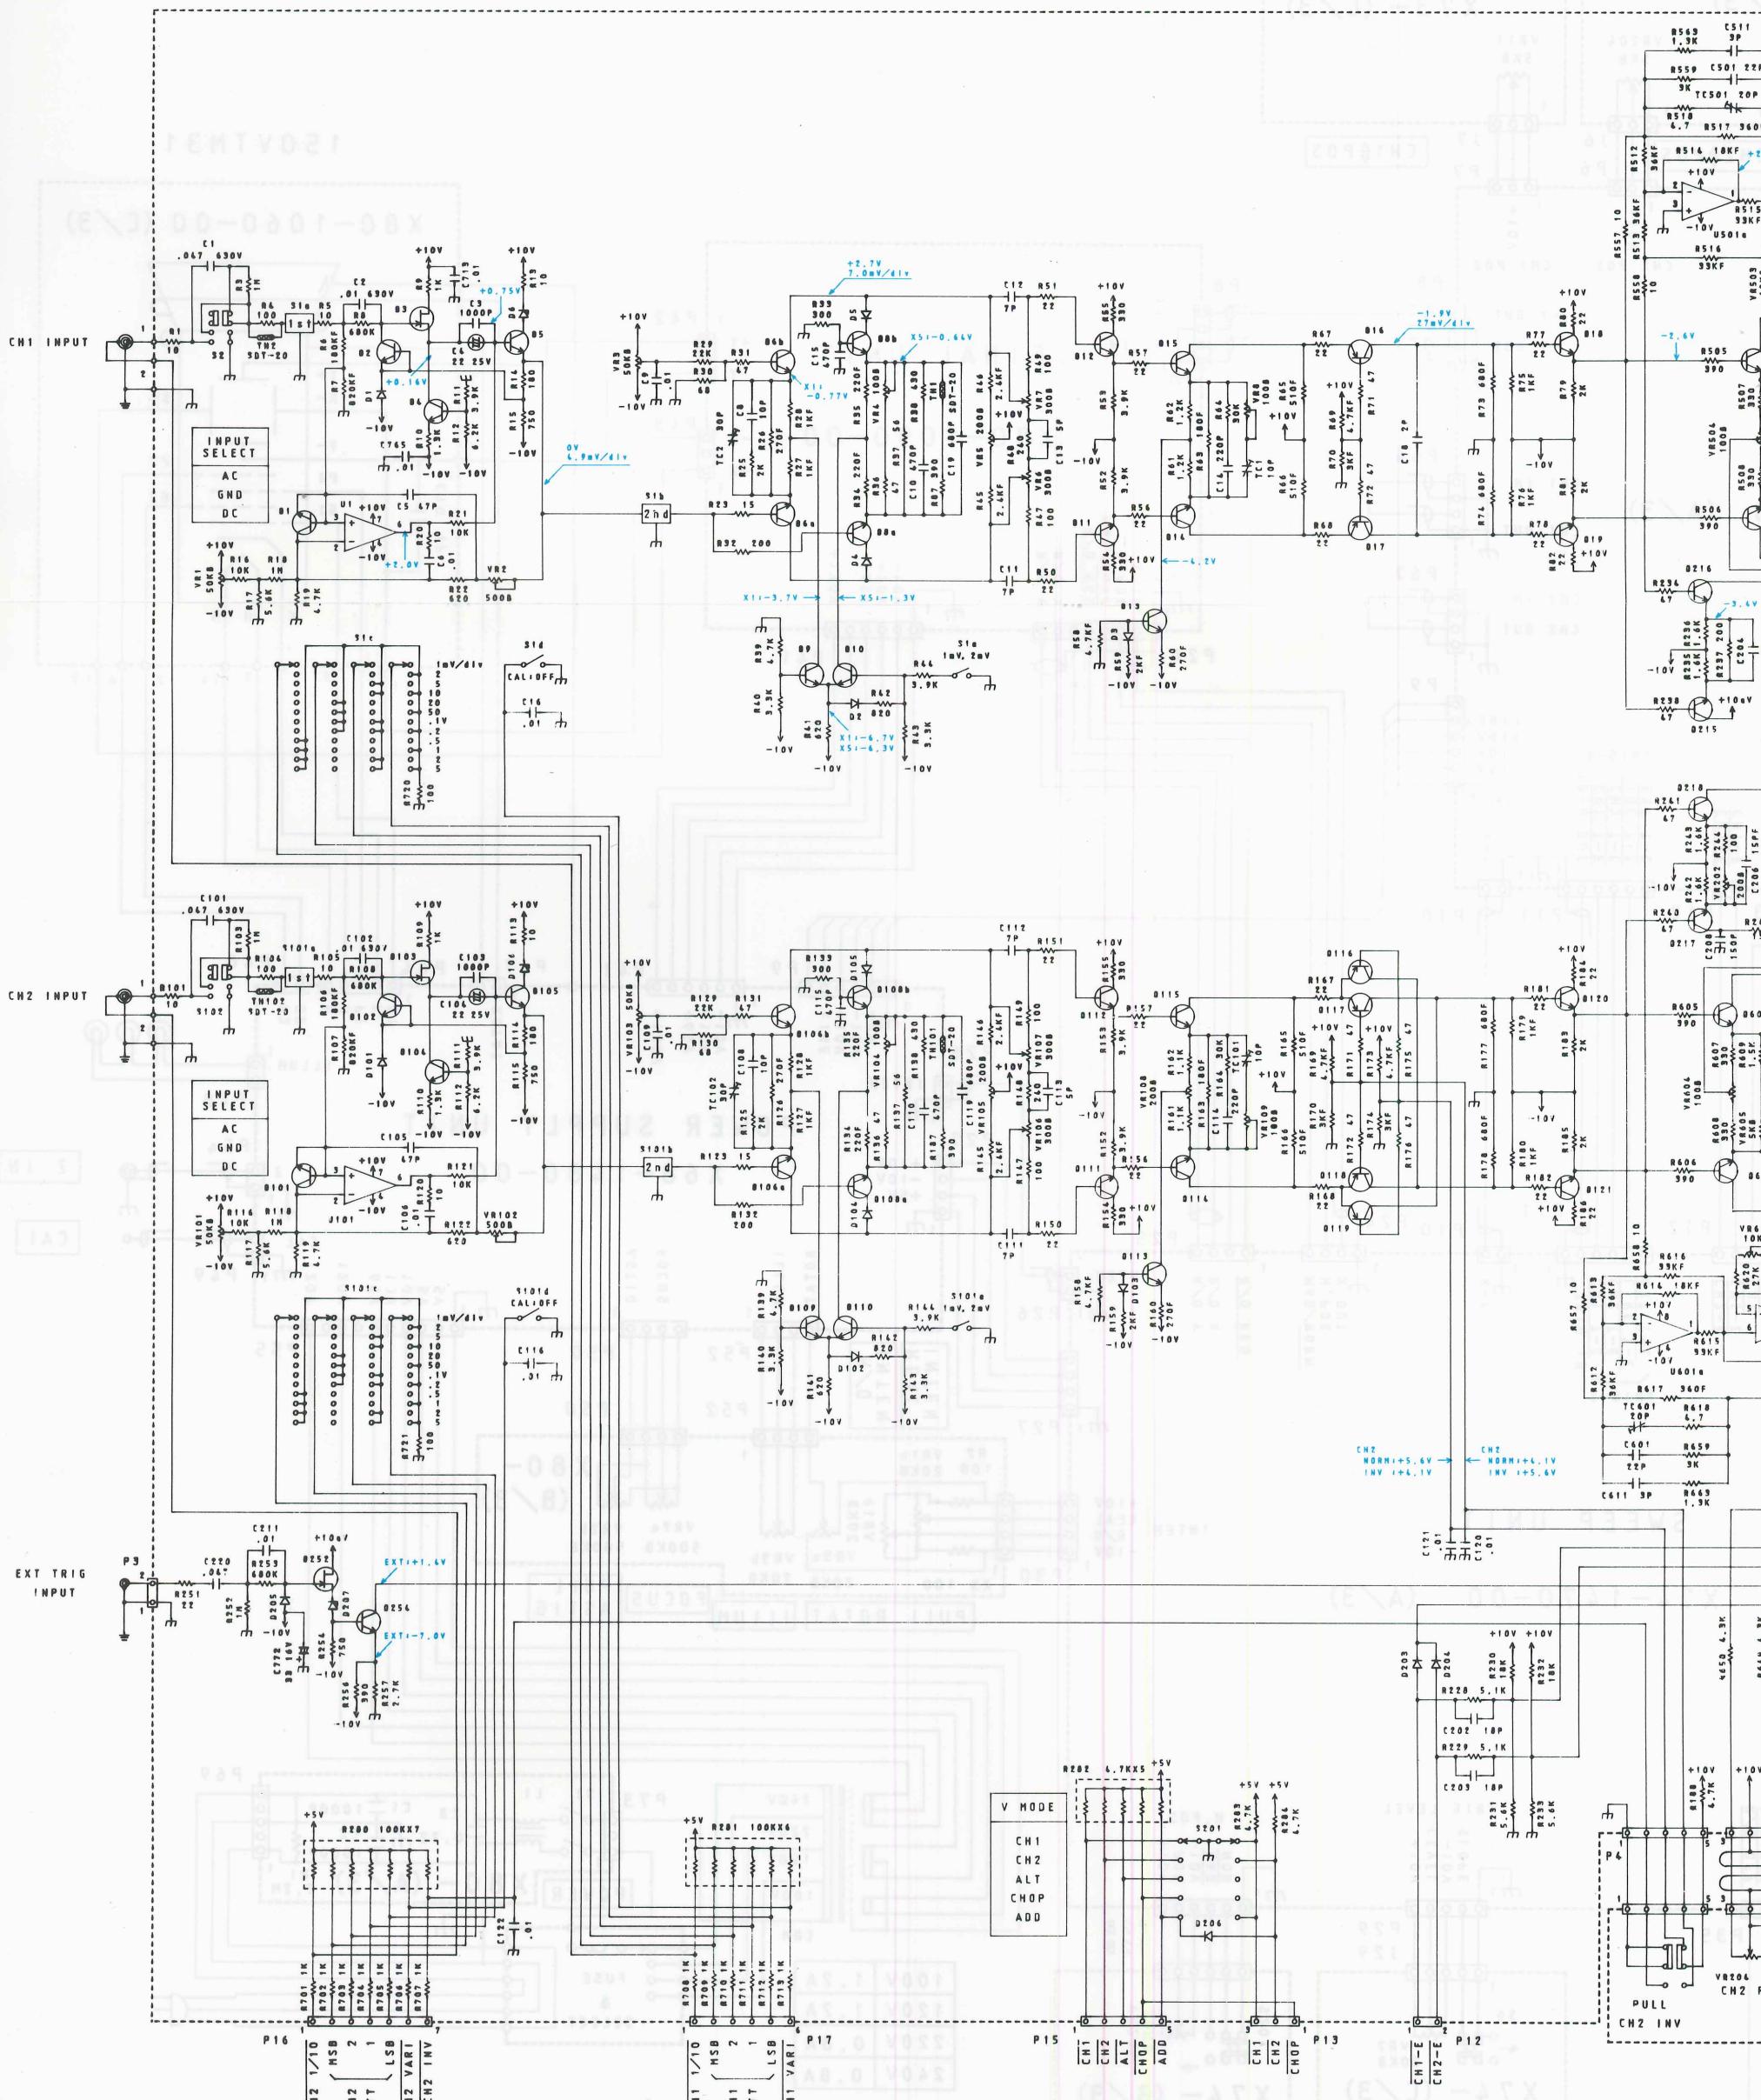

SCHEMATIC DIAGRAM

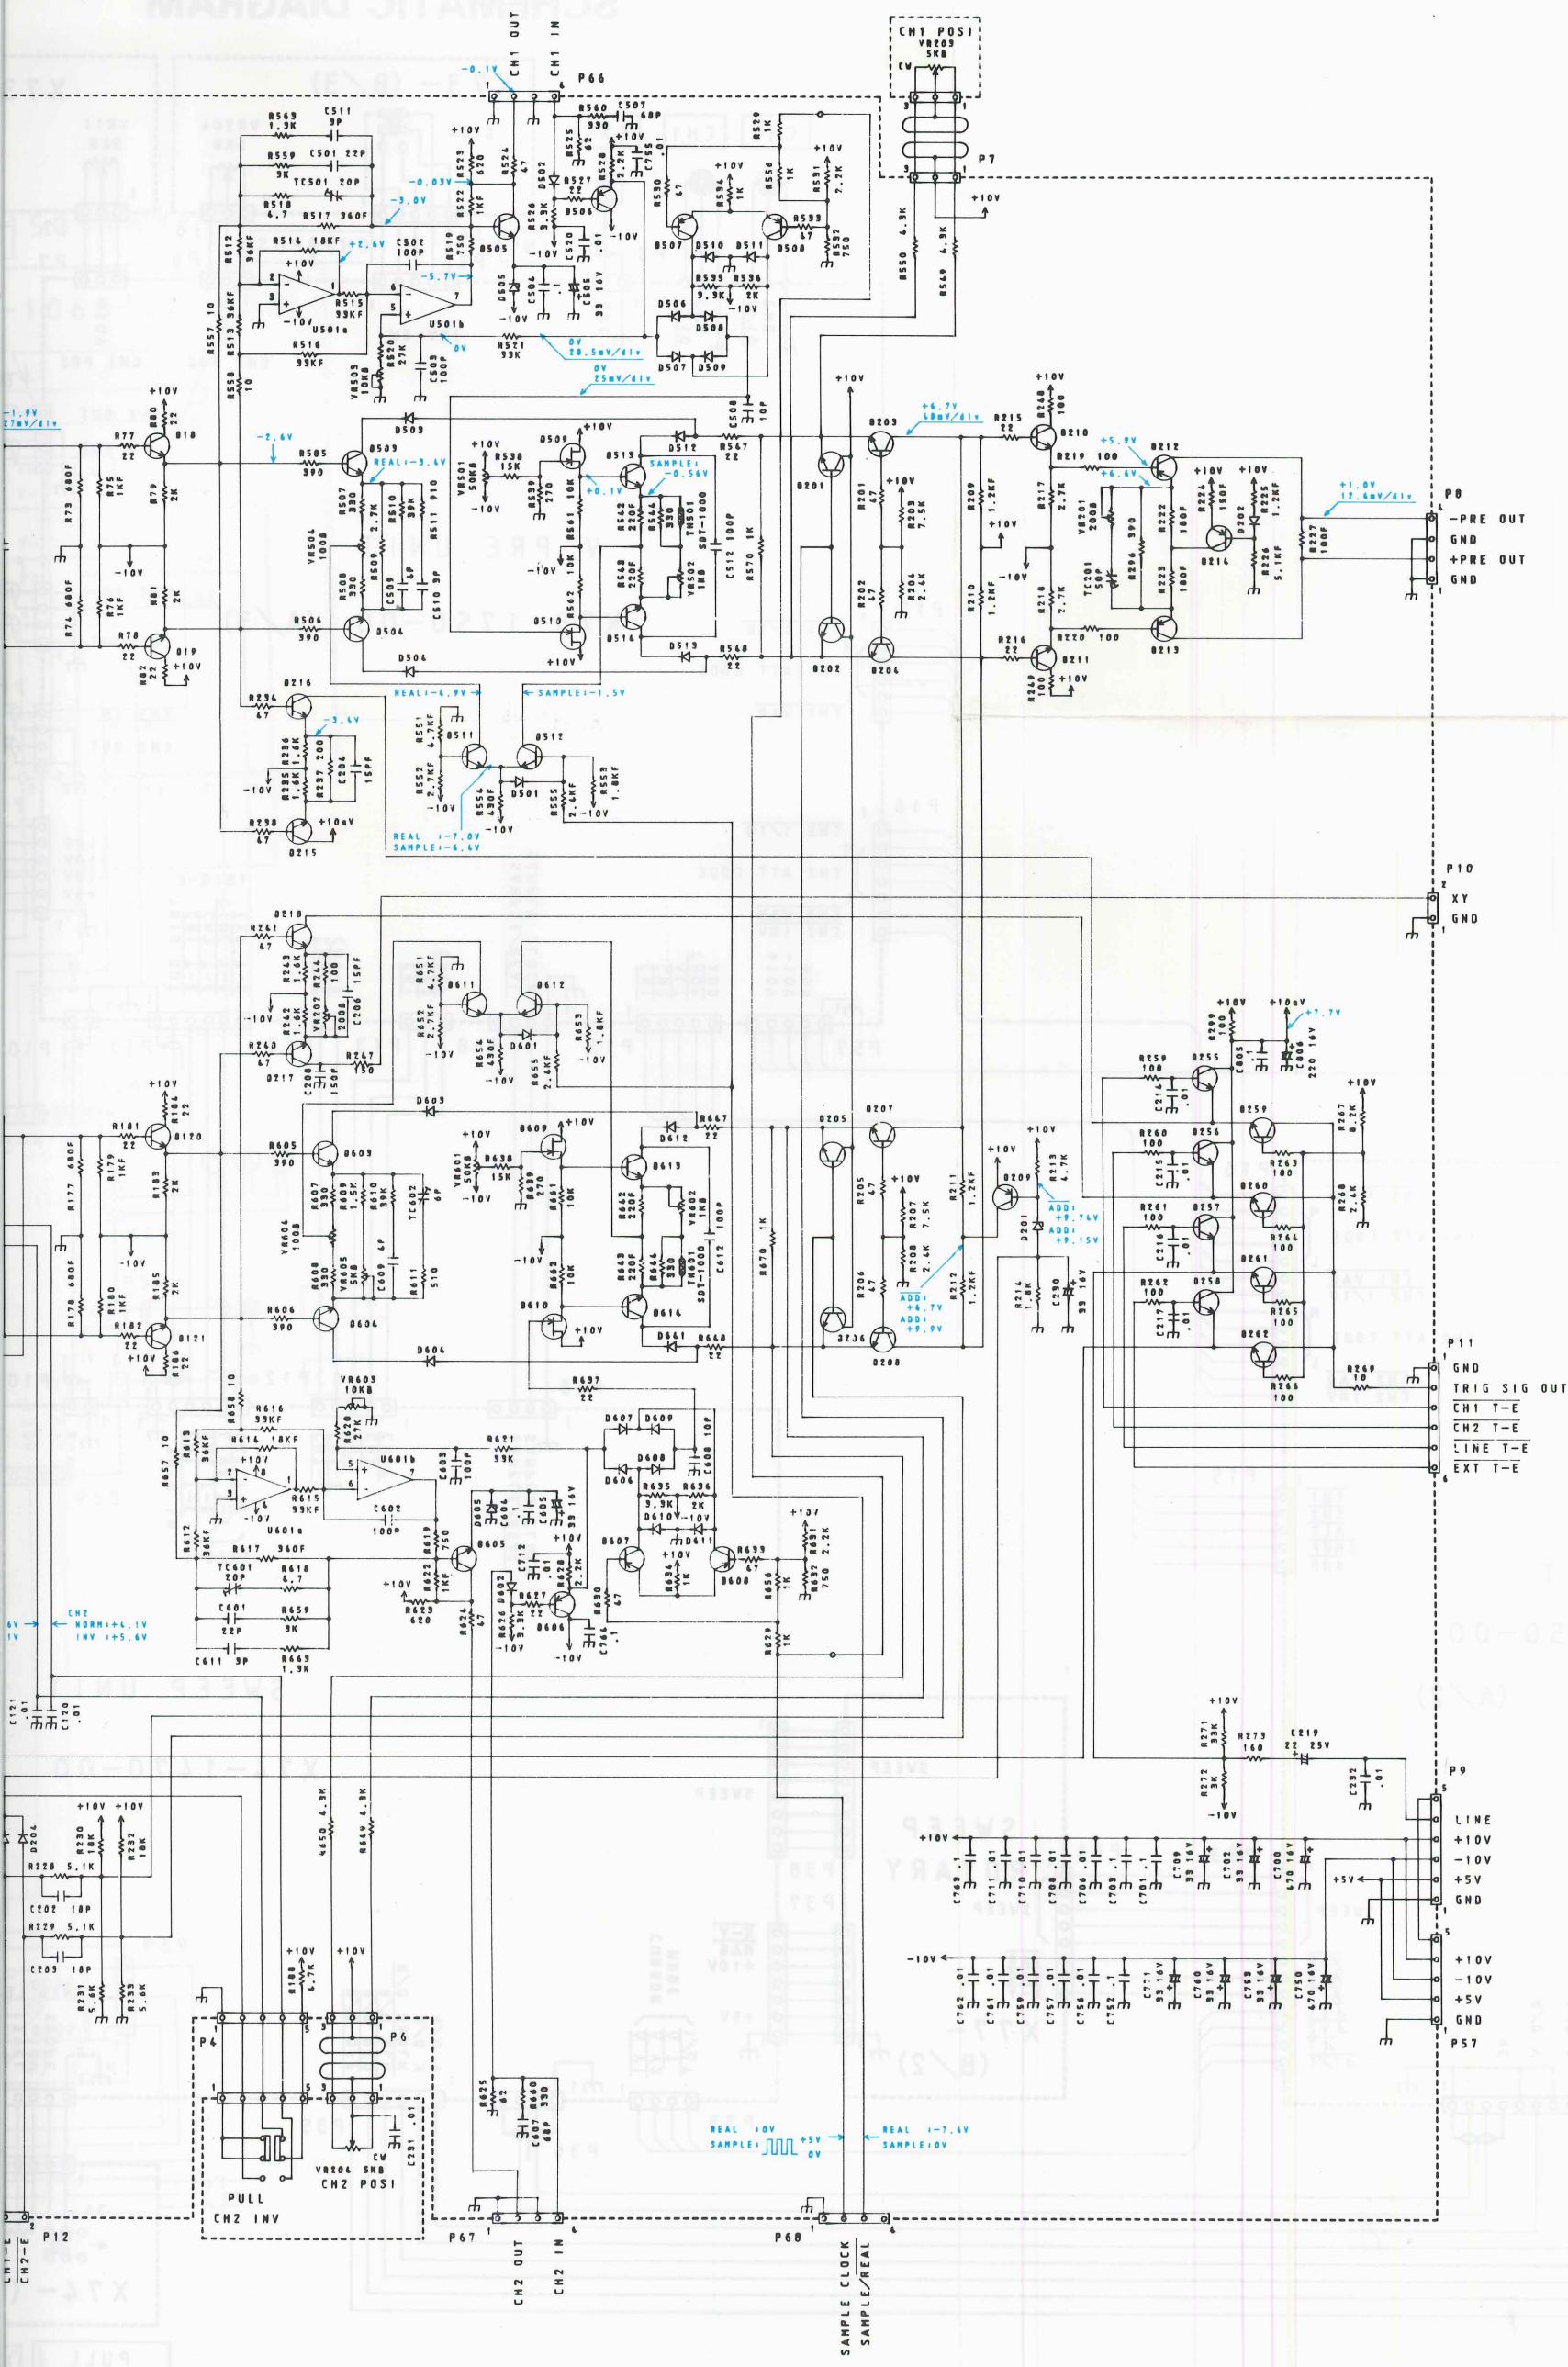

Q 1, 2, 4, 9, 10, 13,
101, 102, 104, 109,
110, 113, 203, 204,
207, 208, 210, 211,
215~218, 254,
259~262, 503, 504,
603, 604

Q 3, 103, 252
Q 5, 11, 12, 14, 15,
18, 19, 105, 111,
112, 114, 115, 120,
121, 505, 605

Q 6, 106
Q 8, 108
Q 16, 17, 116~119,
212, 213, 506~508,
606~608

Q 201, 202, 205, 206,
255~258, 511~514,
611~614

Q 209, 214

Q 509, 510, 609, 610

D 1, 2, 3, 101, 102,
103, 202~206,
501~504, 601~604,
D 4, 5, 104, 105,
506~513, 606~613

D 6, 106

D 201, 207, 505, 605

U 1, 101

U 501, 601

P 11
GND
TRIG SIG OUT
CH1 T-E
CH2 T-E
LINE T-E
EXT T-E

P 9
LINE
+10V
-10V
+5V
GND
P 57

: C 33

: K 40

: C 20

: C 40

: C 33

: A 12

: C 21

: A 10

: K 1

: 153

: MA 1


: MT 2

: MT 2



: LF 1

: NJ 1

SWEET UNIT (X 74-1470-00-A/3)

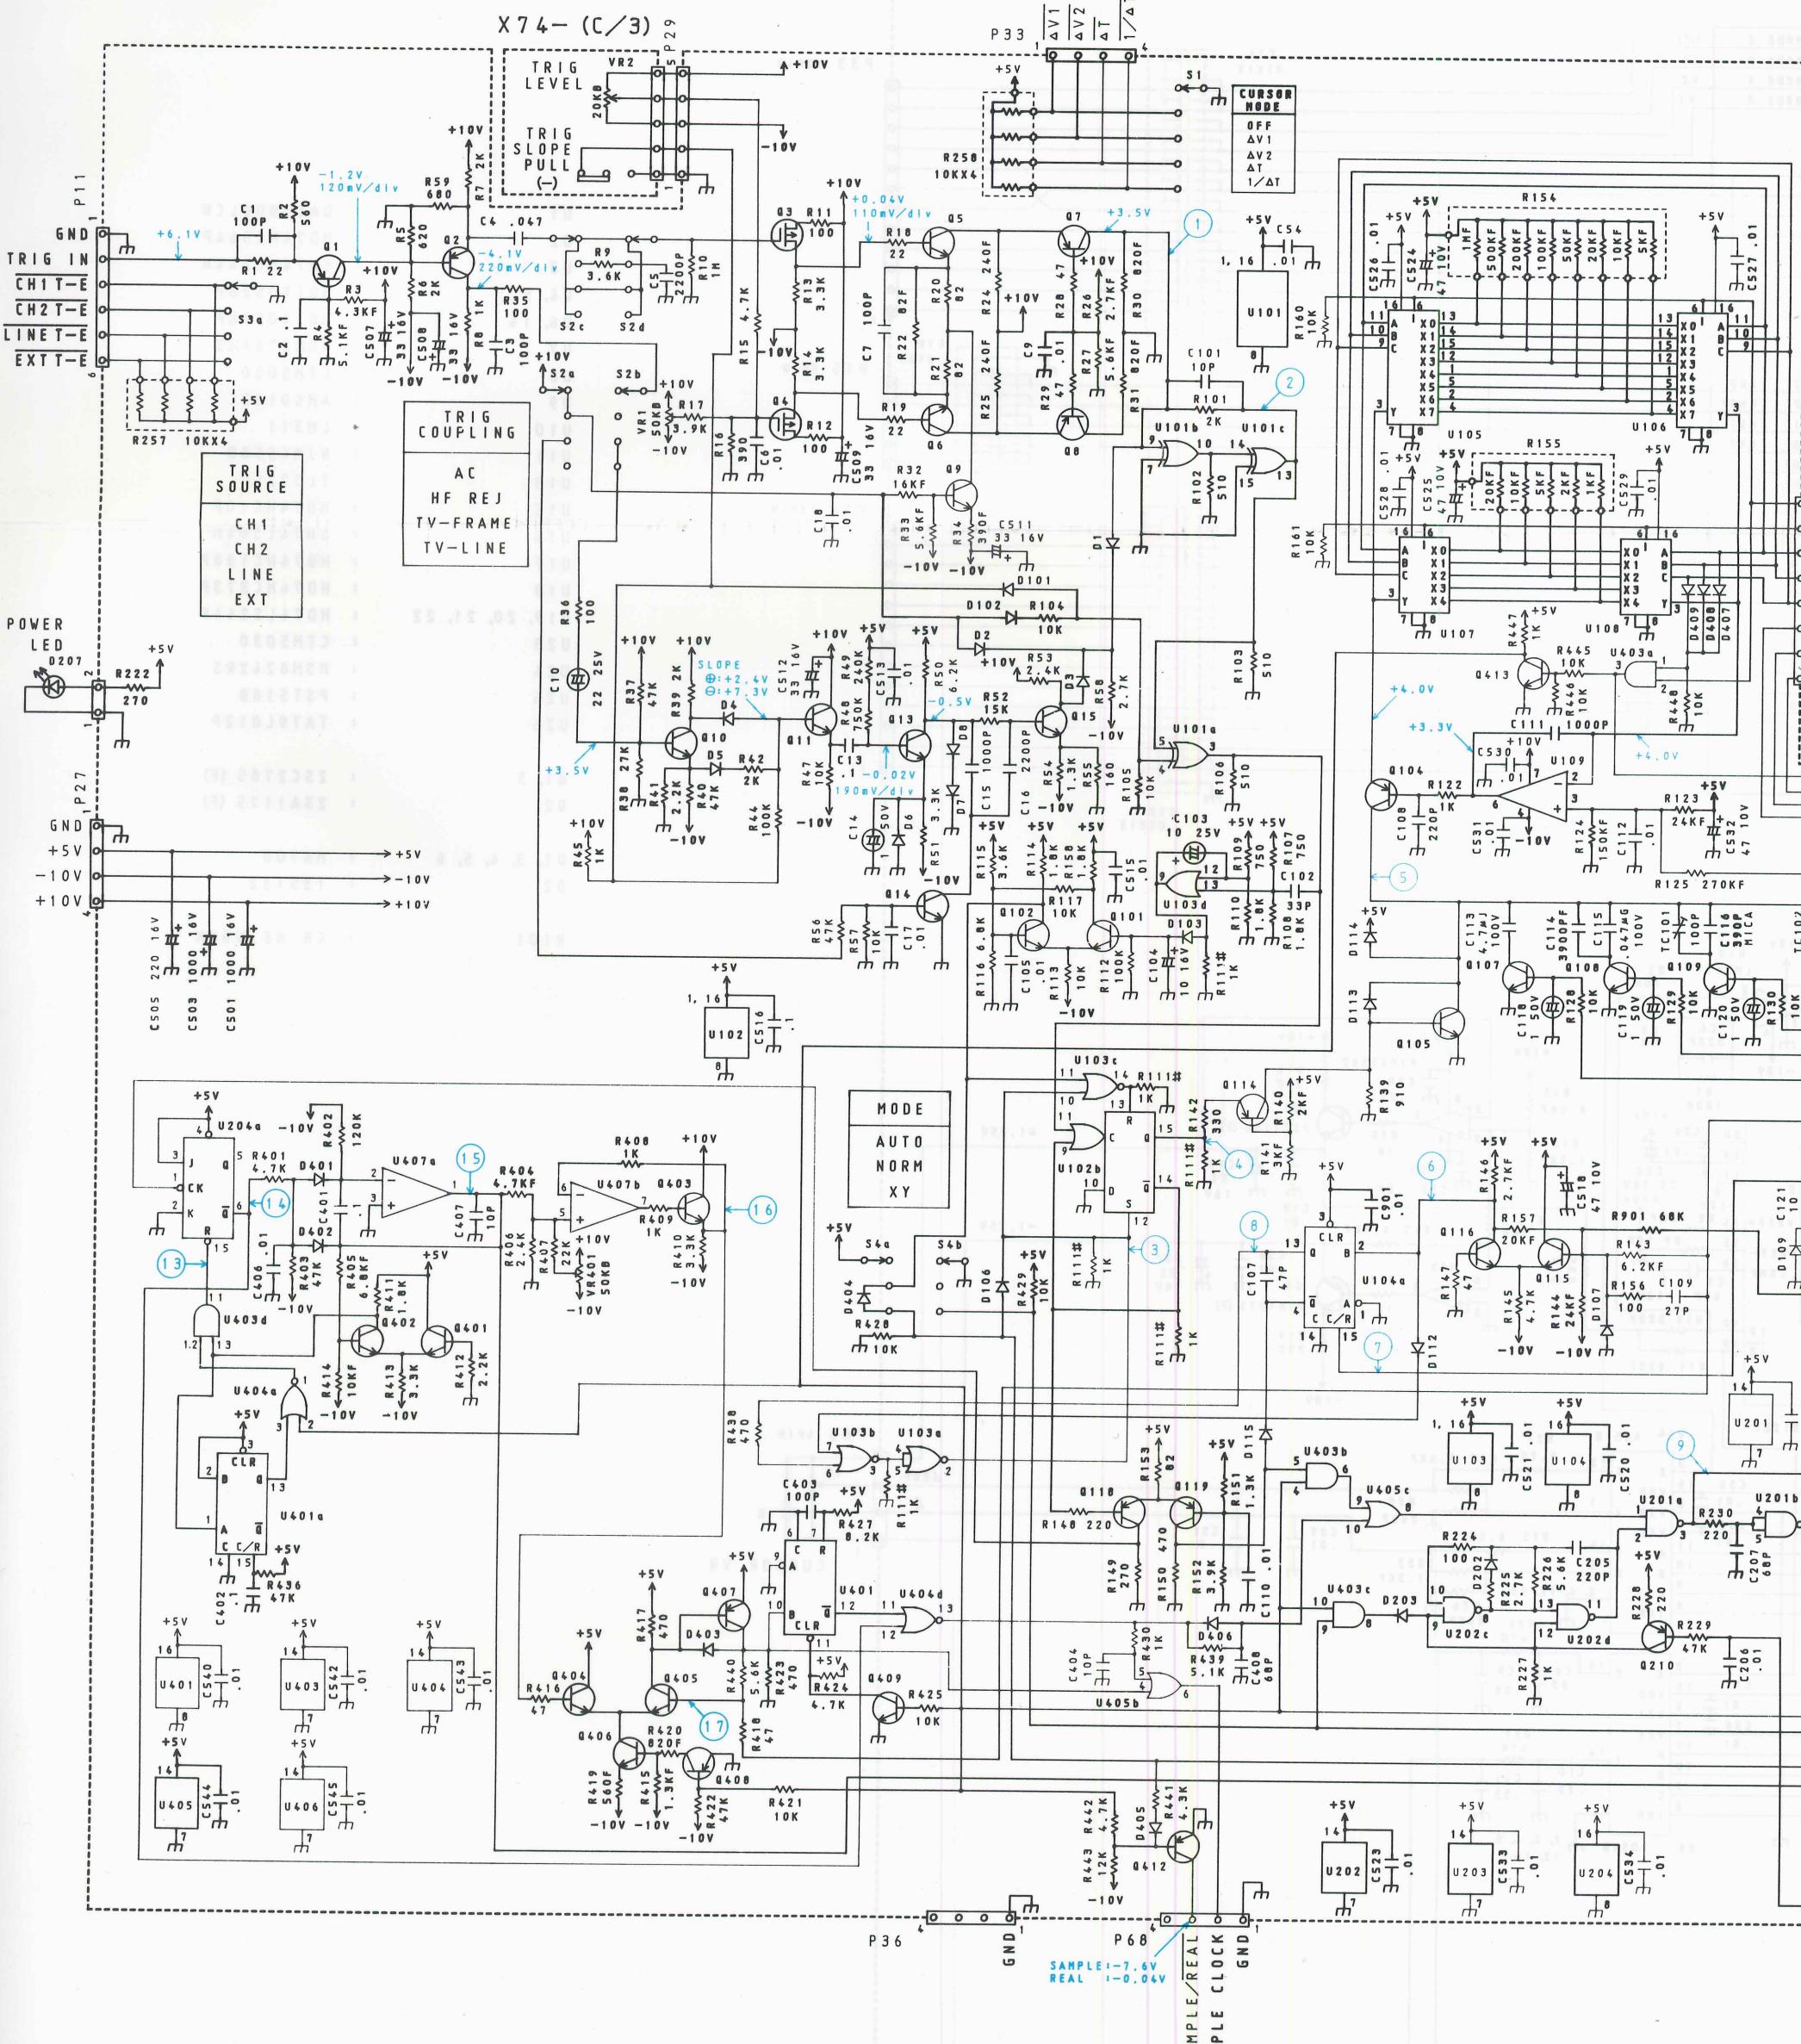


STATIC DIAGRAM

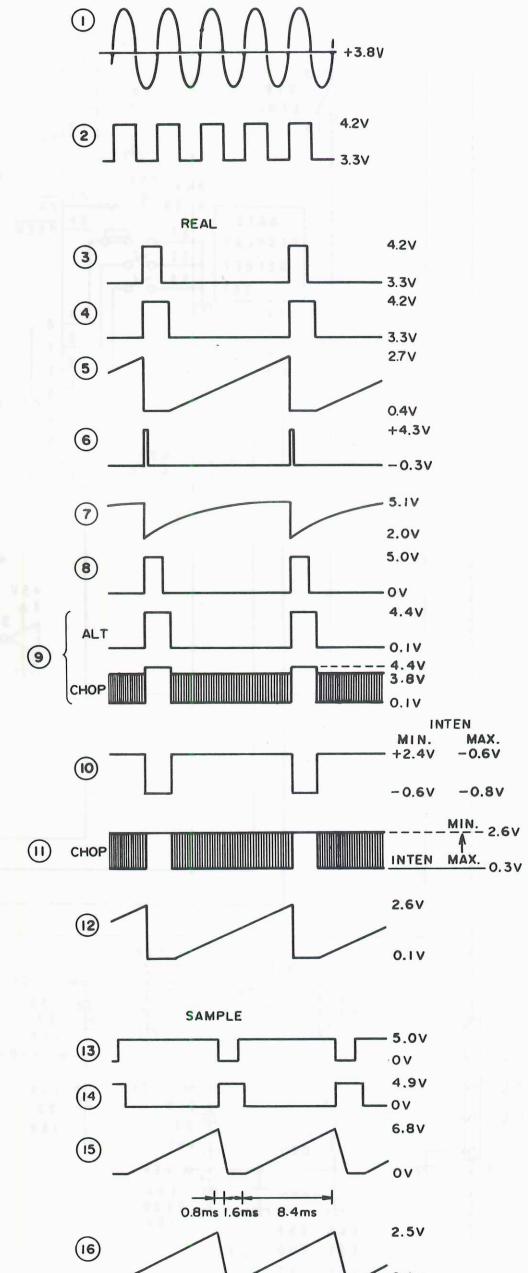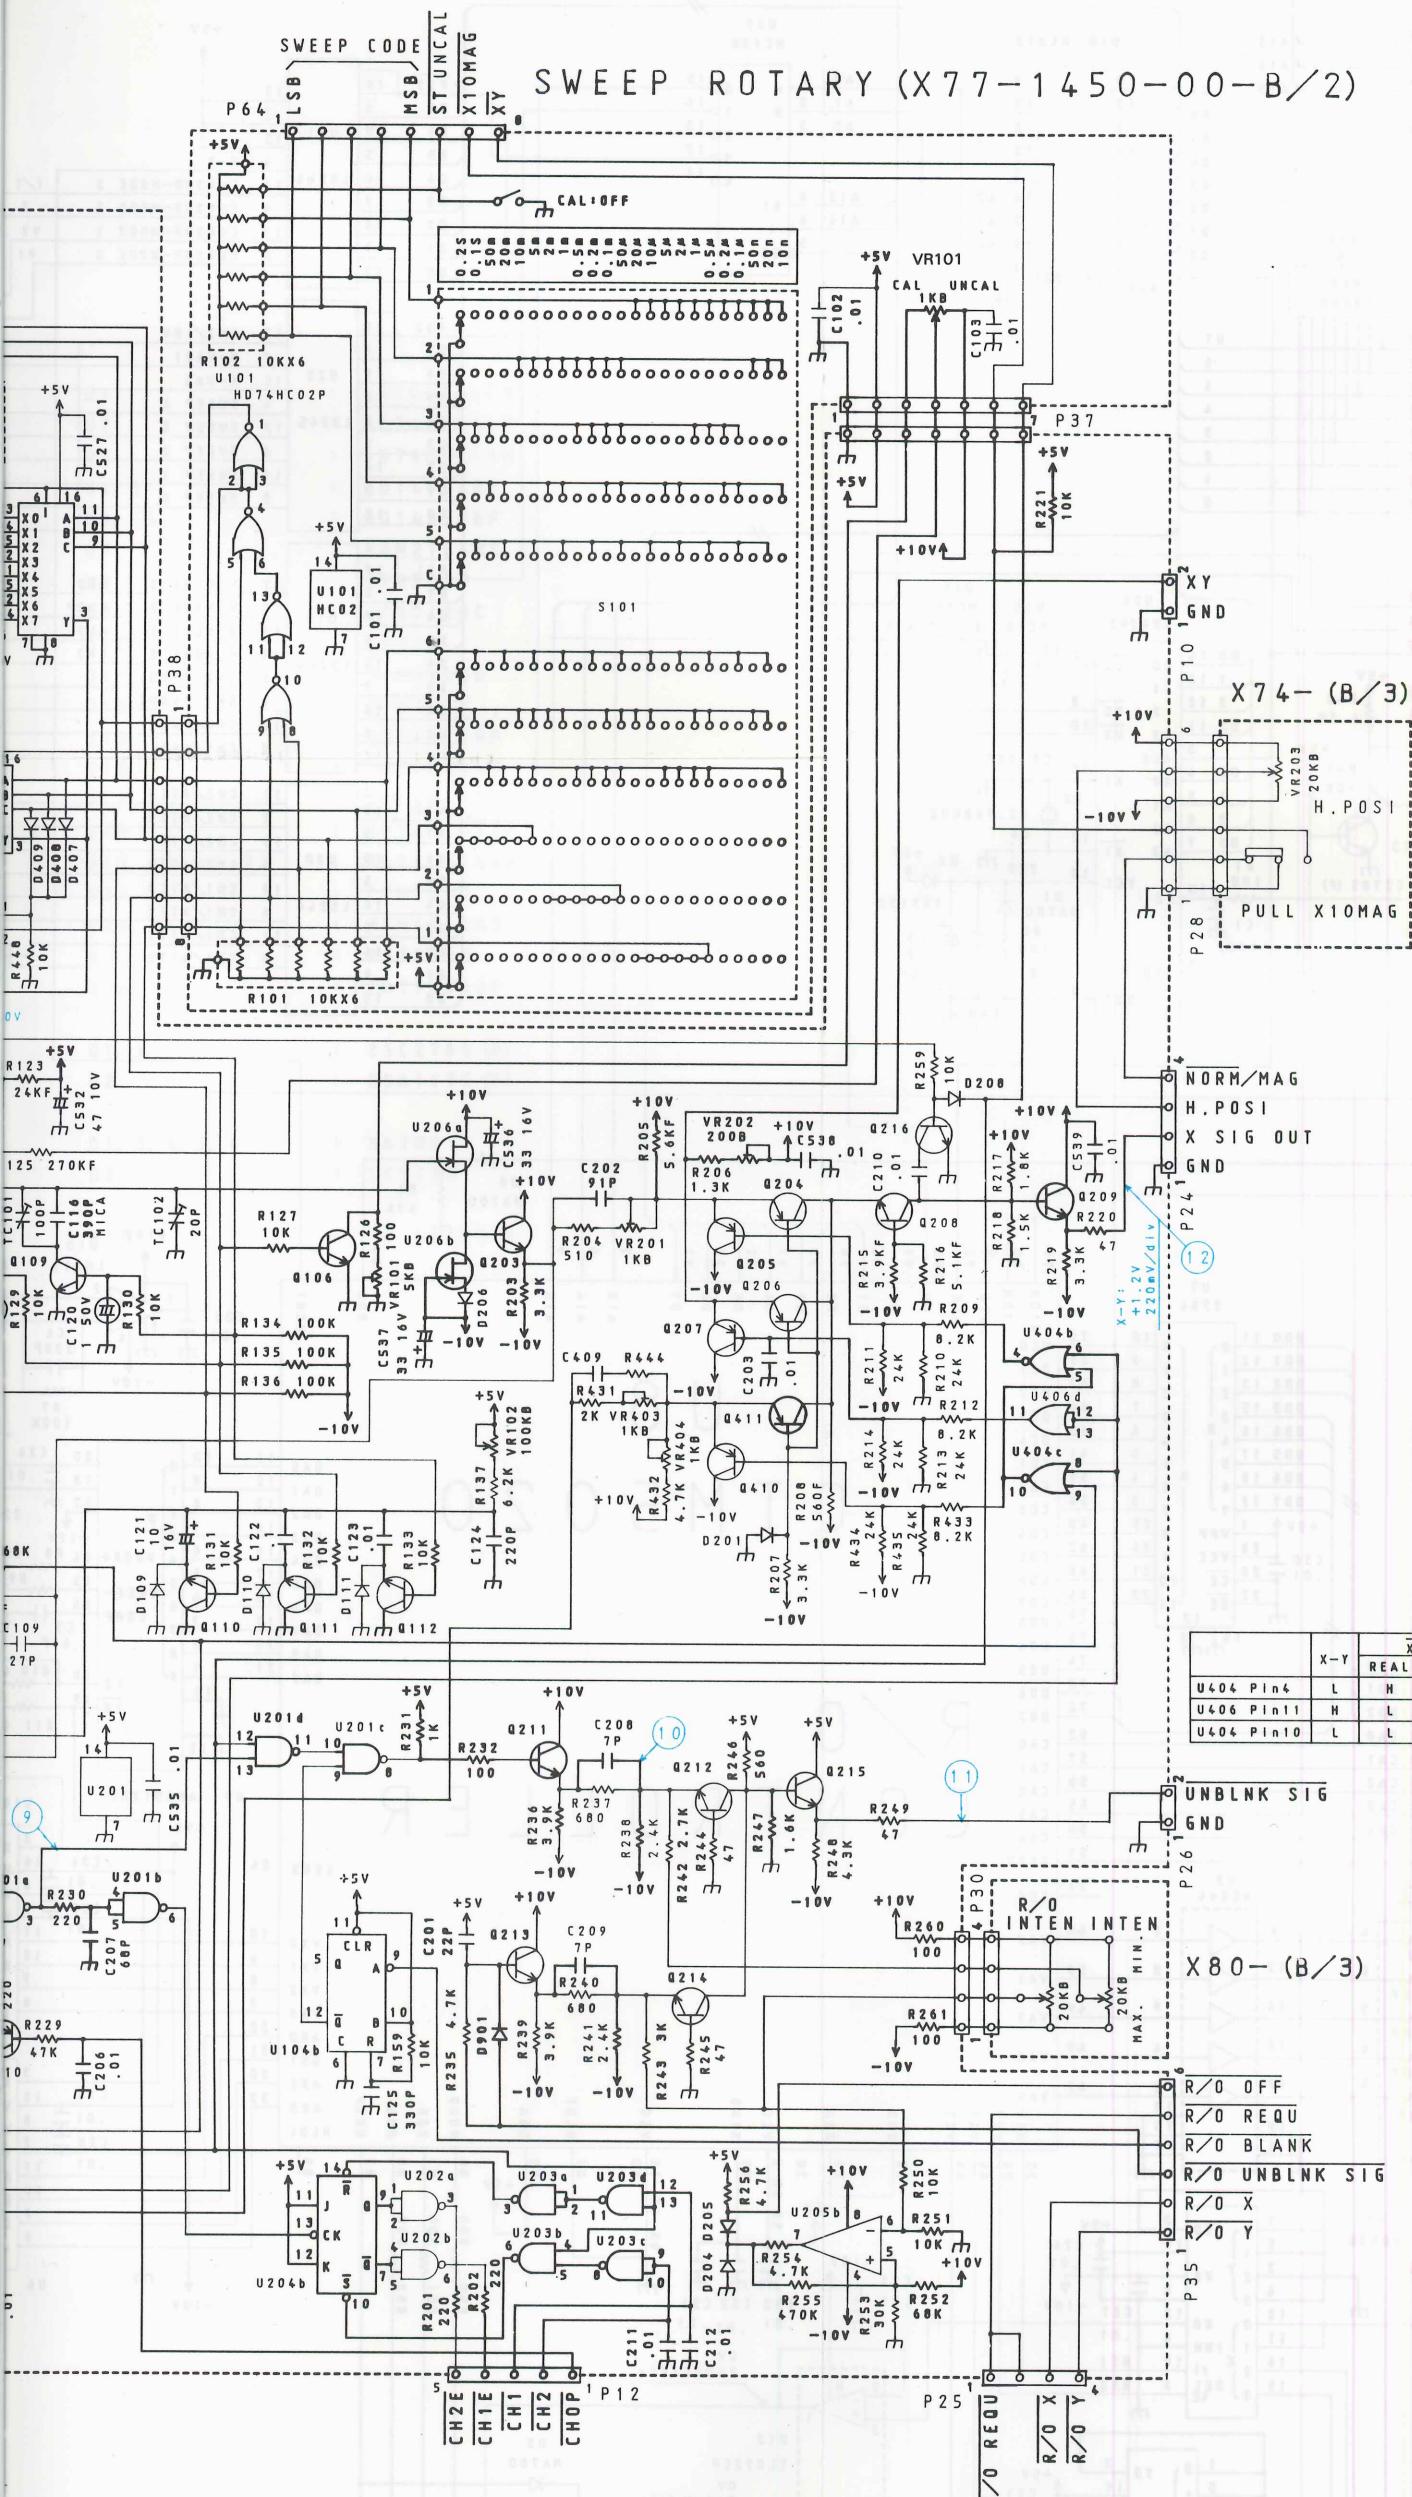


	X-Y	REAL	SAMPLE
U404 Pin 4	L	H	L
U404 Pin 11	H	L	L
U404 Pin 10	L	L	H

X 80 - (B/3)

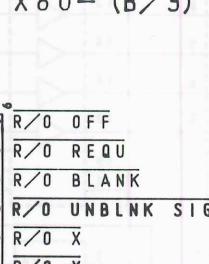


Q1, 407	: A1206 (K)
Q2, 7, 8, 104, 114	: A1005 (K)
Q3, 4	: K241 (Y)
Q5, 6, 404, 405	: C2671 (H)
Q9~11, 13~15, 101, 102, 106, 110~112, 208, 209, 211, 213, 216, 401~403, 409, 413	: C2785 (F)
Q105, 203, 406	: C3354 (S, T)
Q107~109, 115, 116, 212, 214, 215	: C2786 (K)
Q118, 119, 204~207, 210, 408, 410~412	: A1175 (F)
U101	: MC10107L
U102	: MC101H131L
U103	: MC10102L
U104, 401	: TC74HC123P
U105~108	: MC14051BCP
U109	: TL071CP
U201	: SN74ALS00N
U202, 203	: HD74HC00P
U204	: HD74HC112P
U205, 407	: NJM4558D
U206	: 2SK332 (F)
U403	: HD74HC08P
U404	: HD74HC02P
U405, 406	: HD74HC32P


D1~8, 101~103, 106, 107, 109~111, 201~205, 401, 402, 404~409 : ISS132
 D112~115, 206, 208, 403, 901 : MA700
 D207 : LN322GPT
 R111# : 1KX8

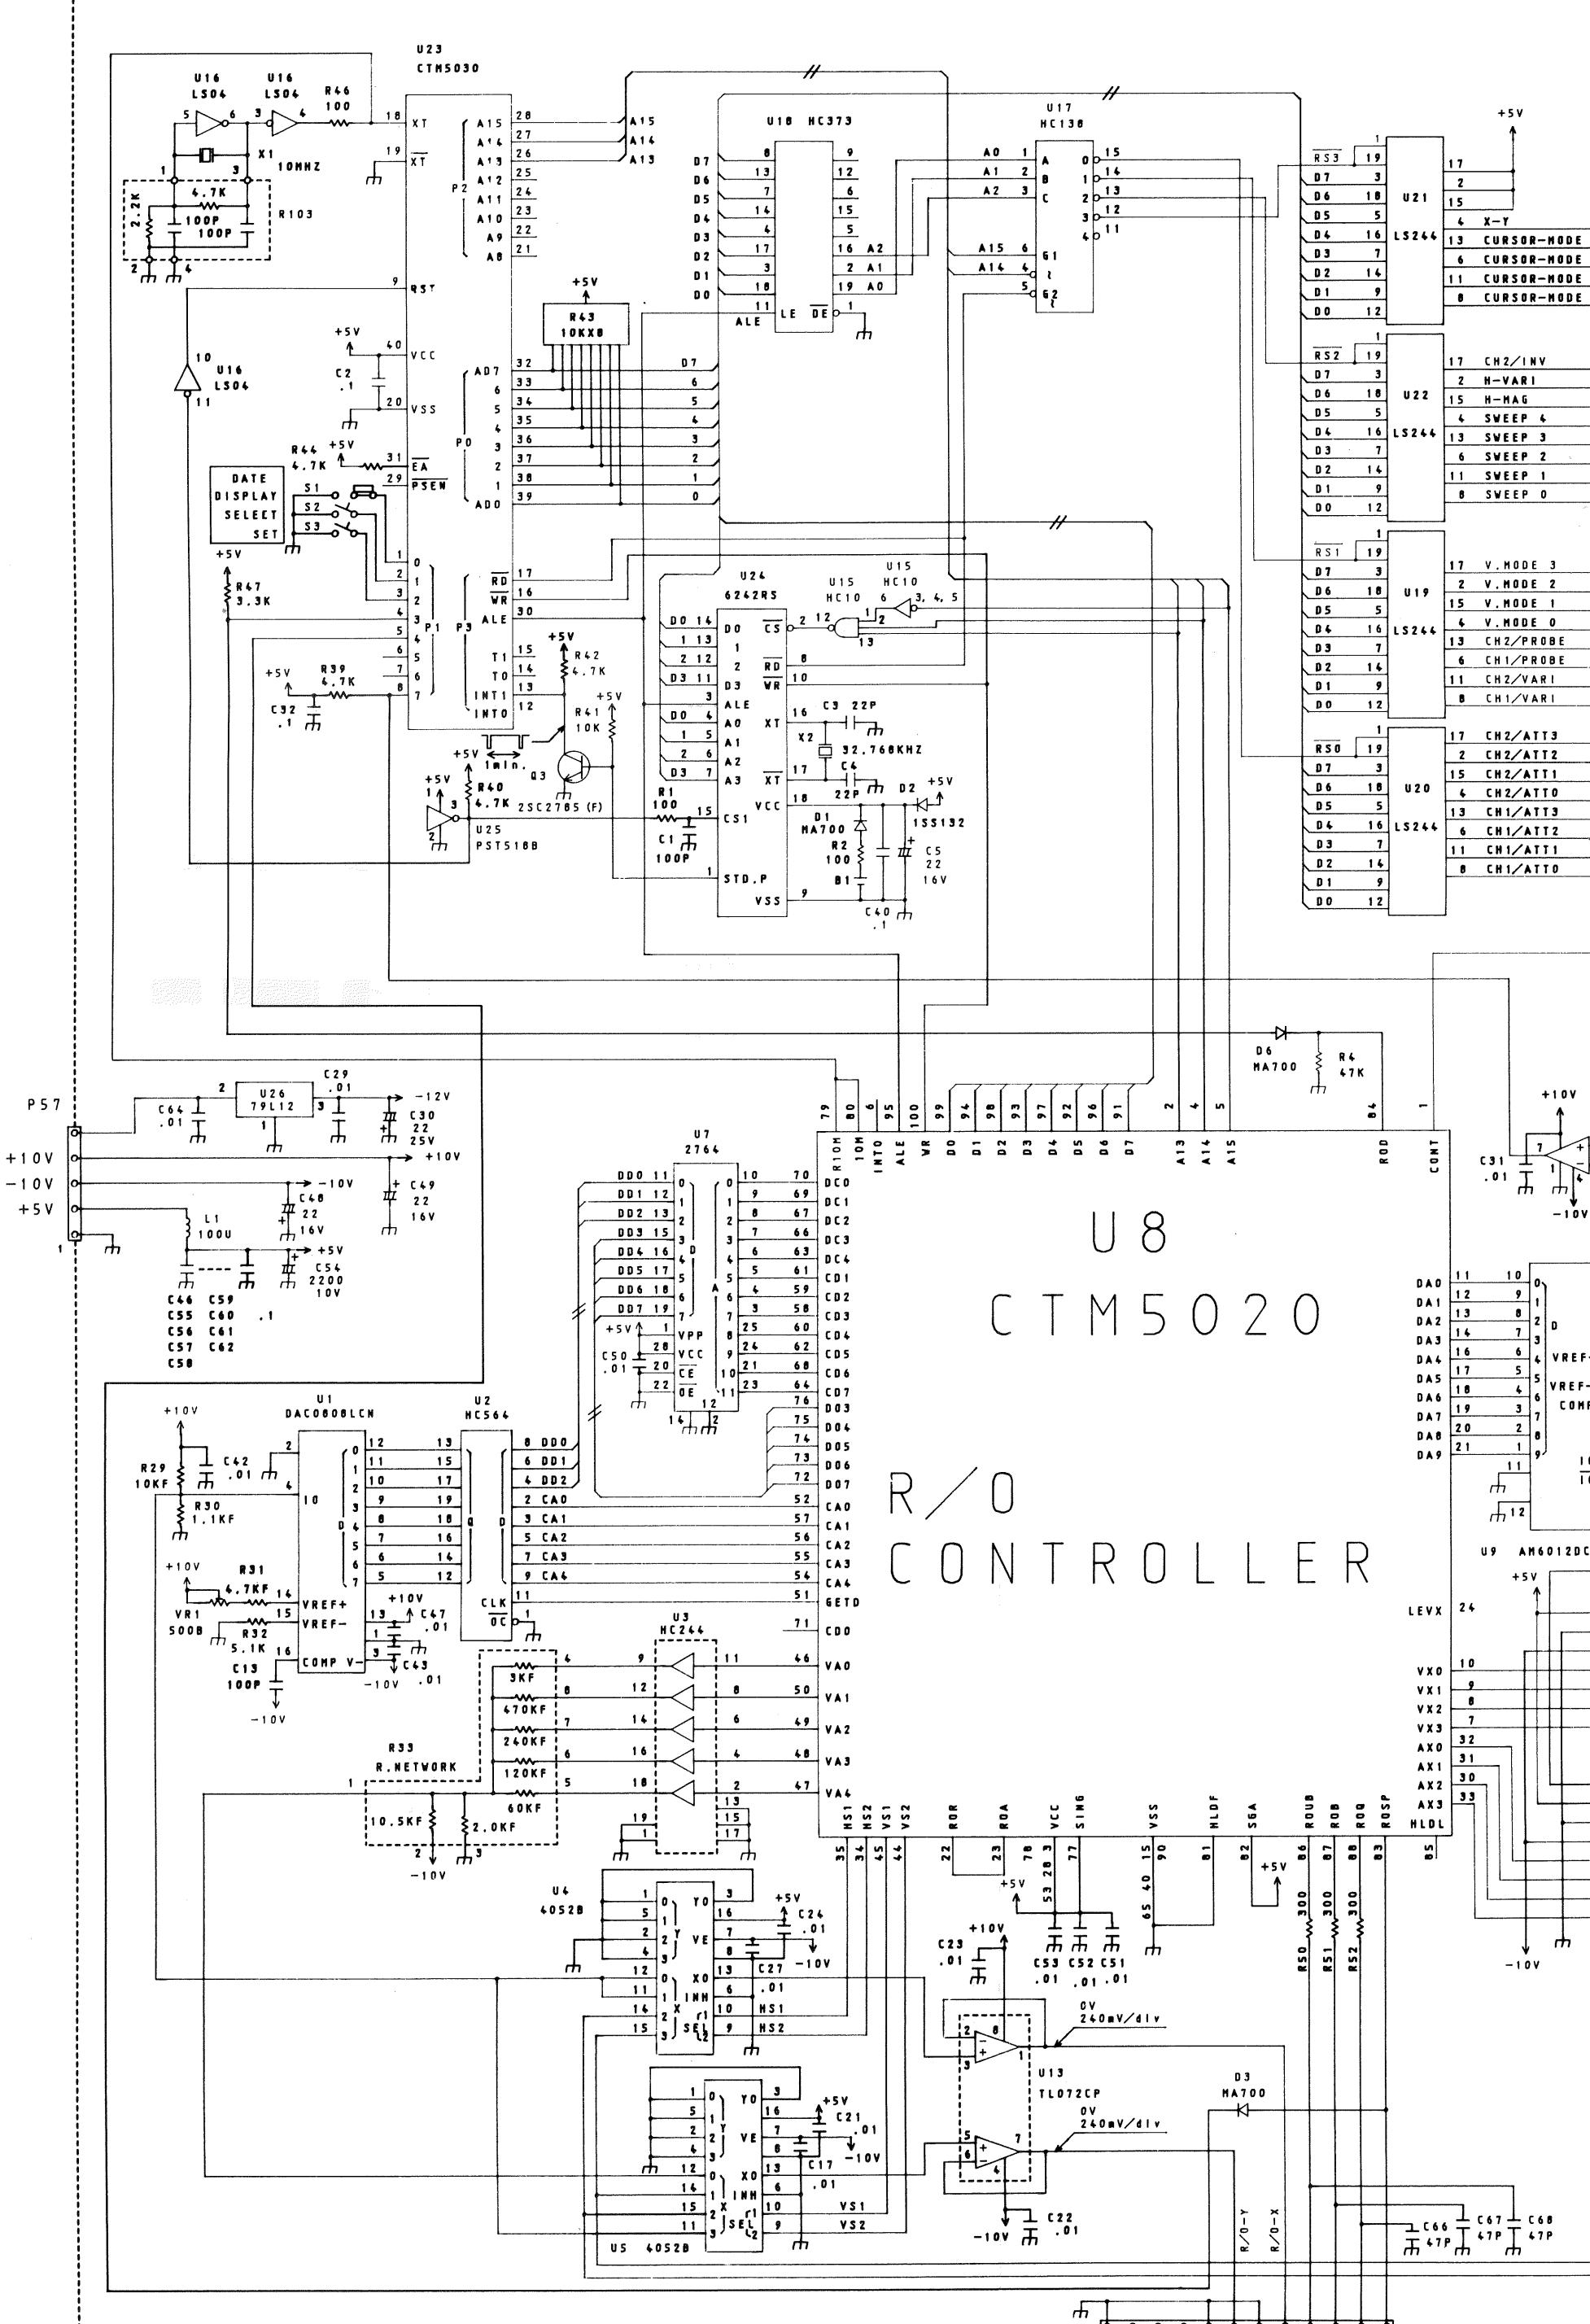

SCHEMATIC DIAGRAM

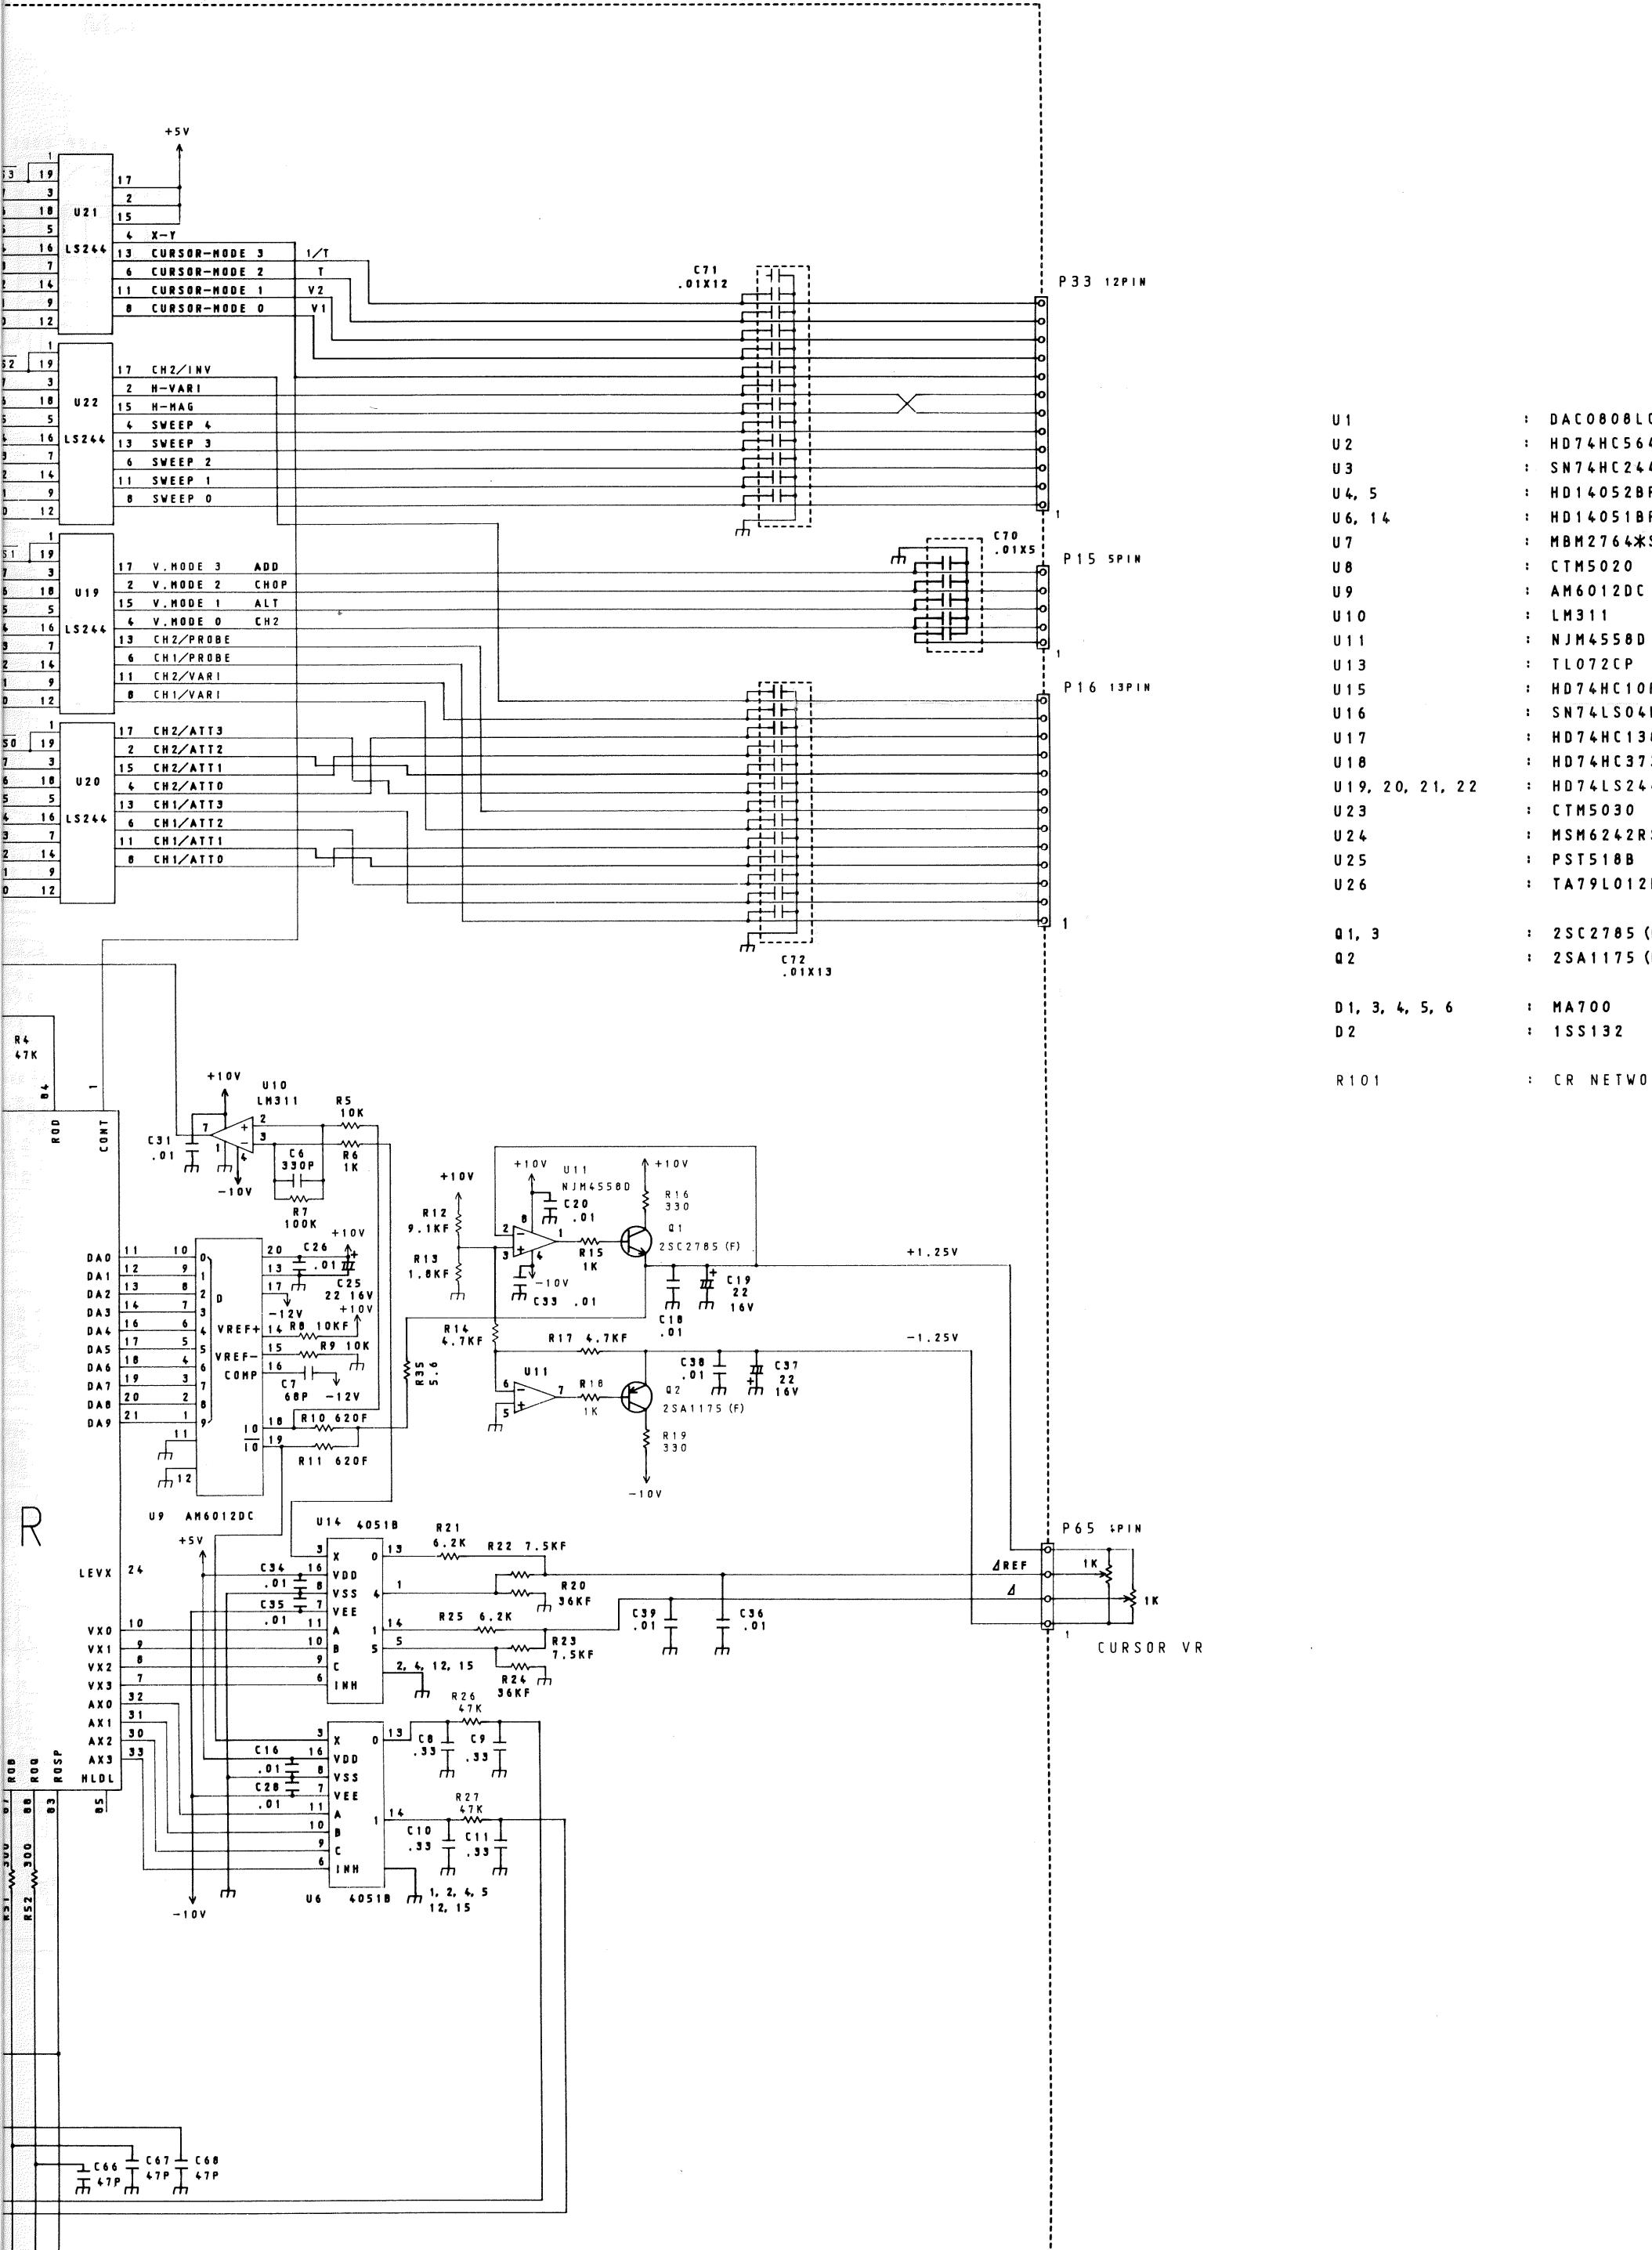


SCHEMATIC DIAGRAM

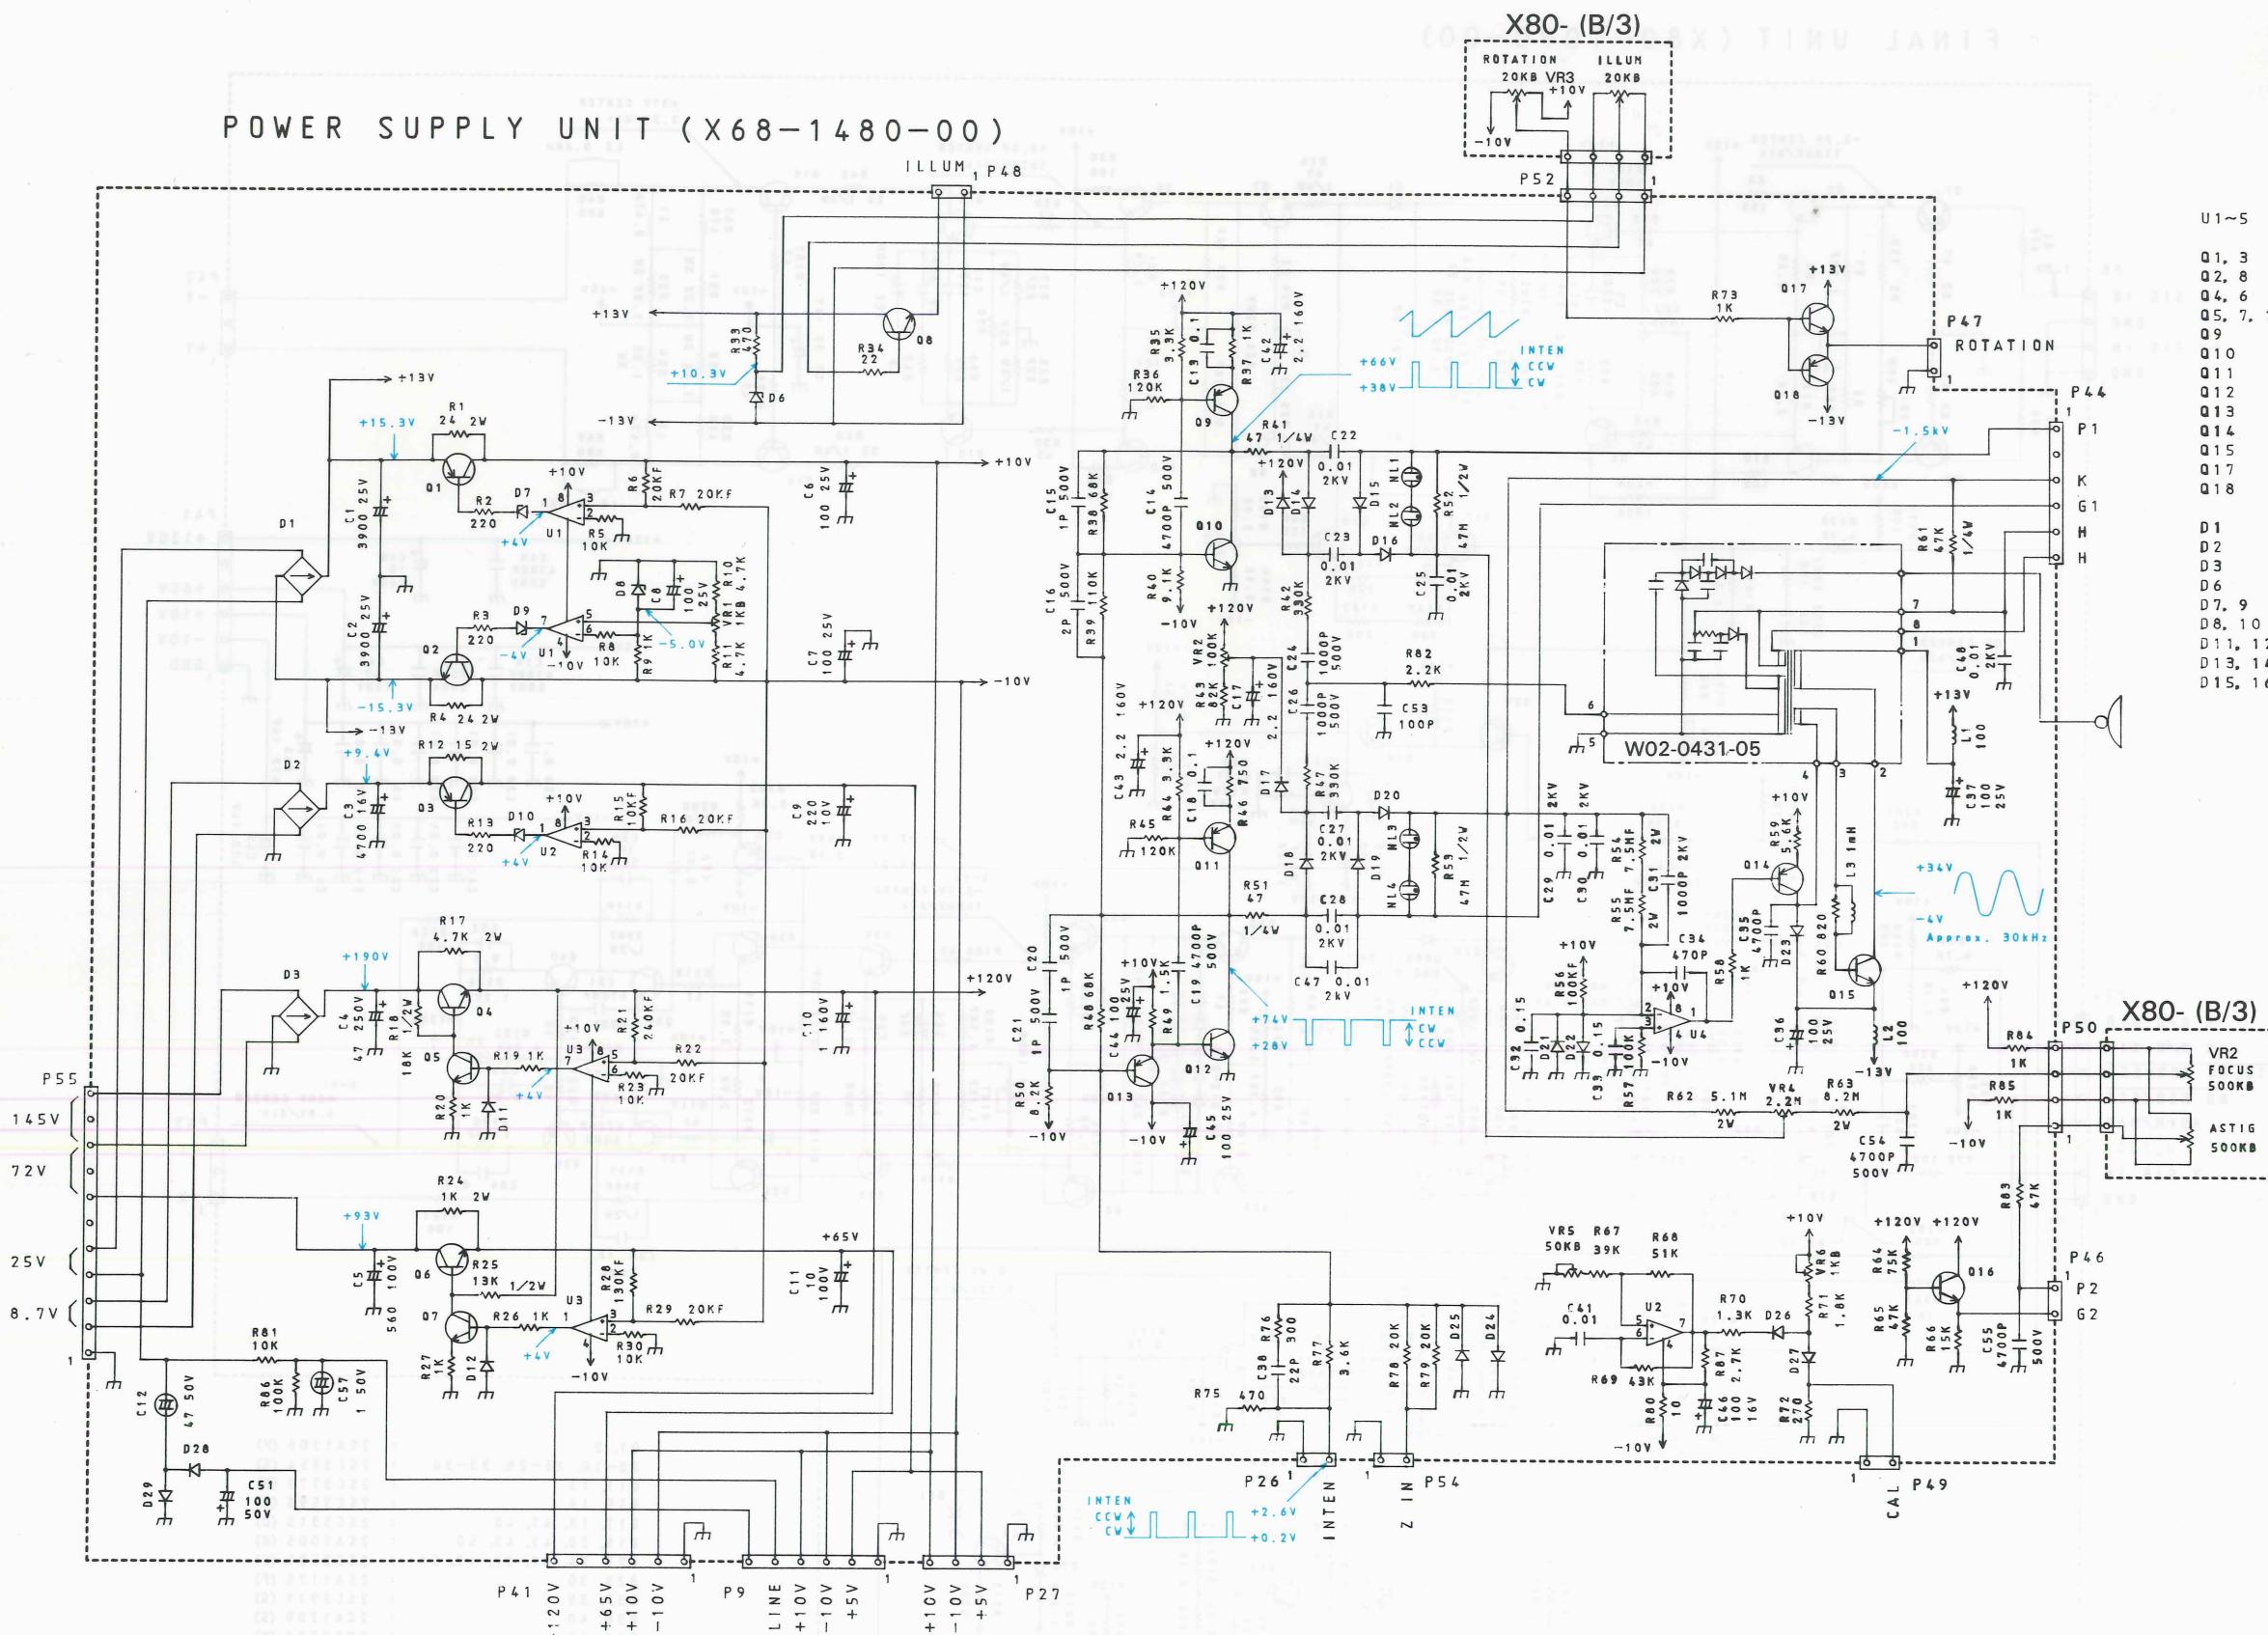

U 1~5	:	N J M 4 5 5 8 D
Q 1, 3	:	2 S B 1 1 3 3 (S)
Q 2, 8	:	2 S D 1 6 6 6 (S)
Q 4, 6	:	2 S C 3 7 4 9 (N)
Q 5, 7, 16	:	2 S C 2 2 7 1 (D)
Q 9	:	2 S A 1 2 0 8 (S)
Q 10	:	2 S C 2 9 1 0 (S)
Q 11	:	2 S A 1 2 1 0 (S)
Q 12	:	2 S C 2 9 1 2 (S)
Q 13	:	2 S A 1 0 0 5 (K)
Q 14	:	2 S A 1 1 7 5 (F)
Q 15	:	2 S D 6 1 3 (E)
Q 17	:	2 S C 1 3 8 4 (R)
Q 18	:	2 S A 6 8 4 (R)
 	:	
D 1	:	S 4 V B 4 0 F 1
D 2	:	S 2 V B 4 0 F 1
D 3	:	S 1 V B 4 0
D 6	:	M T 7 2 4 J C
D 7, 9	:	M T Z 1 0 J C
D 8, 10	:	M T Z 5 . 1 J B
D 11, 12, 21~29	:	I S S 1 3 2
D 13, 14, 17, 18	:	I S S 8 3
D 15, 16, 19, 20	:	I S R 3 5 - 2 0 0


SCHEMATIC DIAGRAM

FINAL UNIT (X80-1090-00)

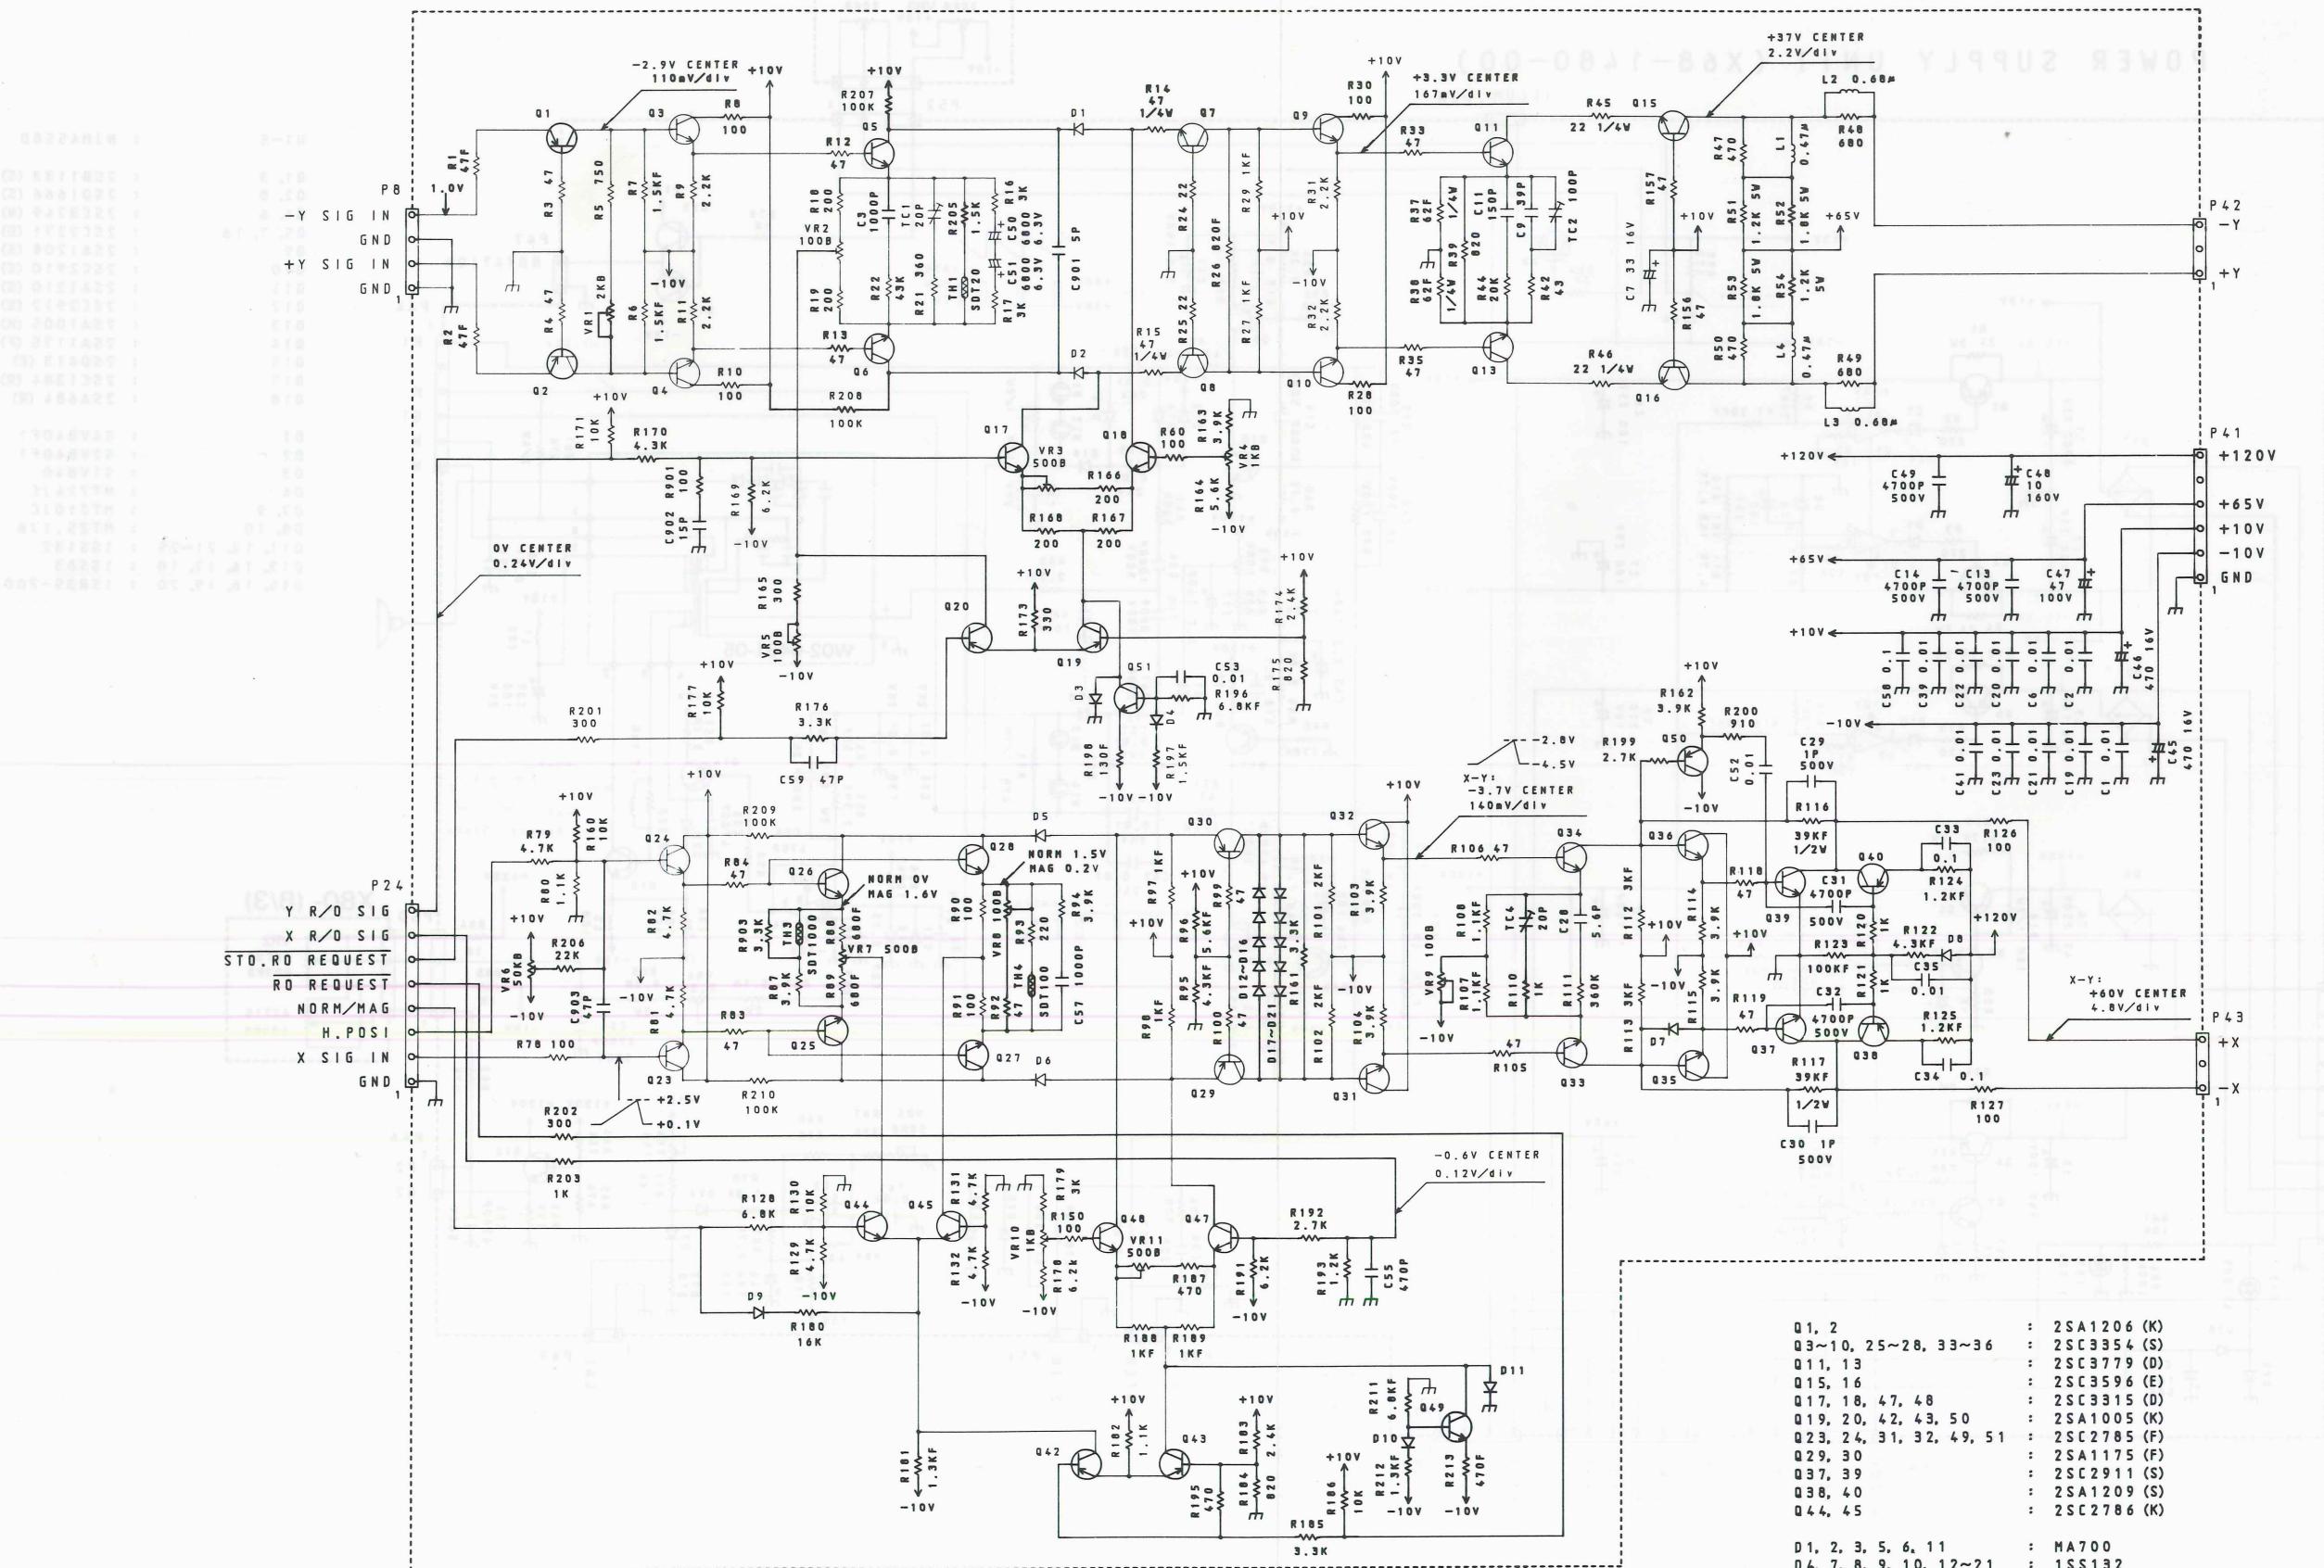


P.C. BOARD

POWER SUPPLY UNIT (X68-1480-00)

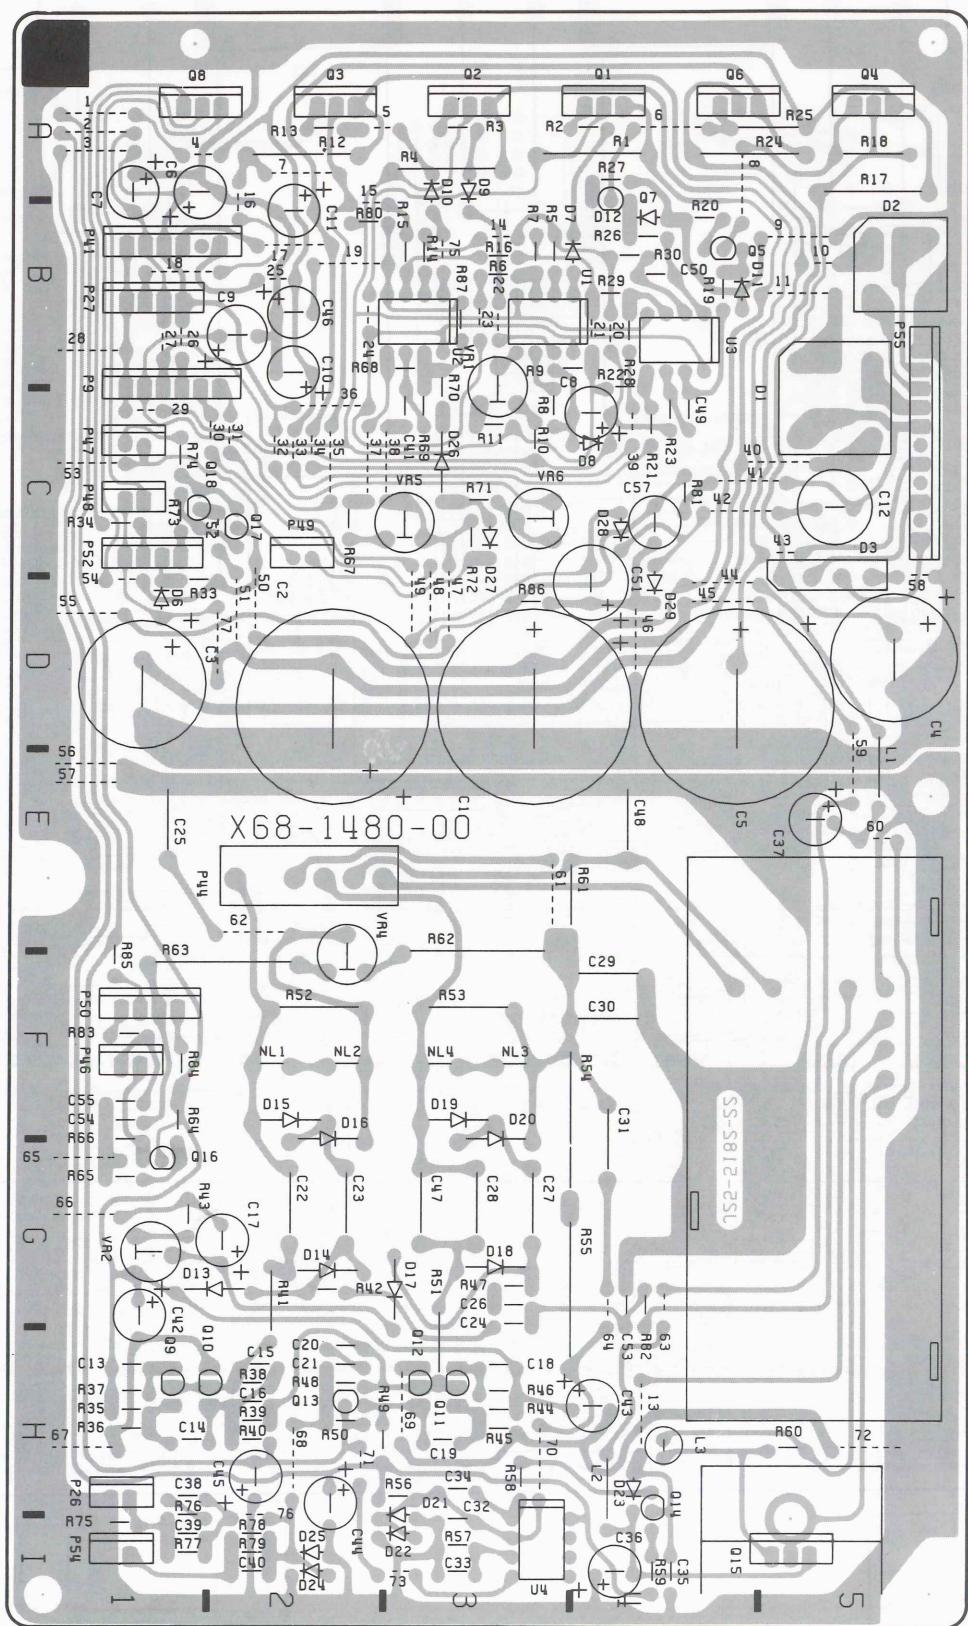


P.C. BOARD

V.PRE UNIT (X73-1750-00)

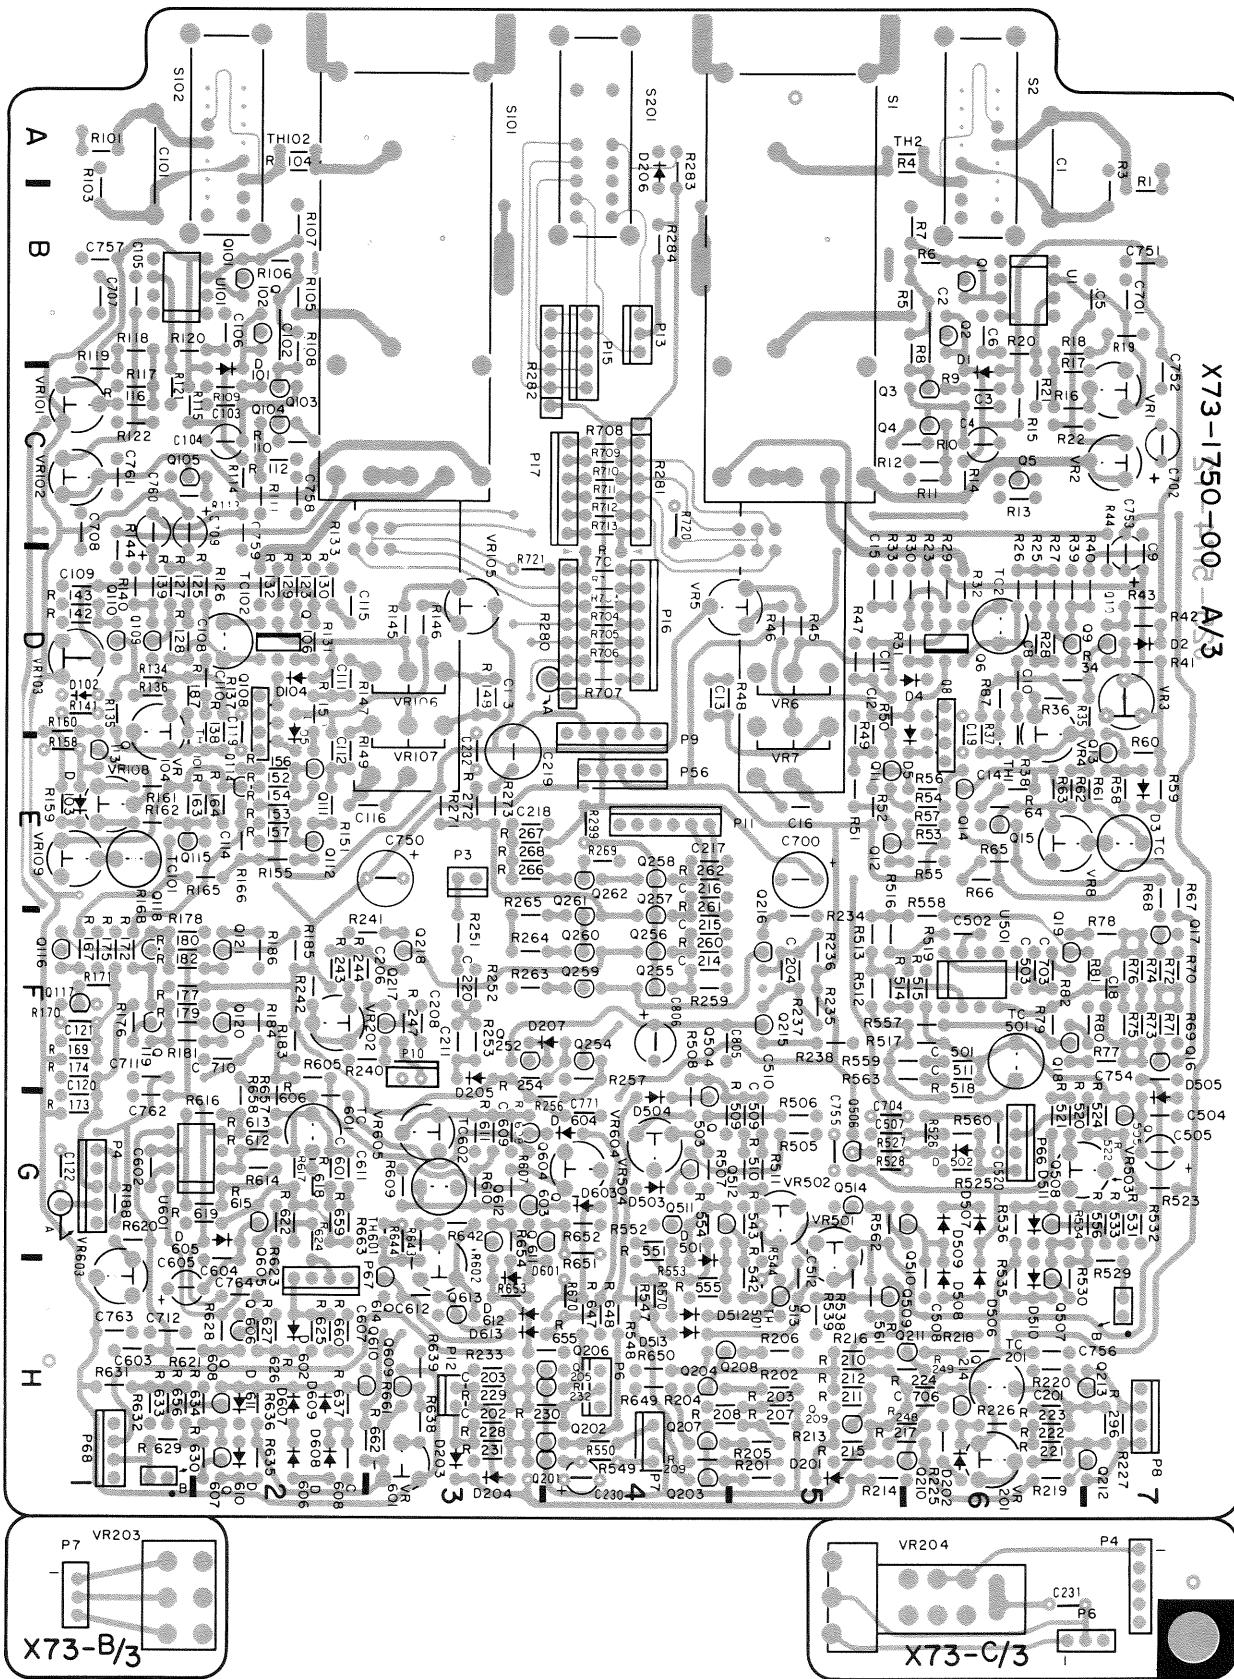


P.C. BOARD

SWEET UNIT (X74-1470-00)

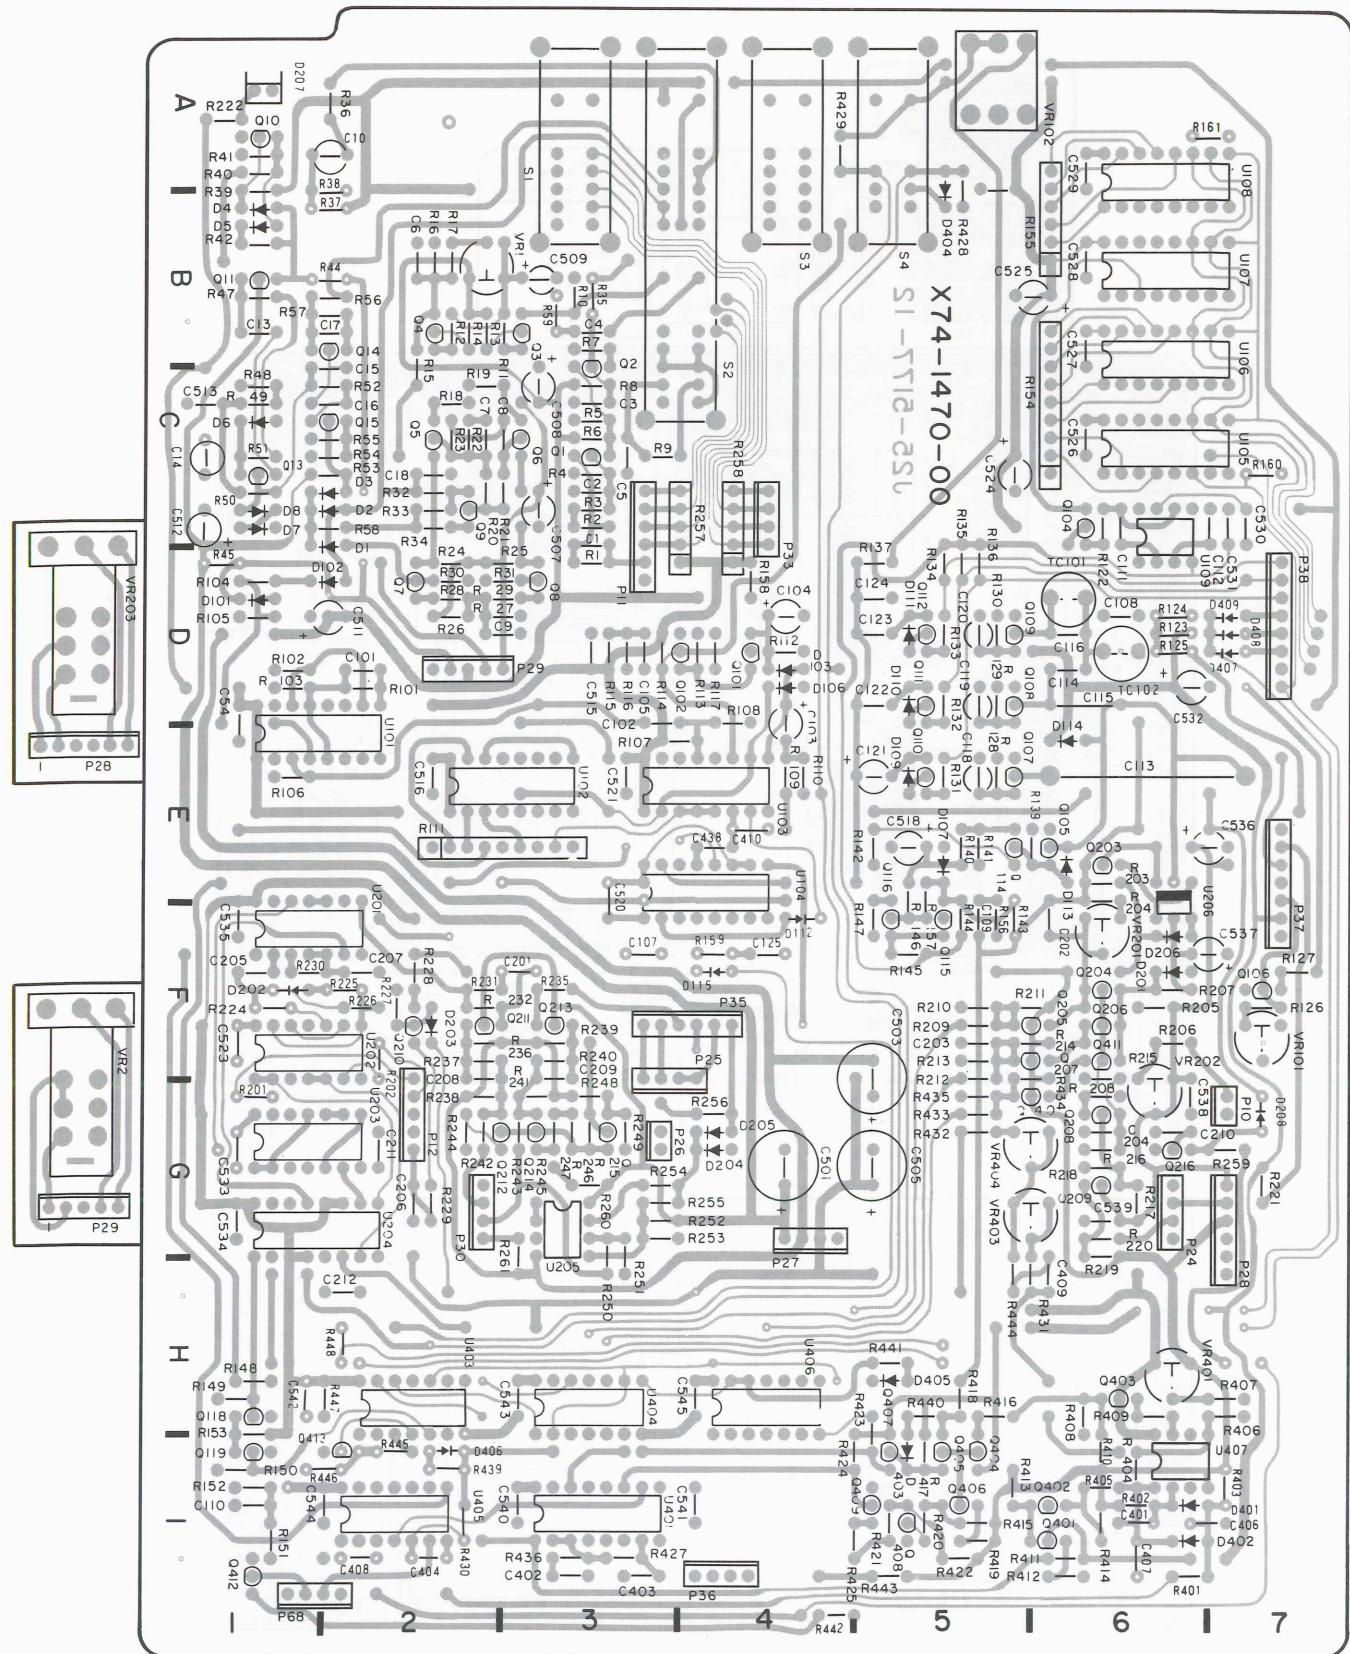


P.C. BOARD

R/O UNIT (X77-1450-00)

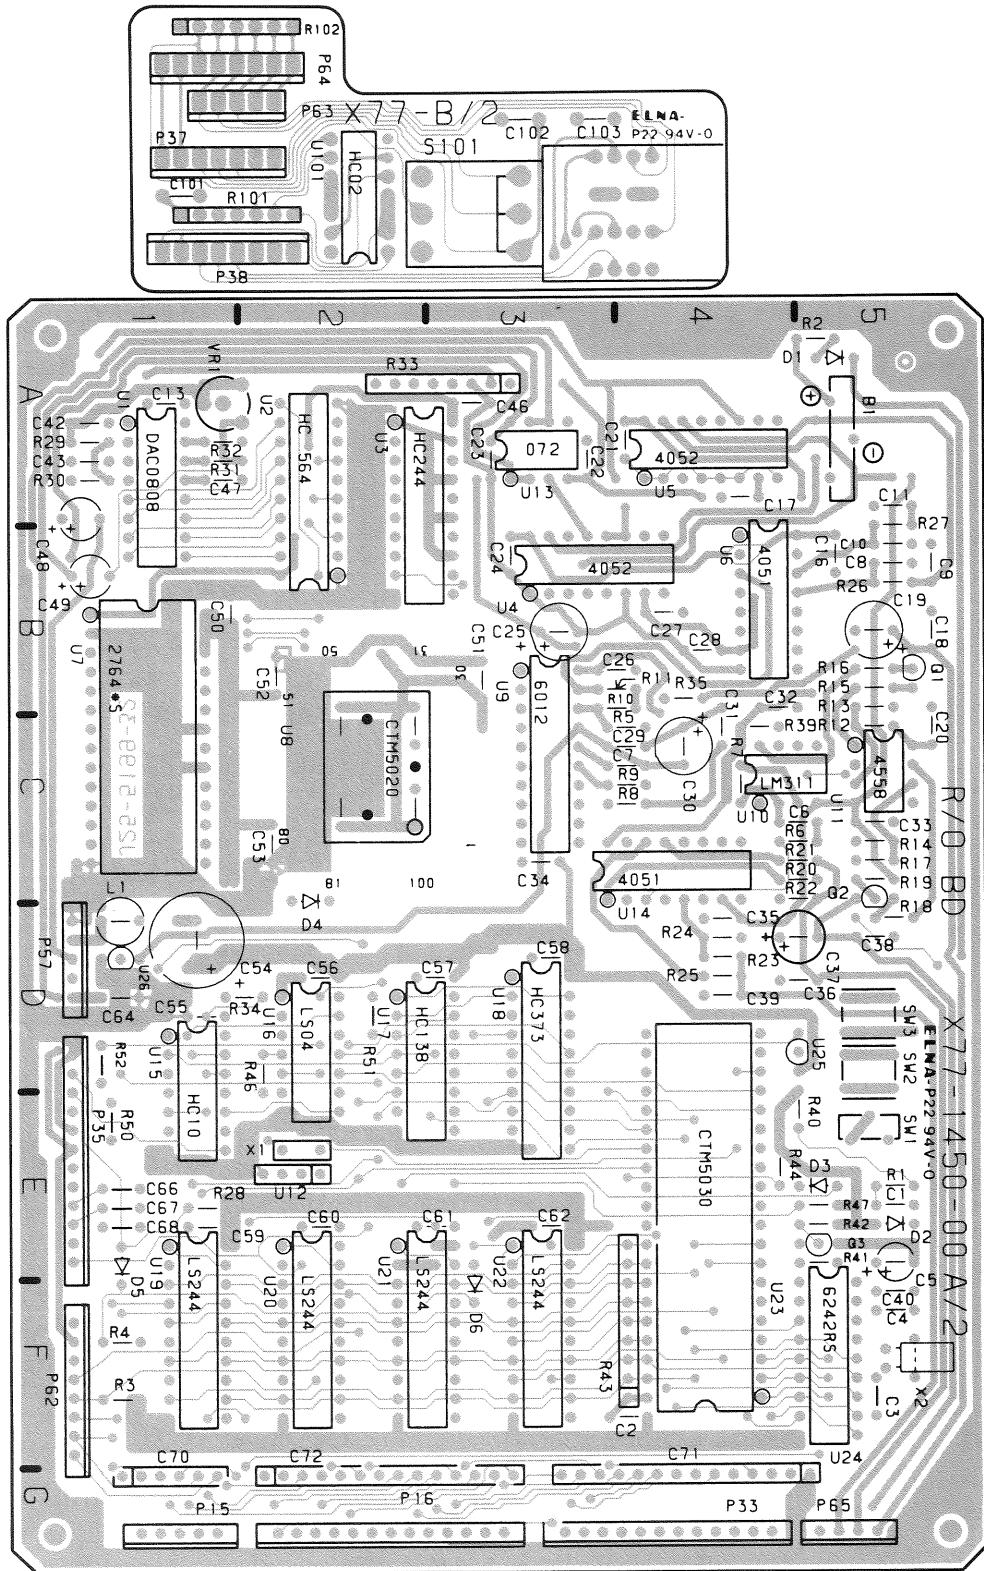


P.C. BOARD

LINE FILTER UNIT (X80-1060-00)

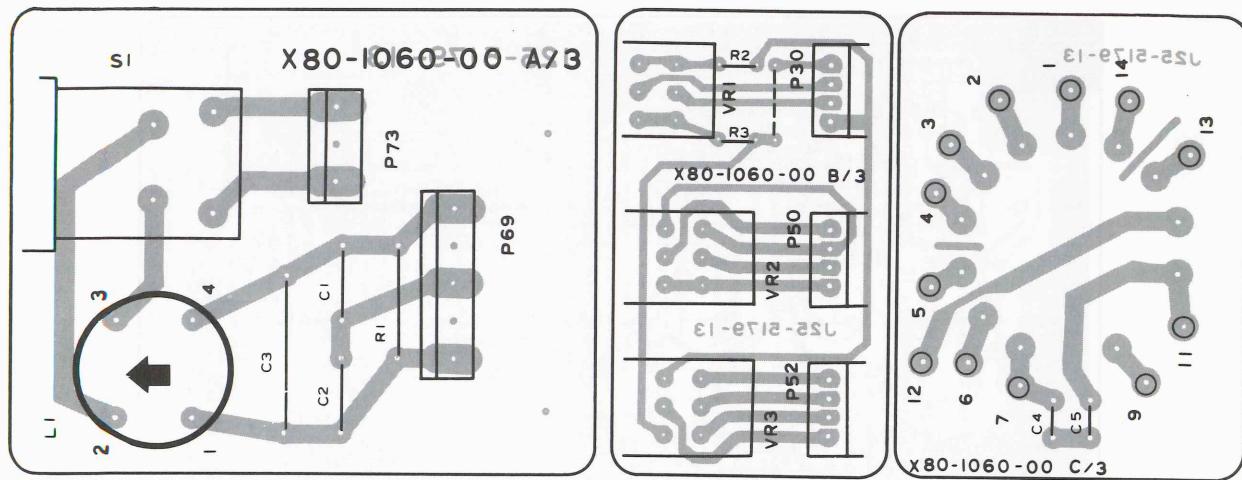


P.C. BOARD






FINAL UNIT (X80-1090-00)

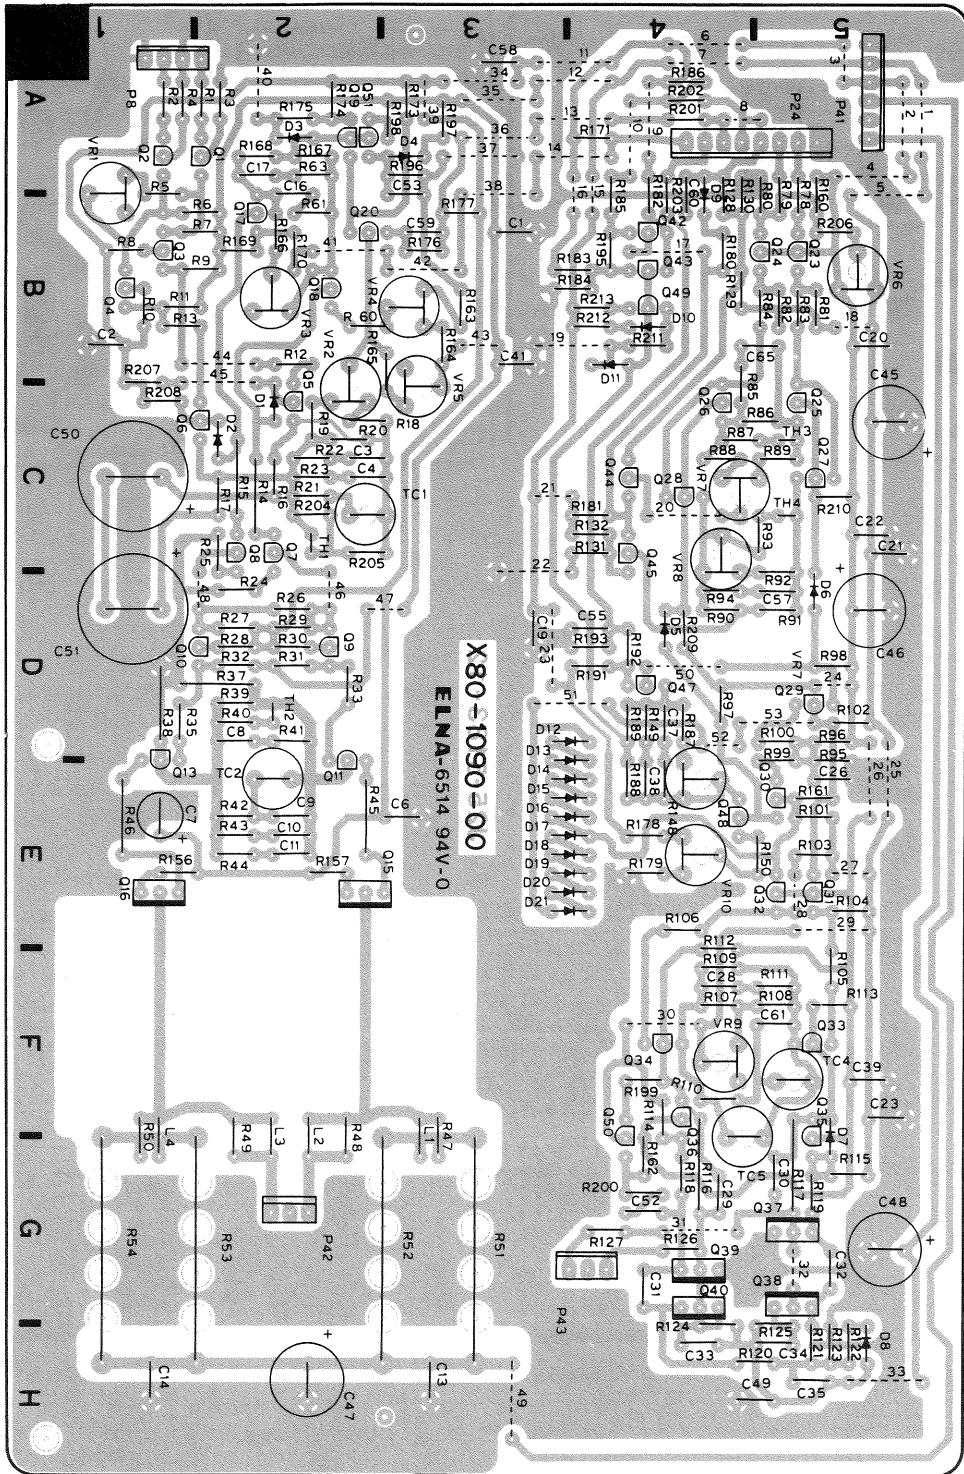


DISASSEMBLY

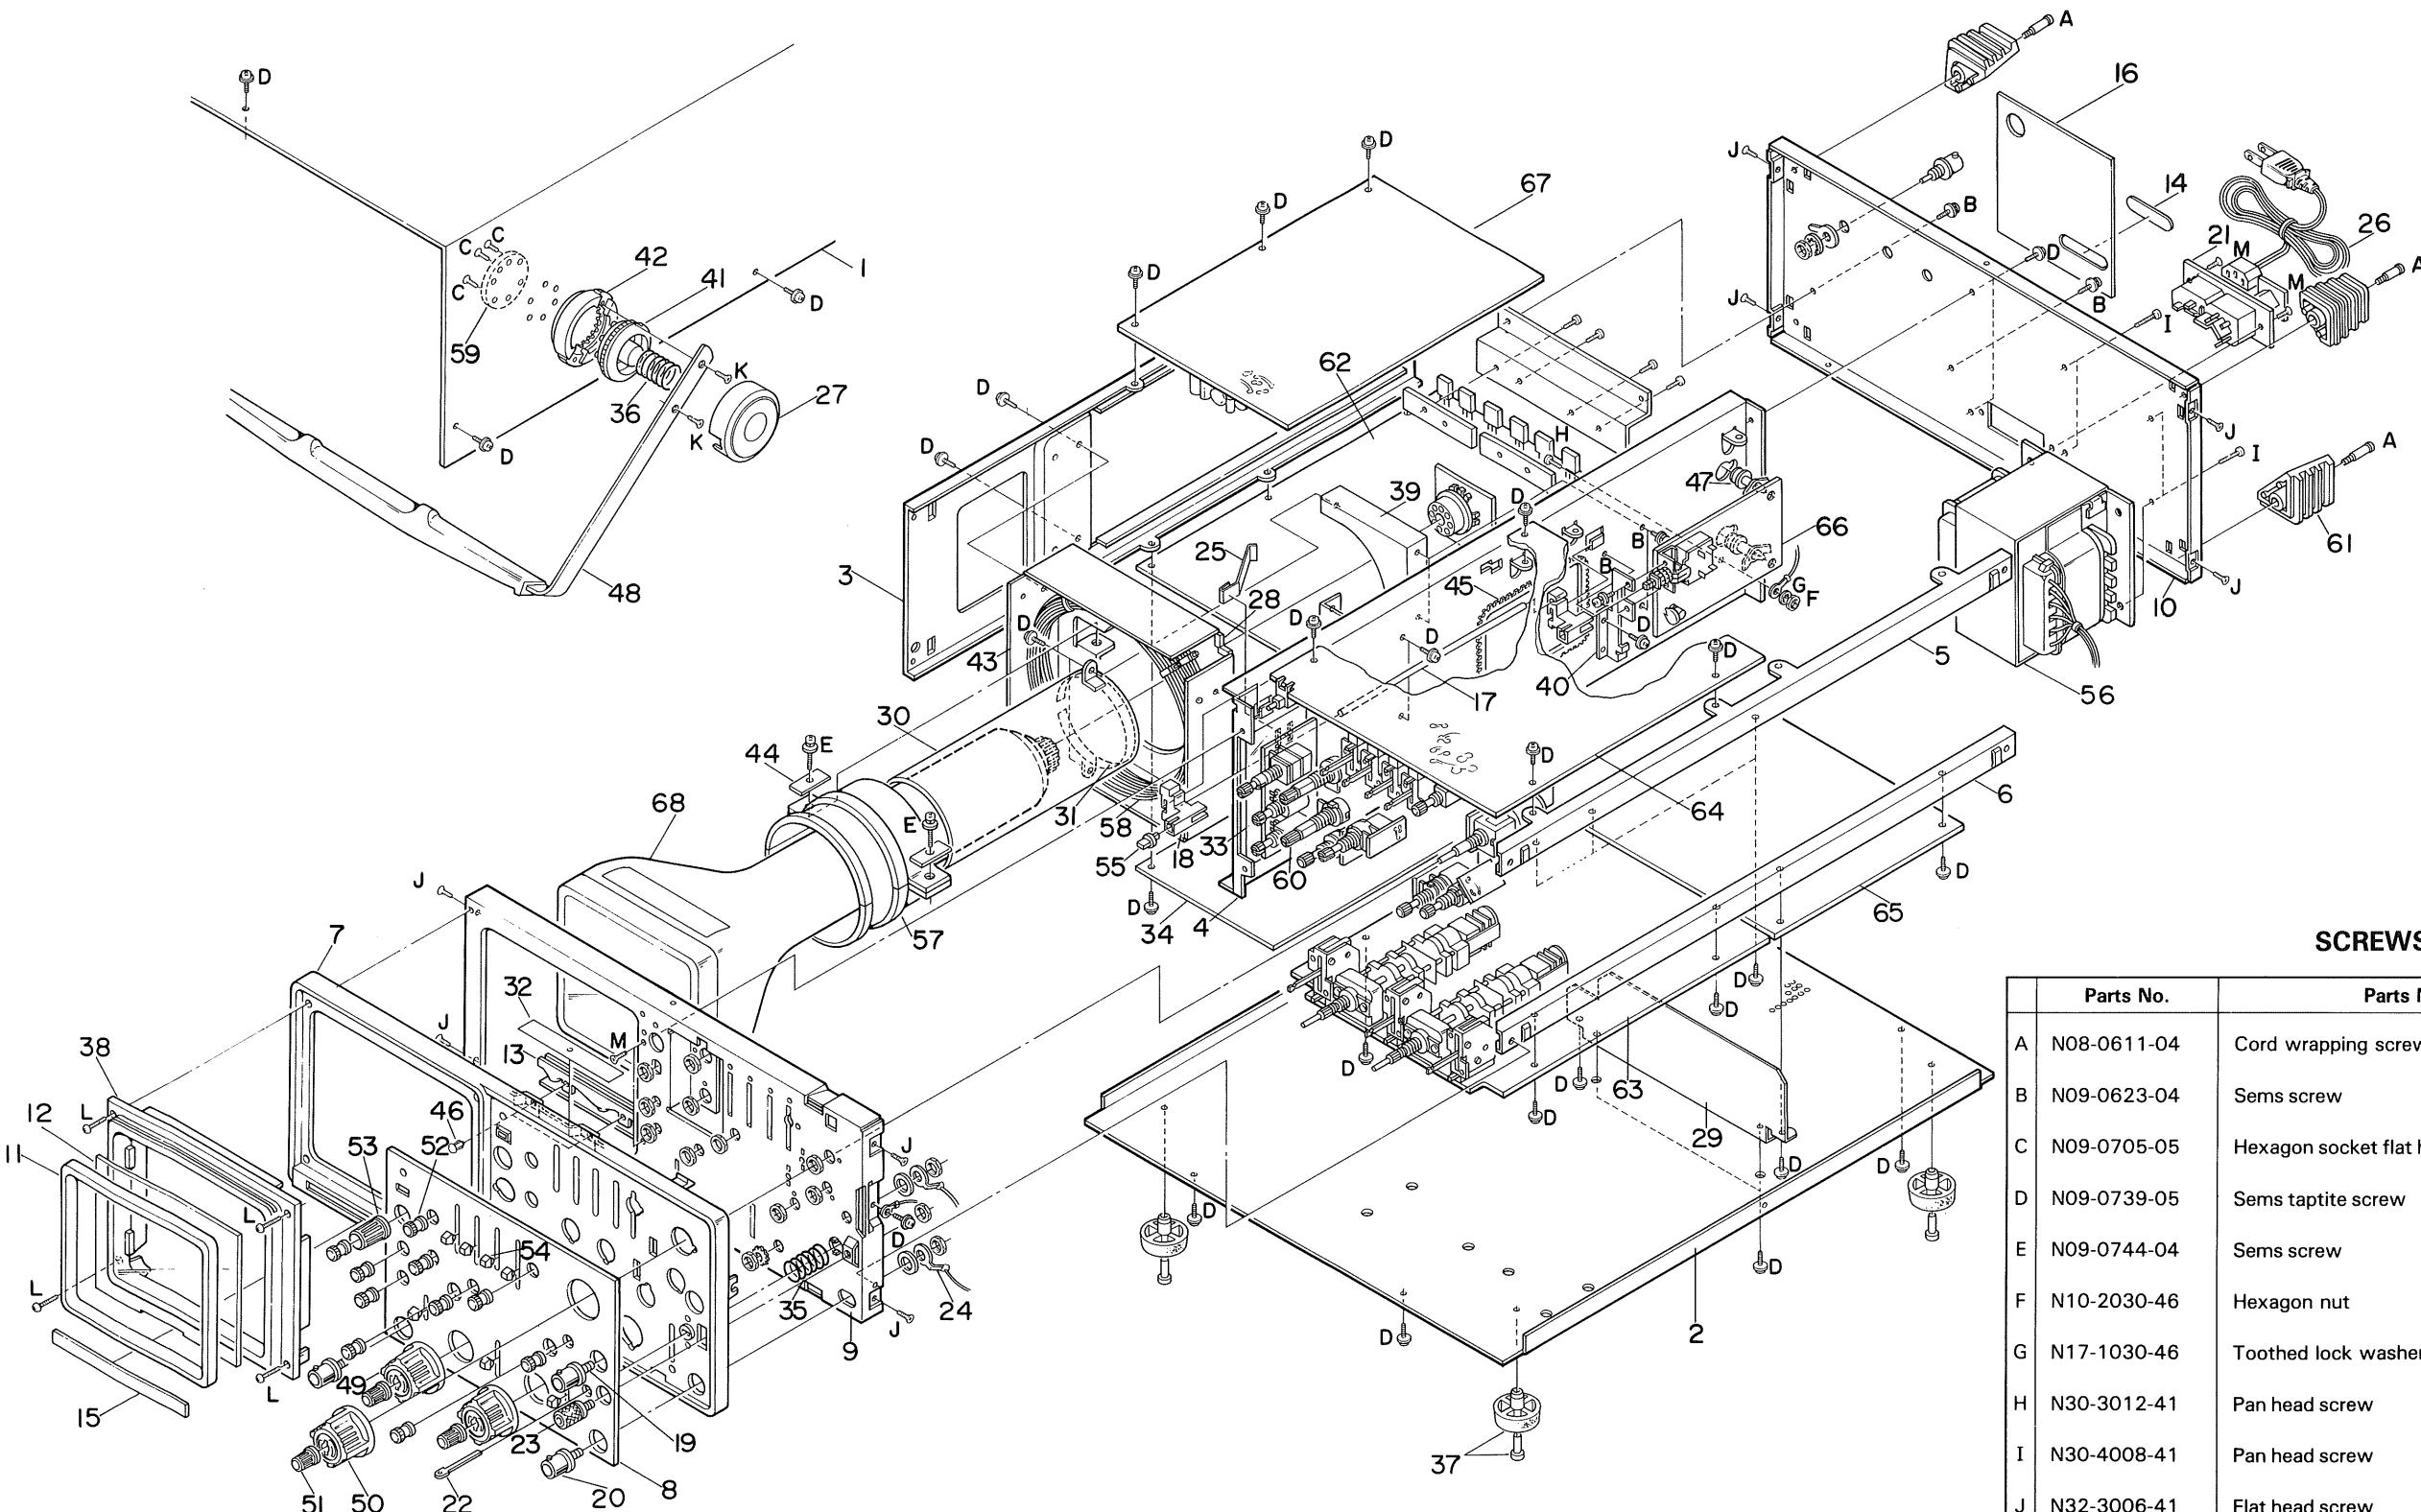

SEMICONDUCTORS

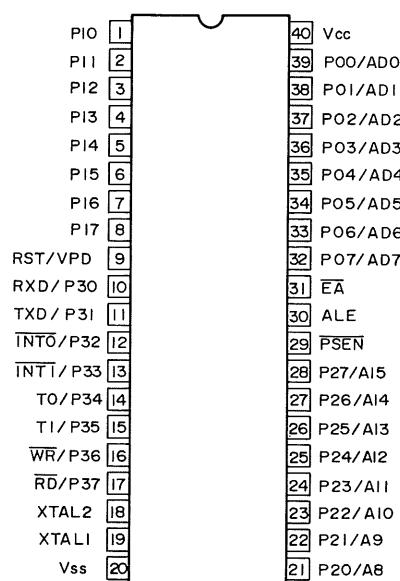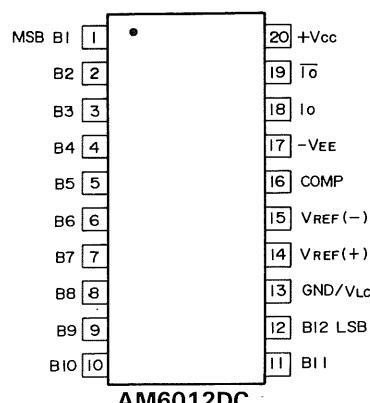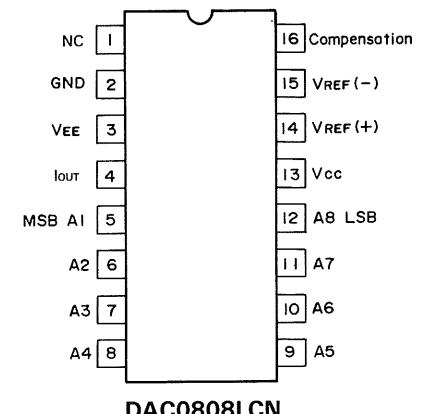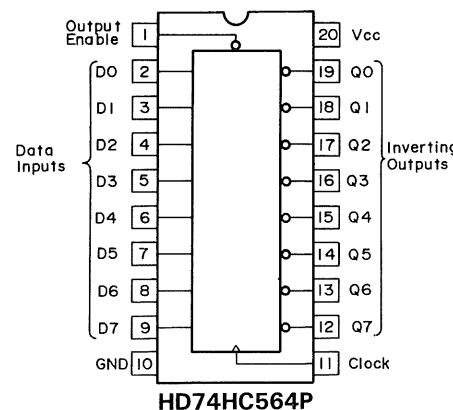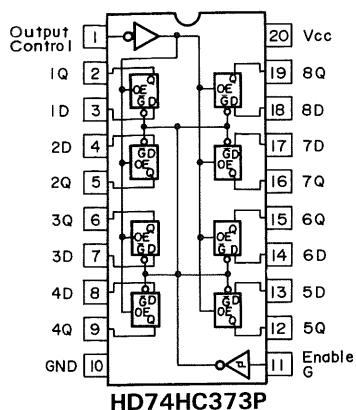


SEMICONDUCTORS

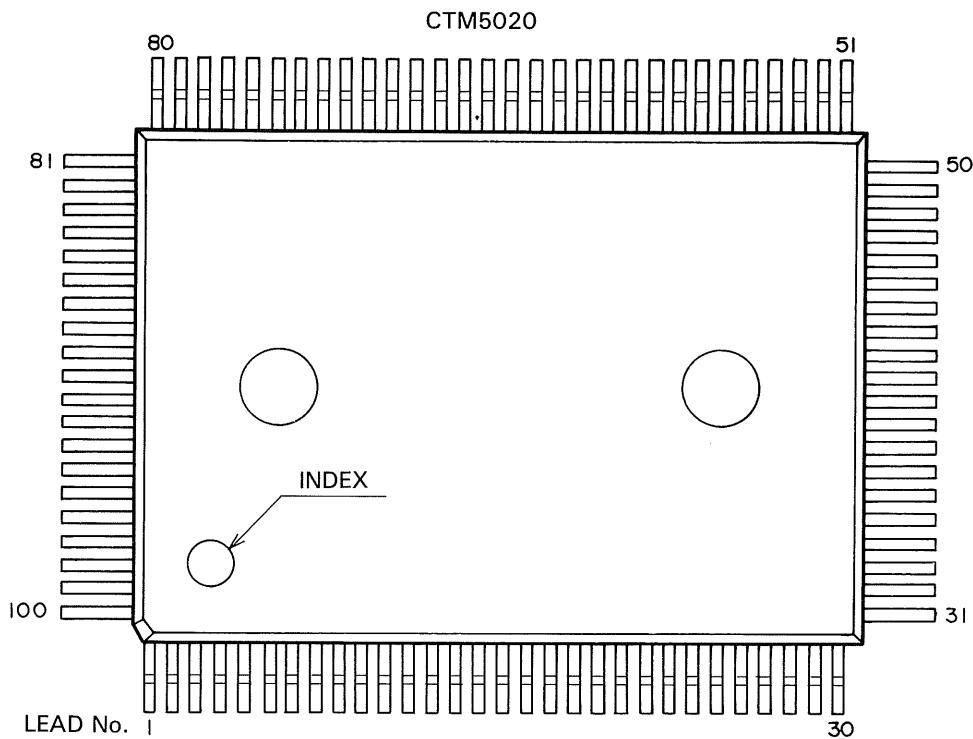


Pin No.	Pin Name						
1	CONT	26	TSD0	51	GETD	76	DD3
2	A13	27	TSD1	52	CA0	77	SING
3	VDD	28	VDD	53	VDD	78	VDD
4	A14	29	TSD2	54	CA4	79	R10M
5	A15	30	AX2	55	CA3	80	10M
6	INT0	31	AX1	56	CA2	81	HLDF
7	VX3	32	AX0	57	CA1	82	SGA
8	VX2	33	AX3	58	CD3	83	ROSP
9	VX1	34	HS2	59	CD2	84	ROD
10	VX0	35	HS1	60	CD4	85	HLDL
11	DA0	36	TDIO	61	CD1	86	ROUB
12	DA1	37	TWE	62	CD5	87	ROB
13	DA2	38	TCK1	63	DC4	88	ROQ
14	DA3	39	TST1	64	CD7	89	ROED
15	VSS	40	VSS	65	VSS	90	VSS
16	DA4	41	TST2	66	DC3	91	D7
17	DA5	42	TADD	67	DC2	92	D5
18	DA6	43	TCK2	68	CD6	93	D3
19	DA7	44	VS2	69	DC1	94	D1
20	DA8	45	VS1	70	DC0	95	ALE
21	DA9	46	VA0	71	CD0	96	D6
22	ROR	47	VA4	72	DD7	97	D4
23	ROA	48	VA3	73	DD6	98	D2
24	LEVX	49	VA2	74	DD5	99	D0
25	TCL	50	VA1	75	DD4	100	WR


SEMICONDUCTORS




2SA684(R)
2SA1005(K)
2SA1208(S)
2SC1384(R)
2SC2271(D)
2SC2910(S)




2SA1175(F)
2SC2785(F)
2SC2786(K)

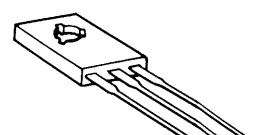


2SA1209(S)
2SA1210(S)
2SC2911(S)
2SC2912(S)
2SC3596(E)




2SB1133(S)
2SC3749(N)
2SD613(E)
2SD1666(S)




2SA1206(K)




2SC2671(H)
2SC3779(D)




2SC3315(D)
2SC3354(S,T)




2SC4072




2SC3381(GR)




2SK404(F)



2SK117(Y)



2SK332(F)



2SK241(Y)

A product of
KENWOOD CORPORATION
17-5, 2-chome, Shibuya, Shibuya-ku, Tokyo 150, Japan
