

40MHz READOUT OSCILLOSCOPE



CS-5230

40MHz OSCILLOSCOPE

CS-5235

SERVICE MANUAL

KENWOOD CORPORATION

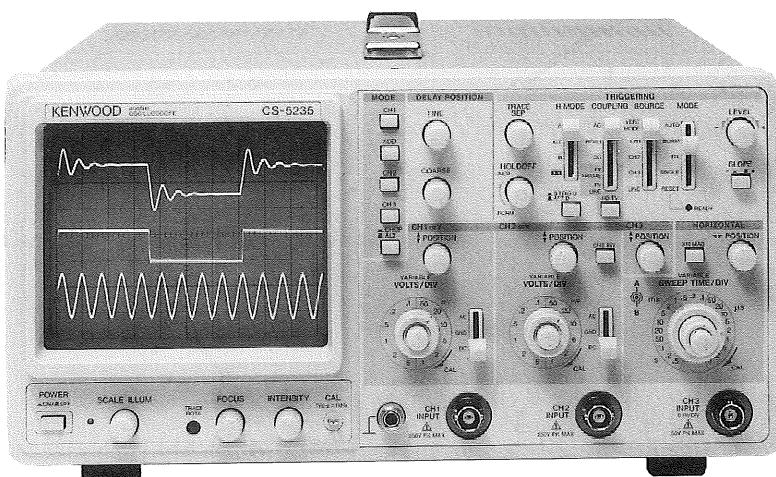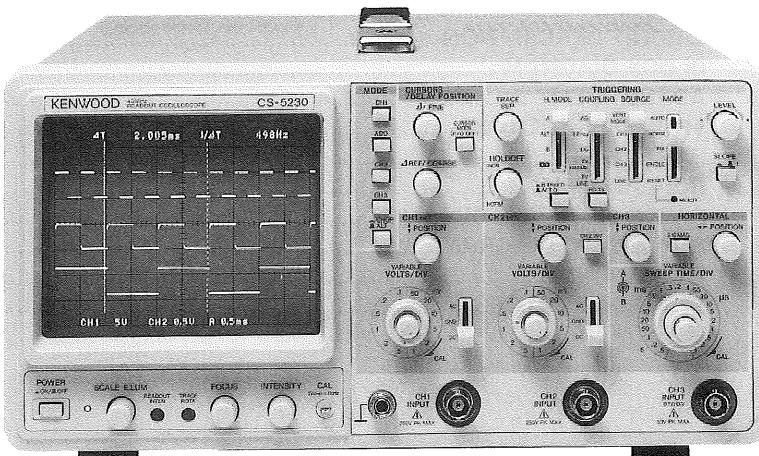

WARNING

The following instructions are for use by qualified personnel only. To avoid electric shock, do not perform any servicing other than contained in the operating instructions unless you are qualified to do so.

CONTENTS

SPECIFICATIONS	3
SAFETY	8
CIRCUIT DESCRIPTION	9
BLOCK DIAGRAM	15
ADJUSTMENT	17
TROUBLESHOOTING	26
PARTS LIST	28
DISASSEMBLY	29
PARTS LIST (ELECTRICAL)	30
SCHEMATIC DIAGRAM	49
P.C. BOARD	60
SEMICONDUCTORS	65

SPECIFICATIONS

CRT	
Type	150 mm rectangular tube with an integral graticule
Acceleration voltage	Approx. 12 kV
Effective area	8 × 10 divisions (1 division = 10 mm)
VERTICAL AXIS (COMMON TO CHANNELS 1 AND 2)	
Sensitivity (+10 to +35°C)	1 mV, 2 mV/div : ±5%, 5 mV to 5 V/div: ±3%
Attenuation	1-2-5 steps, 12 ranges, fine control between ranges
Input impedance	1 MΩ ± 2%, approx. 25 pF
Frequency response (-3 dB) (+10 to +35°C)	5mV to 5V/div DC : DC to 40 MHz AC : 5Hz to 40 MHz 1mV to 2mV/div DC: DC to 20MHz, AC: 5Hz to 20MHz
Rise time (+10 to +35°C)	5mV to 5V/div Approx. 8.8 ns 1mV to 2mV/div Approx. 17.5 ns
Signal delay time	The leading edge may be checked using a square wave of the rise time less than that of this model.
Crosstalk	-40 dB or less (at 1 kHz)
△Maximum input voltage	500 Vp-p or 250 V (DC+AC peak, 1 kHz or less)
VERTICAL AXIS (CH3)	
Sensitivity (+10 to +35°C)	0.1 V/div: ±3%
Input impedance	1MΩ ± 2%, approx. 25 pF
Frequency response (-3 dB) (+10 to +35°C)	DC to 40 MHz
Rise time (+10 to +35°C)	Approx. 8.8 ns
Signal delay time	The leading edge may be checked using a square wave of the rise time less than that of this model.
△Maximum input voltage	100 Vp-p or 50 V (DC+AC peak, 1 kHz or less)
Operation	Single trace: CH1, CH2, CH3 or ADD single trace operation Multi-trace : 2 to 4 traces of CH1, CH2, CH3 and ADD ALT/CHOP: Display by selecting ALT and CHOP ADD : Composite waveform of CH1 and CH2 signals are displayed.

SPECIFICATIONS

Chop frequency	Approx. 250 kHz (in multi-trace operation)	
Channel polarity	Normal or inverted, CH2 only inverted	
Horizontal axis (CH2, except for $\times 10$ MAG operation)		
Sensitivity (+10 to +35°C)	Same as vertical axis (CH2)	
Input impedance	Same as vertical axis (CH2)	
Frequency response (-3 dB) (+10 to +35°C)	DC: DC to 1 MHz, AC: 5 Hz to 1 MHz	
X-Y phase difference	3° or less at 100 kHz	
Operation mode	X-Y mode is selected with H. MODE CH1: Y-axis, CH2: X-axis	
△Maximum input voltage	Same as vertical axis (CH2)	
SWEEP		
Sweep types	A : A sweep ALT : Alternate A sweep and B sweep B' : B sweep X-Y : X-Y oscilloscope operation	
Sweep time (+10 to +35°C)	A sweep	0.5s to 0.1μs/div ±3% 1-2-5 steps, 21 ranges, fine adjustment between ranges
	B sweep	50ms to 0.1μs/div ±3% 1-2-5 steps, 18 ranges, fine adjustment between ranges
Sweep magnified operation (+10 to +35°C)	$\times 10 \pm 5\%$ ($\pm 8\%$ for over 0.5 ns/div)	
Linearity (+10 to +35°C)	±3% ($\pm 5\%$ in $\times 10$ MAG operation)	
HOLDOFF	Continuously variable from A sweep NORM position	
Trace separation	B sweep is continuously variable by ±4 divisions or more with respect to A sweep.	
Delayed sweep operation	Continuous delay operation (AFTER DELAY) Synchronous delay operation (B TRG'D) : Synchronous with the trigger signal	
Delay time	Continuous control by 0.2 to 10 divisions for 0.5 div to maximum speed sweep	
Delay time error (+10 to +35°C)	[CS - 5230] : ±(3% of set value + 1% of full scale) + (0 to 300 ns) [CS - 5235] : Reading on CRT ±4% (0 to 300 ns)	
Delay jitter	10000 : 1 of a value 10 times as high as A sweep setting	

SPECIFICATIONS

TRIGGERING	
Trigger modes	AUTO : Automatic free running with no signal NORM : Triggered sweep FIX : Sweep at triggering point set to center of signal amplitude SINGLE: Single sweep mode RESET : Restarting single sweep operation
Trigger signal sources	VERT: Input signal selected for V. mode CH1 : Channel 1 input signal CH2 : Channel 2 input signal CH3 : Channel 3 input signal LINE: Commercial power line
Trigger coupling (For trigger sensitivity, see the table below.)	AC : AC coupling from 10 Hz HFREJ : Low-pass filter coupling up to 30 kHz DC : DC coupling TV FRAME: Composite video signal, vertical synchronization separation TV LINE : Composite video signal, horizontal synchronization separation

Trigger sensitivity (+10 to +35°C)

MODE	COUPLING	Signal frequency	Sensitivity (Amplitude)	
			NORM	FIX *
NORM	AC	10Hz to 20MHz	1div	1.5div
		20M to 40MHz	1.5div	2div
	HFREJ	10Hz to 30kHz	1div	1.5div
		over 30kHz	>min.	>min.
	DC	DC to 20MHz	1div	1.5div
		20M to 40MHz	1.5div	2div
	TV-F, -L	Composite video signal	1.5div	
	HDTV	HDTV video signal	1.5div	

AUTO : Same as above specifications for above 40Hz.

(The table shows the sensitivities in terms of the amplitude displayed on the CRT.)
(>min. for the HFREJ sensitivity shows that the amplitude necessary for synchronization increases.)

FIX * : Same as above specifications for above 50Hz.

SPECIFICATIONS

CALIBRATION SIGNAL : POSITIVE SQUARE WAVE, 1 V_{p-p} ±3%, APPROX. 1 kHz

INTENSITY MODULATION

Input voltage	Darkens at TTL level (+5 V).
Input impedance	Approx. 10 kΩ
Frequency response (+10 to +35°C)	DC to 3.5 MHz
△Maximum input voltage	100 V _{p-p} or 50V (DC+AC peak)

CH1 OUTPUT SIGNAL (WITH 50 Ω LOAD)

Output voltage	Approx. 50 mV _{p-p} /div
Output impedance	Approx. 50 Ω
Frequency response (-3dB)	1, 2 mV
	5 mV to 100 Hz to 20 MHz
5 mV to	100 Hz to 40 MHz

TRACE ROTATION : TRACE ANGLE IS ADJUSTABLE WITH A SEMI-FIXED CONTROL ON PANEL.

POWER SUPPLY

Voltage	100/120/220/230 VAC ± 10 %
Frequency	50 Hz or 60 Hz
Power consumption	Approx. 43 W, 39 W Approx. 52VA, 49VA

DIMENSIONS AND WEIGHT (VALUES ENCLOSED IN PARENTHESES INCLUDE PROJECTIONS.)

Width	300 mm (300 mm)
Height	150 mm (172 mm)
Depth	400 mm (469 mm)
Weight	Aprrox. 8.7 kg

OPERATING TEMPERATURE AND HUMIDITY

Operating temperature and humidity	0 to 40°C, 85% RH or less
Storage temperature and humidity	-20 to 70°C, 85% RH or less

ACCESSORIES

Probe	PC-33 : 10 MΩ ±1%, 22 pF±10%, 10 : 1 [CS-5230] PC-35 : 10 MΩ ±1%, 19.5 pF±10%, 10 : 1 [CS-5235]
	2 each
Instruction manual	1 copy
Adjusting screwdriver	1
Power cord	1
Replacement fuse	1 A×2 (for 100 V area) 630 mA×2 (for 200 V area)

SPECIFICATIONS

[The specifications shown below do not apply to the CS-5235.]

READOUT	
Set values	CH1 and CH2 scale factors (with probe detection), CH3 scale factor (0.1 V/div fixed, with no probe detection), V-UNCAL, ADD, INV, A/B sweep scale factors (MAG-converted), sweep - UNCAL, DELAY TIME, TRIG' D, X-Y
Cursor modes (Between Δ REF and Δ cursors) In X-Y mode, only Δ V1 may be set.	Δ V1 : Displayed in voltage with conversion according to CH1 scale factor Δ V2 : Displayed in voltage with conversion according to CH2 scale factor Δ V3 : Displayed in voltage with conversion according to CH3 0.1 V/div Δ T : Displayed in time with conversion according to A sweep scale factor 1/ Δ T: Displayed in frequency with conversion according to A sweep scale factor
In V, H-VARI or UNCAL mode	RATIO: Voltage ratio and time ratio are displayed, with 5 divisions on the CRT as 100%. PHASE: Phase difference is displayed, with 5 divisions on the CRT as 360°.
Cursor measurement	Resolution : 10 bits Measuring error: $\pm 4\%$ Measuring range: ± 3.6 divisions or more vertically from CRT center. ± 4.6 divisions or more horizontally from CRT center.

■The specifications shown above are subject to change without notice.

SAFETY

SAFETY

Before connecting the instrument to a power source, carefully read the following information, then verify that the proper power cord is used and the proper line fuse is installed for power source. The specified voltage is shown at the fuse holder of the AC inlet. If the power cord is not applied for specified voltage, there is always a certain amount of danger from electric shock.

Line voltage

This instrument operates using ac-power input voltages that 100/120/220/230 V at frequencies from 50 Hz to 60 Hz.

Power cord

The ground wire of the 3-wire ac power plug places the chassis and housing of the oscilloscope at earth ground. Do not attempt to defeat the ground wire connection or float the oscilloscope; to do so may pose a great safety hazard. The appropriate power cord is supplied by an option that is specified when the instrument is ordered.

The optional power cords are shown as follows in Fig. 1.

Line fuse

The fuse holder is located on the rear panel and contains the line fuse. Verify that the proper fuse is installed by replacing the line fuse.

Voltage conversion

This oscilloscope may be operated from either a 100 V to 230 V, 50/60 Hz power source. Use the following procedure to change from 100 to 230 volt operation or vice versa.

1. Remove the fuse holder.
2. Replace fuse F 1 with a fuse of appropriate value, 1 amp for 100 VAC to 120 VAC operation. 630 m amp for 220 VAC to 230 VAC operation.
3. Reinsert it for appropriate voltage range.
4. When performing the reinsertion of fuse holder for the voltage conversion, the appropriate power cord should be used. (See Fig. 1.)

Plug configuration	Power cord and plug type	Factory installed instrument fuse	Line cord plug fuse	Parts No. for power cord
	North American 120 volt/60 Hz Rated 15 amp (12 amp max; NEC)	1 A, 250 V Fast blow 6 x 30 mm	None	E30-1951-05
	Universal Europe 220 volt/50 Hz Rated 16 amp	North Europe 630 mA, 250 V Slow blow 5 x 20 mm	None	E30-1952-05
		Other Europe 630 mA, 250 V Slow blow 6 x 30 mm		
	U.K. 240 volt/50 Hz Rated 13 amp	630 mA, 250 V Slow blow 6 x 30 mm	None	E30-1947-05
	Australian 240 volt/50 Hz Rated 10 amp	630 mA, 250 V Slow blow 6 x 30 mm	None	E30-1821-15
	North American 240 volt/60 Hz Rated 15 amp (12 amp max; NEC)	630 mA, 250 V Slow blow 6 x 30 mm	None	—
	Switzerland 240 volt/50 Hz Rated 10 amp	630 mA, 250 V Slow blow 6 x 30 mm	None	—

Fig. 1 Power Input Voltage Configuration

CIRCUIT DESCRIPTION

VERTICAL PREAMPLIFIER UNIT

CH1, CH2

Each of the CH1 and CH2 inputs passes through an AC/DC/GND switch and enters the 1st attenuator (1/1, 1/10, 1/100).

The 1st attenuator is used in combination with the 2nd attenuator (1/1, 1/2, 1/4, 1/10) and the 5-fold function of the 2nd amplifier, to switch the 12 vertical ranges.

The head amp is composed of Q102 and U101 (Q202 and U201) and is a 1/1 buffer amp with an input impedance of 1 megohms and used for conversion of impedance. Q102 (Q202) is the source-follower. This head amp is installed between the 1st and 2nd attenuators.

Starting from the 2nd amp, this unit takes the differential amplifier configuration. The functions of U102 (U202) include the variation and inversion functions. The variation function allows to vary the gain continuously according to the voltage applied to pin 5. The inversion function allows to invert the phase according to the voltages applied to pins 6 and 7. As this function is provided only for CH2, CH1 is fixed. At the CH2 side, switch is done by Q215. Q103 (Q203) is the regulated current supply for U102 (U202).

Q106 and Q107 (Q206 and Q207) form an emitter-grounded amp.

Q108 to Q111 (Q208 to Q211) form the cascode amp of the differential amp. The vertical position can be moved by regulating the current applied to the emitter of Q111 (Q211) based on the panel operation.

CH3

With CH3, the attenuator is fixed. The signal impedance is converted by the buffer amp of source follower Q303 and regulated current supply Q304 and the signal is sent to emitter-follower Q305. Q305 is the signal side input stage of the differential amp.

Emitter-follower Q306 is the input stage of a constant-potential differential amp.

The outputs from Q305 and Q306 are input to the differential type cascode amp formed by Q307, Q308, Q310 and Q311. The current of the cascode amp is determined by regulated current supply Q309. The vertical position can be moved by regulating the current applied to the emitter of Q311 based on the panel operation.

Channel selector, delay line drive

As for the outputs from the position amps of the channels, only the signal of the channel with which the cathodes of CH1 - D104, D105, CH2 - D204, D205, CH3 - D301, D302, D304, D305 are turned "H" by the signals from V-MODE LOGIC is sent through CH1 - D103, D106, CH2 - D203, D206, CH3 - D303, D306 and transmitted to the delay line driver.

Q2 and Q3 form a feedback amp. Q1 lets the excessive bias current flow when CH1 or CH2 is in ADD mode.

Trigger amp, trigger selector

With CH1 (CH2), the differential outputs from U102 (U202) are input

to the emitter-followers Q152 and Q153 (Q252 and Q253), where Q153 (Q253) forms a cascode amp with Q114 (Q214).

With CH3, the signal after the buffer amp is sent through the buffer of emitter-follower Q314, feedback amp Q312 an output as current from the collector of emitter-follower Q313.

Only the signal of the channel with which the cathode of CH1 - D108, CH2 - D208, CH3 - D308 is turned "H" by the signal from the trigger controller is sent through CH1 - D107, CH2 - D207, CH3 - D307 and output as current to the Horizontal unit. Q31 the excessive bias current flow when CH1 or CH2 is in ADD mode.

CH1 OUT

The CH1 output is sent from the collector of Q152, through emitter-follower Q51 and output at CH1 OUT of the Final unit.

Trigger controller

The data on the trigger source set on the panel is input to pin 1 of U1 and "H" or "L" is output at pins 4 to 8 according to the set state.

U2 is used to switch between the data from U1 and the CRT display data of each channel from V-MODE LOGIC. If the current mode is not V mode, the former data is selected. If the current mode is V mode, the latter data is selected for use in controlling the trigger selector.

Among CH1 - U2 pin 7, CH2 - U2 pin 9, CH3 - U2 pin 12, the terminal set with the panel is turned "H".

V-MODE LOGIC

U3 and U4 generates a signal synchronized with the display channel select signal from the panel and the end of horizontal sweep, and a signal for controlling the channel selector based on the CHOP signal. (Figure 1)

Q34 cuts off the power supply to U4 only at the instant the channel switch is pressed, in order to prevent malfunction.

Vertical range converter

U401, U403, S102 and S202 output the vertical range, CAL and UNCAL data by turning them into analog values using an opamp for use as the R/O data. (Figures 3, 4)

Horizontal range converter

U402 and S401 output the horizontal range data using an opamp, as analog values for R/O data. (Figure 5)

U404 (for main sweep), U405 (for sub-sweep) and S401 are used to switch the reference voltage for letting the sweep current of the 1-2-5 steps of horizontal sweep flow. (Figure 2)

FINAL UNIT

Final amplifier

The signal sent from the vertical preamp through the delay line is input to the feedback amp of Q1 and Q2. During A ALT B sweep, the variation of the vertical position of sweep B is controlled by the current applied to the base of Q2 based on the panel operation.

Q3, 4, Q105, Q106 and U1 are used to amplify the vertical signal

CIRCUIT DESCRIPTION

and U1, Q105 and Q106 are used to amplify the R/O characters. U1 is used to switch between the vertical signal and R/O signal. Q9-Q12, O113 and Q114 are cascode-connected for use in driving the CRT.

AC inlet, fuse

An external commercial supply voltage switch and fuse holder are provided.

Line filter

A filter for elimination of common mode noise and normal mode noise is provided.

CH1 OUT

The signal from the vertical preamp is output externally via Q201 and Q202 as a signal with 50-ohm impedance.

HORIZONTAL UNIT

Trigger

The trigger signal supplied from the Vertical unit (X73-2070) is AC/DC coupled and the trigger level is added to it.

The obtained signal is input to the trigger shaping circuit to become a pulse signal.

If FIX is selected, the trigger level is fixed so that it is always around the center of the waveform.

With TV-V, the composite video signal is separated by the V sync separator and input to the trigger shaping circuit.

With TV-H, the composite video signal is separated by the H sync separator and input to the trigger shaping circuit.

HFreq is used to apply a 50 kHz LPF to the trigger signal.

The polarity of the trigger pulse signal can be changed with SLOPE +/- . The output signal is input to the sweep logic circuit.

There is an additional circuit which applies the trigger signal to the sweep logic in case the trigger pulse signal has not been input for a certain period and auto free-run mode has been selected.

Sweep

When the trigger pulse is input to the sweep logic, the sweep gate is activated and the sweep wave is output.

When the sweep wave reaches a certain level, the sweep stop circuit is activated to close the sweep gate and end sweep.

When sweep stop is activated, the hold-off circuit is activated and, in a certain period after it, the sweep logic enters the trigger standby state.

The delayed sweep is performed either as the AFTER DELAY sweep or B TRIG'D sweep.

With the AFTER DELAY sweep, the voltage level of the main sweep wave and the voltage set with DTP are compared and delayed sweep is performed using the result signal as the trigger.

With the B TRIG'D sweep, sweep is triggered by the next trigger signal input after the voltage level of sweep wave have reached the voltage set with DTP.

In case ALT sweep is set, the main sweep and delayed sweep are performed alternately.

Horizontal amp

This circuitry switches between the sweep wave generated in the sweep block and the X signal and add H-POSITION.

After being magnified by 10 times if MAG has been selected, the signal is input to the R/O switch.

Here, the R/O signal is added to the vertical signal and the signal is amplified by the final amp to a high enough voltage level to drive the CRT.

Intensity circuit

The Z signal is generated with the sweep gate of the main sweep and that of the delayed sweep. During ALT sweep, a waveform for increasing the intensity of the delayed sweep section is generated with the main sweep. The voltage set with the INTEN potentiometer is added to the X signal and the voltage set with the R/O INTEN potentiometer is added to the R/O blanking signal and they are input to the high voltage circuit.

The high voltage circuits generates the CRT cathode voltage, G1 voltage and P1 voltage based on the intensity signal and the **FOCUS potentiometer**.

The cathode voltage is controlled always constant by the opamp. For use with the after-accelerating CRT, the anode voltage is also generated by the high voltage circuit.

Power supply

AC voltages of +14.8 V, -14.8 V, +6 V, -6 V, +67 V and +170 V are input from the transformer, and they are turned into stable DC voltages of respectively +12 V, -12 V, +5 V, +55 V and +140 V, which are supplied to their respective units.

CHOP

To observe signals of multiple channels simultaneously, the vertical amp is switched with the CHOP signal.

PANEL UNIT

This unit sends the potentiometer and switch data from the control panel to other units.

A limiting circuit is provided to prevent the CHIP operation while multi-channel operation is not selected even when the CHOP key is pressed.

The voltage setting of DTP is made by the opamp in the range from 0 to +4 V. The CAL signal is a 1 kHz, 1 Vp-p square wave. The intensity is controlled by the PWM based on the output from the original oscillator of CAL.

R/O UNIT

The R/O unit (X77-1870-00) accepts the attenuator and sweep data sent from or through the Panel unit and outputs character data to be displayed on the CRT.

It is composed of the controller block (U1, U2, U4 U6, X1), blanking circuit (U5, U14, U15, X2), A/D converter block (U3, U16, U17) and character data output block (U7, U8 U9, U10, U13).

The controller block is composed of the 1-chip CPU (with built-in ROM), RAM, decoder, ALE and oscillator x 1. The 1-chip CPU

CIRCUIT DESCRIPTION

(U1) incorporates a ROM as described above, and the entire unit is controlled by the software written in this ROM. The 1-chip CPU is operated based on X1 (10 MHz). Before the start of operation, the reset signal is input from U18 when the power is switched on. The 1-chip CPU incorporates 8-bit A/D converters in the output ports, input ports and also internally, and it outputs character data for CRT display based on the data input through the A/D converters.

As for the output port configuration, P40 to P47 and P30 to P33 in the circuit diagram output comparison data for an external 12-bit A/D converter and P34 to P37 output the control data for use in switching the analog data to the external 12-bit A/D converter. As for the input port configuration, P60 to P64 are used to recognize the "H" or "L" level of the push switches on the panel and input the CURSOR MODE, B TRIG'D, CH2 INV and X10 MAG signals. Among them, the CURSOR MODE switch is a non-locking switch so a Schmitt circuit is provided before the signal is input to the port. P50 to P57 are the analog voltage input ports. The input voltage is sent to the internal 8-bit A/D converter, converted into digital data and becomes the CRT display data. The 1-chip CPU has a bus configuration of 8 data bus bits and 16 address bus bits. A the lower 8 bits of the address bus are also used as the data bus bits, IC (ALE circuit IC) U6 is provided for their separation.


In addition to above, the controller block also includes a decoder (U4) and memory (U2). The decoder output is supplied to the memory as well as to the Xlatch CLK input, Ylatch CLK input and blanking circuit block which will be described below. The memory functions as the system RAM of the 1-chip CPU and also stores CRT display data. The stored data is some of the data which has originally been prepared in the ROM inside the 1-chip CPU; only the data required for CRT display is stored in this memory.

Next, the blanking circuit block is composed of a 4 MHz oscillator composed of X2 and the inverter (U15), shift register (U14), inverter (U15) and OR (U5). It outputs the Blanking (R/O BLK), request (R/O REQ) and unblanking (R/O UBL) signals. The signals are output at the timing synchronized with the CLK signal from the decoder to X latch (U7) and Y latch (U8) and used to switch the display from waveform to character or from character to waveform and to clear the trace during switching. R/O BLK is used to clear the trace, R/O REQ is used to switch display between characters and traces and R/O UBL is used to illuminate a single dot in the character.

In synchronism with the signal outputs from the blanking circuit block, the character data output block outputs R/O-X (character dot position in Horizontal direction) and R/O-Y (character dot position in Vertical direction). The character data is sent from the memory (U2) described above to the Xlatch and Ylatch, and the position data is sent through the address bus.

These data are latched simultaneously, and the latched data are input to the respective 8-bit D/A converters (U9, U10) to be converted into analog signals. After conversion, the obtained analog signals are input to analog switches U11 and U12, output from opamp U13 as signals with 0 to 4 V amplitudes, and sent respectively to the final amp.

The analog switches are supplied with the cursor voltages, which are used to determine the CRT screen position in case the cursor output is required. The relationship between these voltages and the CRT screen display is as shown in the following diagram.

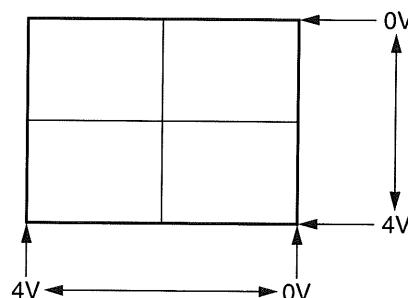

In addition, there is an external 12-bit A/D converter for use as the means to input character data. This converts the cursor voltages, sweep time voltage, DTP voltage, etc., which require a certain resolution into digital data. The A/D converter is formed with an analog switch (U17), comparator (U3) and D/A converter (U16) for A/D conversion with the successive comparison method.

CIRCUIT DESCRIPTION

V-MODE LOGIC

When CH1 is selected with V-MODE

P12-9	<u>CH1</u>	L
P12-8	<u>CH2</u>	H
P12-7	<u>CH3</u>	H
P12-6	<u>ADD</u>	H
P9-5	<u>V.CLK</u>	—
U3-6	<u>C1E</u>	—
U3-9	<u>C2E</u>	—
U3-5	<u>$\bar{C}1E$</u>	—
U3-7	<u>$\bar{C}2E$</u>	—
Q310-C	<u>CH3</u>	—
Q311-C	(<u>$\bar{C}1E$</u> AND <u>$\bar{C}2E$</u>)	—

Fig. 1-a

When CH2 is selected with V-MODE

P12-9	<u>CH1</u>	H
P12-8	<u>CH2</u>	L
P12-7	<u>CH3</u>	H
P12-6	<u>ADD</u>	H
P9-5	<u>V.CLK</u>	—
U3-6	<u>C1E</u>	—
U3-9	<u>C2E</u>	—
U3-5	<u>$\bar{C}1E$</u>	—
U3-7	<u>$\bar{C}2E$</u>	—
Q310-C	<u>CH3</u>	—
Q311-C	(<u>$\bar{C}1E$</u> AND <u>$\bar{C}2E$</u>)	—

Fig. 1-b

When CH3 is selected with V-MODE

P12-9	<u>CH1</u>	H
P12-8	<u>CH2</u>	H
P12-7	<u>CH3</u>	L
P12-6	<u>ADD</u>	H
P9-5	<u>V.CLK</u>	—
U3-6	<u>C1E</u>	—
U3-9	<u>C2E</u>	—
U3-5	<u>$\bar{C}1E$</u>	—
U3-7	<u>$\bar{C}2E$</u>	—
Q310-C	<u>CH3</u>	—
Q311-C	(<u>$\bar{C}1E$</u> AND <u>$\bar{C}2E$</u>)	—

Fig. 1-c

CIRCUIT DESCRIPTION

When ADD is selected with V-MODE

P12-9	CH1	H
P12-8	CH2	H
P12-7	CH3	H
P12-6	ADD	L
P9-5	V.CLK	— — — — —
U3-6	C1E	— — — — —
U3-9	C2E	— — — — —
U3-5	$\bar{C}1E$	— — — — —
U3-7	$\bar{C}2E$	— — — — —
Q310-C	CH3	— — — — —
Q311-C	($\bar{C}1E$ AND $\bar{C}2E$)	— — — — —

Fig. 1-d

There are 16 combinations obtained from the 4 states, and it is abnormal if all of these are "H".

When more than one combination are used, the state is switched at the negative going of $\bar{V}.CLK$ in the order shown below:

→ CH1 → CH3 → CH2 → ADD →

SWEEP CODE		A SWEEP					B SWEEP					VOLTAGE RANGE (V)	VOLTAGE (V)	VOLTAGE (V)
S301	a	b	c	d	e	f	g	h	j	k				
SWEEP TIME DIV	0.5s										< 0.168	Approx. -7.6	-12	
	0.2s	○									0.168 ~ 0.301			
	0.1s		○								0.302 ~ 0.504			
	50ms			○				○			0.505 ~ 0.704	↓		
	20ms	○		○		○		○			0.705 ~ 0.838			
	10ms		○	○			○	○			0.839 ~ 1.044			
	5ms				○				○		1.045 ~ 1.247	↓		
	2ms	○			○	○			○		1.248 ~ 1.381			
	1ms		○	○			○		○		1.382 ~ 1.584			
	0.5ms			○	○			○	○		1.585 ~ 1.784	↓		
	0.2ms	○		○	○		○		○	○	1.785 ~ 1.918			
	0.1ms		○	○	○		○	○	○	○	1.919 ~ 2.124			
	50μs				○					○	2.125 ~ 2.327	↓		
	20μs	○				○	○			○	2.328 ~ 2.461			
	10μs		○			○		○		○	2.462 ~ 2.664			
	5μs			○		○			○	○	2.665 ~ 2.864	↓		
	2μs	○		○		○	○		○	○	2.865 ~ 2.998			
	1μs		○	○		○		○	○	○	2.999 ~ 3.204			
	0.5μs				○	○			○	○	3.205 ~ 3.407	↓		
	0.2μs	○			○	○	○		○	○	3.408 ~ 3.541			
	0.1μs		○		○	○		○	○	○	3.542 ~ 3.743			
	0.05μs			○	○	○		○	○	○	> 3.743	Approx. -7.6		
CHECK POINTS		X73-2070-00					P11-3, 2					P10-9, 4	P10-6, 1	
		X77-1870-00					P23-11, 13							

Fig. 2

CIRCUIT DESCRIPTION

- CH1 ATT & CH2 ATT voltage check table

V-Range (/div)	Voltage range (V)
5V	4.124 ~ 4.450
2V	3.790 ~ 4.123
1V	3.456 ~ 3.789
0.5V	3.130 ~ 3.455
0.2V	2.804 ~ 3.129
0.1V	2.470 ~ 2.803
50mV	2.136 ~ 2.469
20mV	1.810 ~ 2.135
10mV	1.484 ~ 1.809
5mV	1.150 ~ 1.483
2mV	0.816 ~ 1.149
1mV	0.490 ~ 0.815

Fig. 3

CH1 CHECK POINT P23-4
CH2 CHECK POINT P23-6

- UNCAL voltage check table

CH1 CAL	CH2 CAL	SWP CAL	Voltage range (V)
>	>	>	4.406 ~ 4.860
>	>	CAL	3.777 ~ 4.405
>	CAL	>	3.147 ~ 3.776
>	CAL	CAL	2.518 ~ 3.146
CAL	>	>	1.888 ~ 2.517
CAL	>	CAL	1.257 ~ 1.887
CAL	CAL	>	0.626 ~ 1.256
CAL	CAL	CAL	0.156 ~ 0.625

Fig. 4

CHECK POINT P23-15

- SWEEP CODE voltage check table

SWEEP TIME (/div)	Voltage range (V)
50ns	≥ 3.744
0.1μs	3.542 ~ 3.743
0.2μs	3.408 ~ 3.541
0.5μs	3.205 ~ 3.407
1μs	2.999 ~ 3.204
2μs	2.865 ~ 2.998
5μs	2.665 ~ 2.864
10μs	2.462 ~ 2.664
20μs	2.328 ~ 2.461
50μs	2.125 ~ 2.327
0.1ms	1.919 ~ 2.124
0.2ms	1.785 ~ 1.918
0.5ms	1.585 ~ 1.784
1ms	1.382 ~ 1.585
2ms	1.248 ~ 1.381
5ms	1.045 ~ 1.247
10ms	0.839 ~ 1.044
20ms	0.705 ~ 0.838
50ms	0.505 ~ 0.704
0.1s	0.302 ~ 0.504
0.2s	0.168 ~ 0.301
0.5s	≤ 0.167

Fig. 5

14 CHECK POINT
A SWEEP P23-11
B SWEEP P23-13

- V-MODE level check table

V-MODE	CH1	ON	OFF	ON	OFF	ON	OFF	ON
ADD	OFF	ON	OFF	ON	OFF	OFF	ON	ON
CH2	OFF	OFF	OFF	OFF	ON	ON	ON	ON
	↓	↓	↓	↓	↓	↓	↓	↓
CH1	L	L	H	L	H	L	H	L
ADD	H	H	L	L	H	H	L	L
CH2	H	H	H	H	L	L	L	L
	↓	↓	↓	↓	↓	↓	↓	↓
Display	CH1 (CH3)*	CH1 + CH2	CH1 + CH2	CH2	CH2	CH1	CH2	CH1 + CH2
	CH1	CH1 + CH2	CH1 + CH2	CH2	CH2	CH1	CH2	CH1 + CH2

* CH3 display is used when only CH3 is ON.

Fig. 6

CHECK POINT P23-4
P23-10
P24-6

- MAG level check

ON	OFF
L	H

CHECK POINT P23-17

Fig. 7

- CH2 INV level check table

ON	OFF
L	H

CHECK POINT P23-12

Fig. 8

- B TRIG'D level check table

ON	OFF
L	H

CHECK POINT P23-19

Fig. 9

- H DISPLAY voltage check table

	Output voltage range (V)
A	≥ 2.085
ALT	1.381 ~ 2.084
B	0.704 ~ 1.380
X-Y	≤ 0.703

CHECK POINT P23-20

Fig. 10

- Probe voltage check table

	Output voltage range (V)
1/1	≥ 4.197
1/10	3.176 ~ 4.196
1/100	≤ 3.175

CHECK POINT
CH1PB : P23-3
CH2PB : P23-5


Fig. 11

- CURSOR voltage check table


ON	OFF
L	H

Fig. 12

CS-5230 BLOCK DIAGRAM

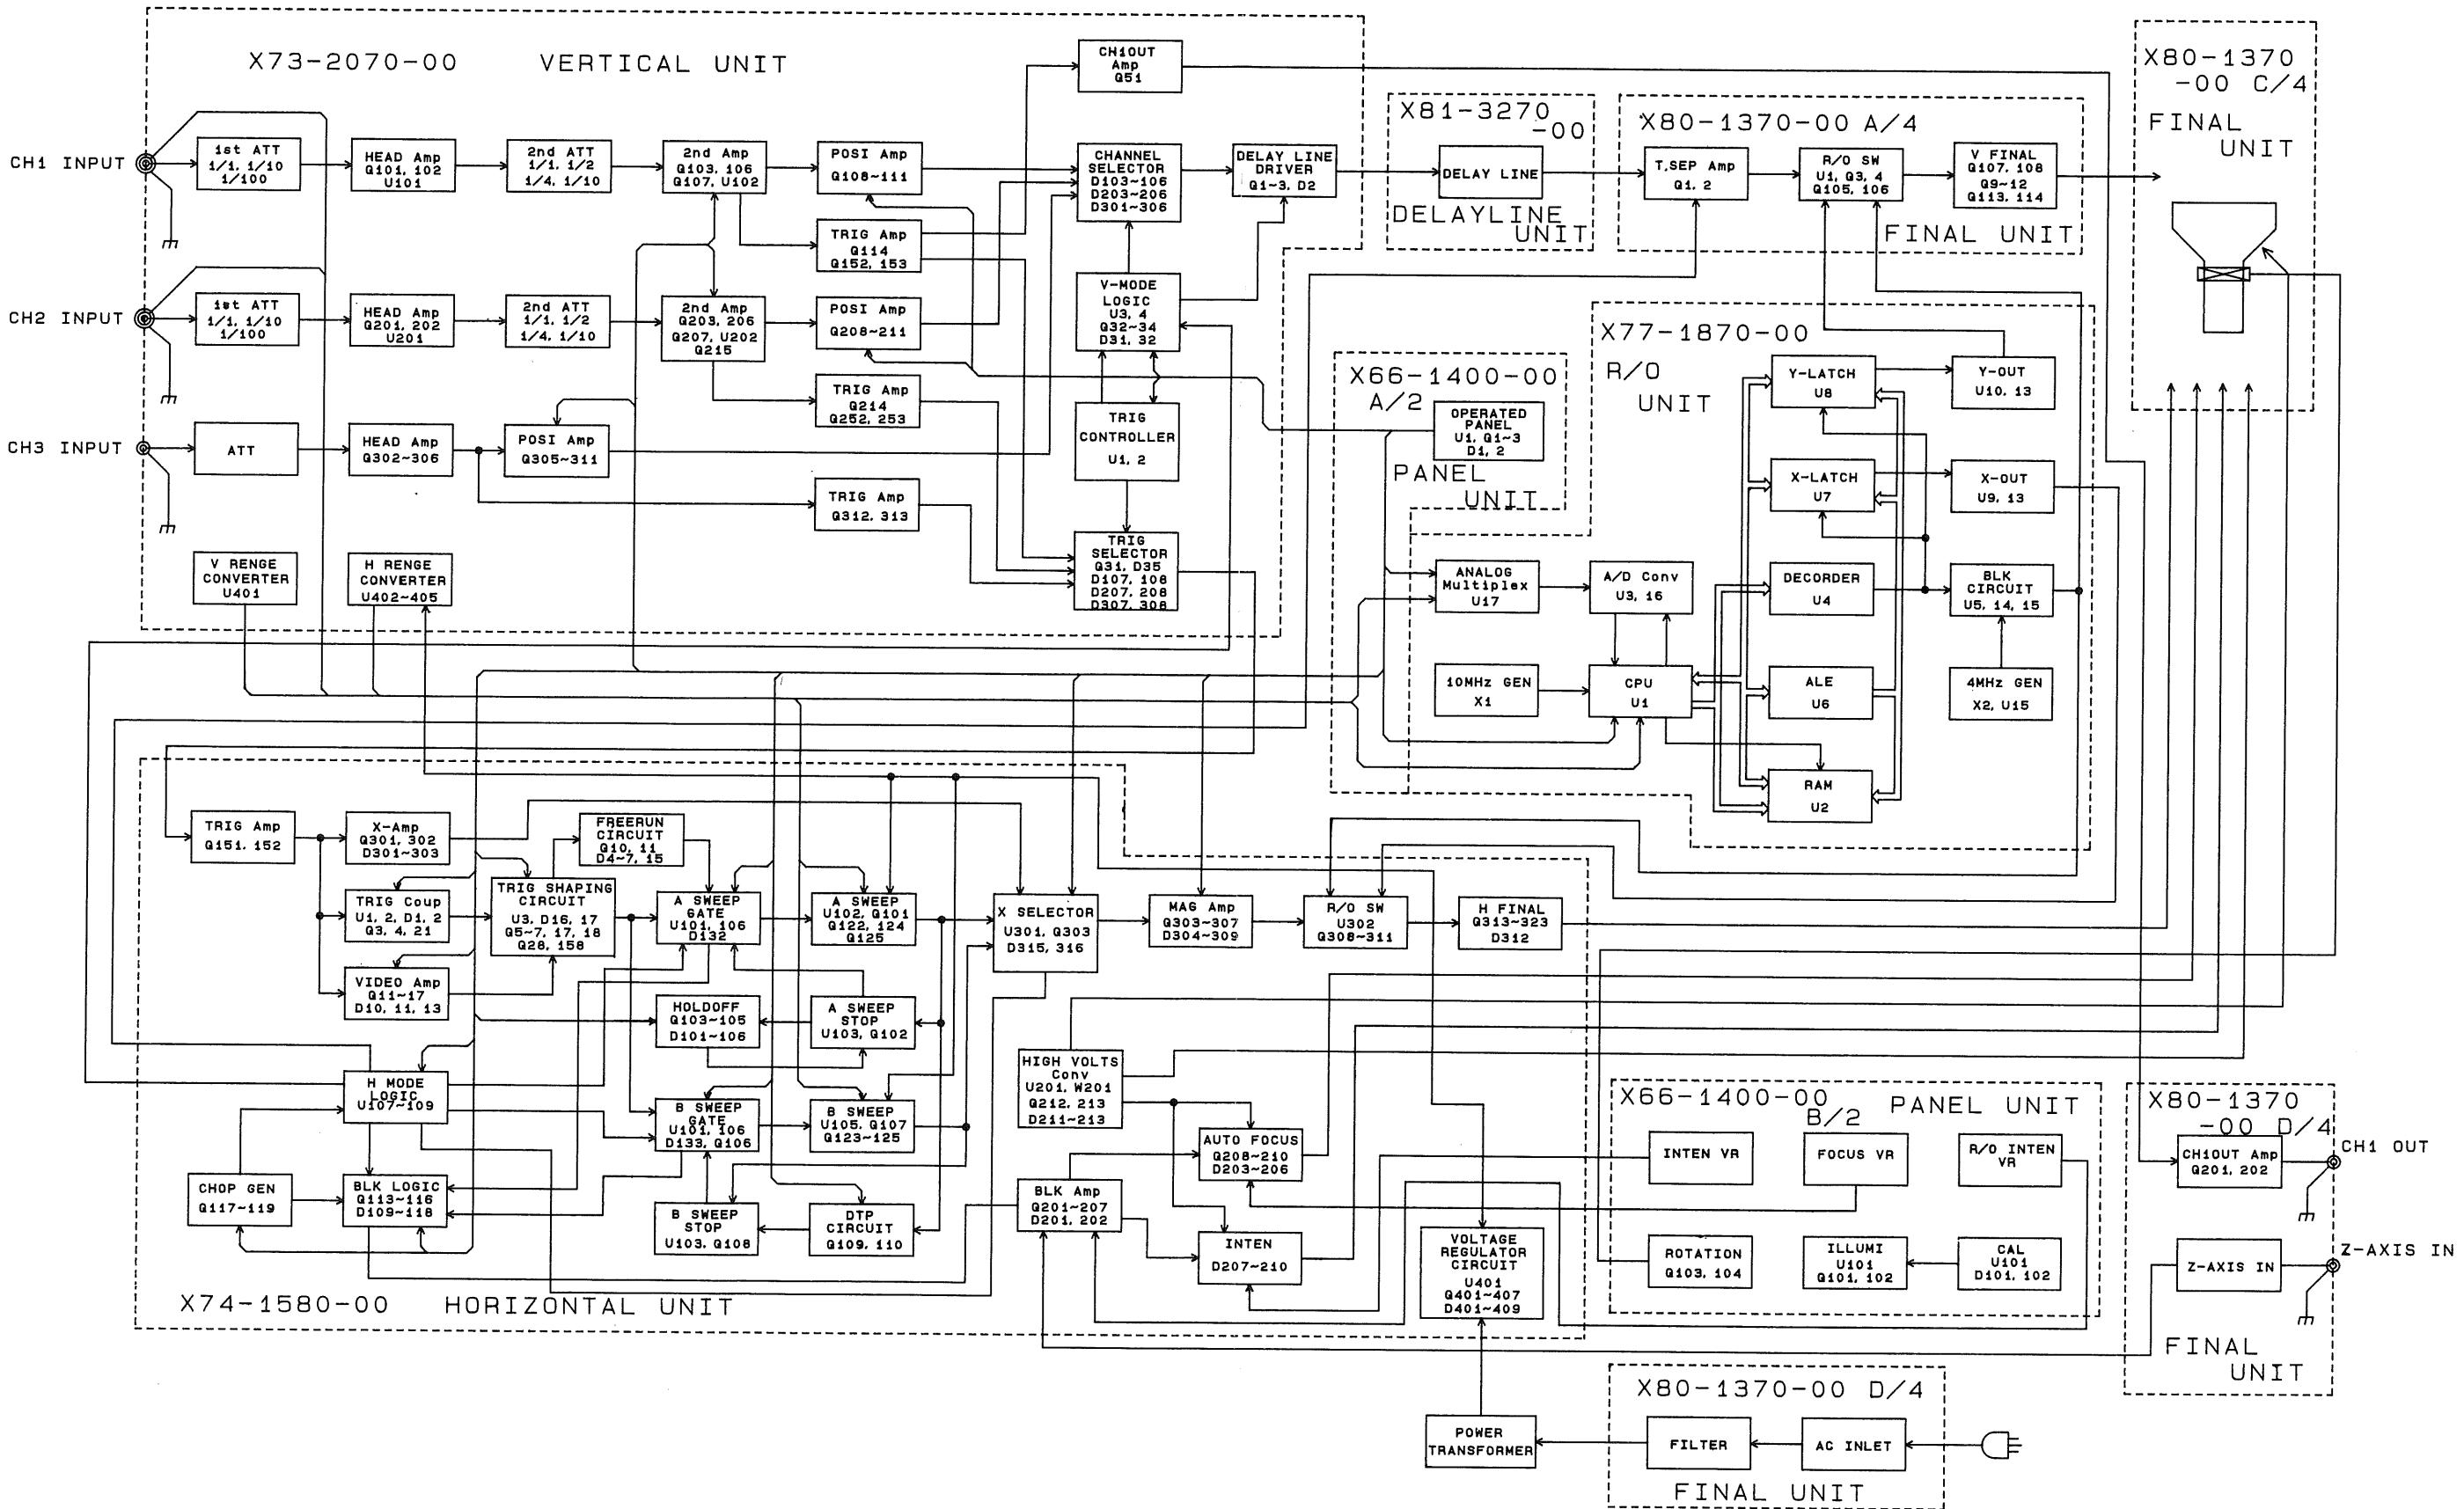

CS-5235 BLOCK DIAGRAM

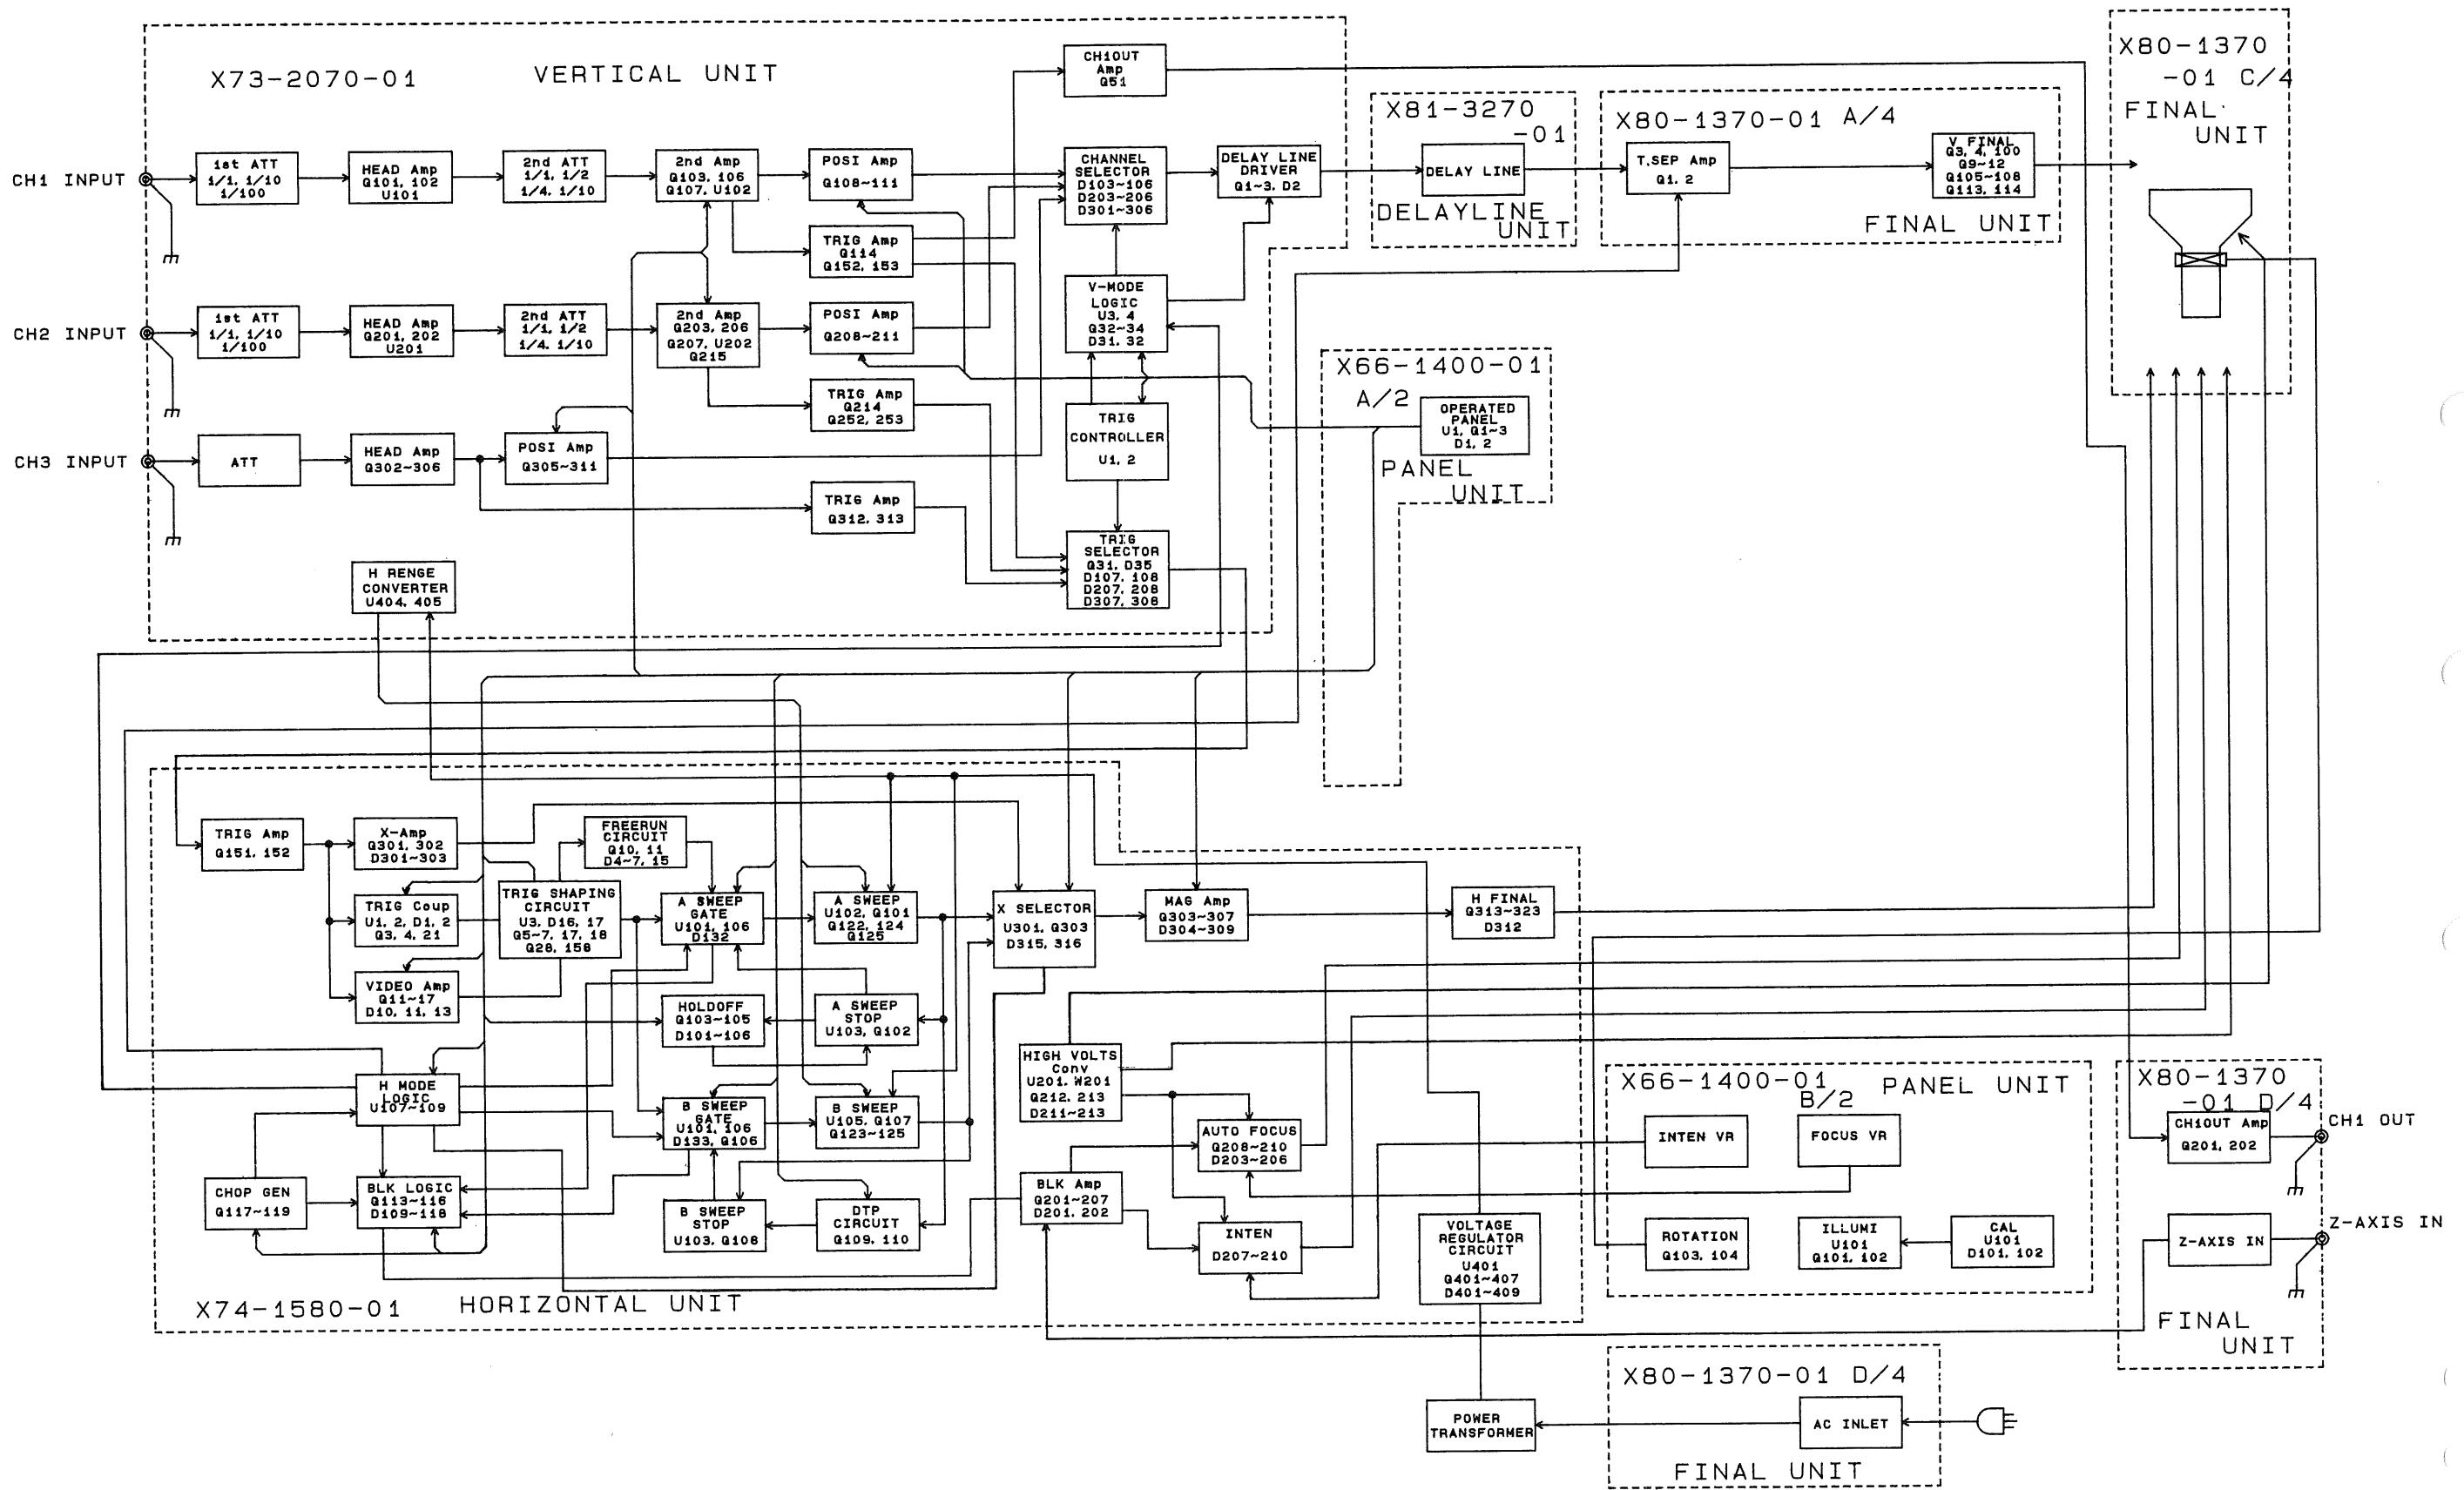

ADJUSTMENT

To obtain the best performance, periodically calibrate the unit. Sometimes, only one mode need be calibrated, while at other times, all modes should be calibrated. When one mode is calibrated, it must be noted that the other modes may be affected. When calibrating all modes, perform the calibration in the specified sequence.

The following calibration required an accurate measuring instrument and an insulated adjusting flat blade screwdriver. If they are not available, contact your dealer. For optimum adjustment, turn the power on and warm up the scope sufficiently (more than 30 minutes) before starting.

Before calibrating the scope, check the power supply voltage.

TEST EQUIPMENT REQUIRED

The following instrument or their equivalent should be used for making adjustment.

Test Equipment	Model	Minimum Specification
Digital Multi-Meter	DL-712 (KENWOOD)	Impedance: More than 10 MΩ, Measuring range: 0.2 V to 1000 V
Sine-Wave Generator	651 B (YHP)	Frequency: 10 Hz to 10 MHz, constant voltage over tuning range
Sine-Wave Generator	SG-503 (Tektronix)	Frequency: 50 kHz to 100 MHz, Output impedance: 50 Ω, constant voltage over tuning range
Square-Wave Generator	PG-506 (Tektronix)	Output signal: 1 kHz, Amplitude: 10 mVp-p to 10 Vp-p, Accuracy: within ± 1%, Rise time: 35ns or less 100 kHz, Rise time: 1 ns or less
Q Meter	4343B (YHP)	—
Color Pattern Generator	CG-921 (KENWOOD)	—
Oscilloscope	CS-6040 (KENWOOD)	Sensitivity: more than 1 mV Frequency response: More than 150 MHz
Time-Marker Generator	TG-501 (Tektronix)	Time mark: 0.5 s to 0.1μs repetitive waveform
High-Voltage Probe	—	Input Impedance: 1000 MΩ
Termination	—	Impedance: 50 Ω Accuracy: within 3%
Termination	—	3 watts type impedance: 50 Ω
Attenuator	—	— 20 dB attenuation (50 Ω)

Table 1

PREPARATION FOR ADJUSTMENT

Control Settings

The control settings listed below must be used for each adjustment procedure.

Exceptions to these settings will be noted as they occur. After completing a adjustment, return the controls to the following settings.


NAME OF KNOBS	POSITION
INTEN	12 o'clock
FOCUS	Optimum position
CH1, CH2, CH3 ▲ POSITION	Mechanical center
◀ ▶ POSITION	Mechanical center
× 10 MAG	OFF
VARIABLE, H.VARIABLE	CAL
(VOLTS/DIV, SWEEP TIME/DIV)	
AC-GND-DC (CH1 and CH2)	DC (GND at no signal)
VERTICAL MODE	CH1
HORIZONTAL MODE	A
TRIGGERING COUPLING	AC
TRIGGERING SOURCE	VERT MODE
TRIGGERING MODE	AUTO
TRIGGERING LEVEL	Mechanical center
VOLTS/DIV (CH1 and CH2)	5 V/DIV
A/B SWEEP TIME/DIV	0.5 s/50 ms
TRACE SEP	Fully CCW
HOLD OFF	Fully CCW
SLOPE	■ +

Table 2


ADJUSTMENT

Item	Adjustment	P.C.B.	Procedure
Operating voltage	VR4 VR303	X80-1370 X74-1580	V.MODE: CH1, CH2. AC-DC: GND (both CH), VOLTS: 10 mV (both CH), H.DISPLAY: X-Y, R/O: OFF 1) Move the spot to the CRT center by operating the POSI controls. 2) Attach the multimeter probes across P5-1 and GND of X80-1370 and adjust VR4 to the voltage 33.5 V. 3) Attach the multimeter probes across P7-1 and GND of X74-1580 and adjust VR303 so that the voltage is 70 V. 4) Attach the probe to P7-4 and ensure that the voltage reading is approx. 70 V.
Focus Center and ASTIG	VR201	X74-1580	V.MODE: CH1, CH2, AC-DC: GND (both CH), VOLTS: 10 mV (both CH), H.DISPLAY: X-Y 1) Move the spot to the CRT center by operating the POSI controls. 2) Adjust the spot to the best point with FOCUS on the panel and ASTIG (VR305). 3) Set FOCUS on the panel to the 12:00 position and adjust VR201 to move the spot to the best point.
Intensity	VR202	X74-1580	V.MODE: CH1, CH2. AC-DC: GND (both CH), VOLTS: 10 mV (both CH), H.DISPLAY: X-Y 1) Set INTEN to the 10:00 position. 2) At the 10:00 position, adjust so that the spot disappears.
Cursor Y-Gain and POSI * In case the R/O unit is not used, ignore this item.	VR3 (Gain) VR2 (POSI)	X80-1370	V.MODE: CH1, CH2. AC-DC: GND (both CH), VOLTS: 10 mV (both CH), H.DISPLAY: A, R/O: ON, A.SWEEP: 1 ms 1) Set the R/O display to 6.00 by operating the cursor POSI controls. 2) Adjust VR3 and VR2 so that the interval between cursors is 6 div. 3) Maximize the cursor interval by operating the cursor POSI controls. 4) Adjust VR2 to make it uniform.
Cursor X-Gain and POSI * In case the R/O unit is not used, adjust only VR304. The VR can be used to adjust the length of the SWEEP TIME 1 ms trace.	VR304 (Gain) VR306(POSI)	X74-1580	V.MODE: CH1, CH2. AC-DC: GND (both CH), VOLTS: 10 mV (both CH), H.DISPLAY: A, R/O: ON (1/ΔT), A.SWEEP: 1 ms 1) Set the R/O display to 8.00 by operating the cursor POSI controls. 2) Adjust VR304 and V306 so that the cursor interval is 8 div.. 3) Maximize the cursor interval by operating the cursor POSI controls. 4) Adjust VR306 to make it uniform. In case the R/O unit is not used, VR304 is to be adjusted in the SWEEP TIME 1 ms adjustment.
CH1 Gain	VR1 (10 mV) VR102(1mV)	X80-1370 X73-2070	V.MODE: CH1, AC-DC: DC, H.DISPLAY: A, VOLTS: 10 mV, VARI: CAL. 1) Input a 50 mV square wave signal. 2) Adjust so that the amplitude is 5 div. (10 mV range) 3) Switch VOLTS to 1 mV and input a 5 mV square wave signal. 4) Adjust so that the amplitude is 5 div. (1 mV range)
CH2 Gain	VR207(10mV) VR202(1mV)	X73-2070	V.MODE: CH2, AC-DC: DC, H DISPLAY: A, VOLTS: 10 mV, VARI: CAL. 1) Input a 50 mV square wave signal. 2) Adjust so that the amplitude is 5 div. (10 mV range) 3) Switch VOLTS to 1 mV and input a 5 mV square wave signal. 4) Adjust so that the amplitude is 5 div. (1 mV range)




ADJUSTMENT

Item	Adjustment	P.C.B.	Procedure
X-Gain * In case the R/O unit is not used, do not adjust this item now but adjust after H.POSI.	VR308	X74-1580	<p>H.DISPLAY: X-Y, AC-DC: DC VOLTS: 10 mV, VARI: CAL.</p> <p>1) Input a 50 mV square wave signal to CH2. 2) Adjust so that the amplitude is 5 div. (10 mV range) * Make the adjustment to 5 div., at the CRT center.</p> 
CH3 Gain	VR301	X73-2070	<p>V.MODE: CH3, H.DISPLAY: A</p> <p>1) Input a 0.5 V square wave signal. 2) Adjust so that the amplitude is 5 div. (0.1 V range)</p>
CH1 Step ATT Balance	VR103	X73-2070	<p>V.MODE: CH1, AC-DC: GND (both CH) VOLTS: 5 mV (both CH) H.DISPLAY: A</p> <p>1) Adjust so that the trace does not move when VOLTS is switched from 5 mV to 2 mV. * Adjust after switching to 2 mV with reference to the 5 mV position.</p>
CH1 VARIABLE Balance	VR104	X73-2070	<p>V.MODE: CH1, AC-DC: GND (both CH) VOLTS: 5 mV (both CH) H.DISPLAY: A</p> <p>Adjust by setting VARIABLE to the MIN (fully counterclockwise) position with reference to the MAX (CAL) position. * Ensure that the trace does not move when VARIABLE is switched between MIN ↔ MAX.</p>
CH2 Step ATT Balance	VR203	X73-2070	<p>V.MODE: CH2, AC-DC: GND, VOLTS: 5 mV, H.DISPLAY: A.</p> <p>1) Adjust so that the trace does not move when VOLTS is switched from 5 mV to 2 mV. * Adjust after switching to 2 mV with reference to the 5 mV position.</p>
CH2 VARIABLE Balance	VR204	X73-2070	<p>V.MODE: CH2, AC-DC: GND, VOLTS: 5 mV, H.DISPLAY: A.</p> <p>1) Adjust by setting VARIABLE to the MIN (fully counterclockwise) position with reference to the MAX (CAL) position. * Ensure that the trace does not move when VARIABLE is switched between MIN ↔ MAX.</p>
CH2 INV Balance	VR208	X73-2070	<p>V.MODE: CH2, AC-DC: GND, VOLTS: 5 mV, H.DISPLAY: A.</p> <p>1) Adjust so that the trace does not move when CH2 INV is switched ON-OFF. 2) Check CH2 STEP ATT BAL and VARI BAL and, if any is deviated, re-adjust following the adjustment procedure.</p>
ADD POSI	VR1	X73-2070	<p>V.MODE: CH1, ADD, AC-DC: GND, VOLTS: 5 mV H.DISPLAY: A</p> <p>1) Superimpose the two displayed traces by operating CH2 POSI. 2) Switch V.MODE CH2 ON. (After this, CH1, CH2 and ADD of V.MODE are ON.) 3) Superimpose the two displayed traces by operating CH1 POSI. 4) Adjust the trace to the center of scale. (The CRT seems to display a single trace but it actually consists of a superimposition of 3 traces.)</p>





ADJUSTMENT

Item	Adjustment	P.C.B.	Procedure
V.POSI Center	VR106 (CH1) VR206 (CH2) VR302 (CH3)	X73-2070	<p>V.MODE: CH1, CH2, CH3, VOLTS: 5 mV, H.DISPLAY: A, AC-DC: GND.</p> <p>1) Set POSI of each CH to the 12:00 position. 2) Adjust the trace of each CH to the scale center.</p>
CH1 Waveform Shaping	TC102 (0.1 V) TC104 (1 V)	X73-2070	<p>V.MODE: CH1, AC-DC: DC, VARI: CAL, VOLTS: 10 mV (ideal waveform), H.DISPLAY: A.</p> <p>1) Input a 1 kHz square wave to the CH1 input. 2) Adjust so that the waveforms at 0.1 V and 1 V are flat.</p>
CH2 Waveform Shaping	TC202 (0.1 V) TC204 (1 V)	X73-2070	<p>V.MODE: CH2, AC-DC: DC, VARI: CAL, VOLTS: 10 mV (ideal waveform), H.DISPLAY: A.</p> <p>1) Input a 1 kHz square wave to the CH2 input. 2) Adjust so that the waveforms at 0.1 V and 1 V are flat.</p>
CH3 Waveform Shaping	TC301	X73-2070	<p>V.MODE: CH3, H.DISPLAY: A.</p> <p>1) Input a 1 kHz square wave to the CH1 input and adjust so that the waveform is flat.</p>
Input Capacity	TC101 (0.1 V) TC103 (1 V)	X73-2070	<p>V.MODE: CH1, AC-DC: DC, VARI: CAL, VOLTS: 10 mV (reference), H.DISPLAY: A.</p> <p>1) Connect a capacity meter to the CH1 input. 2) Measure the capacity of the 10 mV range. (No more than 25 p) 3) At 0.1 V and 1 V, adjust to obtain the same values as 10 mV.</p>
Input Capacity	TC201 (0.1 V) TC203 (1 V)	X73-2070	<p>V.MODE: CH2 AC-DC: DC, VARI: CAL, VOLTS: 10 mV (reference), H.DISPLAY: A.</p> <p>1) Connect a capacity meter to the CH2 input. 2) Measure the capacity of the 10 mV range. (No more than 25 p) 3) At 0.1 V and 1 V, adjust to obtain the same values as 10 mV.</p>
FIX Level	VR2	X74-1580	<p>V.MODE: CH1, AC-DC: DC, VOLTS: 0.1 V, TRIG MODE: FIX, SWEEP T: 0.2 ms.</p> <p>1) Input 1 kHz sine wave to CH1 and set it so that it extends by 3 div., above and below the scale center line. 2) Adjust so that the waveform starts from the scale center line when SLOPE is switched between +/-. 3) Set the amplitude to 1 div., switch SLOPE to + and -, and ensure that triggering is applied. (If it is not applied, re-adjust now.)</p> <p style="text-align: center;">Align the start with → the center. </p>
TRIG Level	VR1	X74-1580	<p>V.MODE: CH1, AC-DC: DC, VOLTS: 0.1 V, TRIG MODE: AUTO, SWEEP T: 0.2 ms.</p> <p>1) Input 1 kHz sine wave to CH1 and set it so that it extends by 3 div., above and below the scale center line. 2) Set TRIG LEVEL to the 12:00 position and adjust so that the waveform starts from the scale center line.</p> <p style="text-align: center;">Align the start with → the center. </p>


ADJUSTMENT

Item	Adjustment	P.C.B.	Procedure
CH1 TRIG DC Coupling	VR105	X73-2070	<p>V.MODE: CH1, AC-DC: DC, VOLTS: 0.1 V, TRIG MODE: AUTO, SWEEP T: 0.2 ms, COUPLING: AC.</p> <p>1) Input 1 kHz sine wave to CH1 and set it so that it extends by 3 div., above and below the scale center line. 2) Adjust TRIG LEVEL so that the waveform starts from the scale center line. 3) Switch COUPLING to DC and adjust so that the waveform starts from the scale center line.</p> <p align="center">Align the start with → the center. </p>
CH2 TRIG DC Coupling	VR205	X73-2070	<p>V.MODE: CH2, AC-DC: DC, VOLTS: 0.1 V, TRIG MODE: AUTO, SWEEP T: 0.2 ms, COUPLING: AC.</p> <p>1) Input 1 kHz sine wave to CH2 and set it so that it extends by 3 div., above and below the scale center line. 2) Adjust TRIG LEVEL so that the waveform starts from the scale center line. 3) Switch COUPLING to DC and adjust so that the waveform starts from the scale center line.</p> <p align="center">Align the start with → the center. </p>
CH3 TRIG DC Coupling	VR303	X73-2070	<p>V.MODE: CH3, TRIG MODE: AUTO, SWEEP T: 0.2 ms.</p> <p>1) Set the trace to the scale center by operating V.POSI. 2) Input a 1 kHz sine wave to CH1 and set it so that it extends by 3 div., above and below the scale center line. (As CH3 is fixed to DC, it may not be triggered at this time. But it can be triggered by adjustment.) 3) Adjust so that the waveform starts from the scale center line.</p> <p align="center">Align the start with → the center. </p>
TRIG ADD	VR31	X73-2070	<p>V.MODE: CH1, CH2, AC-DC: DC, VOLTS: 0.1 V, TRIG MODE: AUTO, SWEEP T: 0.2 ms, COUPLING: AC</p> <p>1) Set the traces of each CH to the scale center position by operating V.POSI. 2) Switch CH1 and CH2 to OFF and ADD to ON. 3) Input a 1 kHz sine wave to CH1 and set it so that it extends by 3 div., above and below the scale center line. 4) Adjust TRIG LEVEL so that the waveform starts from the scale center line. 5) Switch COUPLING to DC and adjust so that the waveform starts from the scale center line.</p>

ADJUSTMENT

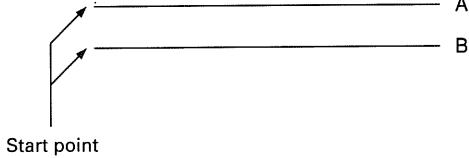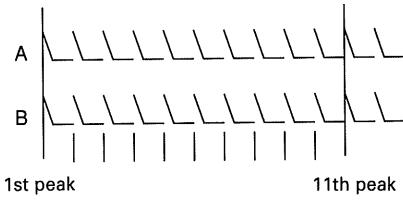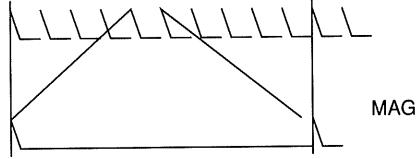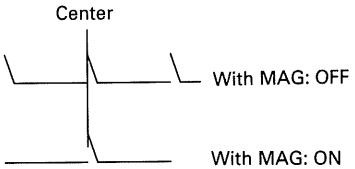
Item	Adjustment	P.C.B.	Procedure
A/B sweep start points	VR102	X74-1580	<p>V.MODE: CH1, AC-DC: DC, SWEEP TIME: A → 1 ms, B → 0.1 ms, H.DISPLAY: ALT DTM: MIN. (Fully counterclockwise)</p> <p>1) Adjust so that the start points of A.SWEEP and B.SWEEP are aligned.</p> 
A, B SWEEP TIME 1 ms <i>* In case the R/O unit is not used, adjust VR304 alternately so that the total number of marker peaks is 12.</i>	VR403 (A, SWEEP) VR402 (B, SWEEP)	X73-2070	<p>SWEEP TIME: A, B → 1 ms, H.DISPLAY: ALT, DTM: MIN (fully counterclockwise).</p> <p>1) Input a 1 ms marker signal. 2) Adjust so that the marker peak and scale coincides at every div.</p> 
MAG GAIN	VR302	X74-1580	<p>SWEEP TIME: A → 1 ms, H.DISPLAY: A, AC-DC: DC.</p> <p>1) Input a 1 ms marker signal. 2) Adjust H.POSI so that the marker peak and scale coincides at every div. 3) Switch X10 MAG ON and adjust so that the interval between two peaks is 10 div.</p> 
MAG Center	VR309	X74-1580	<p>SWEEP TIME: A → 1 ms, H.DISPLAY: A, AC-DC: DC.</p> <p>1) Input a 5 ms marker signal. 2) Adjust H.POSI so that the center peak is aligned with the scale center. 3) Switch X10 MAG ON and adjust so that the center marker peak is aligned with the scale center. (Adjust by repeating a few times.) 4) After the adjustment, switch MAG between ON-OFF and ensure that the center marker peak does not move.</p> 

ADJUSTMENT

Item	Adjustment	P.C.B.	Procedure
H. POSITION X-POSITION * In case the R/O unit is not used. Adjust X-GAIN after H.POSI. (Adjustment sequence) 1) H.POSI 2) X-GAIN 3) X-POS1	VR301 (H.POSI) VR307 (X-POS1)	X74-1580	<p>SWEEP TIME: A → 1 ms, H.DISPLAY: A</p> <p>1) Set the AC-DC switch to GND. (The marker signal can be left input.) 2) Set H.POSI to the 12:00 position. 3) Adjust VR301 so that the trace start point is aligned with the left end of scale. 4) Set H.DISPLAY to X-Y. 5) Adjust VR307 so that the spot comes on the scale center.</p>
A, B SWEEP TIME 1 μs	TC101 (A, SWEEP) TC102 (B, SWEEP)	X74-1580	<p>SWEEP TIME: A, B → 1 μs, H.DISPLAY: ALT, DTM: MIN (fully counterclockwise).</p> <p>1) Input a 1 μs marker signal. 2) Adjust so that the marker peak and scale coincides at every div.</p>
A, SWEEP TIME 0.1 μs	TC303 (A, SWEEP)	X74-1580	<p>SWEEP TIME: A, B → 0.1 μs, H.DISPLAY: ALT, DTM: MIN (fully counterclockwise).</p> <p>1) Input a 50 ns marker signal. 2) Adjust so that the marker peak and scale coincides at every div.</p>
D.T. POSI * In case the R/O unit is not used: 1. Turn the MAIN and FINE potentiometers fully counterclockwise. 2. Align the of B sweep with 0.2 div. 3. Turn the MAIN and FINE potentiometers fully clockwise. 4. Align the start of B sweep with 10 div. The potentiometers used in the start and stop adjustments are the same.	VR103 (Start) VR104 (Stop)	X74-1580	<p>H.DISPLAY: ALT, AC-DC: GND, A.SWEEP: 1 ms, B.SWEEP: 10 μs</p> <p>1) Turn the MAIN and FINE potentiometers of D.T.M. control fully counterclockwise. 2) Adjust the R/O display to 0.40 ms with FINE. 3) Adjust VR103 so that the start of B sweep is aligned with 0.4 div., of the scale. 4) Turn the MAIN and FINE potentiometers of D.T.M. control fully clockwise. 5) Adjust the R/O display to 10.00 ms with FINE. 6) Adjust VR104 so that the start of B sweep is aligned with 10.00 div., of the scale.</p> 
CH1 1 MHz square wave	TC1 TC62 TC105	X80-1370 X73-2070	<p>V.MODE: CH1, VOLTS: 10 mV, AC-DC: DC H.DISPLAY: A.</p> <p>1) Input a 1 MHz square wave to CH1 and set its amplitude to 6 div. 2) Adjust the waveform to the best point.</p> <p>* With the 100 MHz band, provide an overshoot of 0.3 to 0.4 div. * With the 60 MHz band, provide an overshoot of 0.1 to 0.2 div. * With the 40 MHz band, provide an overshoot of 0.1 to 0.2 div.</p> <p>Specification: (Above) 0.5, (Below) 0.5, (Above + Below) = Less than 0.7 div.</p>
CH2 1 MHz square wave	TC205 TC206	X73-2070	<p>V.MODE: CH2, VOLTS: 10 mV, AC-DC: DC H.DISPLAY: A.</p> <p>1) Input a 1 MHz square wave to CH2 and set its amplitude to 6 div. 2) Adjust the waveform to the best point.</p> <p>3) Check that the overshoot in each range from 5 mV to 0.1 V is within the specification. (Check both CHs.)</p> <p>* Provide overshoot in the same way as CH1.</p> <p>Specification: Same as CH1.</p>
CH3 1 MHz square wave	TC302	X73-2070	<p>V.MODE: CH3, H.DISPLAY: A.</p> <p>1) Input a 1 MHz square wave to CH3 and set its amplitude to 6 div. 2) Adjust the waveform to the best point.</p>

ADJUSTMENT


VERTICAL UNIT (X73-2070-0X)

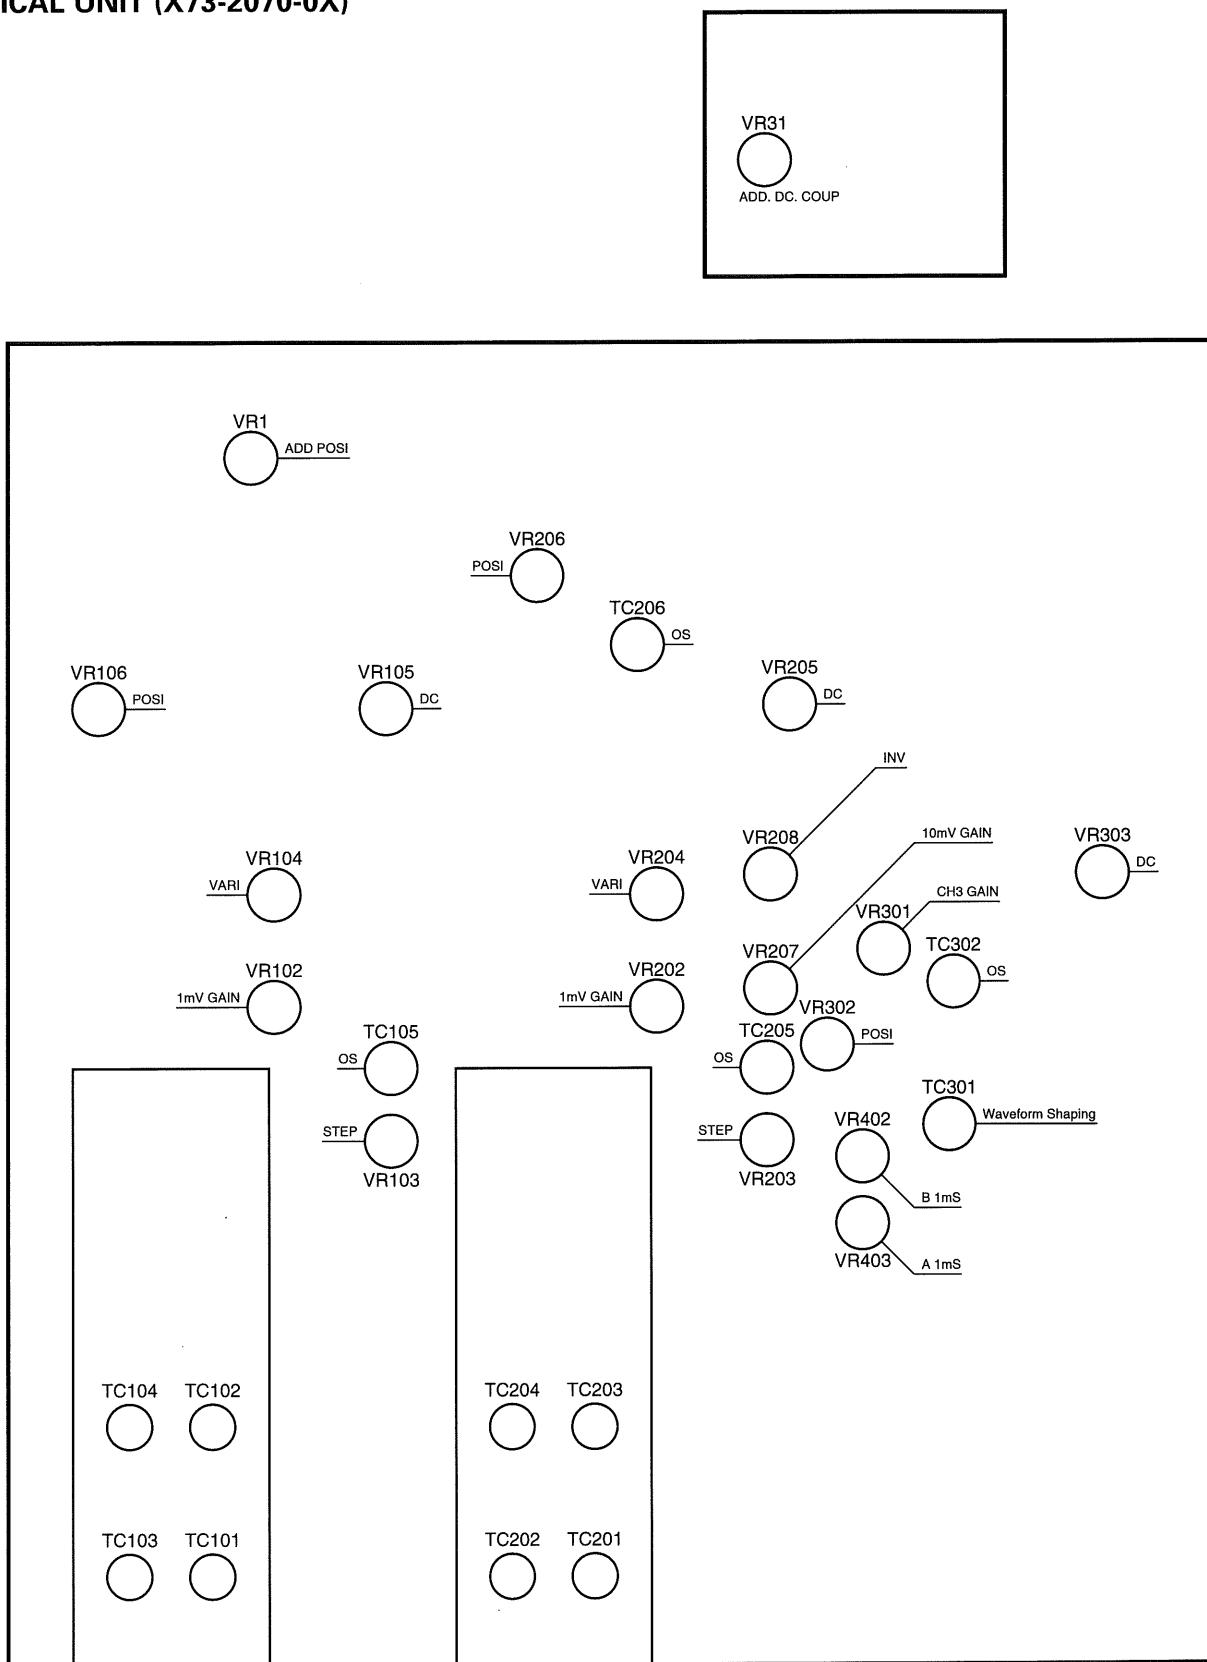

FRONT

ADJUSTMENT


HORIZONTAL UNIT (X74-1580-0X)

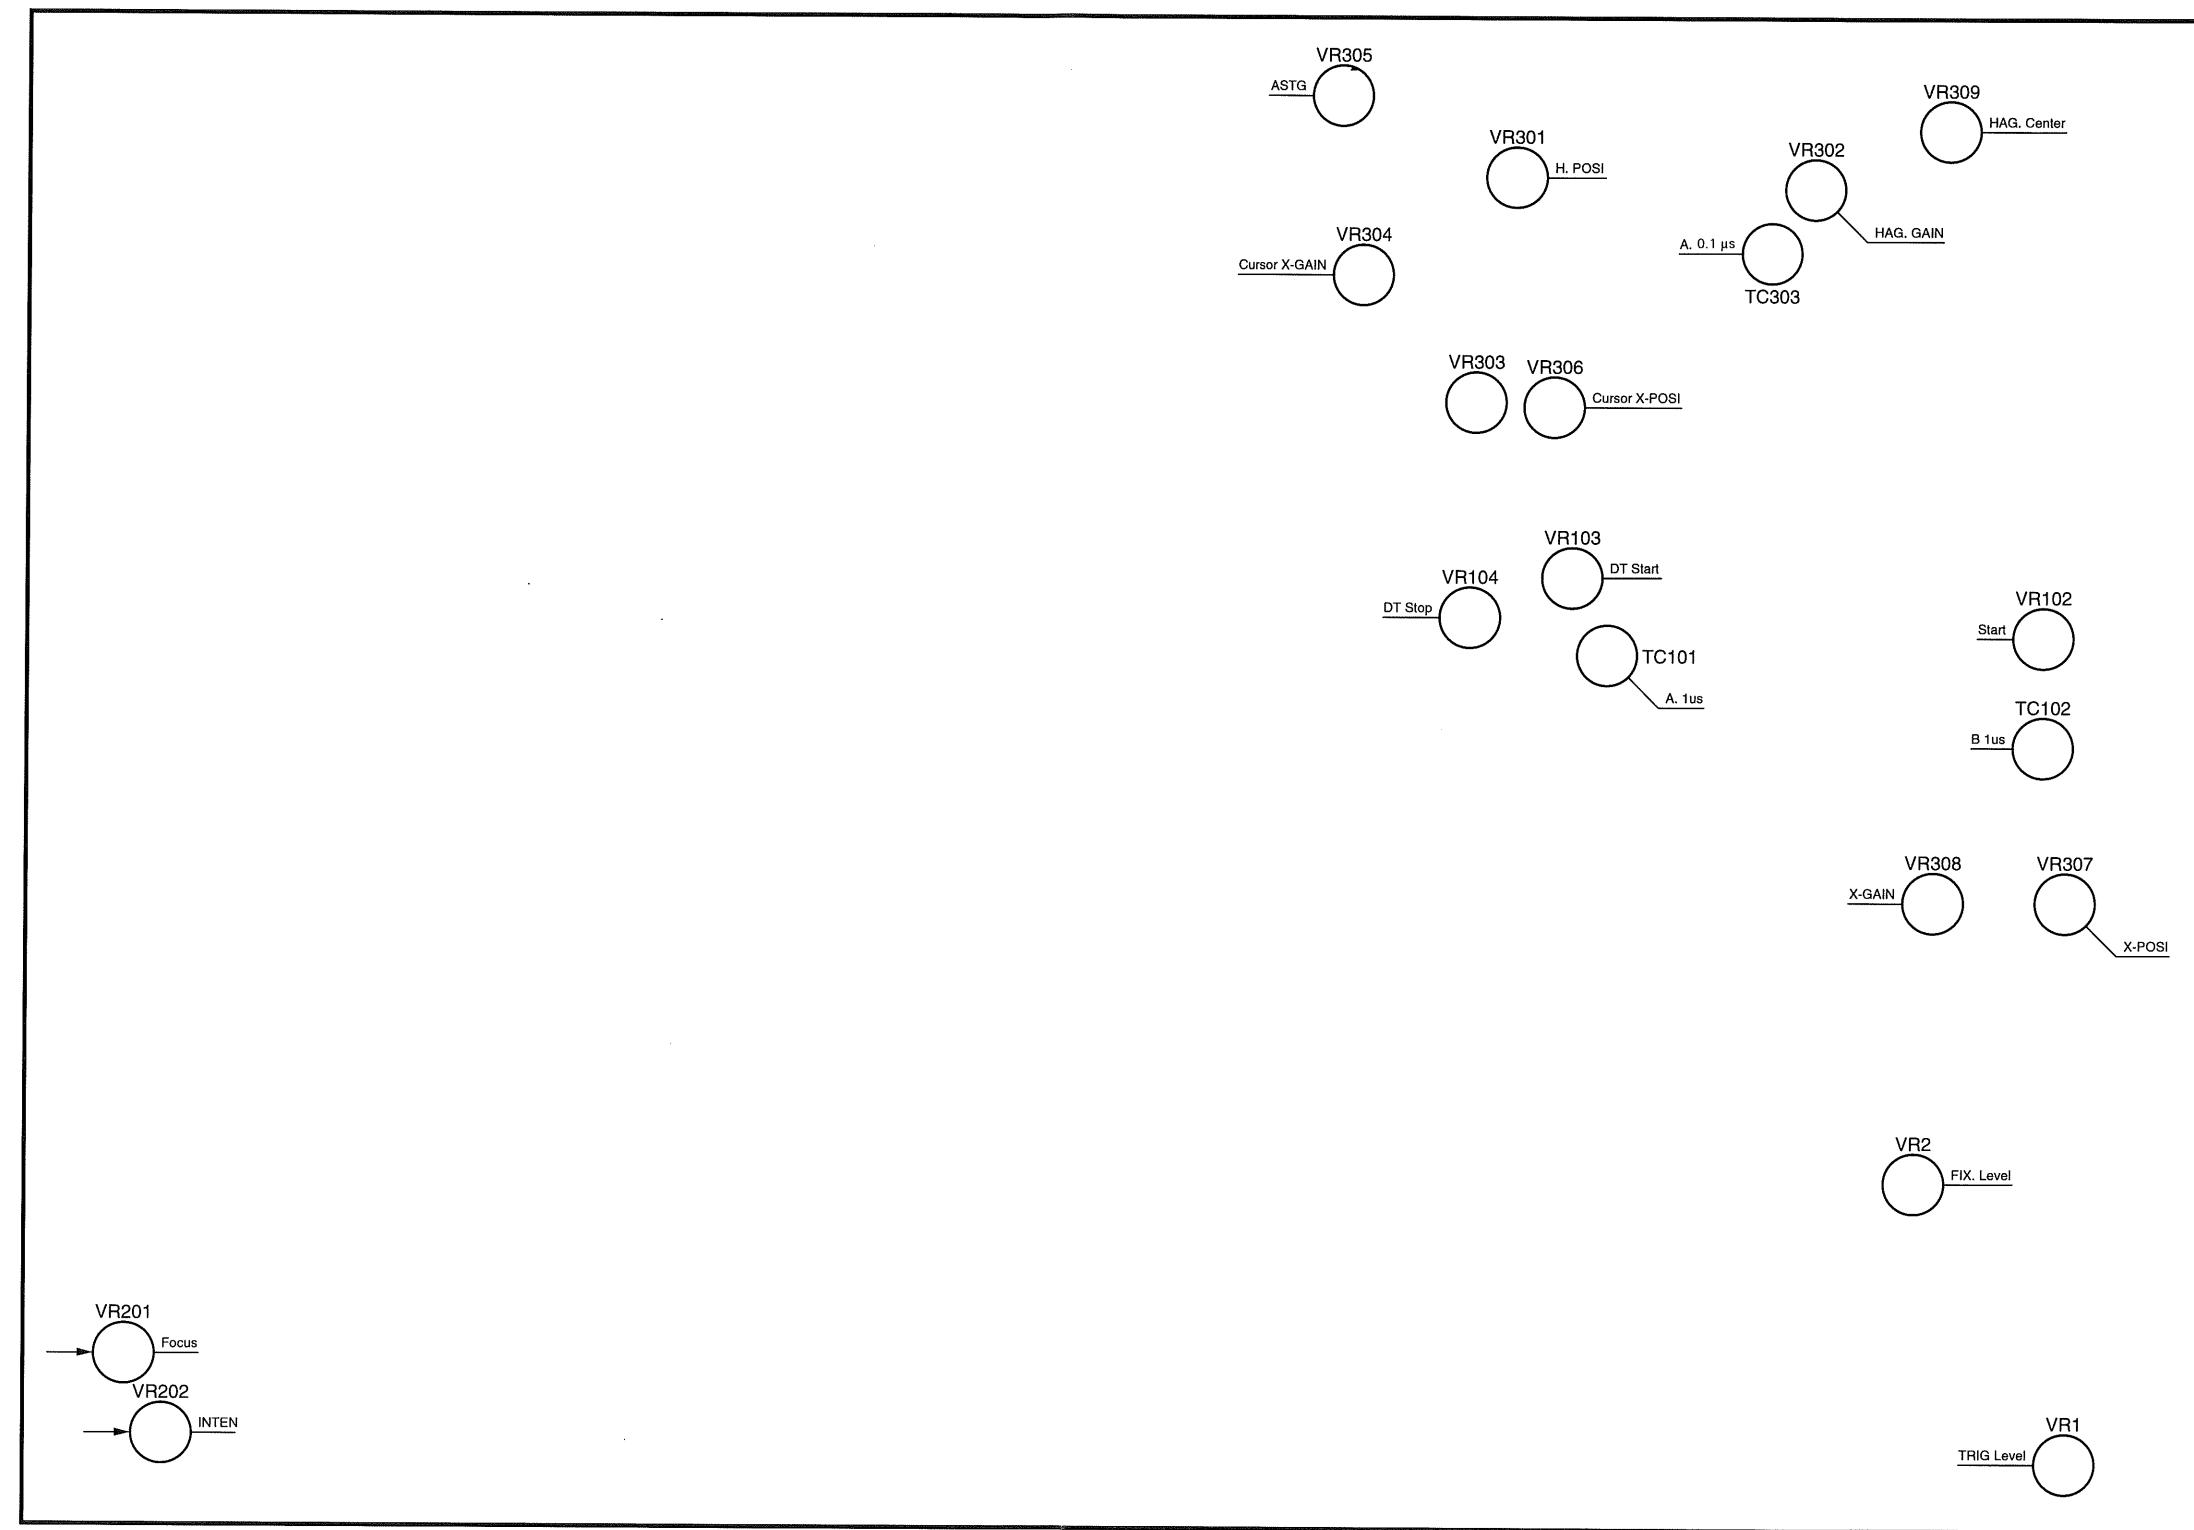

FRONT

ADJUSTMENT

FINAL UNIT (X80-1370-0X)

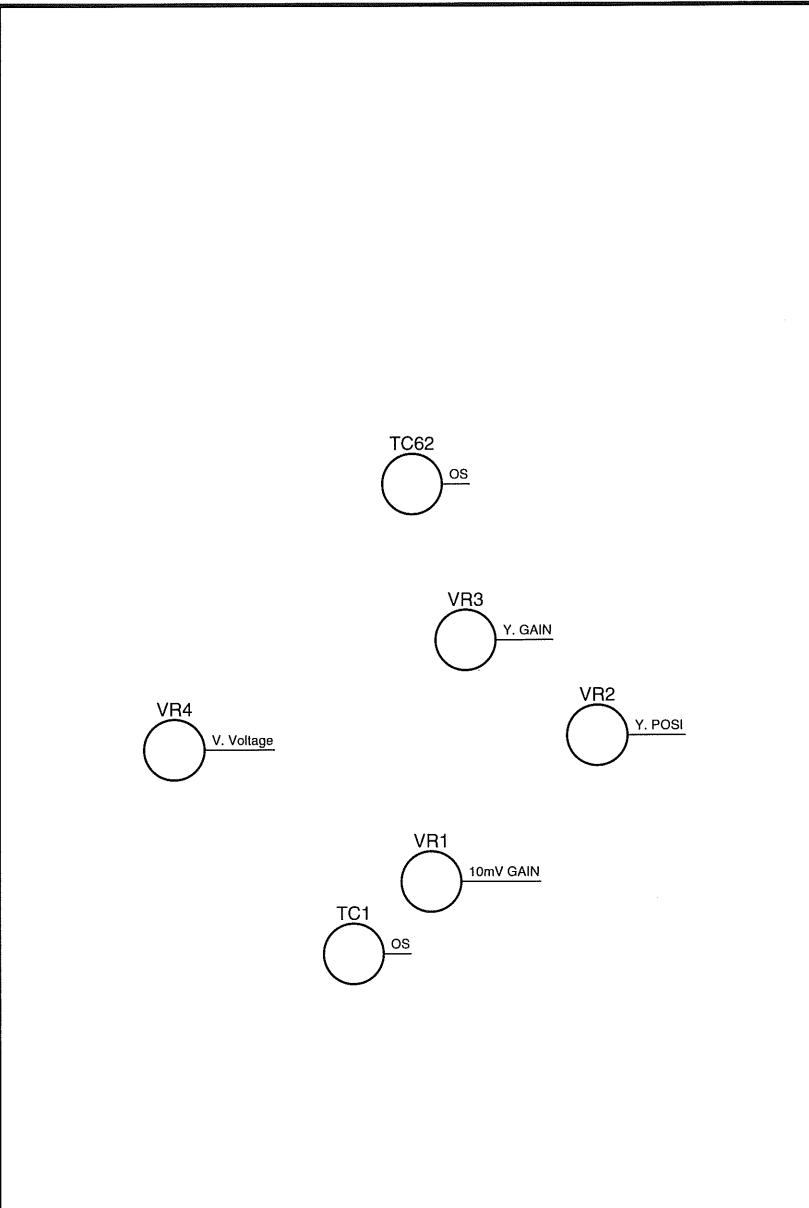

TROUBLESHOOTING

When operating the CS-5200, be sure to use the proper procedure and check all panel settings.

A wrong setting cause abnormal operation from even a good product. For example, observation of a waveform with high noise components is accompanied by jitter. In such a case, the jitter can be corrected by setting the trigger coupling to HFREJ. If there is any function which you do not understand, check out by reading the instruction manual. If the operation is abnormal even when the operating procedure is correct, remove the top case and bottom panel.

CAUTION
HIGH VOLTAGE PARTS ARE INSIDE THE EQUIPMENT. THEY ARE EXTREMELY DANGEROUS.

Check all PC boards to ensure that there is no unplugged connector or soldering defect.

Some problems may be corrected by applying correct adjustment. For example, if the trace moves up and down when the Vertical Variable control is turned, it can be corrected by adjusting the Variable balance. For the adjustment methods, read the descriptions of adjustment procedures.

The description in the troubleshooting section use the same circuit names as those used in the block diagram. Refer to the block diagram when reading the troubleshooting.

First, start with checking the power supply block.
Check the voltages at U401 on X74-1580.

pin no.	voltage
1	+140
4	+55
6	+12
8	-12
10	+5
11	-8

OK (Acceptable): Go to next step.
NG (Unacceptable): There is a problem in the power supply block. Check the regulator circuit

a: In case no spot is displayed on the CRT in the X-Y mode.

Check that voltages at pins 1 and 4 of P7 on the X74-1580. OK: Check the voltages at pins 1 and 3 of P5 on the X80-1370.
OK: There is a problem in the BLK amp. (Go to b.)
NG: There is a problem in the vertical amp. (Go to i.)
NG: There is a problem in the horizontal amp. (Go to c.)

b: Check if the voltage at JW18 on X74-1580 is correct.

OK: There is a problem in the BLK amp.
NG: There is a problem in the HIGH Volts converter.

c: Short-circuit the bases of Q306 and Q307 on X74-1580.

A spot is displayed on the CRT:
There is a problem somewhere before the X amp. (Go to d.)
Nothing is displayed on the CRT:
Short the collectors of Q310 and Q311.
A spot is displayed on the CRT:
There is a problem in the MAG amp or R/O SW.
Nothing is displayed on the CRT:
There is a problem in H-FINAL.

d: Short-circuit the collector of Q151 on X74-1580 with the chassis.

A spot is displayed on the CRT:
There is a problem in the Vertical block.
Nothing is displayed on the CRT:
There is a problem in the X amp.

e: In case no trace is displayed on the CRT in the A sweep mode.

Measure the waveform at pin 12 of U102 on X74-1580.
OK: Measure every waveform after U102 to locate the defective position.
NG: Measure the A SWEEP GATE, A SWEEP, A SWEEP STOP and HOLD OFF waveforms to locate the defective position.

f: In case no trace is displayed on the CRT in the B sweep mode.

Measure the waveform at pin 12 of U105 on X74-1580.
OK: Measure every waveform after U105 to locate the defective position.
NG: Measure the B SWEEP GATE, B SWEEP, B SWEEP STOP and DTP circuit waveforms to locate the defective position.

g: Intensity is not modulated in ALT sweep mode.

Check the waveform at the collector of Q116 on X74-1580.
OK: There is a problem in INTEN.
NG: There is a problem in the BLK amp.

h: Triggering cannot be applied.

Check the waveform at the collector of Q151 on the X74-1580.
OK: Check the waveform at the collector of Q158 on X74-1580.
OK: There is a problem in the Schmitt circuit.
NG: There is a problem in the Trig. Coup.
NG: There is a problem in the trigger selector.

TROUBLESHOOTING

i: Trace is not displayed.

Short-circuit the bases of Q7 and Q8 on X80-1370 and check if a trace is displayed on or near the center.

OK: Short-circuit the bases of Q1 and Q2 on X80-1370 and check if a trace is displayed on or near the center.

OK: There is a problem in X73-2070. Check the defective point by shorting each signal line.

NG: There is a problem in the T.SEP amp or R/O SW on X80-1370.

NG: There is a problem in V. FINAL.

j: TV synchronization is impossible.

Check the waveforms of the video amp on X74-1580.

OK: There is a problem in the Schmitt circuit.

NG: There is a problem in the circuitry before the video amp.

Check the defective position following the signal flow.
Be sure to check both TV-H and TV-V.

k: The channels are not displayed properly.

Check the outputs from V-MODE LOGIC on X73-2070.

OK: There is a problem in the circuitry before the POSI amp of one of the channels. Check the waveforms.

NG: Check the V-CLK waveform.

OK: There is a problem in the V-MODE LOGIC.

NG: There is a problem in the H-MODE LOGIC on X74-1580.

l: ADD is not possible.

There is a problem in the delay line driver on X73-2070.

m: CHOP sweep is not possible.

Check the waveform at the collector of Q118 on X74-1580.

OK: There is a problem in the H-MODE LOGIC.

NG: There is a problem in the CHOP generator.

n: Auto free-run is not possible.

Check +5 V at pin 1 of U106 on X74-1580.

OK: There is a problem in the A sweep gate.

NG: There is a problem in the free-run circuit.

o: Characters are not displayed on the CRT.

● Check the CURSOR MODE SW and R/O INTEN.

● Check the blanking signals at P24-1, 3 and 5.

OK: Check the signals at ROX at P24-8 and ROY at P24-7.

If NG, go to the next check item. If OK, check V FINAL or H FINAL.

NG: There is a problem in the blanking circuitry.

(Check U15, U14, U5 and X2 and their surroundings.)

p: Character are not displayed properly on the CRT:

● Check if the CPU (U1) operates normally.

(Check the conditions of X1, 10 MHz, U1, data bus and address bus.)

- Trace ROX from the input to output to find if there is any abnormal position. Also check ROY from the input to output.

(Check U7, U9, U11, U13, U8, U10 and U12 and their surroundings.)

OK: There is a problem in V FINAL or H FINAL.

NG: There is a problem in the ROX or ROY output circuits.

q: Character data is not displayed properly on the CRT.

- Trace the character data input circuit and its surroundings to find if there is any abnormal position.

(Check U3, U5 and U17.)

OK: There is a problem in the Panel unit.

NG: There is a problem in the character data input circuit.

r: The cursor and DTP do not function properly.

- Check if the cursor and DTP voltages are output properly.

	Δ	ΔREF	DTP	CHECK POINT
Δ	0V	0V	4V	P23-8
ΔREF	0V	4V	0V	P23-14
DTP	4V	0V	0V	P23-18

OK: There is a problem in the ROX or ROY output circuit.

NG: There is a problem in the Panel unit.

s: Abnormality occurs with other function than above.

Trace the signal path of the defective function referring to the block diagram to locate the defective position.

When all of the troubles have been repaired above, start re-adjustments following the adjustment procedures.


PARTS LIST

CS-5230

Y70-1940-00

REF. NO	PARTS NO	NAME & DESCRIPTION
A 63-0109-03	PANEL ASS'Y	
B 41-0710-14	CAUTION LABEL, HIGH VOLTAGE	
B 42-3820-05	LABEL; CARTON BOX	
B 63-0218-20	INSTRUCTION MANUAL; JAPANESE	
B 63-0219-30	INSTRUCTION MANUAL; ENGLISH	
E 30-1929-05	BS POWER CORD	
E 30-1950-05	JIS POWER CORD	
E 30-1951-05	UL/CSA POWER CORD	
E 30-1952-05	CEE POWER CORD	
F 51-0031-05	FUSE (6X30MM) 630MA/250V	
F 51-0033-05	FUSE (6X30MM) 1A/250V	
H 10-2883-02	FORMED STYRENE PAD, FRONT	
H 10-2884-02	FORMED STYRENE PAD, REAR	
H 20-1727-04	VINYL COVER	
H 53-0150-04	CARTON BOX	
W 01-0406-14	ADJUTMENT ROD	
D 1	LN322GP	LED; GREEN
D 103	LN322GP	LED; GREEN
1	A 01-4017-02	CASE, TOP
2	A 01-4018-02	CASE, BOTTOM
3	A 13-2205-02	FRAME, LEFT
4	A 13-2206-02	FRAME, RIGHT
5	A 13-2207-12	FRAME, CENTER
6	A 21-2421-03	DECORATIVE PANEL, LARGE
7	A 21-2425-04	DECORATIVE PANEL, SMALL
8	A 22-1307-02	SUB PANEL
9	A 63-0110-01	MOLD PANEL, LARGE
10	A 63-0111-02	MOLD PANEL, SMALL
11	A 83-0067-02	REAR PANEL
12	B 11-0518-04	FILTER
13	B 41-2069-04	CAUTION LABEL
14	B 73-0084-04	NAME PLATE; MODEL NO.
15	D 21-0935-04	EXTENSION SHAFT
16	E 18-0365-05	AC SELECTOR WITH 6X30MM FUSE
17	E 21-0686-04	TERMINAL, CAL
18	E 23-0552-04	EARTH TERMINAL
20	F 11-1206-13	SHIELD CASE, CRT
21	F 11-1269-03	SHIELD CASE
22	F 15-0733-04	FELT (CRT SHIELD)
23	F 20-3013-03	INSULATOR, LARGE
24	F 20-3014-04	INSULATOR, SMALL
25	F 29-0528-05	INSULATOR TUBE
26	J 02-0089-05	RUBBER FOOT
27	J 02-0509-04	TIKT STAND
28	J 19-1622-05	CORD CLAMP
29	J 19-1653-23	HOLDER FOR CRT
30	J 21-2573-04	HOLDER FOR LEG
31	J 21-4853-04	BRACKET, FRONT
32	J 21-4854-04	BRACKET, REAR
33	J 21-4855-04	BRACKET
34	J 42-0558-05	BUSHING
35	J 59-0403-05	NYLON RIVET (ILLUMI)
36	K 01-0541-05	HANDLE
37	K 21-0919-04	KNOB; 5 USED
38	K 21-0920-04	KNOB; VARI
39	K 21-0940-04	KNOB; A SWP
40	K 23-0818-04	KNOB; V/DIV
41	K 24-3005-04	PUSH SW; POWER
42	K 27-0590-04	PUSH BUTTON; GRAYWHITE
43	K 27-3618-14	LEVER
44	K 29-0877-04	KNOB; VR
45	L 07-1509-05	POWER TRANSFORMER
46	L 38-0531-05	ROTATION COIL
47	S 40-2532-05	POWER SW
48	W 01-0503-04	REAR RUBBER FOOT/CORD WRAP
49	X 66-1400-00	PANEL UNIT
50	X 73-2070-00	VERTICAL UNIT
51	X 74-1580-00	HORIZONTAL UNIT
52	X 77-1870-00	R/O UNIT
53	X 80-1370-00	FINAL AMP UNIT
54	X 81-3270-00	DELAY LINE UNIT
55	150VTM31A	CRT

MODEL PC-33 (LOW CAPACITY PROBE)

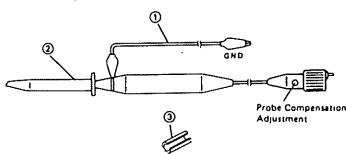


ITEM	DESCRIPTION	PARTS NO.
①	Ground Wire Assembly	E30-1883-08
②	Retractable Hook Tip	E29-0540-08
③	Marker (Orange)	B42-1950-08

CS-5235

X70-1950-00


REF. NO	PARTS NO	NAME & DESCRIPTION
A 63-0164-03	PANEL ASS'Y	
B 41-0710-14	CAUTION LABEL, HIGH VOLTAGE	
B 42-3820-05	LABEL; CARTON BOX	
B 63-0218-20	INSTRUCTION MANUAL; JAPANESE	
B 63-0219-30	INSTRUCTION MANUAL; ENGLISH	
E 30-1929-05	BS POWER CORD	
E 30-1950-05	JIS POWER CORD	
E 30-1951-05	UL/CSA POWER CORD	
E 30-1952-05	CEE POWER CORD	
F 51-0031-05	FUSE (6X30MM) 630MA/250V	
F 51-0033-05	FUSE (6X30MM) 1A/250V	
H 10-2883-02	FORMED STYRENE PAD, FRONT	
H 10-2884-02	FORMED STYRENE PAD, REAR	
H 20-1727-04	VINYL COVER	
H 53-0151-04	CARTON BOX	
W 01-0406-14	ADJUTMENT ROD	
D 1	LN322GP	LED; GREEN
D 103	LN322GP	LED; GREEN
1	A 01-4017-02	CASE, TOP
2	A 01-4018-02	CASE, BOTTOM
3	A 13-2205-02	FRAME, LEFT
4	A 13-2206-02	FRAME, RIGHT
5	A 13-2207-12	FRAME, CENTER
6	A 21-2422-03	DECORATIVE PANEL, LARGE
7	A 21-2426-04	DECORATIVE PANEL, SMALL
8	A 22-1307-02	SUB PANEL
9	A 63-0110-01	MOLD PANEL, LARGE
10	A 63-0111-02	MOLD PANEL, SMALL
11	A 83-0067-02	REAR PANEL
12	B 11-0518-04	FILTER
13	B 41-2069-04	CAUTION LABEL
14	B 73-0085-04	NAME PLATE; MODEL NO.
15	D 21-0935-04	EXTENSION SHAFT
16	E 18-0365-05	AC SELECTOR WITH 6X30MM FUSE
17	E 21-0686-04	TERMINAL, CAL
18	E 23-0552-04	EARTH TERMINAL
20	F 11-1206-13	SHIELD CASE, CRT
21	F 11-1268-03	SHIELD CASE
22	F 15-0733-04	FELT (CRT SHIELD)
23	F 20-3013-03	INSULATOR, LARGE
24	F 20-3014-04	INSULATOR, SMALL
25	F 29-0528-05	INSULATOR TUBE
26	J 02-0089-05	RUBBER FOOT
27	J 02-0509-04	TIKT STAND
28	J 19-1622-05	CORD CLAMP
29	J 19-1653-23	HOLDER FOR CRT
30	J 21-2573-04	HOLDER FOR LEG
31	J 21-4853-04	BRACKET, FRONT
32	J 21-4854-04	BRACKET, REAR
33	J 21-4855-04	BRACKET
34	J 42-0558-05	BUSHING
35	J 59-0403-05	NYLON RIVET (ILLUMI)
36	K 01-0541-05	HANDLE
37	K 21-0919-04	KNOB; 5 USED
38	K 21-0920-04	KNOB; VARI
39	K 21-0940-04	KNOB; A SWP
40	K 23-0818-04	KNOB; V/DIV
41	K 24-3005-04	PUSH SW; POWER
42	K 27-0590-04	PUSH BUTTON; GRAYWHITE
43	K 27-3618-14	LEVER
44	K 29-0877-04	KNOB; VR
45	L 07-1509-05	POWER TRANSFORMER
46	L 38-0531-05	ROTATION COIL
47	S 40-2532-05	POWER SW
48	W 01-0503-04	REAR RUBBER FOOT/CORD WRAP
49	X 66-1400-00	PANEL UNIT
50	X 73-2070-00	VERTICAL UNIT
51	X 74-1580-00	HORIZONTAL UNIT
52	X 77-1870-00	R/O UNIT
53	X 80-1370-00	FINAL AMP UNIT
54	X 81-3270-00	DELAY LINE UNIT
55	150VTM31A	CRT

MODEL PC-35 (LOW CAPACITY PROBE)

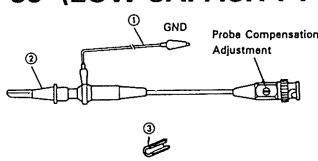

ITEM	DESCRIPTION	PARTS NO.
①	Ground Wire Assembly	E30-1883-08
②	Retractable Hook Tip	E29-0540-08
③	Marker (Orange)	B42-1950-08

DISASSEMBLY

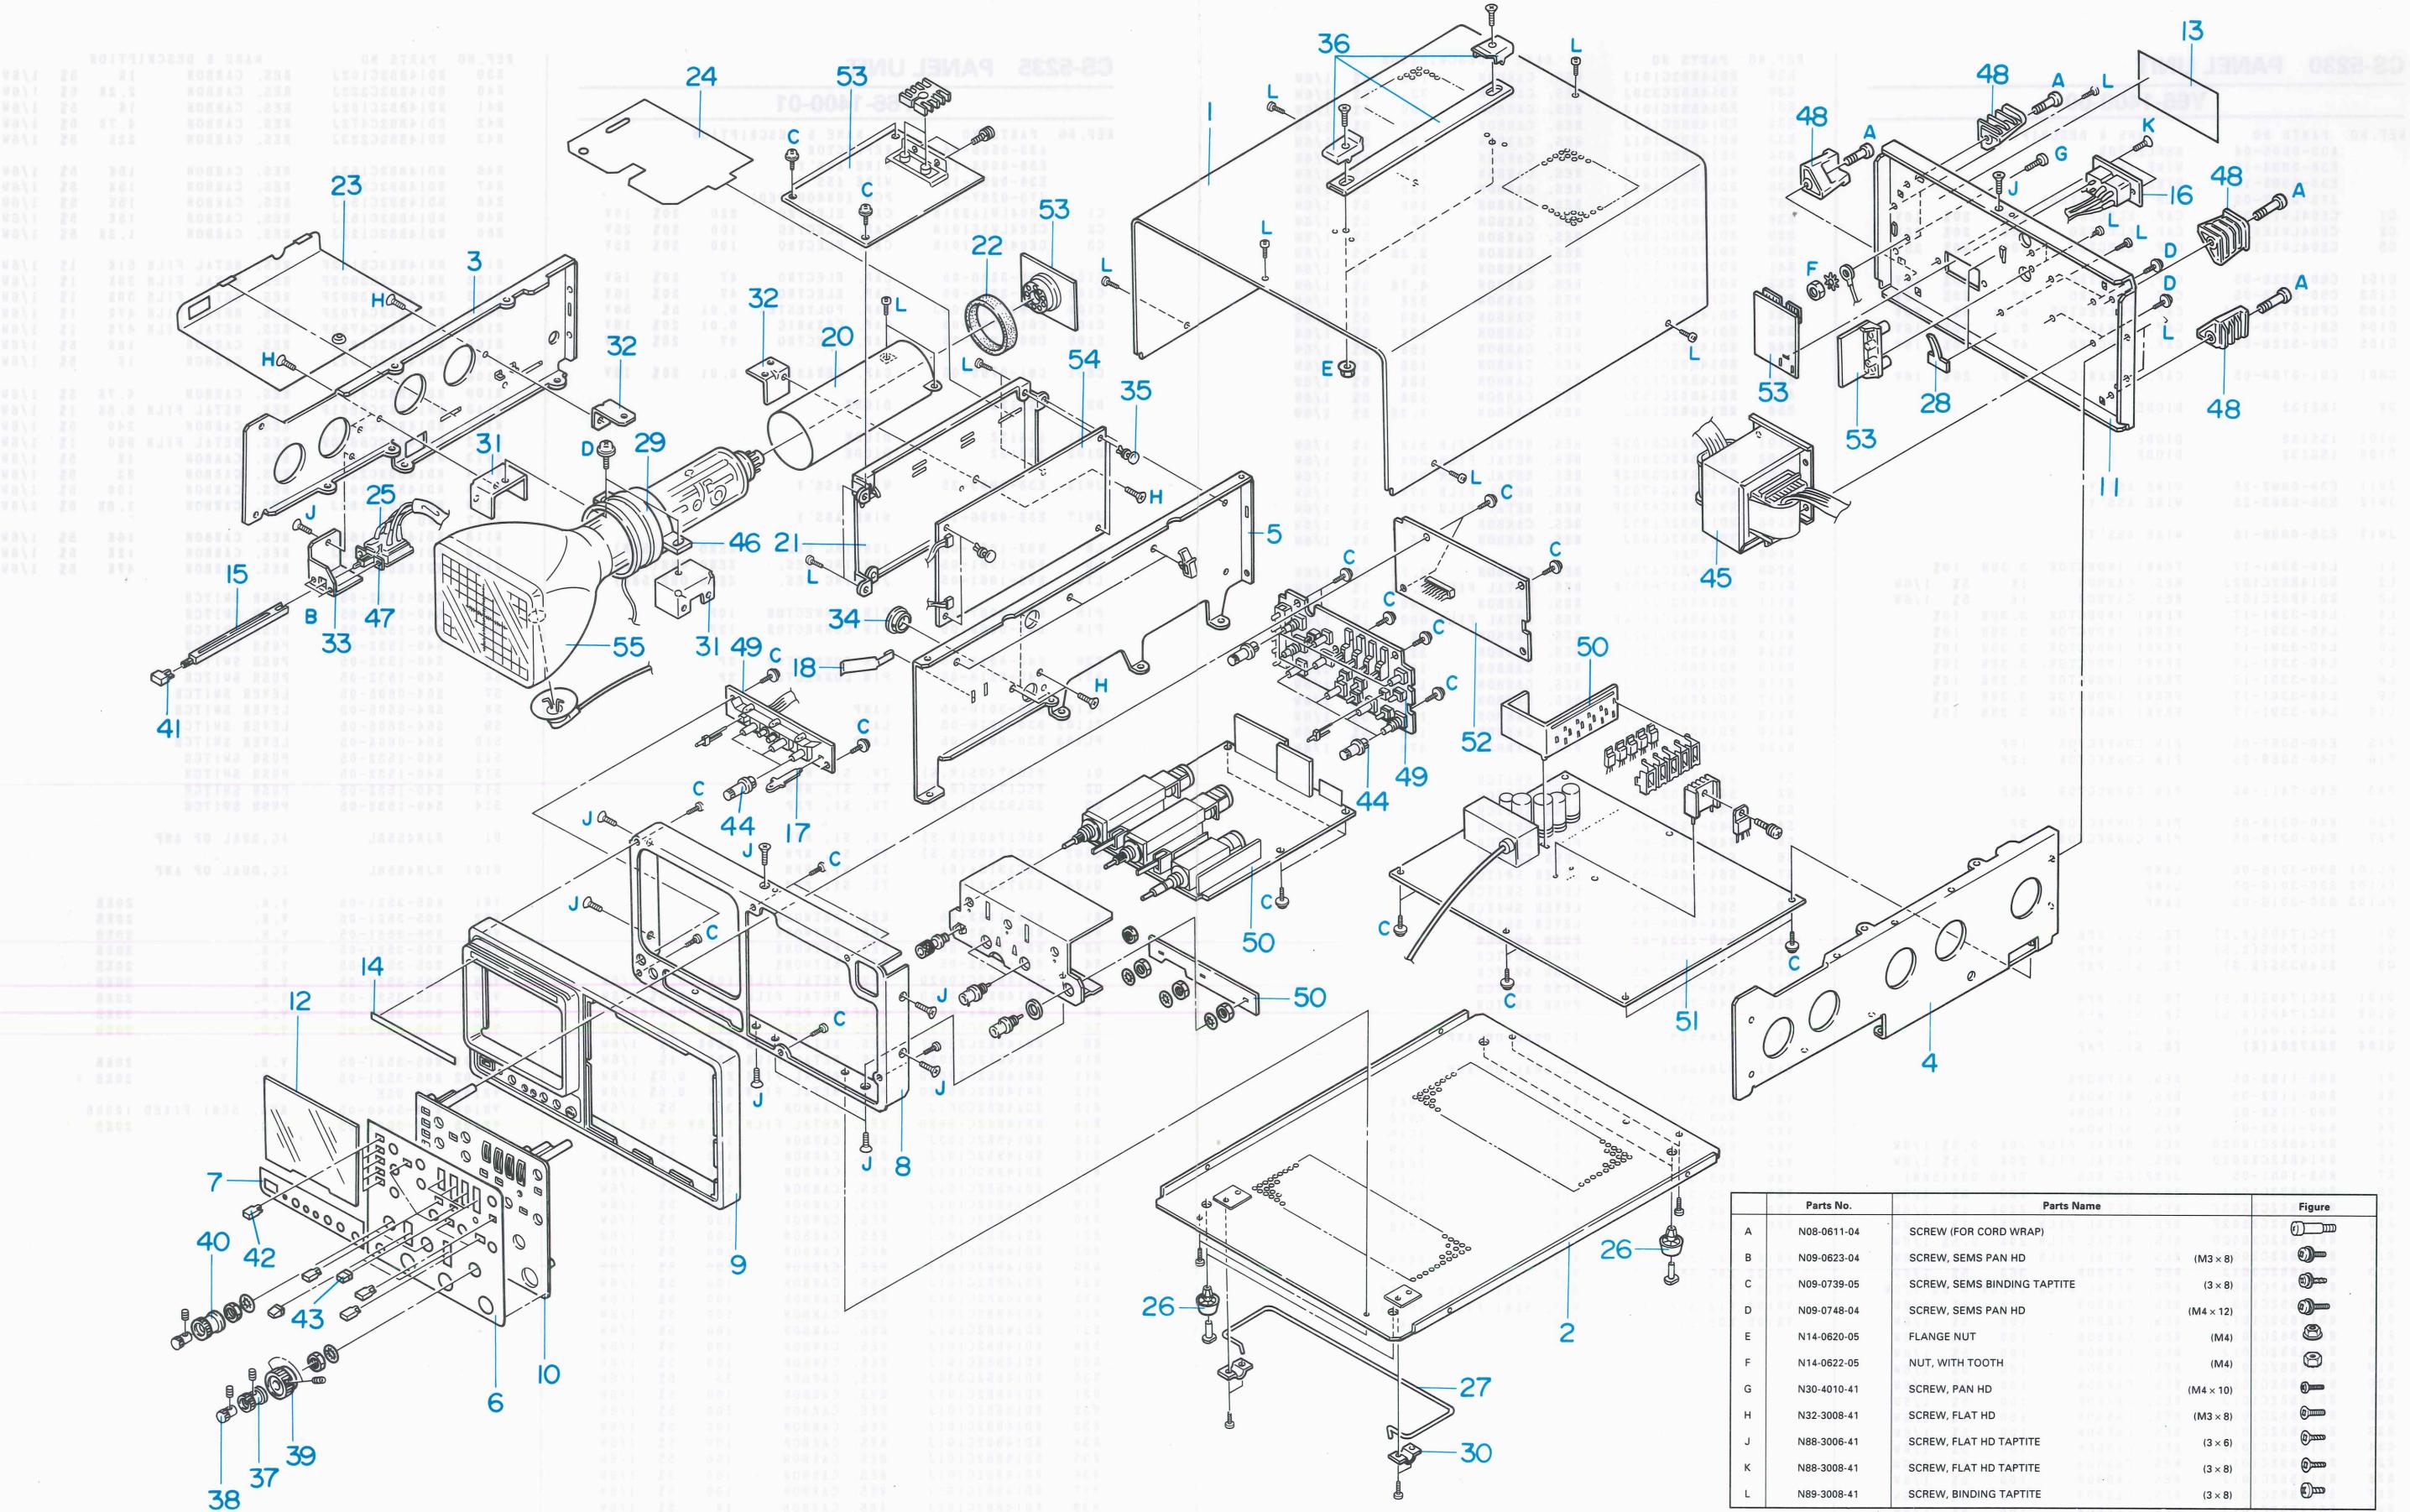

	Parts No.	Parts Name	Figure
A	N08-0611-04	SCREW (FOR CORD WRAP)	
B	N09-0623-04	SCREW, SEMS PAN HD	
C	N09-0739-05	SCREW, SEMS BINDING TAPITIE	
D	N09-0748-04	SCREW, SEMS PAN HD	
E	N14-0620-05	FLANGE NUT	
F	N14-0622-05	NUT, WITH TOOTH	
G	N30-4010-41	SCREW, PAN HD	
H	N32-3008-41	SCREW, FLAT HD	
J	N88-3006-41	SCREW, FLAT HD TAPITIE	
K	N88-3008-41	SCREW, FLAT HD TAPITIE	
L	N89-3008-41	SCREW, BINDING TAPITIE	

PARTS LIST

CS-5230 PANEL UNIT

Y66-1400-00

REF. NO	PARTS NO	NAME & DESCRIPTION
A33-0505-04	REFLECTOR	
E38-0994-15	WIRE ASS'Y	
E38-0995-15	WIRE ASS'Y	
J73-0287-02	PCB (UNMOUNTED)	
C1	CE04LW1A221H	CAP. ELECTRO 220 20% 10V
C2	CE04LW1E101H	CAP. ELECTRO 100 20% 25V
C3	CE04LW1E101H	CAP. ELECTRO 100 20% 25V
C101	C90-3228-05	CAP. ELECTRO 47 20% 16V
C102	C90-3228-05	CAP. ELECTRO 47 20% 16V
C103	CF92FV1H103J	CAP. POLYESTER 0.01 5% 50V
C104	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C105	C90-3228-05	CAP. ELECTRO 47 20% 16V
C801	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
D2	ISS132	DIODE
D101	ISS132	DIODE
D102	ISS132	DIODE
JW11	E38-0992-25	WIRE ASS'Y
JW12	E38-0993-25	WIRE ASS'Y
JW17	E38-0996-15	WIRE ASS'Y
L1	L40-3391-17	FERRI INDUCTOR 3.3UH 10%
L2	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
L3	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
L4	L40-3391-17	FERRI INDUCTOR 3.3UH 10%
L5	L40-3391-17	FERRI INDUCTOR 3.3UH 10%
L6	L40-3391-17	FERRI INDUCTOR 3.3UH 10%
L7	L40-3391-17	FERRI INDUCTOR 3.3UH 10%
L8	L40-3391-17	FERRI INDUCTOR 3.3UH 10%
L9	L40-3391-17	FERRI INDUCTOR 3.3UH 10%
L10	L40-3391-17	FERRI INDUCTOR 3.3UH 10%
P15	E40-5067-05	PIN CONNECTOR 10P
P16	E40-5069-05	PIN CONNECTOR 12P
P23	E40-7411-05	PIN CONNECTOR 26P
P26	E40-0218-05	PIN CONNECTOR 2P
P27	E40-0218-05	PIN CONNECTOR 2P
PL101	B30-3016-05	LAMP
PL102	B30-3016-05	LAMP
'PL103	B30-3016-05	LAMP
Q1	2SC1740S(R,S)	TR. SI, NPN
Q2	2SC1740S(R,S)	TR. SI, NPN
Q3	2SA933S(R,S)	TR. SI, PNP
Q101	2SC1740S(R,S)	TR. SI, NPN
Q102	2SC1740S(R,S)	TR. SI, NPN
Q103	2SC1318A(R)	TR. SI, NPN
Q104	2SA720A(R)	TR. SI, PNP
R1	R90-1182-05	RES. NETWORK
R2	R90-1182-05	RES. NETWORK
R3	R90-1182-05	RES. NETWORK
R4	R90-1182-05	RES. NETWORK
R5	RN14BK2C1002D	RES. METAL FILM 10K 0.5% 1/6W
R6	RN14BK2C2002D	RES. METAL FILM 20K 0.5% 1/6W
R7	R92-1061-05	JUMPING RES. ZERO OHM(5MH)
R8	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R9	RN14BK2C2203F	RES. METAL FILM 220K 1% 1/6W
R10	RN14BK2C2202F	RES. METAL FILM 22K 1% 1/6W
R11	RN14BK2C2002D	RES. METAL FILM 20K 0.5% 1/6W
R12	RN14BK2C2002D	RES. METAL FILM 20K 0.5% 1/6W
R13	RD14BB2C361J	RES. CARBON 360 5% 1/6W
R14	RN14BK2C1962D	RES. METAL FILM 19.6K 0.5% 1/6W
R15	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R16	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R17	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R18	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R19	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R20	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R21	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R22	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R23	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R24	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R25	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R26	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R27	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R28	RD14BB2C101J	RES. CARBON 100 5% 1/6W

PARTS LIST

CS-5235 PANEL UNIT

Y66-1400-01

REF. NO	PARTS NO	NAME & DESCRIPTION
R29	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R30	RD14BB2C330J	RES. CARBON 33 5% 1/6W
R31	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R32	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R33	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R34	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R35	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R36	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R37	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R38	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R39	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R40	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R41	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R42	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R43	RD14BB2C23J	RES. CARBON 22K 5% 1/6W
R44	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R45	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R46	RD14BB2C153J	RES. CARBON 15K 5% 1/6W
R47	RD14BB2C153J	RES. CARBON 15K 5% 1/6W
R48	RD14BB2C153J	RES. CARBON 15K 5% 1/6W
R49	RD14BB2C153J	RES. CARBON 15K 5% 1/6W
R50	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W
R51	RN14BK2C5102F	RES. METAL FILM 51K 1% 1/6W
R52	RN14BK2C3902F	RES. METAL FILM 39K 1% 1/6W
R53	RN14BK2C3902F	RES. METAL FILM 39K 1% 1/6W
R54	RN14BK2C4702F	RES. METAL FILM 47K 1% 1/6W
R55	RN14BB2C4702F	RES. METAL FILM 47K 1% 1/6W
R56	C80-3228-05	CAP. ELECTRO 47 20% 16V
R57	C90-3228-05	CAP. ELECTRO 47 20% 16V
R58	C90-3228-05	CAP. ELECTRO 47 20% 16V
R59	C90-3228-05	CAP. ELECTRO 47 20% 16V
R60	RN14BK2C183J	RES. CARBON 18K 5% 1/6W
R61	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R62	RN14BK2C6801F	RES. METAL FILM 6.8K 1% 1/6W
R63	RN14BK2C424J	RES. CARBON 240 5% 1/6W
R64	RD14BB2C6800F	RES. METAL FILM 680 1% 1/6W
R65	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R66	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R67	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R68	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W
R69	RD14BB2C123J	RES. CARBON 12K 5% 1/6W
R70	RD14BB2C163J	RES. CARBON 16K 5% 1/6W
R71	RD14BB2C123J	RES. CARBON 12K 5% 1/6W
R72	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
S1	S40-1532-05	PUSH SWITCH
S2	S40-1532-05	PUSH SWITCH
S3	S40-1532-05	PUSH SWITCH
S4	S40-1532-05	PUSH SWITCH
S5	S40-1532-05	PUSH SWITCH
S6	S40-1532-05	PUSH SWITCH
S7	S64-0605-05	LEVER SWITCH
S8	S64-0605-05	LEVER SWITCH
S9	S64-0606-05	LEVER SWITCH
S10	S64-0604-05	LEVER SWITCH
S11	S40-1532-05	PUSH SWITCH
S12	S40-1532-05	PUSH SWITCH
S13	S40-1532-05	PUSH SWITCH
S14	S40-1532-05	PUSH SWITCH
Q1	2SC1740S(R,S)	TR. SI, NPN
Q2	2SC1740S(R,S)	TR. SI, NPN
Q3	2SA933S(R,S)	TR. SI, PNP
Q101	2SC1740S(R,S)	TR. SI, NPN
Q102	2SC1740S(R,S)	TR. SI, NPN
Q103	2SC1318A(R)	TR. SI, NPN
Q104	2SA720A(R)	TR. SI, PNP
U1	NJM4558L	IC, DUAL OP AMP
U101	NJM4558L	IC, DUAL OP AMP
R1	R90-1182-05	RES. NETWORK
R2	R90-1182-05	RES. NETWORK
R3	R90-1182-05	RES. NETWORK
R4	R90-1182-05	RES. NETWORK
R5	R90-1182-05	RES. NETWORK
R6	R90-1182-05	RES. NETWORK
R7	R92-1061-05	JUMPING RES. ZERO OHM(5MH)
R8	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R9	RN14BK2C2203F	RES. METAL FILM 220K 1% 1/6W
R10	RN14BK2C2202F	RES. METAL FILM 22K 1% 1/6W
R11	RN14BK2C2002D	RES. METAL FILM 20K 0.5% 1/6W
R12	RN14BK2C2002D	RES. METAL FILM 20K 0.5% 1/6W
R13	RD14BB2C361J	RES. CARBON 360 5% 1/6W
R14	RN14BK2C1962D	RES. METAL FILM 19.6K 0.5% 1/6W
R15	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R16	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R17	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R18	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R19	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R20	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R21	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R22	RD14BB2C101J	RES. CARBON 100 5% 1/

PARTS LIST

CS-5230 VERTICAL UNIT

X73-2070-00

REF. NO	PARTS NO	NAME & DESCRIPTION					
A22-1308-03	SUB PANEL						
E21-0667-05	METAL TERMINAL						
E23-0149-05	GND TERMINAL						
F01-2318-04	HEAT SINK						
F10-1590-14	SHIELD PLATE, ATT						
F10-1668-04	SHIELD PLATE						
J30-0623-04	SPACER						
J73-0283-22	PCB (UNMOUNTED)						
C2	CC45FCH1H101J	CAP. CERAMIC	100P	5%	50V		
C7	C91-0769-05	CAP. CERAMIC	0.01	20%	16V		
C30	C91-0747-05	CAP. CERAMIC	150P	10%	50V		
C31	C91-0747-05	CAP. CERAMIC	150P	10%	50V		
C32	C91-0748-05	CAP. CERAMIC	180P	10%	50V		
C33	C91-2595-05	CAP. CERAMIC	68P	5%	50V		
C34	CE04LW0J331M	CAP. ELECTRO	330	20%	6.3V		
C35	C91-0769-05	CAP. CERAMIC	0.01	20%	16V		
C36	C91-0745-05	CAP. CERAMIC	100P	10%	50V		
C37	C91-0745-05	CAP. CERAMIC	100P	10%	50V		
C38	C91-0745-05	CAP. CERAMIC	100P	10%	50V		
C39	CE04CW1C470M	CAP. ELECTRO	47	20%	16V		
C40	CE04LW1A470M	CAP. ELECTRO	47	20%	10V		
C51	CE04LW1C101M	CAP. ELECTRO	100	20%	16V		
C52	C91-0769-05	CAP. CERAMIC	0.01	20%	16V		
C53	C91-0769-05	CAP. CERAMIC	0.01	20%	16V		
C54	CE04LW1C330M	CAP. ELECTRO	33	20%	16V		
C57	CE04HW1C220M	CAP. ELECTRO	22	20%	16V		
C58	CC45FC1H080D	CAP. CERAMIC	9P	0.5P	50V		
C59	CE04LW1E470M	CAP. ELECTRO	47	20%	25V		
C101	C91-2605-05	CAP. CERAMIC	470P	5%	50V		
C102	C91-2580-05	CAP. POLYESTER	0.047	10%	400V		
C103	C91-2579-05	CAP. POLYESTER	0.01	10%	400V		
C104	C91-0769-05	CAP. CERAMIC	0.01	20%	16V		
C105	CE04LW1A101M	CAP. ELECTRO	100	20%	10V		
C110	CC45FCH1H680J	CAP. CERAMIC	68P	5%	50V		
C111	NO USE						
C112	CC45FC1H100D	CAP. CERAMIC	10P	0.5P	50V		
C113	C91-0769-05	CAP. CERAMIC	0.01	20%	16V		
C114	C91-0769-05	CAP. CERAMIC	0.01	20%	16V		
C117	CE04CW1C470M	CAP. ELECTRO	47	20%	16V		
C118	CE04LW1C101M	CAP. ELECTRO	100	20%	16V		
C122	CC45FCH1H560J	CAP. CERAMIC	56P	5%	50V		
C125	CF02FV1H332J	CAP. POLYESTER	3300P	5%	50V		
C201	C91-2603-05	CAP. CERAMIC	330P	5%	50V		
C202	C91-2580-05	CAP. POLYESTER	0.047	10%	400V		
C203	C91-2579-05	CAP. POLYESTER	0.01	10%	400V		
C204	C91-0769-05	CAP. CERAMIC	0.01	20%	16V		
C205	CE04LW1A101M	CAP. ELECTRO	100	20%	10V		
C210	CC45FCH1H680J	CAP. CERAMIC	68P	5%	50V		
C211	NO USE						
C212	CC45FC1H100D	CAP. CERAMIC	10P	0.5P	50V		
C213	C91-0769-05	CAP. CERAMIC	0.01	20%	16V		
C214	C91-0769-05	CAP. CERAMIC	0.01	20%	16V		
C217	CE04CW1C470M	CAP. ELECTRO	47	20%	16V		
C218	CE04LW1C101M	CAP. ELECTRO	100	20%	16V		
C221	CE04LW1E470M	CAP. ELECTRO	47	20%	25V		
C222	CC45FCH1H560J	CAP. CERAMIC	56P	5%	50V		
C225	CF02FV1H332J	CAP. POLYESTER	3300P	5%	50V		
C301	CC45FCH1H070D	CAP. CERAMIC	7P	0.5P	50V		
C302	CC45FCH1H150J	CAP. CERAMIC	15P	5%	50V		
C303	CK45FB1H102K	CAP. CERAMIC	1000P	10%	50V		
C304	NO USE						
C305	C91-0769-05	CAP. CERAMIC	0.01	20%	16V		
C306	CC45FCH1H220J	CAP. CERAMIC	22P	5%	50V		
C307	C91-0769-05	CAP. CERAMIC	0.01	20%	16V		
C313	C91-0769-05	CAP. CERAMIC	0.01	20%	16V		
C314	C91-0769-05	CAP. CERAMIC	0.01	20%	16V		
C315	NO USE						
C316	CE04EW1E470M	CAP. ELECTRO	47	20%	25V		
C319	CE04LW1C470M	CAP. ELECTRO	47	20%	16V		
C320	C91-0711-05	CAP. CERAMIC	1.5P	20%	50V		
C401	C91-0769-05	CAP. CERAMIC	0.01	20%	16V		
C402	C91-0769-05	CAP. CERAMIC	0.01	20%	16V		
C403	CE04LW1C470M	CAP. ELECTRO	47	20%	16V		
C404	C91-0769-05	CAP. CERAMIC	0.01	20%	16V		
C405	C91-0769-05	CAP. CERAMIC	0.01	20%	16V		

REF. NO	PARTS NO	NAME & DESCRIPTION					
C406	NO USE						
C407	C91-0769-05	CAP. CERAMIC	0.01	20%	16V		
C410	C91-0769-05	CAP. CERAMIC	0.01	20%	16V		
C411	NO USE						
C412	C91-0769-05	CAP. CERAMIC	0.01	20%	16V		
C418	CE04EW1A101M	CAP. ELECTRO	100	20%	10V		
C451	C91-0769-05	CAP. CERAMIC	0.01	20%	16V		
C452	C91-0769-05	CAP. CERAMIC	0.01	20%	16V		
C801	CK45B1H102K	CAP. CERAMIC	1000P	10%	50V		
D2	ISS132	DIODE					
D31	ISS132	DIODE					
D32	ISS132	DIODE					
D35	ISS132	DIODE					
D36	ISS132	DIODE					
D37	ISS132	DIODE					
D101	ISS132	DIODE					
D102	ISS132	DIODE					
D103	ISS132	DIODE					
D104	ISS132	DIODE					
D105	ISS132	DIODE					
D106	ISS132	DIODE					
D107	ISS132	DIODE					
D108	ISS132	DIODE					
D201	ISS132	DIODE					
D202	ISS132	DIODE					
D203	ISS132	DIODE					
D204	ISS132	DIODE					
D205	ISS132	DIODE					
D301	ISS132	DIODE					
D302	ISS132	DIODE					
D303	ISS132	DIODE					
D304	ISS132	DIODE					
D305	ISS132	DIODE					
D306	ISS132	DIODE					
D307	ISS132	DIODE					
D308	ISS132	DIODE					
D309	ISS132	DIODE					
JW6	E38-0885-05	WIRE ASS' Y; V TO H TRG					
JW10	E38-0986-05	WIRE ASS' Y; V TO H SWP					
JW301	E38-0887-15	WIRE ASS' Y; CH3 INPUT					
JW401	E38-0884-15	WIRE ASS' Y; PROBE DETECTION					
JW501	E38-0883-25	WIRE ASS' Y; SUB PANEL TO GND					
L1	L78-0553-05	NOISE FILTER					
L40	L40-2201-17	FERRI INDUCTOR	22UH	10%			
L51	L40-4791-17	FERRI INDUCTOR	4.7UH	10%			
L52	L40-4791-17	FERRI INDUCTOR	4.7UH	10%			
L301	L40-4781-17	FERRI INDUCTOR	0.47UH	10%			
P1	E04-0260-05	BNC RECEPTACLE (READOUT)					
P2	E04-0260-05	BNC RECEPTACLE (READOUT)					
P3	E04-0259-05	BNC RECEPTACLE					
P4	E40-7515-05	PIN CONNECTOR	3P				
P8	E40-7518-05	PIN CONNECTOR	6P				
P10	NO USE						
P11	E40-3242-05	PIN CONNECTOR	7P				
P12	E40-5066-05	PIN CONNECTOR	9P				
P13	E40-7515-05	PIN CONNECTOR	3P				
P201	E40-7432-05	PIN CONNECTOR	13P				
P202	E40-7423-05	PIN CONNECTOR	4P				
P203	E40-7430-05	PIN CONNECTOR	11P				
P204	E40-7426-05	PIN CONNECTOR	7P				
P205	E40-7422-05	PIN CONNECTOR	3P				
P206	E40-7426-05	PIN CONNECTOR	7P				
P207	E40-7432-05	PIN CONNECTOR	13P				
P208	E40-7432-05	PIN CONNECTOR	13P				
Q1	2SC1740S(R,S)	TR. SI, NPN					
Q2	2SC3778(D)	TR. SI, NPN					
Q3	2SC3778(D)	TR. SI, NPN					
Q32	2SC3066(G)	TR. SI, NPN					
Q33	2SC1740S(R,S)	TR. SI, NPN					
Q34	2SA933S(R,S)	TR. SI, PNP					

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
Q51	2SC1923(0)	TR. SI, NPN	R101	RD14BB2E220J	RES. CARBON 22 5% 1/4W
Q101	2SC1923(0)	TR. SI, NPN	R102	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
Q102	2SK404(E)	FET, N-CHANNEL	R103	RD14BB2C220J	RES. CARBON 22 5% 1/6W
Q103	2SC1923(0)	TR. SI, NPN	R104	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
Q106	2SC3779(D)	TR. SI, NPN	R107	RD14BB2C684J	RES. CARBON 680K 5% 1/6W
Q107	2SC3779(D)	TR. SI, NPN	R108	RD14BB2C220J	RES. CARBON 22 5% 1/6W
Q108	2SA1005(K)	TR. SI, PNP	R109	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
Q109	2SA1005(K)	TR. SI, PNP	R110	NO USE	
Q110	2SA1005(K)	TR. SI, PNP	R111	RD14BB2C160J	RES. CARBON 16 5% 1/6W
Q111	2SA1005(K)	TR. SI, PNP	R112	RD14BK2C2700F	RES. METAL FILM 270 1% 1/6W
Q114	2SA1005(K)	TR. SI, PNP	R113	NO USE	
Q152	2SA1005(K)	TR. SI, PNP	R114	RD14BB2C220J	RES. CARBON 22 5% 1/6W
Q153	2SA1005(K)	TR. SI, PNP	R115	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W
Q201	2SC1923(0)	TR. SI, NPN	R116	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W
Q202	2SK404(E)	FET, N-CHANNEL	R117	RN14BK2C3301F	RES. METAL FILM 3.3K 1% 1/6W
Q203	2SC1923(0)	TR. SI, NPN	R118	RN14BK2C2401F	RES. METAL FILM 2.4K 1% 1/6W
Q206	2SC3779(D)	TR. SI, NPN	R119	RN14BK2C5100F	RES. METAL FILM 510 1% 1/6W
Q207	2SC3779(D)	TR. SI, NPN	R120	RD14BB2C301J	RES. CARBON 300 5% 1/6W
Q208	2SA1005(K)	TR. SI, PNP	R121	RN14BK2C1004F	RES. METAL FILM 1K 1% 1/6W
Q209	2SA1005(K)	TR. SI, PNP	R122	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
Q210	2SA1005(K)	TR. SI, PNP	R123	RD14BB2C331J	RES. CARBON 330 5% 1/6W
Q211	2SA1005(K)	TR. SI, PNP	R124	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
Q214	2SA1005(K)	TR. SI, PNP	R125	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
Q215	2SC1740S(R,S)	TR. SI, NPN	R126	RD14BB2C273J	RES. CARBON 27K 5% 1/6W
Q252	2SA1005(K)	TR. SI, PNP	R127	RD14BB2C163J	RES. CARBON 16K 5% 1/6W
Q253	2SA1005(K)	TR. SI, PNP	R128	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
Q302	2SC1923(0)	TR. SI, NPN	R129	NO USE	
Q303	2SK404(E)	FET, N-CHANNEL	R130	RD14BB2C823J	RES. CARBON 82K 5% 1/6W
Q304	2SC1923(0)	TR. SI, NPN	R131	NO USE	
Q305	2SA1005(K)	TR. SI, PNP	R132	RN14BK2C4701F	RES. METAL FILM 4.7K 1% 1/6W
Q306	2SA1005(K)	TR. SI, PNP	R133	RN14BK2C47R0F	RES. METAL FILM 47 1% 1/6W
Q307	2SC1923(0)	TR. SI, NPN	R134	RN14BK2C1002F	RES. METAL FILM 10K 1% 1/6W
Q308	2SC1923(0)	TR. SI, NPN	R135	RN14BK2C1002F	RES. METAL FILM 10K 1% 1/6W
Q309	2SC1923(0)	TR. SI, NPN	R136	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W
Q310	2SA1005(K)	TR. SI, PNP	R137	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W
Q311	2SA1005(K)	TR. SI, PNP	R138	RN14BK2C1801F	RES. METAL FILM 1.8K 1% 1/6W
Q312	2SC1923(0)	TR. SI, NPN	R139	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q313	2SA1005(K)	TR. SI, PNP	R140	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q314	2SA1005(K)	TR. SI, PNP	R141	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W
R1	RN14BK2C2002F	RES. METAL FILM 20K 1% 1/6W	R142	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W
R2	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W	R143	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R3	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W	R144	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R6	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W	R145	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R7	RD14BB2C473J	RES. CARBON 47K 5% 1/6W	R146	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R8	RN14BK2C3900F	RES. METAL FILM 390 1% 1/6W	R147	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R9	RN14BK2C3900F	RES. METAL FILM 390 1% 1/6W	R148	RD14BB2C273J	RES. CARBON 27K 5% 1/6W
R10	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W	R149	RD14BB2C361J	RES. CARBON 360 5% 1/6W
R11	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W	R150	RD14BB2C333J	RES. CARBON 33K 5% 1/6W
R12	R92-1553-05	RES. SPECIAL POWER 620 5% 1W	R151	RD14BB2C513J	RES. CARBON 51K 5% 1/6W
R17	RN14BK2C6200F	RES. METAL FILM 620 1% 1/6W	R152	RD14BB2C333J	RES. CARBON 33K 5% 1/6W
R18	RN14BK2C6200F	RES. METAL FILM 620 1% 1/6W	R153	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R19	RN14BK2C39R0F	RES. METAL FILM 38 1% 1/6W	R154	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R20	RN14BK2C39R0F	RES. METAL FILM 39 1% 1/6W	R155	RD14BB2C752J	RES. CARBON 7.5K 5% 1/6W
R21	NO USE		R156	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R22	RN14BK2C6802F	RES. METAL FILM 68K 1% 1/6W	R157	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R31	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R158	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R32	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R159	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R33	RD14BB2C751J	RES. CARBON 750 5% 1/6W	R160	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R34	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	R161	RD14BB2C431J	RES. CARBON 430 5% 1/6W
R35	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R162	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R36	R90-0645-05	RES. NETWORK 4X10K	R163	RD14BB2C163J	RES. CARBON 15K 5% 1/6W
R37	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W	R164	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W
R38	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R165	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W
R39	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R166	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R40	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R170	R92-1578-05	RES. LINEAR PCT 3.8K 5% 1/6W
R41	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	R171	NO USE	
R42	RD14BB2C100J	RES. CARBON 10 5% 1/6W	R172	RD14BB2C100J	RES. CARBON 10 5% 1/6W
R43	RD14BB2C100J	RES. CARBON 10 5% 1/6W	R173	NO USE	
R44	RD14BB2C223J	RES. CARBON 22K 5% 1/6W	R174	RD14BB2C201J	RES. CARBON 200 5% 1/6W
R45	RD14BB2C223J	RES. CARBON 22K 5% 1/6W	R175	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R52	RD14BB2C391J	RES. CARBON 390 5% 1/6W	R176	NO USE	
R59	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W	R177	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R62	RD14BB2C301J	RES. CARBON 300 5% 1/6W	R201	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R63	RD14BB2C821J	RES. CARBON 820 5% 1/6W	R202	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R64	RD14BB2C133J	RES. CARBON 13K 5% 1/6W	R203	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R65	RD14BB2C910J	RES. CARBON 91 5% 1/6W	R204	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
R66	RD14BB2C910J	RES. CARBON 91 5% 1/6W	R207	RD14BB2C684J	RES. CARBON 680K 5% 1/6W
R67	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R208	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R68	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R209	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
R69	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R210	NO USE	
R70	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R211	RD14BB2C160J	RES. CARBON 16 5% 1/6W
R71	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R212	RN14BK2C2200F	RES. METAL FILM 220 1% 1/6W
R214	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R213	NO USE	
R215	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W	R216	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W
R217	RN14BK2C3301F	RES. METAL FILM 3.3K 1% 1/6W	R218	RN14BK2C2401F	RES. METAL FILM 2.4K 1% 1/6W
R219	RN14BK2C5100F	RES. METAL FILM 510 1% 1/6W	R220	RD14BB2C301J	RES. CARBON 300 5% 1/6W
R221	RN14BK2C1004F	RES. METAL FILM 1K 1% 1/6W	R222	RD14BK2C1004F	RES. METAL FILM 1K 1% 1/6W
R223	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W	R224	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R225	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W	R225	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
R226	RD14BB2C273J	RES. CARBON 27K 5% 1/6W	R345	R92-1579-05	RES. LINEAR PCT 220
R227	RD14BB2C163J	RES. CARBON 16K 5% 1/6W	R346	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R228	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R347	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W
R229	NO USE		R348	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R230	RD14BB2C823J	RES. CARBON 82K 5% 1/6W	R401	RN14BK2C2201F	RES. METAL FILM 2.2K 1% 1/6W
R231	NO USE		R407	RN14BK2C2201F	RES. METAL FILM 2.2K 1% 1/6W
R232	RN14BK2C4701F	RES. METAL FILM 4.7K 1% 1/6W	R413	RN14BK2C1801D	RES. METAL FILM 1.8K 0.5% 1/6W
R233	RN14BK2C47R0F	RES. METAL FILM 47 1% 1/6W	R414	RN14BK2C1002D	RES. METAL FILM 10K 0.5% 1/6W
R234	RN14BK2C1002F	RES. METAL FILM 10K 1% 1/6W	R415	RN14BK2C2002D	RES. METAL FILM 20K 0.5% 1/6W
R235	RN14BK2C1002F	RES. METAL FILM 10K 1% 1/6W	R416	RN14BK2C4022D	RES. METAL FILM 40.2K 0.5% 1/6W
R236	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W	R417	RN14BK2C8062D	RES. METAL FILM 80.6K 0.5% 1/6W
R237	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W	R418	RN14BK2C1603D	RES. METAL FILM 160K 0.5% 1/6W
R238	RN14BK2C1801F	RES. METAL FILM 1.8K 1% 1/6W	R419	RN14BK2C2153D	RES. METAL FILM 215K 0.5% 1/6W
R239	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R420	NO USE	
R240	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R421	RN14BK2C1801D	RES. METAL FILM 1.8K 0.5% 1/6W
R241	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W	R422	RN14BK2C1002D	RES. METAL FILM 10K 0.5% 1/6W
R242	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W	R423	RN14BK2C2002D	RES. METAL FILM 20K 0.5% 1/6W
R243	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R424	RN14BK2C4022D	RES. METAL FILM 40.2K 0.5% 1/6W
R244	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R425	RN14BK2C8062D	RES. METAL FILM 80.6K 0.5% 1/6W
R245	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R426	RN14BK2C1603D	RES. METAL FILM 160K 0.5% 1/6W
R246	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R427	RN14BK2C2153D	RES. METAL FILM 215K 0.5% 1/6W
R247	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R428	NO USE	
R248	RD14BK2C73J	RES. CARBON 27K 5% 1/6W	R429	RN14BK2C5101F	RES. METAL FILM 5.1K 1% 1/6W
R249	RD14BK2C361J	RES. CARBON 360 5% 1/6W	R430	RN14BK2C1003D	RES. METAL FILM 100K 0.5% 1/6W
R250	RD14BK2C333J	RES. CARBON 33K 5% 1/6W	R431	RN14BK2C5002D	RES. METAL FILM 50K 0.5% 1/6W
R251	RD14BK2C513J	RES. CARBON 51K 5% 1/6W	R432	RN14BK2C3002D	RES. METAL FILM 30K 0.5% 1/6W
R252	RD14BK2C333J	RES. CARBON 33K 5% 1/6W	R433	RN14BK2C2002D	RES. METAL FILM 20K 0.5% 1/6W
R253	RD14BK2C220J	RES. CARBON 22 5% 1/6W	R434	NO USE	
R254	RD14BK2C220J	RES. CARBON 22 5% 1/6W	R435	RN14BK2C1502F	RES. METAL FILM 15K 1% 1/6W
R255	RD14BK2C752J	RES. CARBON 7.5K 5% 1/6W	R436	RN14BK2C1003D	RES. METAL FILM 100K 0.5% 1/6W
R256	RD14BK2C332J	RES. CARBON 3.3K 5% 1/6W	R437	RN14BK2C5002D	RES. METAL FILM 50K 0.5% 1/6W
R257	RD14BK2C101J	RES. CARBON 100 5% 1/6W	R438	RN14BK2C3002D	RES. METAL FILM 30K 0.5% 1/6W
R258	RD14BK2C101J	RES. CARBON 100 5% 1/6W	R439	RN14BK2C2002D	RES. METAL FILM 20K 0.5% 1/6W
R259	RD14BK2C102J	RES. CARBON 1K 5% 1/6W	R440	RN14BK2C2101F	RES. METAL FILM 2.1K 1% 1/6W
R260	RD14BK2C102J	RES. CARBON 1K 5% 1/6W	R441	RD14BK2C152J	RES. CARBON 1.5K 5% 1/6W
R261	RD14BK2C343J	RES. CARBON 430 5% 1/6W	R442	RN14BK2C1002F	RES. METAL FILM 10K 1% 1/6W
R262	RD14BK2C221J	RES. CARBON 220 5% 1/6W	R443	RN14BK2C2002F	RES. METAL FILM 20K 1% 1/6W
R263	RD14BK2C153J	RES. CARBON 15K 5% 1/6W	R444	RN14BK2C4022F	RES. METAL FILM 40.2K 1% 1/6W
R264	RD14BK2C622J	RES. CARBON 6.2K 5% 1/6W	R445	RN14BK2C8062F	RES. METAL FILM 80.6K 1% 1/6W
R265	RD14BK2C362J	RES. CARBON 3.6K 5% 1/6W	R446	RD14BK2C221J	RES. CARBON 220 5% 1/6W
R266	RD14BK2C101J	RES. CARBON 100 5% 1/6W	R447	RD14BK2C221J	RES. CARBON 220 5% 1/6W
R267	RD14BK2C73J	RES. CARBON 47K 5% 1/6W	S101	S64-0603-05	LEVER SWITCH
R268	RD14BK2C361J	RES. CARBON 360 5% 1/6W	S102	S60-0608-05	ATTENUATOR
R269	RD14BK2C271J	RES. CARBON 270 5% 1/6W	S201	S64-0603-05	LEVER SWITCH
R270	R82-1578-05	RES. LINEAR PCT 3.9K 5% 1/6W	S202	S60-0608-05	ATTENUATOR
R271	RD14BK2C121J	RES. CARBON 120 5% 1/6W	S401	S60-0612-05	ROTARY SWITCH
R272	RD14BK2C100J	RES. CARBON 10 5% 1/6W	TC105	C81-2589-05	CAP. CERAMIC 22P 5% 50V
R273	RD14BK2C220J	RES. CARBON 22 5% 1/6W	TC106	C05-0468-05	CAP. TRIMMER 10P
R274	RD14BK2C201J	RES. CARBON 200 5% 1/6W	TC205	C05-0470-05	CAP. TRIMMER 20P
R275	RD14BK2C470J	RES. CARBON 47 5% 1/6W	TC206	C05-0468-05	CAP. TRIMMER 10P
R276	NO USE		TC301	C05-0468-05	CAP. TRIMMER 10P
R277	RD14BK2C473J	RES. CARBON 47K 5% 1/6W	TC302	C05-0471-05	CAP. TRIMMER 30P
R300	RD14BB2C101J	RES. CARBON 100 5% 1/6W	TH101	112-102-2	THERMISTOR
R301	RN14BK2C8003F	RES. METAL FILM 800K 1% 1/6W	TH102	112-201-2FX	THERMISTOR
R302	RN14BK2C2003F	RES. METAL FILM 200K 1% 1/6W	TH201	112-102-2	THERMISTOR
R303	NO USE		TH202	112-201-2FX	THERMISTOR
R304	RD14BB2C470J	RES. CARBON 47 5% 1/6W	TH301	112-201-2FX	THERMISTOR
R305	RD14BK2C331J	RES. CARBON 330 5% 1/6W	U1	KMS01	IC, LINEAR
R306	RD14BK2C222J	RES. CARBON 2.2K 5% 1/6W	U2	SN74LS158N	IC, QUAD 2-1 DATA SELECTOR/MPX
R307	RD14BK2C822J	RES. CARBON 8.2K 5% 1/6W	U3	SN74LS112AN	IC, DUAL J-K F.F.
R308	RD14BK2C302J	RES. CARBON 3K 5% 1/6W	U4	SN74LS00N	IC, QUAD 2-INPUT NAND GATE
R309	RD14BK2C470J	RES. CARBON 47 5% 1/6W	U101	KMC13	IC, LINEAR
R310	RD14BK2C470J	RES. CARBON 47 5% 1/6W	U102	KMC12	IC, LINEAR
R311	RD14BK2C362J	RES. CARBON 3.6K 5% 1/6W	U201	KMC13	IC, LINEAR
R312	RD14BK2C362J	RES. CARBON 3.6K 5% 1/6W	U202	KMC12	IC, LINEAR
R313	RD14BK2C621J	RES. CARBON 620 5% 1/6W	U401	NJN072L	IC, J-FET INPUT OP AMP
R314	RD14BB2C221J	RES. CARBON 220 5% 1/6W	U402	NJN072D	IC, J-FET INPUT OP AMP
R315	RD14BK2C302J	RES. CARBON 3K 5% 1/6W	U403	NJN4558L	IC, DUAL OP AMP
R316	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W	U404	TC4053BP	IC, TRIPLE 2-CH MPX/DE-MPX
R317	RD14BK2C112J	RES. CARBON 1.1K 5% 1/6W	U405	TC4053BP	IC, TRIPLE 2-CH MPX/DE-MPX
R318	RD14BK2C112J	RES. CARBON 1.1K 5% 1/6W	VRI	R12-0679-05	RES. SEMI FIXED 22KB
R319	RN14BK2C4300F	RES. METAL FILM 430 1% 1/6W	VR31	R12-0880-05	RES. SEMI FIXED 220
R320	RN14BK2C3301F	RES. METAL FILM 3.3K 1% 1/6W	VR102	R12-0885-05	RES. SEMI FIXED 100
R321	RN14BK2C6801F	RES. METAL FILM 6.8K 1% 1/6W	VR103	R12-0680-05	RES. SEMI FIXED 47K
R322	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W	VR104	R12-0885-05	RES. SEMI FIXED 100
R323	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W	VR105	R12-0679-05	RES. SEMI FIXED 22KB
R324	RD14BB2C203J	RES. CARBON 20K 5% 1/6W	VR106	R12-0679-05	RES. SEMI FIXED 22KB
R325	RD14BB2C333J	RES. CARBON 33K 5% 1/6W			
R326	RD14BB2C473J	RES. CARBON 47K 5% 1/6W			
R327	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W			
R328	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W			
R329	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W			
R330	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W			
R331	NO USE				
R332	RD14BB2C113J	RES. CARBON 11K 5% 1/6W			
R333	RD14BB2C302J	RES. CARBON 3K 5% 1/6W			
R334	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W			
R335	RD14BB2C821J	RES. CARBON 820 5% 1/6W			
R336	RD14BB2C471J	RES. CARBON 470 5% 1/6W			
R337	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W			
R338	R92-1577-05	RES. LINEAR PCT 1K 5% 1/6W			
R339	NO USE				
R340	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
R341	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
R342	NO USE				
R343	RD14BK2C121J	RES. CARBON 120 5% 1/6W			
R344	RD14BB2C101J	RES. CARBON 100 5% 1/6W			

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
VR202	R12-0885-05	RES. SEMI FIXED 100
VR203	R12-0680-05	RES. SEMI FIXED 47K
VR204	R12-0885-05	RES. SEMI FIXED 100
VR205	R12-0679-05	RES. SEMI FIXED 22KB
VR206	R12-0679-05	RES. SEMI FIXED 22KB
VR207	R12-0885-05	RES. SEMI FIXED 100
VR208	R12-0885-05	RES. SEMI FIXED 100
VR301	R12-0887-05	RES. SEMI FIXED 470
VR302	R12-0680-05	RES. SEMI FIXED 47K
VR303	R12-0679-05	RES. SEMI FIXED 22KB
VR402	R12-3589-05	RES. SEMI FIXED 22K
VR403	R12-3589-05	RES. SEMI FIXED 22K

CS-5235 VERTICAL UNIT

X73-2070-01

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
A22-1308-03	SUB PANEL		C303	CK45FB1H102K	CAP. CERAMIC 1000P 10% 50V
E21-0667-05	METAL TERMINAL		C304	NO USE	
E23-0149-05	GND TERMINAL		C305	C91-0768-05	CAP. CERAMIC 0.01 20% 16V
F01-2318-04	HEAT SINK		C306	CG45FCH1H220J	CAP. CERAMIC 22P 5% 50V
F10-1590-14	SHIELD PLATE, ATT		C307	C91-0768-05	CAP. CERAMIC 0.01 20% 16V
F10-1668-04	SHIELD PLATE		C313	C91-0768-05	CAP. CERAMIC 0.01 20% 16V
J30-0623-04	SPACER		C314	C91-0768-05	CAP. CERAMIC 0.01 20% 16V
J73-0283-22	PCB (UNMOUNTED)		C315	NO USE	
C2	CC45FCH1H101J	CAP. CERAMIC 100P 5% 50V	C316	CE04EW1E470M	CAP. ELECTRO 47 20% 25V
C7	C91-0768-05	CAP. CERAMIC 0.01 20% 16V	C319	CE04LW1C470M	CAP. ELECTRO 47 20% 16V
C30	C91-0747-05	CAP. CERAMIC 150P 10% 50V	C320	C91-0711-05	CAP. CERAMIC 1.5P 20% 50V
C31	C91-0747-05	CAP. CERAMIC 150P 10% 50V	C402	C91-0768-05	CAP. CERAMIC 0.01 20% 16V
C32	C91-0748-05	CAP. CERAMIC 180P 10% 50V	C403	CE04LW1C470M	CAP. ELECTRO 47 20% 16V
C33	C91-2505-05	CAP. CERAMIC 68P 5% 50V	C407	C91-0768-05	CAP. CERAMIC 0.01 20% 16V
C34	CE04LW01J331M	CAP. ELECTRO 330 20% 6.3V	C410	C91-0768-05	CAP. CERAMIC 0.01 20% 16V
C35	C91-0769-05	CAP. CERAMIC 0.01 20% 16V	C411	NO USE	
C36	C91-0745-05	CAP. CERAMIC 100P 10% 50V	C412	C91-0768-05	CAP. CERAMIC 0.01 20% 16V
C37	C91-0745-05	CAP. CERAMIC 100P 10% 50V	C418	CE04EW1A101M	CAP. ELECTRO 100 20% 10V
C38	C91-0745-05	CAP. CERAMIC 100P 10% 50V	C901	CK45B1H102K	CAP. CERAMIC 1000P 10% 50V
C39	CE04CW1C470M	CAP. ELECTRO 47 20% 16V	D2	1SS132	DIODE
C40	CE04LW1A470M	CAP. ELECTRO 47 20% 10V	D31	1SS132	DIODE
C51	CE04LW1C101M	CAP. ELECTRO 100 20% 16V	D32	1SS132	DIODE
C52	C91-0769-05	CAP. CERAMIC 0.01 20% 16V	D35	1SS132	DIODE
C53	C91-0769-05	CAP. CERAMIC 0.01 20% 16V	D36	1SS132	DIODE
C54	CE04LW1C330M	CAP. ELECTRO 33 20% 16V	D37	1SS132	DIODE
C57	CE04HW1C220M	CAP. ELECTRO 22 20% 16V	D201	1SS132	DIODE
C58	CC45FCH1H090D	CAP. CERAMIC 8P 0.5P 50V	D202	1SS132	DIODE
C59	CE04LW1E470M	CAP. ELECTRO 47 20% 25V	D203	1SS132	DIODE
C101	C91-2605-05	CAP. CERAMIC 470P 5% 50V	D204	1SS132	DIODE
C102	C91-2580-05	CAP. POLYESTER 0.047 10% 400V	D205	1SS132	DIODE
C103	C91-2579-05	CAP. POLYESTER 0.01 10% 400V	D206	1SS132	DIODE
C104	C91-0769-05	CAP. CERAMIC 0.01 20% 16V	D207	1SS132	DIODE
C105	CE04LW1A101M	CAP. ELECTRO 100 20% 10V	D208	1SS132	DIODE
C110	CC45FCH1H680J	CAP. CERAMIC 68P 5% 50V	D301	1SS132	DIODE
C111	NO USE		D302	1SS132	DIODE
C112	CG45FCH1H100D	CAP. CERAMIC 10P 0.5P 50V	D303	1SS132	DIODE
C113	C91-0769-05	CAP. CERAMIC 0.01 20% 16V	D304	1SS132	DIODE
C114	C91-0769-05	CAP. CERAMIC 0.01 20% 16V	D305	1SS132	DIODE
C117	CE04CW1C470M	CAP. ELECTRO 47 20% 16V	D306	1SS132	DIODE
C118	CE04LW1C101M	CAP. ELECTRO 100 20% 16V	D307	1SS132	DIODE
C122	CC45FCH1H560J	CAP. CERAMIC 56P 5% 50V	D308	1SS132	DIODE
C125	CF82FV1H332J	CAP. POLYESTER 3300P 5% 50V	D309	1SS132	DIODE
C201	C91-2603-05	CAP. CERAMIC 330P 5% 50V	JW6	E38-0985-05	WIRE ASS'Y; V TO H TRG
C202	C91-2580-05	CAP. POLYESTER 0.047 10% 400V	JW10	E38-0986-05	WIRE ASS'Y; V TO H SWP
C203	C91-2579-05	CAP. POLYESTER 0.01 10% 400V	JW301	E38-0987-15	WIRE ASS'Y; CH3 INPUT
C204	C91-0769-05	CAP. CERAMIC 0.01 20% 16V	JW501	E38-0988-25	WIRE ASS'Y; SUB PANEL TO GND
C205	CE04LW1A101M	CAP. ELECTRO 100 20% 10V	L1	L79-0553-05	NOISE FILTER
C210	CC45FCH1H680J	CAP. CERAMIC 68P 5% 50V	L40	L40-2201-17	FERRI INDUCTOR 22UH 10%
C211	NO USE		L51	L40-4781-17	FERRI INDUCTOR 4.7UH 10%
C212	CG45FCH1H100D	CAP. CERAMIC 10P 0.5P 50V	L52	L40-4781-17	FERRI INDUCTOR 4.7UH 10%
C213	C91-0769-05	CAP. CERAMIC 0.01 20% 16V	L301	L40-4781-17	FERRI INDUCTOR 0.47UH 10%
C214	C91-0769-05	CAP. CERAMIC 0.01 20% 16V	P1	E04-0259-05	BNC RECEPTACLE
C215	CF82FV1H332J	CAP. POLYESTER 3300P 5% 50V	P2	E04-0258-05	BNC RECEPTACLE
C216	CC45FCH1H680J	CAP. CERAMIC 68P 5% 50V	P3	E04-0258-05	BNC RECEPTACLE
C217	CE04CW1C470M	CAP. ELECTRO 47 20% 16V	P4	E40-7515-05	PIN CONNECTOR 3P
C218	CE04LW1C101M	CAP. ELECTRO 100 20% 16V	P8	E40-7518-05	PIN CONNECTOR 6P
C221	CE04LW1E470M	CAP. ELECTRO 47 20% 25V	P12	E40-5066-05	PIN CONNECTOR 9P
C222	CC45FCH1H560J	CAP. CERAMIC 56P 5% 50V	P13	E40-7515-05	PIN CONNECTOR 3P
C225	CF82FV1H332J	CAP. POLYESTER 3300P 5% 50V	P201	E40-7432-05	PIN CONNECTOR 13P
C301	CC45FCH1H070D	CAP. CERAMIC 7P 0.5P 50V	P202	E40-7423-05	PIN CONNECTOR 4P
C302	CC45FCH1H150J	CAP. CERAMIC 15P 5% 50V	P203	E40-7430-05	PIN CONNECTOR 11P
			P204	E40-7426-05	PIN CONNECTOR 7P
			P205	E40-7422-05	PIN CONNECTOR 3P
			P206	E40-7426-05	PIN CONNECTOR 7P
			P207	E40-7432-05	PIN CONNECTOR 13P

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
P208	E40-7432-05	PIN CONNECTOR 13P	R62	RD14BB2C301J	RES. CARBON 300 5% 1/6W
Q1	2SC1740S(R,S)	TR. SI, NPN	R63	RD14BB2C821J	RES. CARBON 820 5% 1/6W
Q2	2SC3779(D)	TR. SI, NPN	R64	RD14BB2C133J	RES. CARBON 13K 5% 1/6W
Q3	2SC3779(D)	TR. SI, NPN	R65	RD14BB2C910J	RES. CARBON 91 5% 1/6W
Q32	2SC3066(G)	TR. SI, NPN	R66	RD14BB2C910J	RES. CARBON 91 5% 1/6W
Q33	2SC1740S(R,S)	TR. SI, NPN	R67	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q34	2SA933S(R,S)	TR. SI, PNP	R68	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q51	2SC1923(O)	TR. SI, NPN	R69	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q101	2SC1923(O)	TR. SI, NPN	R70	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q102	2SK404(E)	FET, N-CHANNEL	R71	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q103	2SC1923(O)	TR. SI, NPN	R101	RD14BB2E220J	RES. CARBON 22 5% 1/4W
Q106	2SC3779(D)	TR. SI, NPN	R102	NO USE	
Q107	2SC3779(D)	TR. SI, NPN	R103	RD14BB2C220J	RES. CARBON 22 5% 1/6W
Q108	2SA1005(K)	TR. SI, PNP	R104	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
Q109	2SA1005(K)	TR. SI, PNP	R107	RD14BB2C684J	RES. CARBON 680K 5% 1/6W
Q110	2SA1005(K)	TR. SI, PNP	R108	RD14BB2C220J	RES. CARBON 22 5% 1/6W
Q111	2SA1005(K)	TR. SI, PNP	R109	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
Q114	2SA1005(K)	TR. SI, PNP	R110	NO USE	
Q152	2SA1005(K)	TR. SI, PNP	R111	RD14BB2C160J	RES. CARBON 16 5% 1/6W
Q153	2SA1005(K)	TR. SI, PNP	R112	RN14BK2C2700F	RES. METAL FILM 270 1% 1/6W
Q201	2SC1923(O)	TR. SI, NPN	R113	NO USE	
Q202	2SK404(E)	FET, N-CHANNEL	R114	RD14BB2C220J	RES. CARBON 22 5% 1/6W
Q203	2SC1923(O)	TR. SI, NPN	R115	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W
Q206	2SC3779(D)	TR. SI, NPN	R116	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W
Q207	2SC3779(D)	TR. SI, NPN	R117	RN14BK2C3301F	RES. METAL FILM 3.3K 1% 1/6W
Q208	2SA1005(K)	TR. SI, PNP	R118	RN14BK2C2401F	RES. METAL FILM 2.4K 1% 1/6W
Q209	2SA1005(K)	TR. SI, PNP	R119	RN14BK2C5100F	RES. METAL FILM 510 1% 1/6W
Q210	2SA1005(K)	TR. SI, PNP	R120	RD14BB2C301J	RES. CARBON 300 5% 1/6W
Q211	2SA1005(K)	TR. SI, PNP	R121	RN14BK2C1004F	RES. METAL FILM 1M 1% 1/6W
Q214	2SA1005(K)	TR. SI, PNP	R122	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
Q215	2SC1740S(R,S)	TR. SI, NPN	R123	RD14BB2C331J	RES. CARBON 330 5% 1/6W
Q252	2SA1005(K)	TR. SI, PNP	R124	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
Q253	2SA1005(K)	TR. SI, PNP	R125	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
Q302	2SC1923(O)	TR. SI, NPN	R126	RD14BB2C273J	RES. CARBON 27K 5% 1/6W
Q303	2SK404(E)	FET, N-CHANNEL	R127	RD14BB2C163J	RES. CARBON 16K 5% 1/6W
Q304	2SC1923(O)	TR. SI, NPN	R128	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
Q305	2SA1005(K)	TR. SI, PNP	R129	NO USE	
Q306	2SA1005(K)	TR. SI, PNP	R130	RD14BB2C823J	RES. CARBON 82K 5% 1/6W
Q307	2SC1923(O)	TR. SI, NPN	R131	NO USE	
Q308	2SC1923(O)	TR. SI, NPN	R132	RN14BK2C4701F	RES. METAL FILM 4.7K 1% 1/6W
Q309	2SC1923(O)	TR. SI, NPN	R133	RN14BK2C47R0F	RES. METAL FILM 47 1% 1/6W
Q310	2SA1005(K)	TR. SI, PNP	R134	RN14BK2C1002F	RES. METAL FILM 10K 1% 1/6W
Q311	2SA1005(K)	TR. SI, PNP	R135	RN14BK2C1002F	RES. METAL FILM 10K 1% 1/6W
Q312	2SC1923(O)	TR. SI, NPN	R136	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W
Q313	2SA1005(K)	TR. SI, PNP	R137	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W
Q314	2SA1005(K)	TR. SI, PNP	R138	RN14BK2C1801F	RES. METAL FILM 1.8K 1% 1/6W
R1	RN14BK2C2002F	RES. METAL FILM 20K 1% 1/6W	R139	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R2	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W	R140	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R3	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W	R141	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W
R6	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W	R142	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W
R7	RD14BB2C473J	RES. CARBON 47K 5% 1/6W	R143	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R8	RN14BK2C3900F	RES. METAL FILM 380 1% 1/6W	R144	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R9	RN14BK2C3900F	RES. METAL FILM 380 1% 1/6W	R145	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R10	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W	R146	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R11	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W	R147	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R12	R82-1553-05	RES. SPECIAL POWER 620 5% 1W	R148	RD14BB2C273J	RES. CARBON 27K 5% 1/6W
R17	RN14BK2C6200F	RES. METAL FILM 620 1% 1/6W	R149	RD14BB2C361J	RES. CARBON 360 5% 1/6W
R18	RN14BK2C6200F	RES. METAL FILM 620 1% 1/6W	R150	RD14BB2C333J	RES. CARBON 33K 5% 1/6W
R19	RN14BK2C39R0F	RES. METAL FILM 38 1% 1/6W	R151	RN14BK2C513J	RES. CARBON 51K 5% 1/6W
R20	RN14BK2C39R0F	RES. METAL FILM 38 1% 1/6W	R152	RD14BB2C333J	RES. CARBON 33K 5% 1/6W
R21	NO USE		R153	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R22	RN14BK2C6802F	RES. METAL FILM 68K 1% 1/6W	R154	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R31	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R155	RD14BB2C752J	RES. CARBON 7.5K 5% 1/6W
R32	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R156	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R33	RD14BB2C751J	RES. CARBON 750 5% 1/6W	R157	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R34	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	R158	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R35	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R159	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R36	R90-0645-05	RES. NETWORK 4X10K	R160	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R37	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W	R161	RD14BB2C431J	RES. CARBON 430 5% 1/6W
R38	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R162	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R39	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R163	RD14BB2C153J	RES. CARBON 15K 5% 1/6W
R40	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R164	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W
R41	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	R165	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W
R42	RD14BB2C100J	RES. CARBON 10 5% 1/6W	R166	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R43	RD14BB2C100J	RES. CARBON 10 5% 1/6W	R170	R92-1578-05	RES. LINEAR PCT 3.9K 5% 1/6W
R44	RD14BB2C223J	RES. CARBON 22K 5% 1/6W	R171	NO USE	
R45	RD14BB2C223J	RES. CARBON 22K 5% 1/6W	R172	RD14BB2C100J	RES. CARBON 10 5% 1/6W
R52	RD14BB2C391J	RES. CARBON .380 5% 1/6W	R173	NO USE	
R59	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W	R174	RD14BB2C201J	RES. CARBON 200 5% 1/6W
			R175	RD14BB2C470J	RES. CARBON 47 5% 1/6W
			R176	NO USE	
			R177	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
			R201	RD14BB2E220J	RES. CARBON 22 5% 1/4W
			R202	NO USE	
			R203	RD14BB2C220J	RES. CARBON 22 5% 1/6W
			R204	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
			R207	RD14BB2C684J	RES. CARBON 680K 5% 1/6W
			R208	RD14BB2C220J	RES. CARBON 22 5% 1/6W
			R209	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
			R210	NO USE	
			R211	RD14BB2C160J	RES. CARBON 16 5% 1/6W
			R212	RN14BK2C2200F	RES. METAL FILM 220 1% 1/6W
			R213	NO USE	

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
R214	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R333	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R215	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W	R334	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W
R216	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W	R335	RD14BB2C821J	RES. CARBON 820 5% 1/6W
R217	RN14BK2C3301F	RES. METAL FILM 3.3K 1% 1/6W	R336	RD14BB2C471J	RES. CARBON 470 5% 1/6W
R218	RN14BK2C2401F	RES. METAL FILM 2.4K 1% 1/6W	R337	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
R219	RN14BK2C5100F	RES. METAL FILM 510 1% 1/6W	R338	R92-1577-05	RES. LINEAR PCT 1K 5% 1/6W
R220	RD14BB2C301J	RES. CARBON 300 5% 1/6W	R339	NO USE	
R221	RN14BK2C1004F	RES. METAL FILM 1K 1% 1/6W	R340	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R222	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R341	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R223	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W	R342	NO USE	
R224	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R343	RD14BB2C121J	RES. CARBON 120 5% 1/6W
R225	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W	R344	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R226	RD14BB2C273J	RES. CARBON 27K 5% 1/6W	R345	R92-1579-05	RES. LINEAR PCT 220
R227	RD14BB2C163J	RES. CARBON 16K 5% 1/6W	R346	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R228	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R347	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W
R229	NO USE		R348	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R230	RD14BB2C823J	RES. CARBON 82K 5% 1/6W	R414	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R231	NO USE		R415	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R232	RN14BK2C4701F	RES. METAL FILM 4.7K 1% 1/6W	R416	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R233	RN14BK2C47R0F	RES. METAL FILM 47 1% 1/6W	R417	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R234	RN14BK2C1002F	RES. METAL FILM 10K 1% 1/6W	R418	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R235	RN14BK2C1002F	RES. METAL FILM 10K 1% 1/6W	R422	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R236	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W	R423	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R237	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W	R424	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R238	RN14BK2C1801F	RES. METAL FILM 1.8K 1% 1/6W	R425	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R239	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R426	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R240	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R428	RN14BK2C5101F	RES. METAL FILM 5.1K 1% 1/6W
R241	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W	R430	RN14BK2C1003D	RES. METAL FILM 100K 0.5% 1/6W
R242	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W	R431	RN14BK2C5002D	RES. METAL FILM 50K 0.5% 1/6W
R243	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R432	RN14BK2C3002D	RES. METAL FILM 30K 0.5% 1/6W
R244	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R433	RN14BK2C2002D	RES. METAL FILM 20K 0.5% 1/6W
R245	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R434	NO USE	
R246	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R435	RN14BK2C1502F	RES. METAL FILM 15K 1% 1/6W
R247	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R436	RN14BK2C1003D	RES. METAL FILM 100K 0.5% 1/6W
R248	RD14BB2C273J	RES. CARBON 27K 5% 1/6W	R437	RN14BK2C5002D	RES. METAL FILM 50K 0.5% 1/6W
R249	RD14BB2C361J	RES. CARBON 360 5% 1/6W	R438	RN14BK2C3002D	RES. METAL FILM 30K 0.5% 1/6W
R250	RD14BB2C333J	RES. CARBON 33K 5% 1/6W	R439	RN14BK2C2002D	RES. METAL FILM 20K 0.5% 1/6W
R251	RN14BK2C513J	RES. CARBON 51K 5% 1/6W	R446	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R252	RN14BB2C333J	RES. CARBON 33K 5% 1/6W	R447	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R253	RD14BB2C220J	RES. CARBON 22 5% 1/6W	S101	S64-0603-05	LEVER SWITCH
R254	RD14BB2C220J	RES. CARBON 22 5% 1/6W	S102	S60-0608-05	ATTENUATOR
R255	RD14BB2C752J	RES. CARBON 7.5K 5% 1/6W	S201	S64-0603-05	LEVER SWITCH
R256	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W	S202	S60-0608-05	ATTENUATOR
R257	RD14BB2C101J	RES. CARBON 100 5% 1/6W	S401	S60-0612-05	ROTARY SWITCH
R258	RD14BB2C101J	RES. CARBON 100 5% 1/6W	TC105	C91-2589-05	CAP. CERAMIC 22P 5% 50V
R259	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	TC106	C05-0469-05	CAP. TRIMMER 10P
R260	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	S103	S64-0603-05	LEVER SWITCH
R261	RD14BB2C431J	RES. CARBON 430 5% 1/6W	S203	S60-0608-05	ATTENUATOR
R262	RD14BB2C221J	RES. CARBON 220 5% 1/6W	TC205	C05-0470-05	CAP. TRIMMER 20P
R263	RD14BB2C153J	RES. CARBON 15K 5% 1/6W	TC206	C05-0469-05	CAP. TRIMMER 10P
R264	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W	TC301	C05-0469-05	CAP. TRIMMER 10P
R265	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W	TC302	C05-0471-05	CAP. TRIMMER 30P
R266	RD14BB2C101J	RES. CARBON 100 5% 1/6W	TH101	112-102-2	THERMISTOR
R267	RD14BB2C473J	RES. CARBON 47K 5% 1/6W	TH102	112-201-2FM	THERMISTOR
R268	RD14BB2C361J	RES. CARBON 360 5% 1/6W	TH201	112-102-2	THERMISTOR
R269	RD14BB2C271J	RES. CARBON 270 5% 1/6W	TH202	112-201-2FM	THERMISTOR
R270	R92-1578-05	RES. LINEAR PCT 3.9K 5% 1/6W	TH301	112-201-2FM	THERMISTOR
R271	RD14BB2C121J	RES. CARBON 120 5% 1/6W	TC105	C91-2589-05	CAP. CERAMIC 22P 5% 50V
R272	RD14BB2C100J	RES. CARBON 10 5% 1/6W	TC206	C05-0469-05	CAP. TRIMMER 10P
R273	RD14BB2C220J	RES. CARBON 22 5% 1/6W	TC301	C05-0469-05	CAP. TRIMMER 10P
R274	RD14BB2C201J	RES. CARBON 200 5% 1/6W	TC302	C05-0471-05	CAP. TRIMMER 30P
R275	RD14BB2C470J	RES. CARBON 47 5% 1/6W	TH101	112-102-2	THERMISTOR
R276	NO USE		TH102	112-201-2FM	THERMISTOR
R277	RD14BB2C473J	RES. CARBON 47K 5% 1/6W	TH201	112-102-2	THERMISTOR
R300	RD14BB2C101J	RES. CARBON 100 5% 1/6W	TH202	112-201-2FM	THERMISTOR
R301	RN14BK2C8003F	RES. METAL FILM 800K 1% 1/6W	TH301	112-201-2FM	THERMISTOR
R302	RN14BK2C2003F	RES. METAL FILM 200K 1% 1/6W	U1	KHS01	IC,LINEAR
R303	NO USE		U2	SN74LS158N	IC,QUAD 2-1 DATA SELECTOR/MPX
R304	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U3	SN74LS112AN	IC,DUAL J-K F.F.
R305	RD14BB2C331J	RES. CARBON 330 5% 1/6W	U4	SN74LS00N	IC,QUAD 2-INPUT NAND GATE
R306	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	U101	KHC13	IC,LINEAR
R307	RD14BB2C822J	RES. CARBON 8.2K 5% 1/6W	U102	KHC12	IC,LINEAR
R308	RD14BB2C302J	RES. CARBON 3K 5% 1/6W	U201	KHC13	IC,LINEAR
R309	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U202	KHC12	IC,LINEAR
R310	RD14BB2C470J	RES. CARBON 47 5% 1/6W	U404	TC4053BP	IC,TRIPLE 2-CH MPX/DE-MPX
R311	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W	U405	TC4053BP	IC,TRIPLE 2-CH MPX/DE-MPX
R312	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W	VR1	R12-0678-05	RES. SEMI FIXED 22KB
R313	RD14BB2C621J	RES. CARBON 620 5% 1/6W	VR31	R12-0880-05	RES. SEMI FIXED 220
R314	RD14BB2C221J	RES. CARBON 220 5% 1/6W	VR102	R12-0885-05	RES. SEMI FIXED 100
R315	RD14BB2C302J	RES. CARBON 3K 5% 1/6W	VR103	R12-0680-05	RES. SEMI FIXED 47K
R316	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W	VR104	R12-0885-05	RES. SEMI FIXED 100
R317	RD14BB2C112J	RES. CARBON 1.1K 5% 1/6W	VR105	R12-0679-05	RES. SEMI FIXED 22KB
R318	RD14BB2C112J	RES. CARBON 1.1K 5% 1/6W	VR106	R12-0678-05	RES. SEMI FIXED 22KB
R319	RN14BK2C4300F	RES. METAL FILM 430 1% 1/6W	VR202	R12-0885-05	RES. SEMI FIXED 100
R320	RN14BK2C3301F	RES. METAL FILM 3.3K 1% 1/6W	VR203	R12-0680-05	RES. SEMI FIXED 47K
R321	RN14BK2C6801F	RES. METAL FILM 6.8K 1% 1/6W	VR204	R12-0885-05	RES. SEMI FIXED 100
R322	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W	VR205	R12-0679-05	RES. SEMI FIXED 22KB
R323	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W	VR206	R12-0679-05	RES. SEMI FIXED 22KB
R324	RD14BB2C203J	RES. CARBON 20K 5% 1/6W			
R325	RD14BB2C333J	RES. CARBON 33K 5% 1/6W			
R326	RD14BB2C473J	RES. CARBON 47K 5% 1/6W			
R327	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W			
R328	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W			
R329	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W			
R330	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W			
R331	NO USE				
R332	RD14BB2C113J	RES. CARBON 11K 5% 1/6W			

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
VR207	R12-0885-05	RES. SEMI FIXED 100
VR208	R12-0885-05	RES. SEMI FIXED 100
VR301	R12-0887-05	RES. SEMI FIXED 470
VR302	R12-0680-05	RES. SEMI FIXED 47K
VR303	R12-0679-05	RES. SEMI FIXED 22KB
VR402	R12-3599-05	RES. SEMI FIXED 22K
VR403	R12-3599-05	RES. SEMI FIXED 22K

REF. NO	PARTS NO	NAME & DESCRIPTION				
C137	CE04LW0J331K	CAP.	ELECTRO	330	20%	6.3V
C138	CE04LW1C101K	CAP.	ELECTRO	100	20%	16V
C139	CC45FSL1H331J	CAP.	CERAMIC	330P	5%	50V
C140	CC45FCH1H470J	CAP.	CERAMIC	47P	5%	50V
C141	CC45FCH1H470J	CAP.	CERAMIC	47P	5%	50V
C142	CC45FCH1H470J	CAP.	CERAMIC	47P	5%	50V
C143	C81-0737-05	CAP.	CERAMIC	47P	5%	50V
C144	C81-0737-05	CAP.	CERAMIC	47P	5%	50V
C145	CE04LW1C100N	CAP.	ELECTRO	10	20%	16V
C146	CC45FSL1H030C	CAP.	CERAMIC	3P	0.25P	50V

CS-5230 HORIZONTAL UNIT

X74-1580-00

REF. NO	PARTS NO		NAME & DESCRIPTION
E23-0149-05		GND TERMINAL	
E23-0557-14		EARTH LUG, THERMAL FUSE	
F01-0867-05		HEAT SINK, HIGH VOLTAGE	
F01-2316-05		HEAT SINK, POWER	
J73-0284-22		PCB (UNMOUNTED)	
N08-0623-04		SCREW, SENS PAN	HD M3X8
C1 C91-0769-05	CAP. CERAMIC	0.01	20%
C2 NO USE			16V
C3 C91-2595-05	CAP. CERAMIC	68P	5%
C4 CF82FV1H103J	CAP. POLYESTER	0.01	5%
C5 C91-2596-05	CAP. CERAMIC	82P	5%
C6 CC45FCH1H470J	CAP. CERAMIC	47P	5%
C7 CC45FCH1H010C	CAP. CERAMIC	1P	0.25P
C8 CC45FCH1H040C	CAP. CERAMIC	4P	0.25P
C9 NO USE			50V
C10 CK45FB1H222K	CAP. CERAMIC	2200P	10%
C11 C91-0757-05	CAP. CERAMIC	1000P	10%
C12 C91-2538-05	CAP. NYLAR	0.1	63V
C13 C91-2593-05	CAP. CERAMIC	47P	5%
C14 CC45FCH1H101J	CAP. CERAMIC	100P	5%
C15 NO USE			50V
C16 CE04LW1E100M	CAP. ELECTRO	10	20%
C17 CE04LW1H010M	CAP. ELECTRO	1	20%
C18 CE04LW1H010M	CAP. ELECTRO	1	20%
C19 CF82FV1H682J	CAP. POLYESTER	6800P	5%
C20 CF82FV1H222J	CAP. POLYESTER	2200P	5%
C21 C91-0769-05	CAP. CERAMIC	0.01	20%
C22 CE04HW1H010M	CAP. ELECTRO	1	20%
C23 CE04HW1H010M	CAP. ELECTRO	1	20%
C24 NO USE			50V
C25 CE04LW1E100H	CAP. ELECTRO	10	20%
C26 CF82FV1H684J	CAP. POLYESTER	0.68	5%
C27 CF82FV1H684J	CAP. POLYESTER	0.68	5%
C28 CE04HW1E220N	CAP. ELECTRO	22	20%
C29 C91-0769-05	CAP. CERAMIC	0.01	20%
C30 C91-2538-05	CAP. NYLAR	0.1	63V
C31 CE04LW0J331M	CAP. ELECTRO	330	20%
C32 CE04EW1A101M	CAP. ELECTRO	100	20%
C33 CC45FCH1H020C	CAP. CERAMIC	2P	0.25P
C34 CE04LW1C331M	CAP. ELECTRO	330	20%
C35 CC45FSL1H221J	CAP. CERAMIC	220P	5%
C38 C91-0745-05	CAP. CERAMIC	100P	10%
C39 C91-0745-05	CAP. CERAMIC	100P	10%
C101 CC45FCH1H470J	CAP. CERAMIC	47P	5%
C102 CC45FCH1H470J	CAP. CERAMIC	47P	5%
C103 CF82FV1H332J	CAP. POLYESTER	3300P	5%
C104 C91-2582-05	CAP. POLYESTER	0.47	5%
C105 CC45FCH1H220J	CAP. CERAMIC	22P	5%
C106 CK45FB1H102K	CAP. CERAMIC	1000P	10%
C107 CE04HW1H2R2M	CAP. ELECTRO	2.2	20%
C108 CC45FCH1H101J	CAP. CERAMIC	100P	5%
C109 NO USE			50V
C110 CC45FCH1H470J	CAP. CERAMIC	47P	5%
C111 CF82FV1H104J	CAP. POLYESTER	0.1	5%
C112 CC45FCH1H220J	CAP. CERAMIC	22P	5%
C113 CC45FCH1H330J	CAP. CERAMIC	33P	5%
C114 CE04LW1A220N	CAP. ELECTRO	22	20%
C115 C91-2604-05	CAP. CERAMIC	390P	5%
C116 C91-2588-05	CAP. CERAMIC	120P	5%
C117 CC45FCH1H680J	CAP. CERAMIC	68P	5%
C118 CC45FCH1H680J	CAP. CERAMIC	68P	5%
C119 NO USE			50V
C120 C91-0769-05	CAP. CERAMIC	0.01	20%
C121 C91-0769-05	CAP. CERAMIC	0.01	20%
C122 CC45FCH1H390J	CAP. CERAMIC	38P	5%
C123 C91-0769-05	CAP. CERAMIC	0.01	20%
C124 C91-2582-05	CAP. POLYESTER	0.47	5%
C125 CE04LW0J331M	CAP. ELECTRO	330	20%
C126 C91-0769-05	CAP. CERAMIC	0.01	20%
C127 C91-0769-05	CAP. CERAMIC	0.01	20%
C128 C91-2538-05	CAP. NYLAR	0.1	63V
C129 C91-0769-05	CAP. CERAMIC	0.01	20%
C132 CC45FCH1H030C	CAP. CERAMIC	3P	0.25P
C135 CE04LW0J331M	CAP. ELECTRO	330	20%
C136 CE04LW0J331M	CAP. ELECTRO	330	20%

C201	CC45FCH1H070D	CAP.	CERAMIC	7P	0.5P	50V
C202	NO USE					
C203	CC45FCH1H120J	CAP.	CERAMIC	12P	5%	50V
C204	C91-0768-05	CAP.	CERAMIC	0.01	20%	16V
C205	C91-0768-05	CAP.	CERAMIC	0.01	20%	16V
C206	NO USE					
C207	CK45FB2H472K	CAP.	CERAMIC	4700P	10%	500V
C208	CE04W2E010M	CAP.	ELECTRO	1	20%	250V
C209	CC45FCH2H020C	CAP.	CERAMIC	2P	0.25P	500V
C210	CK45FB2H472K	CAP.	CERAMIC	4700P	10%	500V
C211	CE04W2E010M	CAP.	ELECTRO	1	20%	250V
C212	CE04W2E010M	CAP.	ELECTRO	1	20%	250V
C213	CK45FB2H102K	CAP.	CERAMIC	1000P	10%	500V
C214	CK45FB2H102K	CAP.	CERAMIC	1000P	10%	500V
C215	C91-1317-05	CAP.	CERAMIC	0.01	80/-20%	2K
C216	C91-1317-05	CAP.	CERAMIC	0.01	80/-20%	2K
C217	C91-1317-05	CAP.	CERAMIC	0.01	80/-20%	2K
C218	CE04W2E010M	CAP.	ELECTRO	1	20%	250V
C219	NO USE					
C220	C91-1317-05	CAP.	CERAMIC	0.01	80/-20%	2K
C221	C91-1317-05	CAP.	CERAMIC	0.01	80/-20%	2K
C222	CE04LW1E221M	CAP.	ELECTRO	220	20%	25V
C223	CE04LW1H101M	CAP.	ELECTRO	100	20%	50V
C224	CK45FB1H472K	CAP.	CERAMIC	4700P	10%	50V
C227	CC45FCH2H101J	CAP.	CERAMIC	100P	5%	500V
C228	CK45FB1H222K	CAP.	CERAMIC	2200P	10%	50V
C229	C91-1317-05	CAP.	CERAMIC	0.01	80/-20%	2K
C230	CK45E3D102P	CAP.	CERAMIC	1000P		2KV
C231	C91-2581-05	CAP.	CERAMIC	0.01	5%	2KV
C232	CE04W2E010M	CAP.	ELECTRO	1	20%	250V
C233	CE04LW1C101M	CAP.	ELECTRO	100	20%	16V
C234	CE04LW1C101M	CAP.	ELECTRO	100	20%	16V
C301	CC45FCH1H101J	CAP.	CERAMIC	100P	5%	50V
C302	CC45FLS1H331J	CAP.	CERAMIC	330P	5%	50V
C303	C91-0713-05	CAP.	CERAMIC	2.2	10%	50V
C306	C91-1361-05	CAP.	NYLAR	0.01	10%	100V
C307	C91-2585-05	CAP.	NYLAR	0.01	10%	250V
C308	C91-2587-05	CAP.	NYLAR	0.1	10%	250V
C309	C91-1361-05	CAP.	NYLAR	0.01	10%	100V
C310	C91-2587-05	CAP.	NYLAR	0.1	10%	250V
C311	C91-2585-05	CAP.	NYLAR	0.01	10%	250V
C314	CK45FB2H152K	CAP.	CERAMIC	1500P	10%	500V
C315	NO USE					
C316	CE04LW0J331M	CAP.	ELECTRO	330	20%	6.3V
C317	NO USE					
C318	CC45FCH1H020C	CAP.	CERAMIC	2P	0.25P	50V
C319	C91-0768-05	CAP.	CERAMIC	0.01	20%	16V
C320	NO USE					
C321	C91-0768-05	CAP.	CERAMIC	0.01	20%	16V
C322	CE04LW1A221M	CAP.	ELECTRO	220	20%	10V
C323	CC45FCH1H150J	CAP.	CERAMIC	15P	5%	50V
C324	CE04LW0J331M	CAP.	ELECTRO	330	20%	6.3V
C325	CE04LW1C101M	CAP.	ELECTRO	100	20%	16V
C401	CE04W2E470M	CAP.	ELECTRO	47	20%	250V
C402	CE04W2E100M	CAP.	ELECTRO	10	20%	250V
C403	CE04LW1E220M	CAP.	ELECTRO	22	20%	25V
C404	CE04W2A471M	CAP.	ELECTRO	470	20%	100V
C405	CE04LW2A220M	CAP.	ELECTRO	22	20%	100V
C406	CE04EW1E472M	CAP.	ELECTRO	4700	20%	25V
C407	CE04LW1C331M	CAP.	ELECTRO	330	20%	16V
C408	CE04EW1E472M	CAP.	ELECTRO	4700	20%	25V
C409	CE04EW1C332M	CAP.	ELECTRO	3300	20%	16V
C410	CE04LW0J471M	CAP.	ELECTRO	470	20%	6.3V
C411	CE04LW1C331M	CAP.	ELECTRO	330	20%	16V
C412	CE04LW0J331M	CAP.	ELECTRO	330	20%	6.3V
C413	CE04LW1C101M	CAP.	ELECTRO	100	20%	16V
C414	CE04LW1C101M	CAP.	ELECTRO	100	20%	16V
C415	CE04EW1E102M	CAP.	ELECTRO	1000	20%	25V
C416	CE04EW1E102M	CAP.	ELECTRO	1000	20%	25V
C417	C91-0761-05	CAP.	CERAMIC	2200P	20%	50V
C418	C91-0757-05	CAP.	CERAMIC	1000P	10%	50V
C901	CF92V1H103J	CAP.	POLYESTER	0.01	5%	50V
D1	MA700		DIODE			
D2	MA700		DIODE			
D3	MA700		DIODE			
D4	MA700		DIODE			
D5	MA700		DIODE			
D6	1SS132		DIODE			
D7	1SS132		DIODE			
D8	1SS132		DIODE			

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
D9	1SS132	DIODE	K301	S76-0627-05	RELAY
D10	1SS132	DIODE	L101	L78-0553-05	NOISE FILTER
D11	1SS132	DIODE	L201	L40-1545-06	FERRI INDUCTOR 150MH 5%
D12	MA700	DIODE	L202	L40-1011-04	FERRI INDUCTOR 100UH 10%
D13	1SS132	DIODE	L203	L40-1011-04	FERRI INDUCTOR 100UH 10%
D14	1SS132	DIODE	L204	L40-3925-05	FERRI INDUCTOR 3.8MH 5%
D15	1SS132	DIODE	L301	L40-1001-11	FERRI INDUCTOR 10UH 10%
D16	1SS132	DIODE	NL201	NE-38B	NEON LAMP
D17	1SS132	DIODE	NL202	NE-38B	NEON LAMP
D18	1SS132	DIODE	NL203	NE-38B	NEON LAMP
D19	1SS132	DIODE	NL204	NE-38B	NEON LAMP
D100	1SS132	DIODE	P6	E40-7515-05	PIN CONNECTOR 3P
D102	1SS132	DIODE	P7	E40-7519-05	PIN CONNECTOR 4P
D103	1SS132	DIODE	P8	E40-7040-05	PIN CONNECTOR 13P
D104	1SS132	DIODE	P9	NO USE	
D105	1SS132	DIODE	P10	E40-5066-05	PIN CONNECTOR 8P
D106	1SS132	DIODE	P15	E40-5067-05	PIN CONNECTOR 10P
D107	1SS132	DIODE	P16	E40-5069-05	PIN CONNECTOR 12P
D108	1SS132	DIODE	P17	E40-3306-05	PIN CONNECTOR 8P
D109	MA700	DIODE	P20	E40-3288-05	PIN CONNECTOR 2P
D110	1SS132	DIODE	P24	E40-3243-05	PIN CONNECTOR 8P
D111	1SS132	DIODE	Q3	2SC1740S(R,S)	TR. SI, NPN
D112	1SS132	DIODE	Q4	2SC1923(0)	TR. SI, NPN
D113	1SS132	DIODE	Q5	2SC1923(0)	TR. SI, NPN
D114	MA700	DIODE	Q6	2SC3779(D)	TR. SI, NPN
D115	1SS132	DIODE	Q7	2SC3778(D)	TR. SI, NPN
D116	1SS132	DIODE	Q8	NO USE	
D117	1SS132	DIODE	Q9	2SA1459(K)	TR. SI, PNP
D118	1SS132	DIODE	Q10	2SC1740S(R,S)	TR. SI, NPN
D119	1SS132	DIODE	Q11	2SC1740S(R,S)	TR. SI, NPN
D120	1SS132	DIODE	Q12	2SA1005(K)	TR. SI, PNP
D121	1SS132	DIODE	Q13	2SC1740S(R,S)	TR. SI, NPN
D122	1SS132	DIODE	Q14	2SC1740S(R,S)	TR. SI, NPN
D123	1SS132	DIODE	Q15	2SA1005(K)	TR. SI, PNP
D124	1SS132	DIODE	Q16	2SA1005(K)	TR. SI, PNP
D125	1SS132	DIODE	Q17	2SA833S(R,S)	TR. SI, PNP
D126	1SS132	DIODE	Q18	2SA833S(R,S)	TR. SI, PNP
D127	1SS132	DIODE	Q19	2SC1740S(R,S)	TR. SI, NPN
D128	1SS132	DIODE	Q20	2SA833S(R,S)	TR. SI, PNP
D129	1SS132	DIODE	Q21	2SC1907	TR. SI, NPN
D130	MA700	DIODE	Q28	2SA1459(K)	TR. SI, PNP
D131	NO USE		Q101	2SK170(V)	FET, N-CHANNEL
D132	MA700	DIODE	Q102	2SC1923(0)	TR. SI, NPN
D133	MA700	DIODE	Q103	2SA833S(R,S)	TR. SI, PNP
D201	1SS132	DIODE	Q104	2SC1740S(R,S)	TR. SI, NPN
D202	1SS132	DIODE	Q105	2SC1740S(R,S)	TR. SI, NPN
D203	1SS83	DIODE	Q106	2SC1740S(R,S)	TR. SI, NPN
D204	1SS83	DIODE	Q107	2SK170(V)	FET, N-CHANNEL
D205	1SS83	DIODE	Q108	2SC1923(0)	TR. SI, NPN
D206	1SS83	DIODE	Q109	2SC3066(G)	TR. SI, NPN
D207	1SS83	DIODE	Q110	2SA1459(K)	TR. SI, PNP
D208	1SS83	DIODE	Q111	2SA833S(R,S)	TR. SI, PNP
D209	1SS83	DIODE	Q112	2SA833S(R,S)	TR. SI, PNP
D210	1SS83	DIODE	Q113	2SA1005(K)	TR. SI, PNP
D211	1SS132	DIODE	Q114	2SA1005(K)	TR. SI, PNP
D212	1SS132	DIODE	Q115	2SA1005(K)	TR. SI, PNP
D213	1SS132	DIODE	Q116	2SA1005(K)	TR. SI, PNP
D301	MA700	DIODE	Q117	2SC1923(0)	TR. SI, NPN
D302	1SS132	DIODE	Q118	2SC1923(0)	TR. SI, NPN
D303	MTZ3.0JA	DIODE, ZENER	Q119	2SA833S(R,S)	TR. SI, PNP
D304	1SS132	DIODE	Q120	2SA1459(K)	TR. SI, PNP
D305	1SS132	DIODE	Q121	2SC1923(0)	TR. SI, NPN
D307	MA700	DIODE	Q122	2SC1740S(R,S)	TR. SI, NPN
D308	TLR112	LED, RED	Q123	2SC1740S(R,S)	TR. SI, NPN
D309	TLR112	LED, RED	Q124	2SC1740S(R,S)	TR. SI, NPN
D312	MTZ5.1JB	DIODE, ZENER	Q125	2SC1740S(R,S)	TR. SI, NPN
D313	1SS132	DIODE	Q126	2SC1740S(R,S)	TR. SI, NPN
D314	NO USE		Q127	2SA1005(K)	TR. SI, PNP
D315	1SS132	DIODE	Q151	2SA1459(K)	TR. SI, PNP
D316	MTZ3.0JA	DIODE, ZENER	Q152	2SA1459(K)	TR. SI, PNP
D401	S1VB60	DIODE, STACK	Q158	2SA1459(K)	TR. SI, PNP
D402	S1VB60	DIODE, STACK	Q201	2SA833S(R,S)	TR. SI, PNP
D403	S4VB20F	DIODE, STACK	Q202	2SA833S(R,S)	TR. SI, PNP
D404	S1VB60	DIODE, STACK	Q203	2SC1923(0)	TR. SI, NPN
D405	1SS132	DIODE	Q204	2SC1740S(R,S)	TR. SI, NPN
D406	1SS132	DIODE	Q205	2SA833S(R,S)	TR. SI, PNP
D407	MTZ13JC	DIODE, ZENER	Q206	2SC2910(S)	TR. SI, NPN
D408	MTZ13JC	DIODE, ZENER	Q207	2SA1208(S)	TR. SI, PNP
D409	MTZ7.5JA	DIODE, ZENER	Q208	2SC2910(S)	TR. SI, NPN
D801	MA700	DIODE	Q209	2SA1208(S)	TR. SI, PNP
F201	F53-0107-05	THERMAL FUSE 400mA/125V	Q210	2SC2551(0)	TR. SI, NPN
JW1	E38-1005-05	WIRE ASS'Y; 3P	Q211	2SC2551(0)	TR. SI, NPN
JW2	E38-1006-05	WIRE ASS'Y; 6P	Q212	2SA833S(R,S)	TR. SI, PNP
JW8	E38-0988-15	WIRE ASS'Y; H TO V	Q213	2SD613(E)	TR. SI, NPN
JW14	E38-0989-05	WIRE ASS'Y; H TO FINAL			
JW18	E38-0990-05	WIRE ASS'Y; H TO CRT			
JW19	E38-0991-05	WIRE ASS'Y; H TO BNC			

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
Q301	2SC1740S(R,S)	TR. SI, NPN
Q302	2SC1740S(R,S)	TR. SI, NPN
Q303	2SC1740S(R,S)	TR. SI, NPN
Q304	2SC1740S(R,S)	TR. SI, NPN
Q305	2SA933S(R,S)	TR. SI, PNP
Q306	2SA1005(K)	TR. SI, PNP
Q307	2SA1005(K)	TR. SI, PNP
Q308	2SC1740S(R,S)	TR. SI, NPN
Q309	2SC1740S(R,S)	TR. SI, NPN
Q310	2SA933S(R,S)	TR. SI, PNP
Q311	2SA933S(R,S)	TR. SI, PNP
Q312	2SC1740S(R,S)	TR. SI, NPN
Q313	2SC1740S(R,S)	TR. SI, NPN
Q314	2SC1807	TR. SI, NPN
Q315	2SC1807	TR. SI, NPN
Q316	2SA1459(K)	TR. SI, PNP
Q317	2SA1459(K)	TR. SI, PNP
Q318	2SC1807	TR. SI, NPN
Q319	2SC1807	TR. SI, NPN
Q320	2SC4732(E)	TR. SI, NPN
Q321	2SC4732(E)	TR. SI, NPN
Q322	2SA1828(E)	TR. SI, PNP
Q323	2SA1828(E)	TR. SI, PNP
Q324	2SA933S(R,S)	TR. SI, PNP

Q401	2SA1498(P)	TR. SI, PNP
Q402	2SC2551(O)	TR. SI, NPN
Q403	2SA1304	TR. SI, PNP
Q404	2SC2551(O)	TR. SI, NPN
Q405	2SB1015(Y)	TR. SI, PNP
Q406	2SD1406(Y)	TR. SI, NPN
Q407	2SB1015(Y)	TR. SI, PNP

R1	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R2	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R3	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R4	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R5	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R6	RD14BB2C822J	RES. CARBON 8.2K 5% 1/6W
R7	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R8	RD14BB2C181J	RES. CARBON 180 5% 1/6W
R9	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
R10	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
R11	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
R12	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
R13	NO USE	
R14	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R15	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R16	RD14BB2C751J	RES. CARBON 750 5% 1/6W
R17	RD14BB2C821J	RES. CARBON 820 5% 1/6W
R18	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R19	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R20	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R21	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R22	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R23	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R24	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W
R25	RD14BB2C512J	RES. CARBON 5.1K 5% 1/6W
R26	RD14BB2C331J	RES. CARBON 330 5% 1/6W
R27	RD14BB2C750J	RES. CARBON 75 5% 1/6W
R28	RD14BB2C750J	RES. CARBON 75 5% 1/6W
R29	RD14BB2C680J	RES. CARBON 68 5% 1/6W
R30	RD14BB2C390J	RES. CARBON 38 5% 1/6W
R31	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W
R32	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R33	RD14BB2C681J	RES. CARBON 680 5% 1/6W
R34	NO USE	
R35	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R36	NO USE	
R37	RD14BB2C391J	RES. CARBON 390 5% 1/6W
R38	RD14BB2C751J	RES. CARBON 750 5% 1/6W
R39	R90-0660-05	RES. NETWORK 4X1K
R40	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R41	RD14BB2C683J	RES. CARBON 6.8K 5% 1/6W
R42	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R43	RD14BB2C393J	RES. CARBON 39K 5% 1/6W
R44	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R45	RD14BB2C163J	RES. CARBON 16K 5% 1/6W
R46	RD14BB2C752J	RES. CARBON 7.5K 5% 1/6W
R47	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R48	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R49	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R50	RD14BB2C393J	RES. CARBON 38K 5% 1/6W
R51	RD14BB2C123J	RES. CARBON 12K 5% 1/6W
R52	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R53	RD14BB2C113J	RES. CARBON 11K 5% 1/6W
R54	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R55	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R56	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W
R57	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W
R58	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R59	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R60	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R61	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R62	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R63	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R64	RD14BB2C223J	RES. CARBON 22K 5% 1/6W

REF. NO	PARTS NO	NAME & DESCRIPTION
R65	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R66	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R67	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R68	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
R69	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R70	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R71	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R72	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R73	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R74	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R75	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R76	NO USE	
R77	RD14BB2C752J	RES. CARBON 7.5K 5% 1/6W
R78	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R79	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R80	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R81	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R82	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R83	RD14BB2E223J	RES. CARBON 22K 5% 1/6W
R84	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R85	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R86	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R87	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R88	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R89	NO USE	
R90	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R91	RD14BB2C203J	RES. CARBON 20K 5% 1/6W
R101	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R102	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R103	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R104	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R105	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R106	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R107	RD14BB2C812J	RES. CARBON 9.1K 5% 1/6W
R108	RD14BB2C163J	RES. CARBON 16K 5% 1/6W
R109	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R110	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R111	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R112	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R113	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R114	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R115	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R116	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R117	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R118	RD14BB2C162J	RES. CARBON 1.6K 5% 1/6W
R119	RD14BB2C243J	RES. CARBON 24K 5% 1/6W
R120	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R121	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R122	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R123	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R124	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R125	RD14BB2C330J	RES. CARBON 33 5% 1/6W
R126	RD14BB2C120J	RES. CARBON 12 5% 1/6W
R127	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W
R128	RD14BB2E471J	RES. CARBON 470 5% 1/4W
R129	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R130	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R131	RD14BB2C912J	RES. CARBON 9.1K 5% 1/6W
R132	RD14BB2C163J	RES. CARBON 16K 5% 1/6W
R133	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R134	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R135	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R136	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R137	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R138	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R139	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R140	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W
R141	RD14BB2C471J	RES. CARBON 470 5% 1/6W
R142	NO USE	
R143	RD14BB2C322J	RES. CARBON 3K 5% 1/6W
R144	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R145	RD14BB2C131J	RES. CARBON 130 5% 1/6W
R146	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W
R147	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R148	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R149	RD14BB2C183J	RES. CARBON 18K 5% 1/6W
R150	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R151	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R152	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R153	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R154	RD14BB2C684J	RES. CARBON 6.80K 5% 1/6W
R155	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R156	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R157	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R158	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R159	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R160	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R161	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R162	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R163	RD14BB2C151J	RES. CARBON 150 5% 1/6W
R164	RD14BB2C111J	RES. CARBON 110 5% 1/6W
R165	RD14BB2C681J	RES. CARBON 6.80 5% 1/6W
R166	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R167	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R168	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R169	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R170	RD14BB2C103J	RES. CARBON 10K 5% 1/6W

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
R171	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R300	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R172	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R301	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R173	RD14BB2C431J	RES. CARBON 430 5% 1/6W	R302	RD14BB2C821J	RES. CARBON 820 5% 1/6W
R174	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R303	RD14BB2C821J	RES. CARBON 820 5% 1/6W
R175	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R304	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W
R176	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R305	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R177	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R306	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R178	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R307	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R179	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W	R308	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R180	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W	R309	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W
R181	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R310	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W
R182	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R311	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W
R183	RD14BB2E102J	RES. CARBON 1K 5% 1/4W	R312	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R184	RD14BB2C621J	RES. CARBON 620 5% 1/6W	R313	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W
R185	RD14BB2E103J	RES. CARBON 10K 5% 1/4W	R314	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W
R186	RD14BB2C202J	RES. CARBON 2K 5% 1/6W	R315	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
R187	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R316	RD14BB2C153J	RES. CARBON 15K 5% 1/6W
R188	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R317	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W
R189	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R318	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R190	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W	R319	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R191	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W	R320	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W
R192	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R321	RD14BB2C183J	RES. CARBON 18K 5% 1/6W
R193	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R322	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R194	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R323	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R195	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R324	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W
R196	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R325	RD14BB2C912J	RES. CARBON 9.1K 5% 1/6W
R197	RD14BB2E101J	RES. CARBON 100 5% 1/4W	R326	RD14BB2C301J	RES. CARBON 300 5% 1/6W
R198	RD14BB2C471J	RES. CARBON 470 5% 1/6W	R327	RD14BB2C391J	RES. CARBON 390 5% 1/6W
R199	RD14BB2C478J	RES. CARBON 47K 5% 1/6W	R328	RD14BB2C391J	RES. CARBON 390 5% 1/6W
R200	RD14BB2C113J	RES. CARBON 11K 5% 1/6W	R329	RD14BB2C390J	RES. CARBON 39 5% 1/6W
R203	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	R330	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R204	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W	R331	RD14BB2C271J	RES. CARBON 270 5% 1/6W
R205	NO USE		R332	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
R206	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W	R333	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W
R207	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W	R334	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W
R208	RD14BB2C512J	RES. CARBON 5.1K 5% 1/6W	R335	RD14BB2C243J	RES. CARBON 24K 5% 1/6W
R209	RD14BB2C202J	RES. CARBON 2K 5% 1/6W	R336	RD14BB2C243J	RES. CARBON 24K 5% 1/6W
R210	RD14BB2C333J	RES. CARBON 33K 5% 1/6W	R337	RD14BB2C241J	RES. CARBON 240 5% 1/6W
R338	RD14BB2C241J	RES. CARBON 240 5% 1/6W	R339	NO USE	
R214	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	R340	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W
R215	RD14BB2C431J	RES. CARBON 430 5% 1/6W	R341	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W
R216	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W	R342	RD14BB2C912J	RES. CARBON 9.1K 5% 1/6W
R217	NO USE		R343	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R218	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R344	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R219	RD14BB2C134J	RES. CARBON 130K 5% 1/6W	R345	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R220	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R346	RD14BB2C561J	RES. CARBON 560 5% 1/6W
R221	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R347	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R222	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R348	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R223	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W	R349	R92-1552-05	RES. LINEAR PCT 180
R224	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W	R350	RD14BB2C163J	RES. CARBON 16K 5% 1/6W
R225	RD14BB2C134J	RES. CARBON 130K 5% 1/6W	R351	NO USE	
R226	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R352	RD14BB2C153J	RES. CARBON 15K 5% 1/6W
R227	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R353	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W
R228	RD14BB2C753J	RES. CARBON 75K 5% 1/6W	R354	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R229	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R355	RD14BB2C391J	RES. CARBON 380 5% 1/6W
R230	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W	R356	NO USE	
R231	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W	R357	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R232	RD14BB2C134J	RES. CARBON 130K 5% 1/6W	R358	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R233	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R359	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R234	RD14BB2C474J	RES. CARBON 470K 5% 1/6W	R360	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R235	RD14BB2C474J	RES. CARBON 470K 5% 1/6W	R361	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R236	R92-1563-05	RES. METALGLACE 10K 5% 1/4W	R362	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W
R237	R92-1563-05	RES. METALGLACE 10K 5% 1/4W	R363	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W
R238	R92-1562-05	RES. METALGLACE 8.2K 5% 1/4W	R364	RN14BK2C3901F	RES. METAL FILM 3.9K 1% 1/6W
R239	R92-1561-05	RES. METALGLACE 3.9K 5% 1/4W	R365	RN14BK2C6201F	RES. METAL FILM 6.2K 1% 1/6W
R240	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R366	R92-1560-05	RES. LINEAR PCT 2K
R241	RD14BB2C474J	RES. CARBON 470K 5% 1/6W	R367	RD14BB2C393J	RES. CARBON 38K 5% 1/6W
R242	RD14BB2C683J	RES. CARBON 68K 5% 1/6W	R368	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W
R243	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R369	RD14BB2C204J	RES. CARBON 200K 5% 1/6W
R244	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R370	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R245	RD14BB2C473J	RES. CARBON 47K 5% 1/6W	R371	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R246	RD14BB2C473J	RES. CARBON 47K 5% 1/6W	R372	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R247	RD14BB2C473J	RES. CARBON 47K 5% 1/6W	R373	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R248	RN14BK2C1203F	RES. METAL FILM 120K 1% 1/6W	R374	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R249	R92-1564-05	RES. METALGLACE 15K 1% 1/2W	R375	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W
R250	RD14BB2C124J	RES. CARBON 120K 5% 1/6W	R376	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W
R251	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R377	R92-1558-05	RES. SPECIAL POWER 39K 5% 1W
R252	RD14BB2C382J	RES. CARBON 3.8K 5% 1/6W	R378	R92-1558-05	RES. SPECIAL POWER 39K 5% 1W
R253	RD14BB2C153J	RES. CARBON 15K 5% 1/6W	R381	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R254	RD14BB2C221J	RES. CARBON 220 5% 1/6W	R382	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R255	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R383	RD14BB2C751J	RES. CARBON 750 5% 1/6W
R256	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R384	RD14BB2C751J	RES. CARBON 750 5% 1/6W
R257	RD14BB2C151J	RES. CARBON 150 5% 1/6W	R385	RN14BK2C6801F	RES. METAL FILM 6.8K 1% 1/6W
R258	RD14BB2C302J	RES. CARBON 3K 5% 1/6W	R386	RN14BK2C1303F	RES. METAL FILM 130K 1% 1/6W
R259	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	R387	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R260	RN14BK2C1801F	RES. METAL FILM 1.8K 1% 1/6W	R388	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R261	RN14BK2C1801F	RES. METAL FILM 1.8K 1% 1/6W	R389	NO USE	
R262	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W	R390	RD14BB2C913J	RES. CARBON 91K 5% 1/6W
R263	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W	R394	R92-1559-05	RES. SPECIAL POWER 47K 5% 1W
R264	RD14BB2C303J	RES. CARBON 30K 5% 1/6W	R395	R92-1559-05	RES. SPECIAL POWER 47K 5% 1W
R265	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W	R396	RD14BB2C431J	RES. CARBON 430 5% 1/6W
R266	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R397	RD14BB2C162J	RES. CARBON 1.6K 5% 1/6W
R267	RD14BB2C224J	RES. CARBON 220K 5% 1/6W	R398	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R268	RD14BB2C204J	RES. CARBON 200K 5% 1/6W	R399	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R269	R92-1573-05	RES. LINEAR PCT 2.7K 5% 1/6W	R400	NO USE	

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
R401	R92-1557-05	RES. SPECIAL POWER 6.8K 5% 2W	C15	NO USE	
R402	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	C16	CE04LW1E100M	CAP. ELECTRO 10 20% 25V
R403	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	C17	CE04LW1H010M	CAP. ELECTRO 1 20% 50V
R404	R92-1556-05	RES. SPECIAL POWER 1K 5% 2W	C18	CE04LW1H010M	CAP. ELECTRO 1 20% 50V
R405	R92-1556-05	RES. SPECIAL POWER 1K 5% 2W	C19	CF02FV1H682J	CAP. POLYESTER 6800P 5% 50V
R406	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	C20	CF02FV1H222J	CAP. POLYESTER 2200P 5% 50V
R407	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	C21	C81-0769-05	CAP. CERAMIC 0.01 20% 16V
R408	R92-1555-05	RES. SPECIAL POWER 56 5% 2W	C22	CE04HW1H010M	CAP. ELECTRO 1 20% 50V
R409	R92-1555-05	RES. SPECIAL POWER 56 5% 2W	C23	CE04HW1H010M	CAP. ELECTRO 1 20% 50V
R410	R92-1555-05	RES. SPECIAL POWER 56 5% 2W	C24	NO USE	
R411	R92-1555-05	RES. SPECIAL POWER 56 5% 2W	C25	CE04LW1E100M	CAP. ELECTRO 10 20% 25V
R412	R92-1555-05	RES. SPECIAL POWER 56 5% 2W	C26	CF02FV1H684J	CAP. POLYESTER 0.68 5% 50V
R413	R92-1555-05	RES. SPECIAL POWER 56 5% 2W	C27	CF02FV1H684J	CAP. POLYESTER 0.68 5% 50V
R414	R92-1554-05	RES. SPECIAL POWER 15 5% 2W	C28	CE04HW1E220M	CAP. ELECTRO 22 20% 25V
R415	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	C29	C81-0769-05	CAP. CERAMIC 0.01 20% 16V
R416	RD14BB2C302J	RES. CARBON 3K 5% 1/6W	C30	C81-2538-05	CAP. NYLAR 0.1 63V
R417	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	C31	CE04LW0J331M	CAP. ELECTRO 330 20% 6.3V
TC101	C05-0470-05	CAP. TRIMMER 20P	C32	CE04EW1A101M	CAP. ELECTRO 100 20% 10V
TC102	C05-0470-05	CAP. TRIMMER 20P	C33	CC45FC1H1020C	CAP. CERAMIC 2P 0.25P 50V
TC303	C05-0490-05	CAP. TRIMMER 20P	C34	CE04LW1C331M	CAP. ELECTRO 330 20% 16V
TH301	112-103-2FK	THERNISTOR	C37	CC45FSL1H221J	CAP. CERAMIC 220P 5% 50V
U1	TC4053BP	IC, TRIPLE 2-CH XPX/DE-XPX	C38	C81-0745-05	CAP. CERAMIC 100P 10% 50V
U2	NJM072BD	IC,JFET INPUT OP AMP	C39	C81-0745-05	CAP. CERAMIC 100P 10% 50V
U3	KC10102L	IC,QUAD 2-INPUT NOR GATE	C101	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
U4	KMS01	IC,LINEAR	C102	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
U101	KC10131L	IC,DUAL D-F/FLOP	C103	CF92FV1H332J	CAP. POLYESTER 3300P 5% 50V
U102	KXD05	IC,LINEAR	C104	C91-2582-05	CAP. POLYESTER 0.47 5% 100V
U103	SN74ALS74AN	IC,DUAL D-F.F. (WITH PR&CLR)	C105	CC45FCH1H220J	CAP. CERAMIC 22P 5% 50V
U104	KMS01	IC,LINEAR	C106	CG45FB1H102K	CAP. CERAMIC 1000P 10% 50V
U105	KXD05	IC,LINEAR	C107	CE04HW1H2R2M	CAP. ELECTRO 2.2 20% 50V
U106	SN74ALS02N	IC,QUAD 2 INPUT NOR	C108	CC45FCH1H101J	CAP. CERAMIC 100P 5% 50V
U107	KMS01	IC,LINEAR	C109	NO USE	
U108	SN74ALS74AN	IC,DUAL D-F.F. (WITH PR&CLR)	C110	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
U109	TC74HC4053AP	IC,TRIPLE 2-CH ANALOG XPX	C111	CF92FV1H104J	CAP. POLYESTER 0.1 5% 50V
U201	NJM4558D	IC,DUAL OP-AMP	C112	CC45FCH1H220J	CAP. CERAMIC 22P 5% 50V
U301	TC74HC4053AP	IC,TRIPLE 2-CH ANALOG XPX	C113	CC45FCH1H330J	CAP. CERAMIC 33P 5% 50V
U302	XNG01	IC,LINEAR	C114	CE04LW1A220M	CAP. ELECTRO 22 20% 10V
U401	KMA02	IC,LINEAR	C115	C91-2604-05	CAP. CERAMIC 380P 5% 50V
VR1	R12-0680-05	RES. SEMI FIXED 47K	C116	C91-2598-05	CAP. CERAMIC 120P 5% 50V
VR2	R12-0680-05	RES. SEMI FIXED 47K	C117	CC45FCH1H680J	CAP. CERAMIC 68P 5% 50V
VR102	R12-0694-05	RES. SEMI FIXED 4.7KB	C118	CC45FCH1H680J	CAP. CERAMIC 68P 5% 50V
VR103	R12-0680-05	RES. SEMI FIXED 47K	C119	NO USE	
VR104	R12-1860-05	RES. SEMI FIXED 1KB	C120	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
VR201	R12-5545-05	RES. SEMI FIXED 2.2MB	C121	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
VR202	R12-6507-05	RES. SEMI FIXED 470K	C122	CC45FCH1H390J	CAP. CERAMIC 38P 5% 50V
VR301	R12-0680-05	RES. SEMI FIXED 47K	C123	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
VR302	R12-0882-05	RES. SEMI FIXED 100 B	C124	C91-2582-05	CAP. POLYESTER 0.47 5% 100V
VR303	R12-0678-05	RES. SEMI FIXED 10KB	C125	CE04LW0J331M	CAP. ELECTRO 330 20% 6.3V
VR304	R12-0694-05	RES. SEMI FIXED 4.7KB	C126	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
VR305	R12-6501-05	RES. SEMI FIXED 470KB	C127	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
VR306	R12-0680-05	RES. SEMI FIXED 47K	C128	C91-2538-05	CAP. NYLAR 0.1 63V
VR307	R12-0680-05	RES. SEMI FIXED 47K	C129	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
VR308	R12-0890-05	RES. SEMI FIXED 470 B	C130	CC45FCH1H030C	CAP. CERAMIC 3P 0.25P 50V
VR308	R12-0883-05	RES. SEMI FIXED 220 B	C131	CE04LW0J331M	CAP. ELECTRO 330 20% 6.3V
W201	W02-2256-05	HIGH VOLTAGE BLOCK	C132	CE04LW0J331M	CAP. CERAMIC 330 20% 6.3V
CS-5235 HORIZONTAL UNIT	X74-1580-01		C133	CE04LW0J331M	CAP. ELECTRO 330 20% 6.3V
REF. NO	PARTS NO	NAME & DESCRIPTION	C134	CE04LW0J331M	CAP. ELECTRO 330 20% 6.3V
E23-0148-05	GND TERMINAL		C135	CE04LW0J331M	CAP. ELECTRO 330 20% 6.3V
E23-0557-14	EARTH LUG, THERMAL FUSE		C136	CE04LW0J331M	CAP. ELECTRO 330 20% 6.3V
F01-0867-05	HEAT SINK, HIGH VOLTAGE		C137	CE04LW0J331M	CAP. ELECTRO 330 20% 6.3V
F01-2316-05	HEAT SINK, POWER		C138	CE04LW1C101M	CAP. ELECTRO 100 20% 16V
J73-0284-22	PCB (UNOUNTED)		C139	CC45FSL1H331J	CAP. CERAMIC 330P 5% 50V
N09-0623-04	SCREW,SENS PAN HD X3X8		C140	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C1	C81-0768-05	CAP. CERAMIC 0.01 20% 16V	C141	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C2	NO USE		C142	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C3	C81-2595-05	CAP. CERAMIC 68P 5% 50V	C143	C91-0737-05	CAP. CERAMIC 47P 5% 50V
C4	CF92FV1H103J	CAP. POLYESTER 0.01 5% 50V	C144	C91-0737-05	CAP. CERAMIC 47P 5% 50V
C5	C81-2596-05	CAP. CERAMIC 82P 5% 50V	C145	CE04LW1C100K	CAP. ELECTRO 10 20% 16V
C6	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V	C146	CC45FSL1H030C	CAP. CERAMIC 3P 0.25P 50V
C7	CC45FCH1H010C	CAP. CERAMIC 1P 0.25P 50V	C201	CC45FCH1H070D	CAP. CERAMIC 7P 0.5P 50V
C8	CC45FCH1H040C	CAP. CERAMIC 4P 0.25P 50V	C202	NO USE	
C9	NO USE		C203	CC45FCH1H120J	CAP. CERAMIC 12P 5% 50V
C10	CK45FB1H222K	CAP. CERAMIC 2200P 10% 50V	C204	NO USE	
C11	C81-0757-05	CAP. CERAMIC 1000P 10% 50V	C205	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C12	C91-2538-05	CAP. NYLAR 0.1 63V	C206	NO USE	
C13	C91-2593-05	CAP. CERAMIC 47P 5% 50V	C207	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V
C14	CC45FCH1H101J	CAP. CERAMIC 100P 5% 50V	C208	CE04W2E010M	CAP. ELECTRO 1 20% 250V
CS-5235 HORIZONTAL UNIT	X74-1580-01		C209	CC45FCH2H020C	CAP. CERAMIC 2P 0.25P 500V
REF. NO	PARTS NO	NAME & DESCRIPTION	C210	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V
E23-0148-05	GND TERMINAL		C211	CE04W2E010M	CAP. ELECTRO 1 20% 250V
E23-0557-14	EARTH LUG, THERMAL FUSE		C212	CE04W2E010M	CAP. ELECTRO 1 20% 250V
F01-0867-05	HEAT SINK, HIGH VOLTAGE		C213	CK45FB2H102K	CAP. CERAMIC 1000P 10% 500V
F01-2316-05	HEAT SINK, POWER		C214	CK45FB2H102K	CAP. CERAMIC 1000P 10% 500V
J73-0284-22	PCB (UNOUNTED)		C215	C91-1317-05	CAP. CERAMIC 0.01 80/-20% 2K
N09-0623-04	SCREW,SENS PAN HD X3X8		C216	C91-1317-05	CAP. CERAMIC 0.01 80/-20% 2K
C1	C81-0768-05	CAP. CERAMIC 0.01 20% 16V	C217	C91-1317-05	CAP. CERAMIC 0.01 80/-20% 2K
C2	NO USE		C218	CE04W2E010M	CAP. ELECTRO 1 20% 250V
C3	C81-2595-05	CAP. CERAMIC 68P 5% 50V	C219	NO USE	
C4	CF92FV1H103J	CAP. POLYESTER 0.01 5% 50V	C220	C91-1317-05	CAP. CERAMIC 0.01 80/-20% 2K
C5	C81-2596-05	CAP. CERAMIC 82P 5% 50V	C221	C91-1317-05	CAP. CERAMIC 0.01 80/-20% 2K
C6	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V	C222	CE04LW1E221M	CAP. ELECTRO 220 20% 25V
C7	CC45FCH1H010C	CAP. CERAMIC 1P 0.25P 50V	C223	CE04LW1H010M	CAP. ELECTRO 100 20% 50V
C8	CC45FCH1H040C	CAP. CERAMIC 4P 0.25P 50V	C224	CK45FB1H472K	CAP. CERAMIC 4700P 10% 50V
C9	NO USE		C225	CC45FCH2H101J	CAP. CERAMIC 100P 5% 500V
C10	CK45FB1H222K	CAP. CERAMIC 2200P 10% 50V	C226	CK45FB1H222K	CAP. CERAMIC 2200P 10% 50V
C11	C81-0757-05	CAP. CERAMIC 1000P 10% 50V	C227	CC45FCH2H101J	CAP. CERAMIC 0.01 80/-20% 2K
C12	C91-2538-05	CAP. NYLAR 0.1 63V	C228	CK45FB1H222K	CAP. CERAMIC 2200P 10% 50V
C13	C91-2593-05	CAP. CERAMIC 47P 5% 50V	C229	C91-1317-05	CAP. CERAMIC 0.01 80/-20% 2K
C14	CC45FCH1H101J	CAP. CERAMIC 100P 5% 50V			

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION		REF. NO	PARTS NO	NAME & DESCRIPTION
C230	CK45E3D102P	CAP. CERAMIC 1000P	2KV	D129	ISS132	DIODE
C231	C81-2581-05	CAP. CERAMIC 0.01 5%	2KV	D130	MA700	DIODE
C232	CE04W2E010M	CAP. ELECTRO 1 20%	250V	D131	NO USE	
C233	CE04LW1C101M	CAP. ELECTRO 100 20%	16V	D132	MA700	DIODE
C234	CE04LW1C101M	CAP. ELECTRO 100 20%	16V	D133	MA700	DIODE
C301	CC45FCH1H101J	CAP. CERAMIC 100P	5% 50V	D201	ISS132	DIODE
C302	CC45FSL1H331J	CAP. CERAMIC 330P	5% 50V	D202	ISS132	DIODE
C303	C81-0713-05	CAP. CERAMIC 2.2	10% 50V	D203	ISS83	DIODE
C304	NO USE			D204	ISS83	DIODE
C305	C91-1361-05	CAP. NYLAR 0.01	10% 100V	D205	ISS83	DIODE
C306	C91-1361-05	CAP. NYLAR 0.01	10% 250V	D206	ISS83	DIODE
C307	C91-2585-05	CAP. NYLAR 0.01	10% 250V	D207	ISS83	DIODE
C308	C91-2587-05	CAP. NYLAR 0.1	10% 250V	D208	ISS83	DIODE
C309	C91-1361-05	CAP. NYLAR 0.01	10% 100V	D209	ISS83	DIODE
C310	C91-2587-05	CAP. NYLAR 0.1	10% 250V	D210	ISS83	DIODE
C311	C91-2585-05	CAP. NYLAR 0.01	10% 250V	D211	ISS132	DIODE
C312	CK45FB2H152K	CAP. CERAMIC 1500P	10% 500V	D212	ISS132	DIODE
C313	NO USE			D213	ISS132	DIODE
C314	CE04LW0J331M	CAP. ELECTRO 330	20% 6.3V	D301	MA700	DIODE
C315	NO USE			D302	ISS132	DIODE
C316	CC45FCH1H020C	CAP. CERAMIC 2P	0.25P 50V	D303	MTZ3.0JA	DIODE, ZENER
C317	C91-0760-05	CAP. CERAMIC 0.01	20% 16V	D304	ISS132	DIODE
C318	NO USE			D305	ISS132	DIODE
C319	CC45FCH1H150J	CAP. CERAMIC 15P	5% 50V	D306	MA700	DIODE
C320	NO USE			D307	MA700	DIODE
C321	C91-0760-05	CAP. CERAMIC 0.01	20% 16V	D308	TLR112	LED, RED
C322	CE04LW1A221M	CAP. ELECTRO 220	20% 10V	D309	TLR112	LED, RED
C323	CC45FCH1H150J	CAP. CERAMIC 15P	5% 50V			
C324	CE04LW0J331M	CAP. ELECTRO 330	20% 6.3V			
C325	CE04LW1C101M	CAP. ELECTRO 100	20% 16V			
C401	CE04W2E470M	CAP. ELECTRO 47	20% 250V	D312	MTZ5.1JB	DIODE, ZENER
C402	CE04W2E100M	CAP. ELECTRO 10	20% 250V	D313	ISS132	DIODE
C403	CE04LW1E220M	CAP. ELECTRO 22	20% 25V	D314	NO USE	
C404	CE04EW2A471M	CAP. ELECTRO 470	20% 100V	D315	ISS132	DIODE
C405	CE04LW2A220M	CAP. ELECTRO 22	20% 100V	D316	MTZ3.0JA	DIODE, ZENER
C406	CE04EW1E472M	CAP. ELECTRO 4700	20% 25V	D401	S1VB60	DIODE, STACK
C407	CE04LW1C331M	CAP. ELECTRO 330	20% 16V	D402	S1VB60	DIODE, STACK
C408	CE04EW1E472M	CAP. ELECTRO 4700	20% 25V	D403	S4VB20F	DIODE, STACK
C409	CE04EW1C332M	CAP. ELECTRO 3300	20% 16V	D404	S1VB60	DIODE, STACK
C410	CE04LW0J471M	CAP. ELECTRO 470	20% 6.3V	D405	ISS132	DIODE
C411	CE04LW1C331M	CAP. ELECTRO 330	20% 16V	D406	ISS132	DIODE
C412	CE04LW0J331M	CAP. ELECTRO 330	20% 6.3V	D407	MTZ13JC	DIODE, ZENER
C413	CE04LW1C101M	CAP. ELECTRO 100	20% 16V	D408	MTZ13JC	DIODE, ZENER
C414	CE04LW1C101M	CAP. ELECTRO 100	20% 16V	D409	MTZ7.5JA	DIODE, ZENER
C415	CE04EW1E102M	CAP. ELECTRO 1000	20% 25V	D416	NO USE	
C416	CE04EW1E102M	CAP. ELECTRO 1000	20% 25V	D417	C91-0761-05	CAP. CERAMIC 2200P 20% 50V
C418	C91-0761-05	CAP. CERAMIC 1000P	10% 50V	D419	C91-0757-05	CAP. CERAMIC 1000P 10% 50V
C801	CF92V1H103J	CAP. POLYESTER 0.01	5% 50V	F201	F53-0107-05	THERMAL FUSE 400mA / 125V
D1	MA700	DIODE		JW1	E38-1005-05	WIRE ASS'Y; 3P
D2	MA700	DIODE		JW2	E38-1006-05	WIRE ASS'Y; 6P
D3	MA700	DIODE		JW8	E38-0988-15	WIRE ASS'Y; H TO V
D4	MA700	DIODE		JW14	E38-0988-05	WIRE ASS'Y; H TO FINAL
D5	MA700	DIODE		JW18	E38-0990-05	WIRE ASS'Y; H TO CRT
D6	ISS132	DIODE		JW19	E38-0981-05	WIRE ASS'Y; H TO BNC
D7	ISS132	DIODE		K301	S76-0627-05	RELAY
D8	ISS132	DIODE		L101	L78-0553-05	NOISE FILTER
D9	ISS132	DIODE		L201	L40-1545-06	FERRI INDUCTOR 150uH 5%
D10	ISS132	DIODE		L202	L40-1011-04	FERRI INDUCTOR 100uH 10%
D11	ISS132	DIODE		L203	L40-1011-04	FERRI INDUCTOR 100uH 10%
D12	MA700	DIODE		L204	L40-3825-05	FERRI INDUCTOR 3.0uH 5%
D13	ISS132	DIODE		L301	L40-1001-11	FERRI INDUCTOR 10uH 10%
D14	ISS132	DIODE		NL201	NE-38B	NEON LAMP
D15	ISS132	DIODE		NL202	NE-38B	NEON LAMP
D16	ISS132	DIODE		NL203	NE-38B	NEON LAMP
D17	ISS132	DIODE		NL204	NE-38B	NEON LAMP
D18	ISS132	DIODE		P6	E40-7515-05	PIN CONNECTOR 3P
D101	ISS132	DIODE		P7	E40-7518-05	PIN CONNECTOR 4P
D102	ISS132	DIODE		P8	E40-7040-05	PIN CONNECTOR 13P
D103	ISS132	DIODE		P9	NO USE	
D104	ISS132	DIODE		P10	E40-5066-05	PIN CONNECTOR 9P
D105	ISS132	DIODE		P15	E40-5067-05	PIN CONNECTOR 10P
D106	ISS132	DIODE		P16	E40-5068-05	PIN CONNECTOR 12P
D107	ISS132	DIODE		P17	E40-3306-05	PIN CONNECTOR 9P
D108	ISS132	DIODE		P20	E40-3299-05	PIN CONNECTOR 2P
D109	MA700	DIODE		Q3	2SC1740S(R,S)	TR. SI, NPN
D110	ISS132	DIODE		Q4	2SC1823(0)	TR. SI, NPN
D111	NO USE			Q5	2SC1923(0)	TR. SI, NPN
D112	ISS132	DIODE		Q6	2SC3779(D)	TR. SI, NPN
D113	ISS132	DIODE		Q7	2SC3779(D)	TR. SI, NPN
D114	MA700	DIODE		Q8	NO USE	
D115	ISS132	DIODE		Q9	2SA1459(K)	TR. SI, PNP
D116	NO USE			Q10	2SC1740S(R,S)	TR. SI, NPN
D117	ISS132	DIODE		Q11	2SC1740S(R,S)	TR. SI, NPN
D118	ISS132	DIODE		Q12	2SA1005(K)	TR. SI, PNP
D119	ISS132	DIODE				
D120	ISS132	DIODE				
D121	ISS132	DIODE				
D122	ISS132	DIODE				
D123	ISS132	DIODE				
D124	ISS132	DIODE				
D125	ISS132	DIODE				
D126	ISS132	DIODE				
D127	ISS132	DIODE				
D128	ISS132	DIODE				

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
Q13	2SC1740S(R,S)	TR. SI, NPN
Q14	2SC1740S(R,S)	TR. SI, NPN
Q15	2SA1005(K)	TR. SI, PNP
Q16	2SA1005(K)	TR. SI, PNP
Q17	2SA933S(R,S)	TR. SI, PNP
Q18	2SA933S(R,S)	TR. SI, PNP
Q19	2SC1740S(R,S)	TR. SI, NPN
Q20	2SA933S(R,S)	TR. SI, PNP
Q21	2SC1807	TR. SI, NPN
Q28	2SA1458(K)	TR. SI, PNP
Q101	2SK170(V)	FET, N-CHANNEL
Q102	2SC1823(0)	TR. SI, NPN
Q103	2SA933S(R,S)	TR. SI, PNP
Q104	2SC1740S(R,S)	TR. SI, NPN
Q105	2SC1740S(R,S)	TR. SI, NPN
Q106	2SC1740S(R,S)	TR. SI, NPN
Q107	2SK170(V)	FET, N-CHANNEL
Q108	2SC1823(0)	TR. SI, NPN
Q109	2SC3066(G)	TR. SI, NPN
Q110	2SA1458(K)	TR. SI, PNP
Q111	2SA933S(R,S)	TR. SI, PNP
Q112	2SA933S(R,S)	TR. SI, PNP
Q113	2SA1005(K)	TR. SI, PNP
Q114	2SA1005(K)	TR. SI, PNP
Q115	2SA1005(K)	TR. SI, PNP
Q116	2SA1005(K)	TR. SI, PNP
Q117	2SC1923(0)	TR. SI, NPN
Q118	2SC1923(0)	TR. SI, NPN
Q119	2SA933S(R,S)	TR. SI, PNP
Q120	2SA1459(K)	TR. SI, PNP
Q121	2SC1823(0)	TR. SI, NPN
Q122	2SC1740S(R,S)	TR. SI, NPN
Q123	2SC1740S(R,S)	TR. SI, NPN
Q124	2SC1740S(R,S)	TR. SI, NPN
Q125	2SC1740S(R,S)	TR. SI, NPN
Q126	2SC1740S(R,S)	TR. SI, NPN
Q127	2SA1005(K)	TR. SI, PNP
Q151	2SA1458(K)	TR. SI, PNP
Q152	2SA1458(K)	TR. SI, PNP
Q158	2SA1459(K)	TR. SI, PNP
Q201	2SA933S(R,S)	TR. SI, PNP
Q202	NO USE	
Q203	2SC1923(0)	TR. SI, NPN
Q204	2SC1740S(R,S)	TR. SI, NPN
Q205	2SA933S(R,S)	TR. SI, PNP
Q206	2SC2810(S)	TR. SI, NPN
Q207	2SA1208(S)	TR. SI, PNP
Q208	2SC2910(S)	TR. SI, NPN
Q209	2SA1208(S)	TR. SI, PNP
Q210	2SC2551(0)	TR. SI, NPN
Q211	2SC2551(0)	TR. SI, NPN
Q212	2SA933S(R,S)	TR. SI, PNP
Q213	2SD613(E)	TR. SI, NPN
Q301	2SC1740S(R,S)	TR. SI, NPN
Q302	2SC1740S(R,S)	TR. SI, NPN
Q303	2SC1740S(R,S)	TR. SI, NPN
Q304	2SC1740S(R,S)	TR. SI, NPN
Q305	2SA933S(R,S)	TR. SI, PNP
Q306	2SA1005(K)	TR. SI, PNP
Q307	2SA1005(K)	TR. SI, PNP
Q313	2SC1740S(R,S)	TR. SI, NPN
Q314	2SC1907	TR. SI, NPN
Q315	2SC1907	TR. SI, NPN
Q316	2SA1459(K)	TR. SI, PNP
Q317	2SA1459(K)	TR. SI, PNP
Q318	2SC1907	TR. SI, NPN
Q319	2SC1907	TR. SI, NPN
Q320	2SC4732(E)	TR. SI, NPN
Q321	2SC4732(E)	TR. SI, NPN
Q322	2SA1828(E)	TR. SI, PNP
Q323	2SA1828(E)	TR. SI, PNP
Q324	2SA933S(R,S)	TR. SI, PNP
Q401	2SA1499(P)	TR. SI, PNP
Q402	2SC2551(0)	TR. SI, NPN
Q403	2SA1304	TR. SI, PNP
Q404	2SC2551(0)	TR. SI, NPN
Q405	2SB1015(Y)	TR. SI, PNP
Q406	2SD1406(Y)	TR. SI, NPN
Q407	2SB1015(Y)	TR. SI, PNP
R1	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R2	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R3	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R4	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R5	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R6	RD14BB2C822J	RES. CARBON 8.2K 5% 1/6W
R7	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R8	RD14BB2C181J	RES. CARBON 180 5% 1/6W
R9	RD14BB2C105J	RES. CARBON 1K 5% 1/6W
R10	RD14BB2C105J	RES. CARBON 1K 5% 1/6W
R11	RD14BB2C105J	RES. CARBON 1K 5% 1/6W

REF. NO	PARTS NO	NAME & DESCRIPTION
R12	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
R13	NO USE	
R14	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R15	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R16	RD14BB2C751J	RES. CARBON 750 5% 1/6W
R17	RD14BB2C821J	RES. CARBON 820 5% 1/6W
R18	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R19	RD14BB2C2470J	RES. CARBON 47 5% 1/6W
R20	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R21	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R22	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R23	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R24	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W
R25	RD14BB2C512J	RES. CARBON 5.1K 5% 1/6W
R26	RD14BB2C331J	RES. CARBON 330 5% 1/6W
R27	RD14BB2C750J	RES. CARBON 75 5% 1/6W
R28	RD14BB2C750J	RES. CARBON 75 5% 1/6W
R29	RD14BB2C680J	RES. CARBON 68 5% 1/6W
R30	RD14BB2C380J	RES. CARBON 39 5% 1/6W
R31	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W
R32	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R33	RD14BB2C681J	RES. CARBON 680 5% 1/6W
R34	NO USE	
R35	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R36	NO USE	
R37	RD14BB2C391J	RES. CARBON 390 5% 1/6W
R38	RD14BB2C515J	RES. CARBON 750 5% 1/6W
R39	R90-0660-05	RES. NETWORK 4X1K
R40	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R41	RD14BB2C683J	RES. CARBON 68K 5% 1/6W
R42	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R43	RD14BB2C393J	RES. CARBON 38K 5% 1/6W
R44	RD14BB2C212J	RES. CARBON 220 5% 1/6W
R45	RD14BB2C163J	RES. CARBON 16K 5% 1/6W
R46	RD14BB2C752J	RES. CARBON 7.5K 5% 1/6W
R47	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R48	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R49	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R50	RD14BB2C393J	RES. CARBON 39K 5% 1/6W
R51	RD14BB2C123J	RES. CARBON 12K 5% 1/6W
R52	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R53	RD14BB2C13J	RES. CARBON 11K 5% 1/6W
R54	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R55	RD14BB2C21J	RES. CARBON 220 5% 1/6W
R56	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W
R57	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W
R58	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R59	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R60	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R61	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R62	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R63	RD14BB2C23J	RES. CARBON 22K 5% 1/6W
R64	RD14BB2C23J	RES. CARBON 22K 5% 1/6W
R65	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R66	RD14BB2C23J	RES. CARBON 22K 5% 1/6W
R67	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R68	RD14BB2C105J	RES. CARBON 1K 5% 1/6W
R69	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R70	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R71	RD14BB2C23J	RES. CARBON 22K 5% 1/6W
R72	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R73	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R74	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R75	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R76	NO USE	
R77	RD14BB2C752J	RES. CARBON 7.5K 5% 1/6W
R78	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R79	RD14BB2C23J	RES. CARBON 22K 5% 1/6W
R80	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R81	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R82	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R83	RD14BB2E223J	RES. CARBON 22K 5% 1/4W
R84	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R85	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R86	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R87	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R88	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R89	NO USE	
R90	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R91	RD14BB2C203J	RES. CARBON 20K 5% 1/6W
R101	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R102	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R103	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R104	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R105	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R106	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R107	RD14BB2C912J	RES. CARBON 9.1K 5% 1/6W
R108	RD14BB2C163J	RES. CARBON 16K 5% 1/6W
R109	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R110	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R111	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R112	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R113	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R114	RD14BB2C23J	RES. CARBON 22K 5% 1/6W
R115	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R116	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R117	RD14BB2C473J	RES. CARBON 47K 5% 1/6W

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
R118	RD14BB2C162J	RES. CARBON 1.6K 5% 1/6W	R222	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R118	RD14BB2C243J	RES. CARBON 24K 5% 1/6W	R223	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R120	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R224	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R121	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R225	RD14BB2C134J	RES. CARBON 130K 5% 1/6W
R122	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R226	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R123	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R227	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R124	RD14BB2C223J	RES. CARBON 22K 5% 1/6W	R228	RD14BB2C753J	RES. CARBON 75K 5% 1/6W
R125	RD14BB2C330J	RES. CARBON 33 5% 1/6W	R229	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R126	RD14BB2C120J	RES. CARBON 12 5% 1/6W	R230	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R127	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W	R231	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R128	RD14BB2E471J	RES. CARBON 470 5% 1/4W	R232	RD14BB2C134J	RES. CARBON 130K 5% 1/6W
R128	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W	R233	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R130	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W	R234	RD14BB2C474J	RES. CARBON 470K 5% 1/6W
R131	RD14BB2C912J	RES. CARBON 8.1K 5% 1/6W	R235	RD14BB2C474J	RES. CARBON 470K 5% 1/6W
R132	RD14BB2C163J	RES. CARBON 16K 5% 1/6W	R236	R92-1563-05	RES. METALGLACE 10M 5% 1/4W
R133	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R237	R92-1563-05	RES. METALGLACE 10M 5% 1/4W
R134	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R238	R92-1562-05	RES. METALGLACE 8.2M 5% 1/4W
R135	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R239	R92-1561-05	RES. METALGLACE 3.8M 5% 1/4W
R136	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R240	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R137	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R241	RD14BB2C474J	RES. CARBON 470K 5% 1/6W
R138	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R242	RD14BB2C683J	RES. CARBON 68K 5% 1/6W
R139	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R243	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R140	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W	R244	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R141	RD14BB2C471J	RES. CARBON 470 5% 1/6W	R245	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R142	NO USE		R246	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R143	RD14BB2C302J	RES. CARBON 3K 5% 1/6W	R247	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R144	RD14BB2C302J	RES. CARBON 3K 5% 1/6W	R248	RN14BK2C1203F	RES. METAL FILM 120K 1% 1/6W
R145	RD14BB2C131J	RES. CARBON 130 5% 1/6W	R249	R92-1564-05	RES. METALGLACE 15M 1% 1/2W
R146	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W	R250	RD14BB2C124J	RES. CARBON 120K 5% 1/6W
R147	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R251	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R148	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R252	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W
R148	RD14BB2C183J	RES. CARBON 18K 5% 1/6W	R253	RD14BB2C153J	RES. CARBON 15K 5% 1/6W
R150	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R254	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R151	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R255	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R152	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	R256	NO USE	
R153	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R257	RD14BB2C151J	RES. CARBON 150 5% 1/6W
R154	RD14BB2C684J	RES. CARBON 680K 5% 1/6W	R258	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R155	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R259	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R156	RD14BB2C223J	RES. CARBON 22K 5% 1/6W	R260	RN14BK2C1801F	RES. METAL FILM 1.8K 1% 1/6W
R157	NO USE		R261	RN14BK2C1801F	RES. METAL FILM 1.8K 1% 1/6W
R158	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R262	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W
R159	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R263	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R160	RD14BB2C202J	RES. CARBON 2K 5% 1/6W	R264	RD14BB2C303J	RES. CARBON 30K 5% 1/6W
R161	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R265	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R162	RD14BB2C202J	RES. CARBON 2K 5% 1/6W	R266	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R163	RD14BB2C151J	RES. CARBON 150 5% 1/6W	R267	RD14BB2C224J	RES. CARBON 220K 5% 1/6W
R164	RD14BB2C111J	RES. CARBON 110 5% 1/6W	R268	RD14BB2C204J	RES. CARBON 200K 5% 1/6W
R165	RD14BB2C681J	RES. CARBON 680 5% 1/6W	R269	R92-1573-05	RES. LINEAR PCT 2.7K 5% 1/6W
R166	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	R300	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R167	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	R301	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R168	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R302	RD14BB2C821J	RES. CARBON 820 5% 1/6W
R169	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R303	RD14BB2C821J	RES. CARBON 820 5% 1/6W
R170	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R304	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W
R171	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R305	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R172	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R306	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R173	RD14BB2C431J	RES. CARBON 430 5% 1/6W	R307	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R174	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R308	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R175	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R309	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W
R176	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R310	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W
R177	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R311	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W
R178	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R312	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R179	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W	R313	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W
R180	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W	R314	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W
R181	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R315	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
R182	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R316	RD14BB2C153J	RES. CARBON 15K 5% 1/6W
R183	RD14BB2E102J	RES. CARBON 1K 5% 1/4W	R317	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W
R184	RD14BB2C621J	RES. CARBON 620 5% 1/6W	R318	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R185	RD14BB2E103J	RES. CARBON 10K 5% 1/4W	R319	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R186	RD14BB2C202J	RES. CARBON 2K 5% 1/6W	R320	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W
R187	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R321	RD14BB2C183J	RES. CARBON 18K 5% 1/6W
R188	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R322	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R189	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R323	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R190	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W	R324	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W
R191	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W	R325	RD14BB2C912J	RES. CARBON 9.1K 5% 1/6W
R192	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R326	RD14BB2C301J	RES. CARBON 300 5% 1/6W
R193	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R327	RD14BB2C391J	RES. CARBON 380 5% 1/6W
R194	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R328	RD14BB2C391J	RES. CARBON 380 5% 1/6W
R195	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R329	RD14BB2C390J	RES. CARBON 39 5% 1/6W
R196	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R330	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R197	RD14BB2E101J	RES. CARBON 100 5% 1/4W	R331	RD14BB2C271J	RES. CARBON 270 5% 1/6W
R198	RD14BB2C471J	RES. CARBON 470 5% 1/6W	R332	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
R199	RD14BB2C473J	RES. CARBON 47K 5% 1/6W	R333	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W
R202	RD14BB2C113J	RES. CARBON 11K 5% 1/6W	R334	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W
R206	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W	R335	RD14BB2C243J	RES. CARBON 24K 5% 1/6W
R207	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W	R336	RD14BB2C243J	RES. CARBON 24K 5% 1/6W
R210	RD14BB2C333J	RES. CARBON 33K 5% 1/6W	R349	R92-1552-05	RES. LINEAR PCT 180
R214	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	R355	RD14BB2C301J	RES. CARBON 380 5% 1/6W
R215	RD14BB2C431J	RES. CARBON 430 5% 1/6W	R362	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W
R216	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W	R363	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W
R217	NO USE		R364	RD14BK2C3001F	RES. METAL FILM 3.8K 1% 1/6W
R218	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	R365	RN14BK2C6201F	RES. METAL FILM 6.2K 1% 1/6W
R219	RD14BB2C134J	RES. CARBON 130K 5% 1/6W	R366	R92-1560-05	RES. LINEAR PCT 2K
R220	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R367	RD14BB2C393J	RES. CARBON 38K 5% 1/6W
R221	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R368	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W
			R369	RD14BB2C204J	RES. CARBON 200K 5% 1/6W

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
R370	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R371	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R372	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R373	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R374	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R375	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W
R376	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W
R377	R92-1558-05	RES. SPECIAL POWER 38K 5% 1W
R378	R92-1558-05	RES. SPECIAL POWER 38K 5% 1W
R381	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R382	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R383	RD14BB2C751J	RES. CARBON 750 5% 1/6W
R384	RD14BB2C751J	RES. CARBON 750 5% 1/6W
R385	RN14BK2C6801F	RES. METAL FILM 6.8K 1% 1/6W
R386	RN14BK2C1303F	RES. METAL FILM 130K 1% 1/6W
R387	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R388	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R389	NO USE	
R390	RD14BB2C813J	RES. CARBON 81K 5% 1/6W
R394	R92-1559-05	RES. SPECIAL POWER 47K 5% 1W
R395	R92-1559-05	RES. SPECIAL POWER 47K 5% 1W
R396	RD14BB2C431J	RES. CARBON 430 5% 1/6W
R397	NO USE	
R398	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R399	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R400	NO USE	
R401	R92-1557-05	RES. SPECIAL POWER 6.8K 5% 2W
R402	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R403	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R404	R92-1556-05	RES. SPECIAL POWER 1K 5% 2W
R405	R92-1556-05	RES. SPECIAL POWER 1K 5% 2W
R406	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R407	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R408	NO USE	
R409	R92-1555-05	RES. SPECIAL POWER 56 5% 2W
R410	R92-1555-05	RES. SPECIAL POWER 56 5% 2W
R411	NO USE	
R412	R92-1555-05	RES. SPECIAL POWER 56 5% 2W
R413	R92-1555-05	RES. SPECIAL POWER 56 5% 2W
R414	R92-1554-05	RES. SPECIAL POWER 15 5% 2W
R415	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R416	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R417	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
TC101	C05-0470-05	CAP. TRIMMER 20P
TC102	C05-0470-05	CAP. TRIMMER 20P
TC303	C05-0480-05	CAP. TRIMMER 20P
TH301	112-103-2FM	THERMISTOR
U1	TC4053BP	IC,TRIPLE 2-CH MPX/DE-MPX
U2	NJN072BD	IC,JFET INPUT OP AMP
U3	KC10102L	IC,QUAD 2-INPUT NOR GATE
U4	KMS01	IC,LINEAR
U101	KC10131L	IC,DUAL D-FLIP FLOP
U102	KHD05	IC,LINEAR
U103	SN74ALS74AN	IC,DUAL D-F.F. (WITH PR&CLR)
U104	KHS01	IC,LINEAR
U105	KHD05	IC,LINEAR
U106	SN74ALS02N	IC,QUAD 2 INPUT NOR
U107	KHS01	IC,LINEAR
U108	SN74ALS74AN	IC,DUAL D-F.F. (WITH PR&CLR)
U109	TC74HC4053AP	IC,TRIPLE 2-CH ANALOG MPX
U201	NJM4558D	IC,DUAL OP-AMP
U301	TC74HC4053AP	IC,TRIPLE 2-CH ANALOG MPX
U401	KHA02	IC,LINEAR
VR1	R12-0680-05	RES. SEMI FIXED 47K
VR2	R12-0680-05	RES. SEMI FIXED 47K
VR102	R12-0684-05	RES. SEMI FIXED 4.7KB
VR103	R12-0680-05	RES. SEMI FIXED 47K
VR104	R12-1860-05	RES. SEMI FIXED 1KB
VR201	R12-5545-05	RES. SEMI FIXED 2.2MB
VR202	R12-6507-05	RES. SEMI FIXED 470K
VR301	R12-0680-05	RES. SEMI FIXED 47K
VR302	R12-0882-05	RES. SEMI FIXED 100 B
VR303	R12-0678-05	RES. SEMI FIXED 10KB
VR304	R12-0684-05	RES. SEMI FIXED 4.7KB
VR305	R12-6501-05	RES. SEMI FIXED 470KB
VR306	NO USE	
VR307	R12-0680-05	RES. SEMI FIXED 47K
VR308	R12-0890-05	RES. SEMI FIXED 470 B
VR309	R12-0883-05	RES. SEMI FIXED 220 B
W201	W02-2256-05	HIGH VOLTAGE BLOCK

CS-5230 R/O UNIT

X77-1870-00

REF. NO	PARTS NO	NAME & DESCRIPTION
	J73-0282-02	PCB (UNMOUNTED)
C1	C81-2538-05	CAP. MYLAR 0.1 63V
C2	C81-2538-05	CAP. MYLAR 0.1 63V
C3	C81-1128-05	CAP. CERAMIC 0.1 80/-20% 50V
C4	C81-2538-05	CAP. MYLAR 0.1 63V
C5	C81-1128-05	CAP. CERAMIC 0.1 80/-20% 50V
C6	C81-2538-05	CAP. MYLAR 0.1 63V
C7	C81-2538-05	CAP. MYLAR 0.1 63V
C8	C81-2538-05	CAP. MYLAR 0.1 63V
C9	C81-1361-05	CAP. MYLAR 0.01 10% 100V
C10	C81-2538-05	CAP. MYLAR 0.1 63V
C11	C81-2538-05	CAP. MYLAR 0.1 63V
C12	C81-1361-05	CAP. MYLAR 0.01 10% 100V
C13	C81-1128-05	CAP. CERAMIC 0.1 80/-20% 50V
C14	C81-1128-05	CAP. CERAMIC 0.1 80/-20% 50V
C15	C81-1128-05	CAP. CERAMIC 0.1 80/-20% 50V
C16	C81-1128-05	CAP. CERAMIC 0.1 80/-20% 50V
C17	C81-1128-05	CAP. CERAMIC 0.1 80/-20% 50V
C18	C81-0755-05	CAP. CERAMIC 680P 10% 50V
C19	C81-0755-05	CAP. CERAMIC 680P 10% 50V
C20	C81-1128-05	CAP. CERAMIC 0.1 80/-20% 50V
C21	C81-1128-05	CAP. CERAMIC 0.1 80/-20% 50V
C22	C81-1128-05	CAP. CERAMIC 0.1 80/-20% 50V
C23	CC45FC1H270J	CAP. CERAMIC 27P 5% 50V
C24	CC45FC1H270J	CAP. CERAMIC 27P 5% 50V
C25	C81-1128-05	CAP. CERAMIC 0.1 80/-20% 50V
C26	C81-1128-05	CAP. CERAMIC 0.1 80/-20% 50V
C29	CC45FC1H101J	CAP. CERAMIC 100P 5% 50V
C30	C81-2538-05	CAP. MYLAR 0.1 63V
C31	C81-2538-05	CAP. MYLAR 0.1 63V
C32	C81-2538-05	CAP. MYLAR 0.1 63V
C33	C80-3226-05	CAP. ELECTRO 22 20% 16V
C34	C81-2538-05	CAP. MYLAR 0.1 63V
C35	C81-2538-05	CAP. MYLAR 0.1 63V
C36	C81-1128-05	CAP. CERAMIC 0.1 80/-20% 50V
C39	C81-2538-05	CAP. MYLAR 0.1 63V
C40	C81-2538-05	CAP. MYLAR 0.1 63V
C41	C81-2538-05	CAP. MYLAR 0.1 63V
C42	C81-2538-05	CAP. MYLAR 0.1 63V
C43	C81-1128-05	CAP. CERAMIC 0.1 80/-20% 50V
C44	C81-1128-05	CAP. CERAMIC 0.1 80/-20% 50V
C45	C81-2538-05	CAP. MYLAR 0.1 63V
C46	C81-2538-05	CAP. MYLAR 0.1 63V
C47	C81-2538-05	CAP. MYLAR 0.1 63V
C48	C81-1128-05	CAP. CERAMIC 0.1 80/-20% 50V
C49	C81-1128-05	CAP. CERAMIC 0.1 80/-20% 50V
C50	C81-1128-05	CAP. CERAMIC 0.1 80/-20% 50V
C51	C80-3230-05	CAP. ELECTRO 100 20% 16V
C52	C80-3230-05	CAP. ELECTRO 100 20% 16V
C53	C80-3230-05	CAP. ELECTRO 100 20% 16V
C54	C80-3230-05	CAP. ELECTRO 100 20% 16V
C55	C80-3216-05	CAP. ELECTRO 330 20% 6.3V
C56	NO USE	
C57	CC45FC1H680J	CAP. CERAMIC 68P 5% 50V
C58	CC45FC1H680J	CAP. CERAMIC 68P 5% 50V
C59	C81-0769-05	CAP. CERAMIC 0.01 20% 16V
C60	C81-0769-05	CAP. CERAMIC 0.01 20% 16V
JW24	E38-0982-05	WIRE ASS'Y:8P
JW25	E38-1000-15	WIRE ASS'Y:1P,EARTH LUG
L1	L79-0551-05	NOISE FILTER
L2	L79-0551-05	NOISE FILTER
L3	L79-0551-05	NOISE FILTER
L4	L79-0551-05	NOISE FILTER
L5	R82-1061-05	JUMPING RES. ZERO OHM(5MH)
P23	E40-7404-05	PIN CONNECTOR 26P
R1	RN14BK2C9100F	RES. METAL FILM 910 1% 1/6W
R4	RN14BK2C1101F	RES. METAL FILM 1.1K 1% 1/6W
R7	RN14BK2C3301F	RES. METAL FILM 3.3K 1% 1/6W
R8	RN14BK2C3301F	RES. METAL FILM 3.3K 1% 1/6W
R9	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W
R10	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W
R11	RN14BK2C2701F	RES. METAL FILM 2.7K 1% 1/6W
R12	RN14BK2C2701F	RES. METAL FILM 2.7K 1% 1/6W
R13	RN14BK2C3301F	RES. METAL FILM 3.3K 1% 1/6W
R14	RN14BK2C1601F	RES. METAL FILM 1.6K 1% 1/6W
R15	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R16	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R17	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R18	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
R19	RD14BB2C752J	RES. CARBON 7.5K 5% 1/6W	C14	CC45FCH1H151J	CAP. CERAMIC 150P 5% 50V
R20	RD14BB2C101J	RES. CARBON 100 5% 1/6W	C15	CC45FCH1H030C	CAP. CERAMIC 3P 0.25P 50V
R21	RD14BB2C101J	RES. CARBON 100 5% 1/6W	C16	CC45FCH1H030C	CAP. CERAMIC 3P 0.25P 50V
R22	RD14BB2C101J	RES. CARBON 100 5% 1/6W	C101	CE04LW1E101M	CAP. ELECTRO 100 20% 25V
R23	RD14BB2C101J	RES. CARBON 100 5% 1/6W	C102	CB1-0769-05	CAP. CERAMIC 0.01 20% 16V
R24	RD14BB2C101J	RES. CARBON 100 5% 1/6W	C103	CE04LW1E101M	CAP. ELECTRO 100 20% 25V
R25	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	C104	CB1-0769-05	CAP. CERAMIC 0.01 20% 16V
R26	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	C105	NO USE	
R27	RD14BB2C101J	RES. CARBON 100 5% 1/6W	C106	CB1-1357-05	CAP. POLYESTER 0.1 10% 100V
R28	RD14BB2C101J	RES. CARBON 100 5% 1/6W	C107	CB1-0769-05	CAP. CERAMIC 0.01 20% 16V
R29	RD14BB2C512J	RES. CARBON 5.1K 5% 1/6W	C108	CB1-0769-05	CAP. CERAMIC 0.01 20% 16V
R30	RD14BB2C512J	RES. CARBON 5.1K 5% 1/6W	C109	CB1-0769-05	CAP. CERAMIC 0.01 20% 16V
R31	RD14BB2C512J	RES. CARBON 5.1K 5% 1/6W	C201	C01-2583-05	CAP. CERAMIC 0.1 20% 250V
R32	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	C202	C01-2584-05	CAP. CERAMIC 1000P 10% 250V
R33	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	C203	C01-2584-05	CAP. CERAMIC 1000P 10% 250V
R34	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	C207	CE04LW1E220M	CAP. ELECTRO 22 20% 25V
R35	RD14BB2C101J	RES. CARBON 100 5% 1/6W	C208	CB1-0769-05	CAP. CERAMIC 0.01 20% 16V
R36	RN14BK2C1202D	RES. METAL FILM 12K 0.5% 1/6W	C209	CE04LW0J101M	CAP. ELECTRO 100 20% 6.3V
R37	RN14BK2C1202D	RES. METAL FILM 12K 0.5% 1/6W	JW5	E38-0987-05	WIRE ASS'Y; CRT TO FINAL
R38	RN14BK2C3001D	RES. METAL FILM 3K 0.5% 1/6W	JW6	NO USE	
R39	RN14BK2C1521D	RES. METAL FILM 1.52K 0.5% 1/6W	JW7	E38-0988-05	WIRE ASS'Y; CRT TO H
R40	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W	JW13	E38-0989-05	WIRE ASS'Y; BNC TO V
R41	RN14BK2C1501F	RES. METAL FILM 1.5K 1% 1/6W	L1	L40-2201-17	FERRI INDUCTOR 22UH 10%
R42	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	L2	L40-1001-17	FERRI INDUCTOR 10UH 10%
R43	R90-0653-05	RES. NETWORK 8X10K	L61	L40-1281-17	FERRI INDUCTOR 1.2UH 10%
R44	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	L62	L40-2781-17	FERRI INDUCTOR 2.7UH 10%
R45	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	L63	L40-1281-17	FERRI INDUCTOR 1.2UH 10%
R46	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	L64	L40-2781-17	FERRI INDUCTOR 2.7UH 10%
R47	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	L201	L33-0808-05	CHOKE COIL 1000UH
R48	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	L202	L40-1281-17	FERRI INDUCTOR 1.2UH 10%
R49	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	L203	L40-1281-17	FERRI INDUCTOR 1.2UH 10%
R50	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	P4	E40-7515-05	PIN CONNECTOR 3P
R51	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	P5	E40-3300-05	PIN CONNECTOR 3P
R52	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	P14	E40-5066-05	PIN CONNECTOR 8P
R53	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	P18	E40-7518-05	PIN CONNECTOR 6P
R54	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	P19	E40-7515-05	PIN CONNECTOR 3P
R55	RD14BB2C101J	RES. CARBON 100 5% 1/6W	P20	NO USE	
R56	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	P21	E40-7412-05	PIN CONNECTOR 2P
R57	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	P22	E40-7413-05	PIN CONNECTOR 6P
R58	RD14BB2C103J	RES. CARBON 10K 5% 1/6W	P105	E40-7515-05	PIN CONNECTOR 3P
R59	RD14BB2C101J	RES. CARBON 100 5% 1/6W	P114	E40-7517-05	PIN CONNECTOR 5P
R60	RD14BB2C101J	RES. CARBON 100 5% 1/6W	P201	E04-0277-05	BNC CONNECTOR
U1	QTN5280	IC GATE ARRAY	Q1	2SA1161	TR. SI, PNP
U2	LC3664ASL-10	IC, CHOS 64K SRAM	Q2	2SA1161	TR. SI, PNP
U3	NJN311D	IC, COMPARATOR	Q3	2SC3778(D)	TR. SI, NPN
U4	SN74ALS138N	IC, 3-8 DECODER/DE-MPX	Q4	2SC3778(D)	TR. SI, NPN
U5	SN74ALS32N	IC, QUAD 2 INPUT OR	Q8	2SC2644	TR. SI, NPN
U6	SN74AS373N	IC, OCTAL D TRANSPARENT LATCHES	Q10	2SC2644	TR. SI, NPN
U7	SN74ALS374AN	IC, OCTAL D-F.F.	Q11	2SC2644	TR. SI, NPN
U8	SN74ALS374AN	IC, OCTAL D-F.F.	Q12	2SC2644	TR. SI, NPN
U9	DAC0808LCN	IC, 8-BIT D/A CONVERTER	Q105	2SC1907	TR. SI, NPN
U10	DAC0808LCN	IC, 8-BIT D/A CONVERTER	Q106	2SC1907	TR. SI, NPN
U11	TC74HC4051AP	IC, 8-CH ANALOG MULTIPLEXER	Q107	2SC1907	TR. SI, NPN
U12	TC74WC4051AP	IC, 8-CH ANALOG MULTIPLEXER	Q108	2SC1907	TR. SI, NPN
U13	NJH072BD	IC, JET INPUT OP AMP	Q113	2SC3952(D)	TR. SI, NPN
U14	SN74LS164N	IC, 8-BIT PARA-OUT SERI. REGIST	Q114	2SC3952(D)	TR. SI, NPN
U15	SN74ALS04BN	IC, HEX INVERTERS	Q201	2SC3778(D)	TR. SI, NPN
U16	HA17012PB	IC, 12-BIT D/A CONVERTER	Q202	2SC3778(D)	TR. SI, NPN
U17	HD14051BP	IC, 8-CH ANALOG MPX/DE-MP	R1	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
U18	PST518B	IC, RESET	R2	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W
X1	L78-0131-05	CERALOCK	R3	RD14BB2C822J	RES. CARBON 8.2K 5% 1/4W
X2	L78-0130-05	CERALOCK	R4	RD14BB2C221J	RES. CARBON 220 5% 1/6W

CS-5230 FINAL AMP UNIT

X80-1370-00

REF. NO	PARTS NO	NAME & DESCRIPTION	R1	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
E01-0103-05	CRT SOCKET		R2	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W
E23-0149-05	GND TERMINAL		R3	RD14BB2C822J	RES. CARBON 8.2K 5% 1/4W
F01-2317-04	HEAT SINK: Q113, 114		R4	RD14BB2C221J	RES. CARBON 220 5% 1/6W
F01-2318-04	HEAT SINK		R5	RD14BB2C131J	RES. CARBON 130 5% 1/6W
J73-0265-22	PCB (UNMOUNTED)		R6	RD14BB2C221J	RES. CARBON 220 5% 1/6W
N08-0623-04	SCREW, SENS PAN HD M3X8		R7	RD14BB2C751J	RES. CARBON 750 5% 1/6W
C1	CK45FB1H152K	CAP. CERAMIC 1500P 10% 50V	R8	RD14BB2C911J	RES. CARBON 910 5% 1/6W
C2	NO USE		R9	RD14BB2C911J	RES. CARBON 910 5% 1/6W
C3	C90-3178-05	CAP. METAL FILM 0.047 5.5V	R10	RD14BB2C220J	RES. CARBON 22 5% 1/6W
C4	C90-3178-05	CAP. METAL FILM 0.047 5.5V	R11	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
C5	NO USE		R12	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
C6	CF92FY1H102J	CAP. POLYESTER 1000P 5% 50V	R13	RD14BB2C220J	RES. CARBON 22 5% 1/6W
C7	CC45FCH1H820J	CAP. CERAMIC 82P 5% 50V	R14	RD14BB2E273J	RES. CARBON 27K 5% 1/4W
C8	CF92FY1H102J	CAP. POLYESTER 1000P 5% 50V	R15	R02-1575-05	RES. LINEAR PCT 100 5% 1/6W
C9	CF92FY1H102J	CAP. POLYESTER 1000P 5% 50V	R16	R02-1575-05	RES. LINEAR PCT 100 5% 1/6W
C10	CC45FCH1H070D	CAP. CERAMIC 7P 0.5P 50V	R17	RD14BB2C220J	RES. CARBON 22 5% 1/6W
C11	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V	R18	RD14BB2C220J	RES. CARBON 22 5% 1/6W
C12	CC45FCH1H020C	CAP. CERAMIC 2P 0.25P 50V	R19	RD14BB2C113J	RES. CARBON 11K 5% 1/6W
C13	CC45FCH1H180J	CAP. CERAMIC 18P 5% 50V	R20	RD14BB2C881J	RES. CARBON 680 5% 1/6W
			R21	RD14BB2C220J	RES. CARBON 22 5% 1/6W

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
R22	RN14BK2C5600F	RES. METAL FILM 560 1% 1/6W
R23	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R24	RD14BB2C303J	RES. CARBON 30K 5% 1/6W
R25	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R26	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R27	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
R28	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
R29	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R30	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R34	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R35	RD14BB2C623J	RES. CARBON 62K 5% 1/6W
R36	RD14BB2C203J	RES. CARBON 20K 5% 1/6W
R37	RD14BB2E752J	RES. CARBON 7.5K 5% 1/4W
R38	NO USE	
R39	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W
R40	NO USE	
R41	RD14BB2C680J	RES. CARBON 68 5% 1/6W
R42	RD14BB2C621J	RES. CARBON 620 5% 1/6W
R43	RD14BB2C621J	RES. CARBON 620 5% 1/6W
R44	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R45	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W
R46	RD14BB2C911J	RES. CARBON 810 5% 1/6W
R47	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R48	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R49	RD14BB2C151J	RES. CARBON 150 5% 1/6W
R50	RD14BB2C151J	RES. CARBON 150 5% 1/6W
R51	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R52	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R53	RD14BB2C1R0J	RES. CARBON 1 5% 1/6W
R54	RD14BB2C1R0J	RES. CARBON 1 5% 1/6W
R59	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W
R60	NO USE	
R61	RD14BB2C431J	RES. CARBON 430 5% 1/6W
R62	RD14BB2C431J	RES. CARBON 430 5% 1/6W
R63	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R64	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R65	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R66	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R67	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R68	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R69	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R70	RD14BB2C381J	RES. CARBON 380 5% 1/6W
R71	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R72	RD14BB2C62R0F	RES. METAL FILM 62.0 1% 1/6W
R73	R92-1568-05	RES. SPECIAL POWER 200 5% 1W
R74	R92-1568-05	RES. SPECIAL POWER 200 5% 1W
R75	R92-1571-05	RES. SPECIAL POWER 110 5% 1W
R76	R92-1571-05	RES. SPECIAL POWER 110 5% 1W
R77	R92-1571-05	RES. SPECIAL POWER 110 5% 1W
R78	R92-1571-05	RES. SPECIAL POWER 110 5% 1W
R79	RD14BB2E2R2J	RES. CARBON 2.2 5% 1/4W
R80	RD14BB2E2R2J	RES. CARBON 2.2 5% 1/4W
R81	RD14BB2C381J	RES. CARBON 380 5% 1/6W
R85	R92-1570-05	RES. SPECIAL POWER 750 5% 2W
R86	R92-1570-05	RES. SPECIAL POWER 750 5% 2W
R87	R92-1570-05	RES. SPECIAL POWER 750 5% 2W
R88	R92-1570-05	RES. SPECIAL POWER 750 5% 2W
R89	R92-1570-05	RES. SPECIAL POWER 750 5% 2W
R90	R92-1570-05	RES. SPECIAL POWER 750 5% 2W
R91	R92-1570-05	RES. SPECIAL POWER 750 5% 2W
R92	R92-1570-05	RES. SPECIAL POWER 750 5% 2W
R93	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R94	NO USE	
R95	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R96	NO USE	
R97	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R98	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R201	R92-0173-05	RES. FIXED 2.2M 20% 350V
R202	NO USE	
R203	RD14BB2C471J	RES. CARBON 470 5% 1/6W
R204	RD14BB2C471J	RES. CARBON 470 5% 1/6W
R205	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W
R206	NO USE	
R207	RD14BB2C201J	RES. CARBON 200 5% 1/6W
R208	RD14BB2C100J	RES. CARBON 10 5% 1/6W
R209	RD14BB2C151J	RES. CARBON 150 5% 1/6W
R210	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R211	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R212	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R213	RD14BB2E223J	RES. CARBON 22K 5% 1/4W
R214	RD14BB2E223J	RES. CARBON 22K 5% 1/4W
R215	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R216	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R217	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
Tc1	C05-0472-05	CAP. TRIMMER 50P
Tc62	C05-0472-05	CAP. TRIMMER 50P
Th1	112-103-2FM	THERMISTOR
Th2	112-103-2FM	THERMISTOR
U1	XKG01	IC, LINEAR

REF. NO	PARTS NO	NAME & DESCRIPTION
VRI	R12-1857-05	RES. SEMI FIXED 1K
VR2	R12-0679-05	RES. SEMI FIXED 22KB
VR3	R12-1860-05	RES. SEMI FIXED 1KB
VR4	R12-0679-05	RES. SEMI FIXED 22KB

CS-5235 FINAL AMP UNIT

X80-1370-01

REF. NO	PARTS NO	NAME & DESCRIPTION
E01	0103-05	CRT SOCKET
E23	0149-05	GND TERMINAL
F01	2317-04	HEAT SINK; Q113, 114
F01	2318-04	HEAT SINK
J73	0285-22	PCB (UNMOUNTED)
N08	0623-04	SCREW, SENS PAN HD M3X8
C1	CK45FB1H152K	CAP. CERAMIC 1500P 10% 50V
C2	NO USE	
C3	C90-3178-05	CAP. METAL FILM 0.047 5.5V
C4	C90-3178-05	CAP. METAL FILM 0.047 5.5V
C5	NO USE	
C6	CF82FV1H102J	CAP. POLYESTER 1000P 5% 50V
C7	CC45FC1H1820J	CAP. CERAMIC 82P 5% 50V
C8	CF82FV1H102J	CAP. POLYESTER 1000P 5% 50V
C9	CF82FV1H102J	CAP. POLYESTER 1000P 5% 50V
C10	CC45FC1H1070D	CAP. CERAMIC 7P 0.5P 50V
C11	CC45FC1H1470J	CAP. CERAMIC 47P 5% 50V
C12	CC45FC1H1020C	CAP. CERAMIC 2P 0.25P 50V
C13	CC45FC1H180J	CAP. CERAMIC 18P 5% 50V
C14	CC45FC1H151J	CAP. CERAMIC 150P 5% 50V
C15	CC45FC1H030C	CAP. CERAMIC 3P 0.25P 50V
C16	CC45FC1H030C	CAP. CERAMIC 3P 0.25P 50V
C101	CE04LW1E101M	CAP. ELECTRO 100 20% 25V
C102	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C103	CE04LW1E101M	CAP. ELECTRO 100 20% 25V
C104	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C105	NO USE	
C106	C91-1357-05	CAP. POLYESTER 0.1 10% 100V
C107	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C108	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C109	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C207	CE04LW1E220M	CAP. ELECTRO 22 20% 25V
C208	C91-0769-05	CAP. CERAMIC 0.01 20% 16V
C209	CE04LW0J101M	CAP. ELECTRO 100 20% 6.3V
D100	H4700	DIODE
D101	H4700	DIODE
JW5	E38-0987-05	WIRE ASS'Y; CRT TO FINAL
JW6	NO USE	
JW7	E38-0988-05	WIRE ASS'Y; CRT TO H
JW13	E38-0989-05	WIRE ASS'Y; BNC TO V
L1	L40-2201-17	FERRI INDUCTOR 22UH 10%
L2	L40-1001-17	FERRI INDUCTOR 10UH 10%
L61	L40-1291-17	FERRI INDUCTOR 1.2UH 10%
L62	L40-2791-17	FERRI INDUCTOR 2.7UH 10%
L63	L40-1291-17	FERRI INDUCTOR 1.2UH 10%
L64	L40-2791-17	FERRI INDUCTOR 2.7UH 10%
L202	L40-1291-17	FERRI INDUCTOR 1.2UH 10%
L203	L40-1291-17	FERRI INDUCTOR 1.2UH 10%
P4	E40-7515-05	PIN CONNECTOR 3P
P5	E40-3300-05	PIN CONNECTOR 3P
P14	E40-5066-05	PIN CONNECTOR 8P
P18	E40-7518-05	PIN CONNECTOR 6P
P19	E40-7515-05	PIN CONNECTOR 3P
P20	NO USE	
P21	E40-7412-05	PIN CONNECTOR 2P
P22	E40-7413-05	PIN CONNECTOR 6P
P105	E40-7515-05	PIN CONNECTOR 3P
P114	E40-7517-05	PIN CONNECTOR 5P
P201	E04-0277-05	BNC CONNECTOR
Q1	2SA1161	TR. SI, PNP
Q2	2SA1161	TR. SI, PNP
Q3	2SC3770(D)	TR. SI, NPN
Q4	2SC3770(D)	TR. SI, NPN
Q8	2SC644	TR. SI, NPN
Q10	2SC2644	TR. SI, NPN
Q11	2SC2644	TR. SI, NPN
Q12	2SC2644	TR. SI, NPN

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
Q100	2SC1740S(R,S)	TR. SI, NPN
Q105	2SC1907	TR. SI, NPN
Q106	2SC1907	TR. SI, NPN
Q107	2SC1907	TR. SI, NPN
Q108	2SC1907	TR. SI, NPN
Q113	2SC3952(D)	TR. SI, NPN
Q114	2SC3952(D)	TR. SI, NPN
Q201	2SC3779(D)	TR. SI, NPN
Q202	2SC3778(D)	TR. SI, NPN
R1	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R2	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W
R3	RD14BB2E822J	RES. CARBON 8.2K 5% 1/4W
R4	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R5	RD14BB2C131J	RES. CARBON 130 5% 1/6W
R6	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R7	RD14BB2C761J	RES. CARBON 750 5% 1/6W
R8	RD14BB2C911J	RES. CARBON 810 5% 1/6W
R9	RD14BB2C911J	RES. CARBON 810 5% 1/6W
R10	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R11	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
R12	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
R13	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R14	RD14BB2E273J	RES. CARBON 27K 5% 1/4W
R15	R92-1575-05	RES. LINEAR PCT 100 5% 1/6W
R16	R92-1575-05	RES. LINEAR PCT 100 5% 1/6W
R17	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R18	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R19	RD14BB2C113J	RES. CARBON 11K 5% 1/6W
R20	RD14BB2C681J	RES. CARBON 680 5% 1/6W
R21	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R22	RN14BK2C5600F	RES. METAL FILM 560 1% 1/6W
R23	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R24	RD14BB2C303J	RES. CARBON 30K 5% 1/6W
R25	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R26	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R27	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
R28	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
R29	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R30	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R31	NO USE	
R32	RD14BB2E222J	RES. CARBON 2.2K 5% 1/4W
R33	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W
R34	RD14BB2C241J	RES. CARBON 240 5% 1/6W
R35	NO USE	
R36	RD14BB2C203J	RES. CARBON 20K 5% 1/6W
R37	NO USE	
R38	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R39	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W
R40	NO USE	
R41	RD14BB2C680J	RES. CARBON 68 5% 1/6W
R42	RD14BB2C621J	RES. CARBON 620 5% 1/6W
R43	RD14BB2C621J	RES. CARBON 620 5% 1/6W
R44	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R45	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W
R46	RD14BB2C811J	RES. CARBON 910 5% 1/6W
R47	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R48	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R49	RD14BB2C151J	RES. CARBON 150 5% 1/6W
R50	RD14BB2C151J	RES. CARBON 150 5% 1/6W
R51	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R52	RD14BB2E220J	RES. CARBON 22 5% 1/4W
R53	RD14BB2C1R0J	RES. CARBON 1 5% 1/6W
R54	RD14BB2C1R0J	RES. CARBON 1 5% 1/6W
R59	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W
R60	NO USE	
R61	RD14BB2C431J	RES. CARBON 430 5% 1/6W
R62	RD14BB2C431J	RES. CARBON 430 5% 1/6W
R63	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R64	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R65	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R66	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R67	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R68	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R69	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R70	RD14BB2C391J	RES. CARBON 390 5% 1/6W
R71	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R72	RN14BK2C62R0F	RES. METAL FILM 62.0 1% 1/6W
R73	R92-1568-05	RES. SPECIAL POWER 200 5% 1W
R74	R92-1568-05	RES. SPECIAL POWER 200 5% 1W
R75	R92-1571-05	RES. SPECIAL POWER 110 5% 1W
R76	R92-1571-05	RES. SPECIAL POWER 110 5% 1W
R77	R92-1571-05	RES. SPECIAL POWER 110 5% 1W
R78	R92-1571-05	RES. SPECIAL POWER 110 5% 1W
R79	RD14BB2E2R2J	RES. CARBON 2.2 5% 1/4W
R80	RD14BB2E2R2J	RES. CARBON 2.2 5% 1/4W
R81	RD14BB2C391J	RES. CARBON 390 5% 1/6W
R85	R92-1570-05	RES. SPECIAL POWER 750 5% 2W


REF. NO	PARTS NO	NAME & DESCRIPTION
R86	R92-1570-05	RES. SPECIAL POWER 750 5% 2W
R87	R92-1570-05	RES. SPECIAL POWER 750 5% 2W
R88	R92-1570-05	RES. SPECIAL POWER 750 5% 2W
R89	R92-1570-05	RES. SPECIAL POWER 750 5% 2W
R90	R92-1570-05	RES. SPECIAL POWER 750 5% 2W
R91	R92-1570-05	RES. SPECIAL POWER 750 5% 2W
R92	R92-1570-05	RES. SPECIAL POWER 750 5% 2W
R93	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R94	NO USE	
R95	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R96	NO USE	
R97	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R98	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R203	RD14BB2C471J	RES. CARBON 470 5% 1/6W
R204	RD14BB2C471J	RES. CARBON 470 5% 1/6W
R205	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W
R206	NO USE	
R207	RD14BB2C201J	RES. CARBON 200 5% 1/6W
R208	RD14BB2C100J	RES. CARBON 10 5% 1/6W
R209	RD14BB2C151J	RES. CARBON 150 5% 1/6W
R210	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R211	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R212	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R213	RD14BB2E223J	RES. CARBON 22K 5% 1/4W
R214	RD14BB2E223J	RES. CARBON 22K 5% 1/4W
R215	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R216	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R217	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
TC1	C05-0472-05	CAP. TRIMMER 50P
TC62	C05-0472-05	CAP. TRIMMER 50P
TH1	112-103-2FM	THERMISTOR
TH2	112-103-2FM	THERMISTOR
VR1	R12-1857-05	RES. SEMI FIXED 1K
VR2	NO USE	
VR3	R12-1860-05	RES. SEMI FIXED 1KB
VR4	R12-0679-05	RES. SEMI FIXED 22KB

DELAY LINE UNIT


X81-3270-00

REF. NO	PARTS NO	NAME & DESCRIPTION
J37	J73-0286-03	PCB (UNMOUNTED)
JW4	R92-1061-05	JUMPING RES. ZERO OHM (5MH)
JW4	E38-1001-05	WIRE ASS'Y

CS-5230 SCHEMATIC DIAGRAM


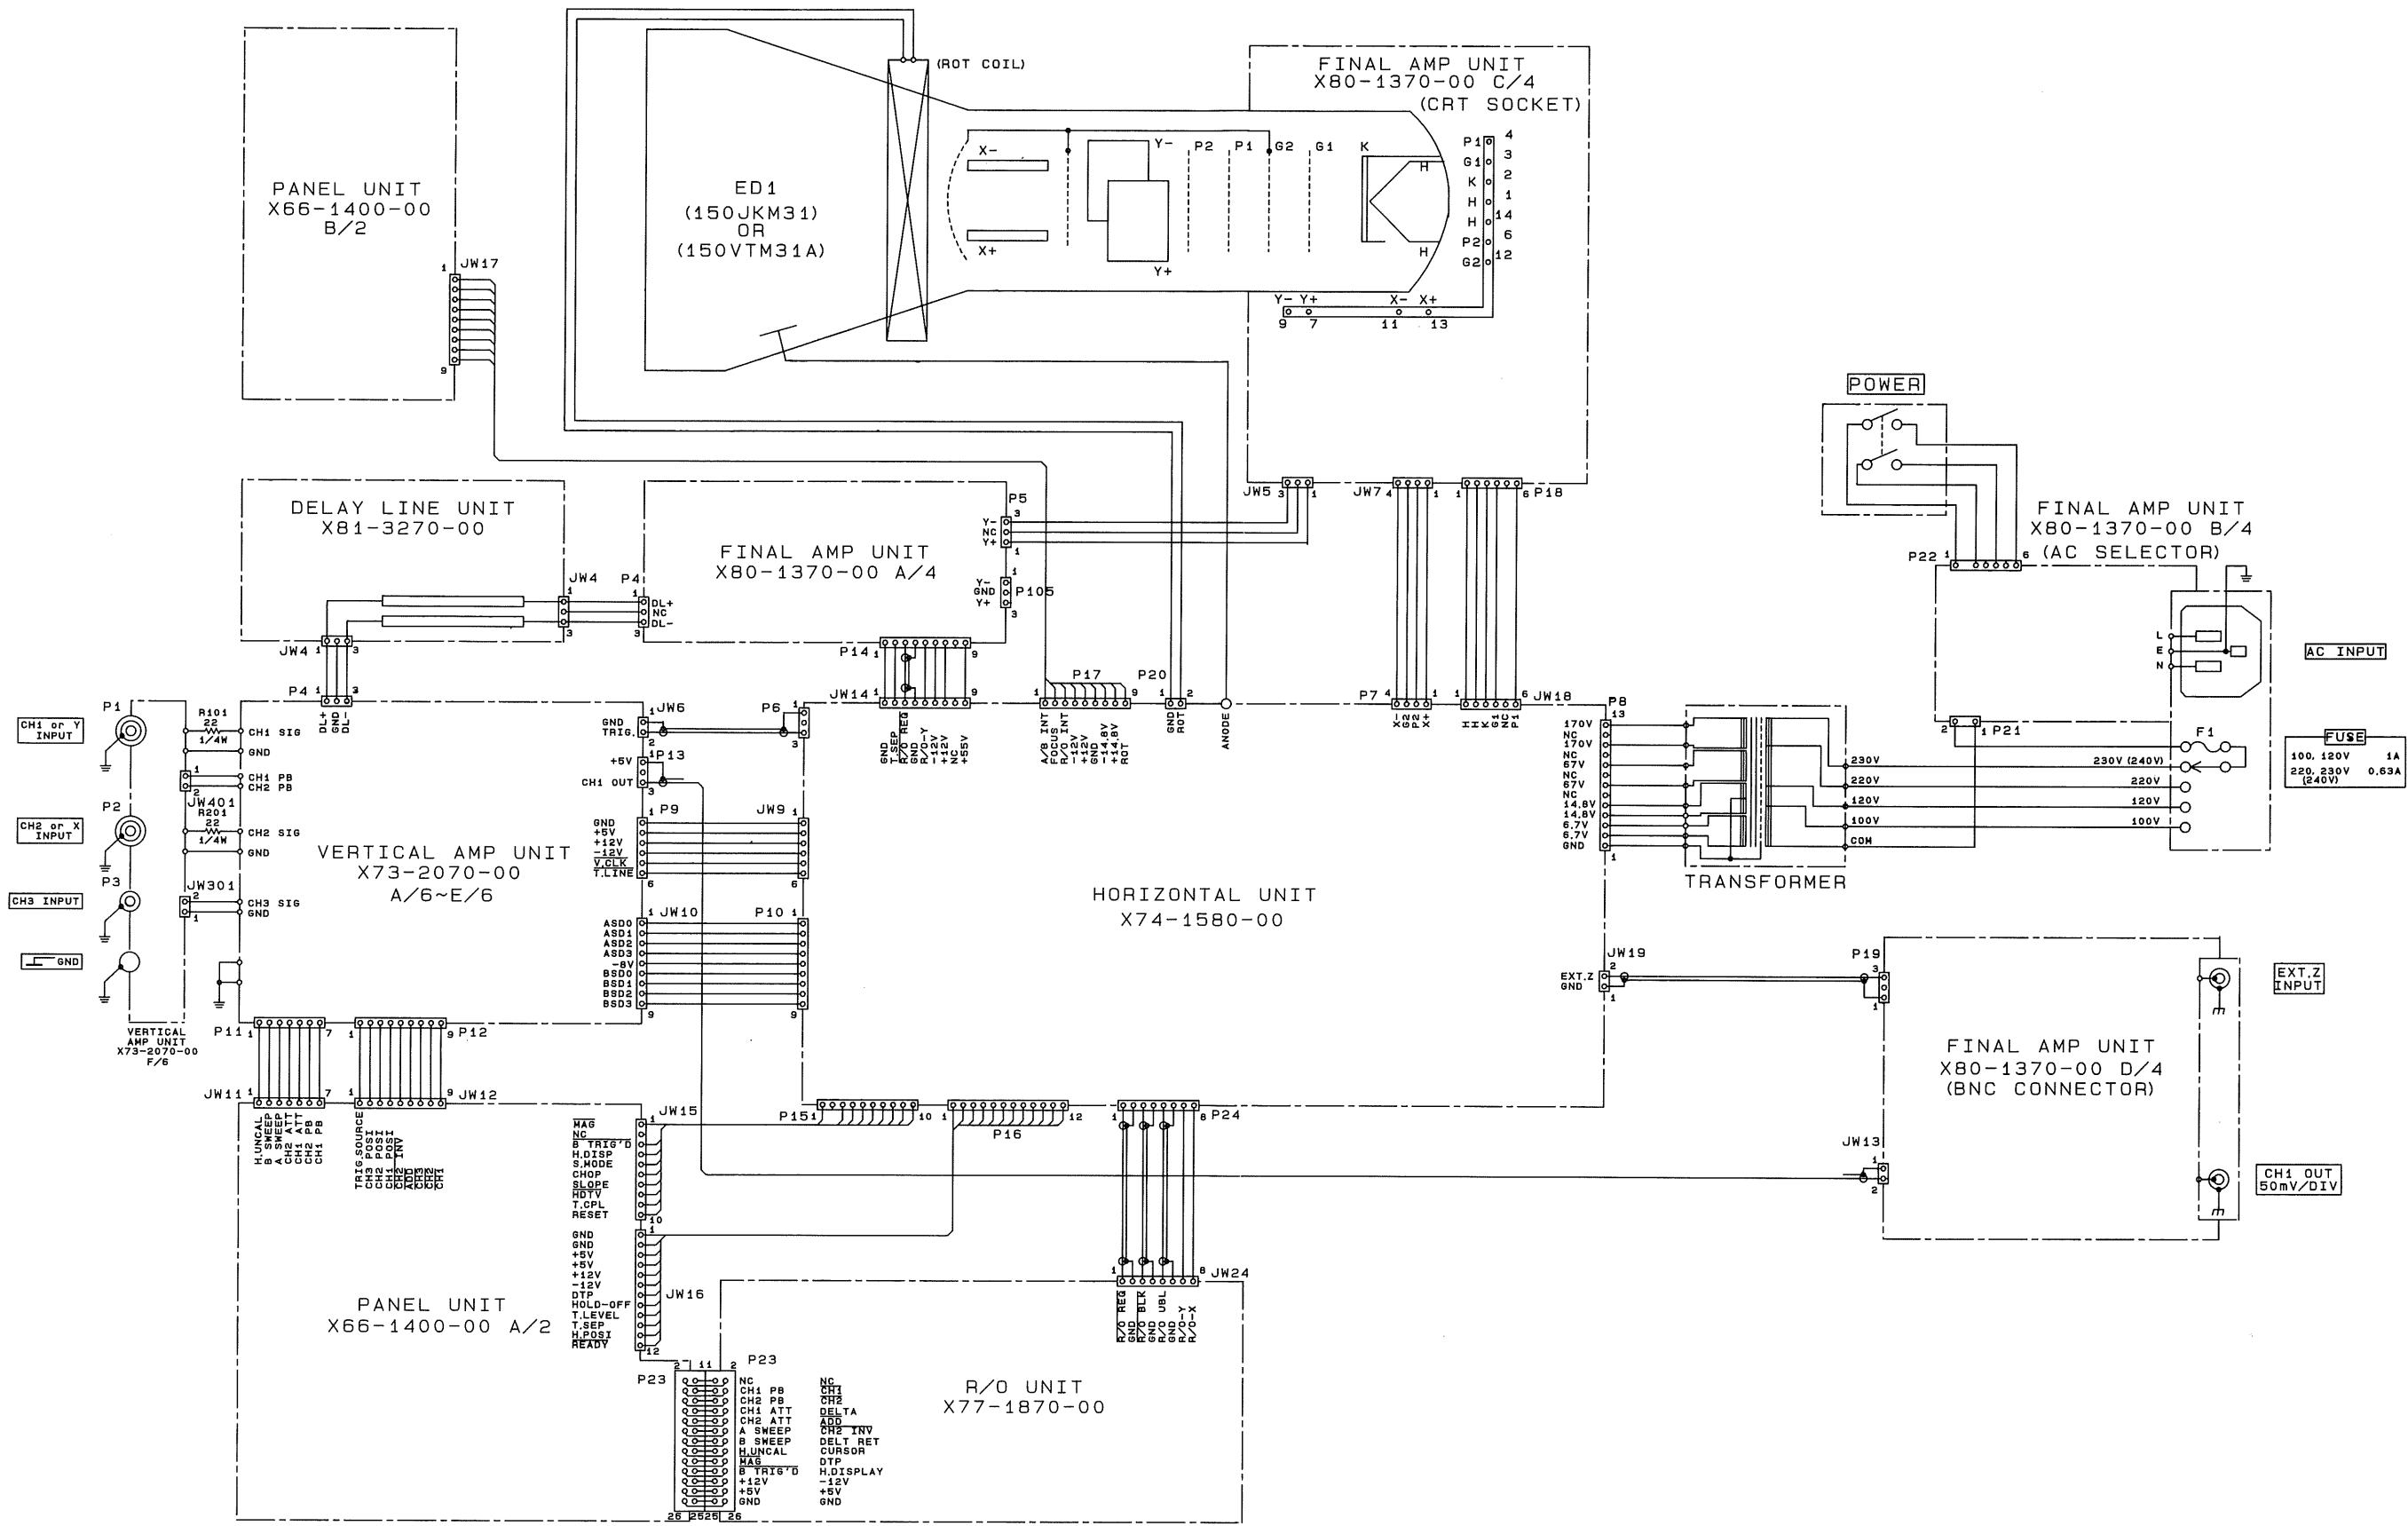


CS-5235 SCHEMATIC DIAGRAM

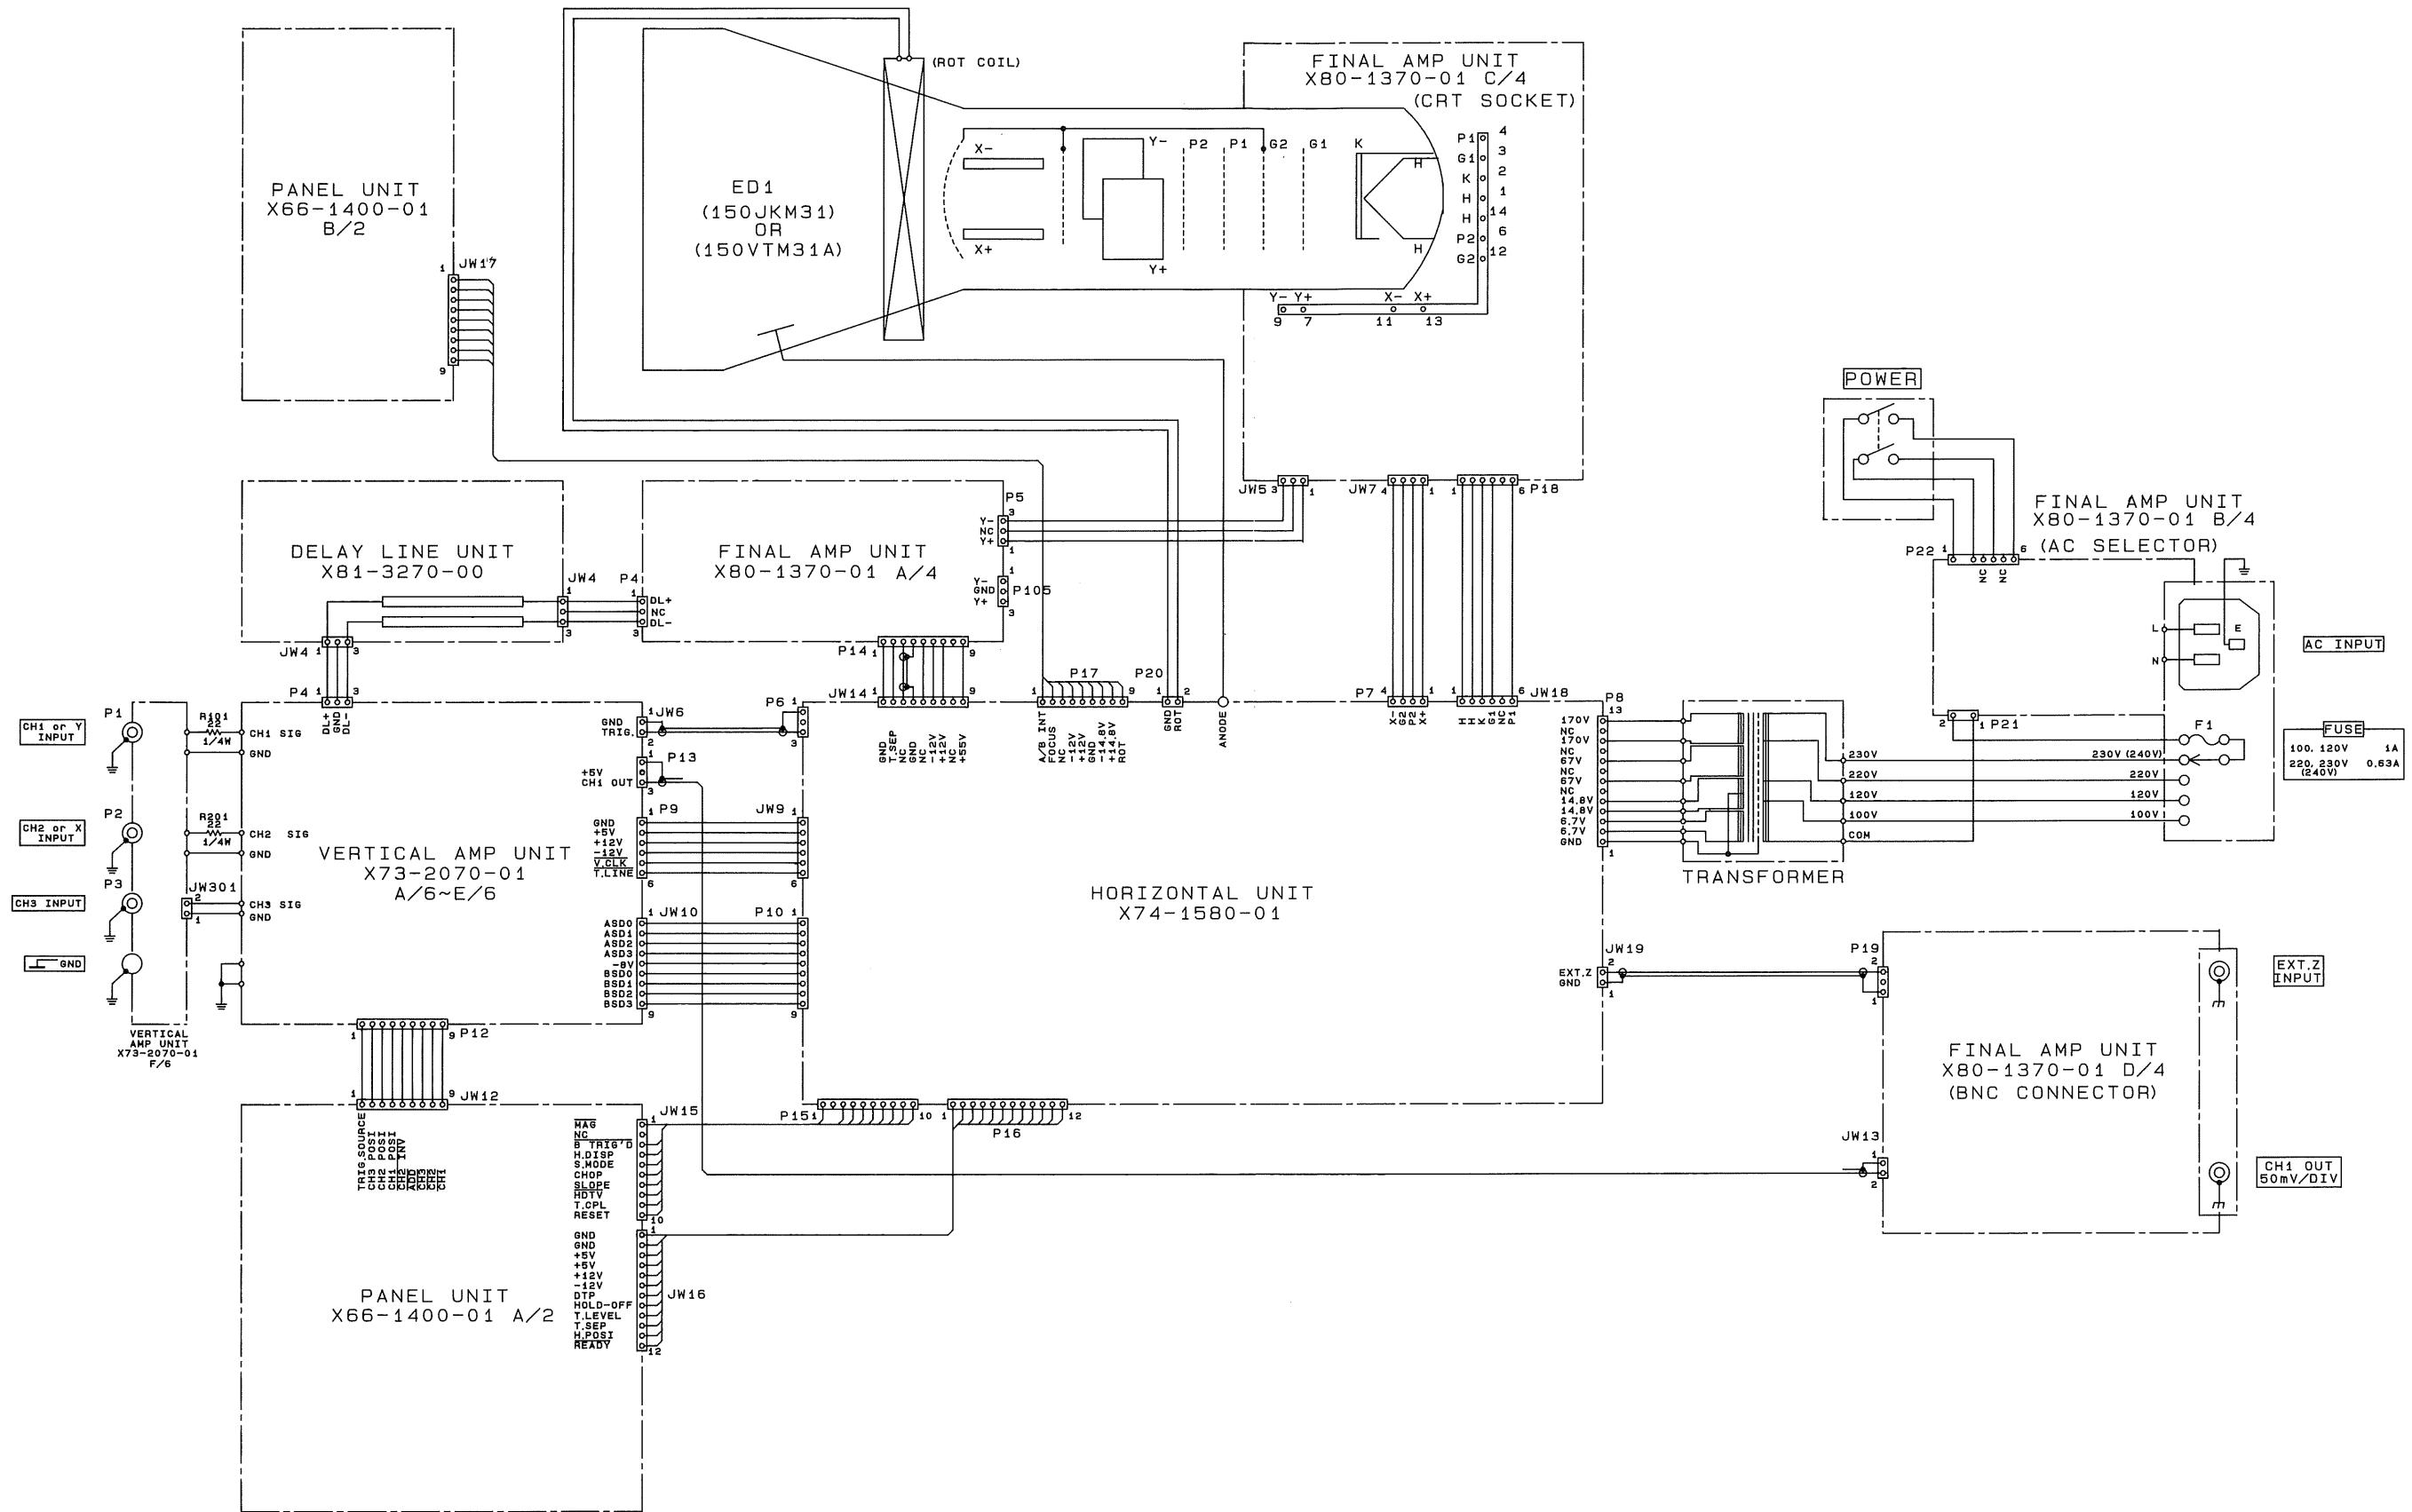



CS-5230 SCHEMATIC DIAGRAM

PANEL UNIT (X66-1400-00)

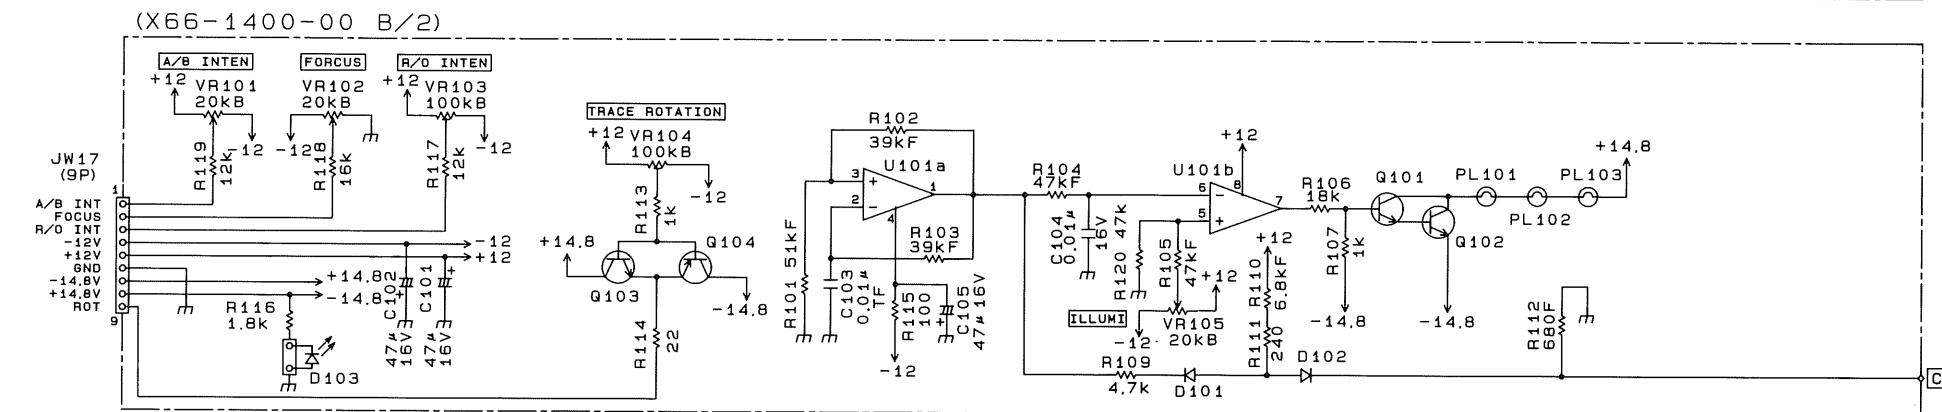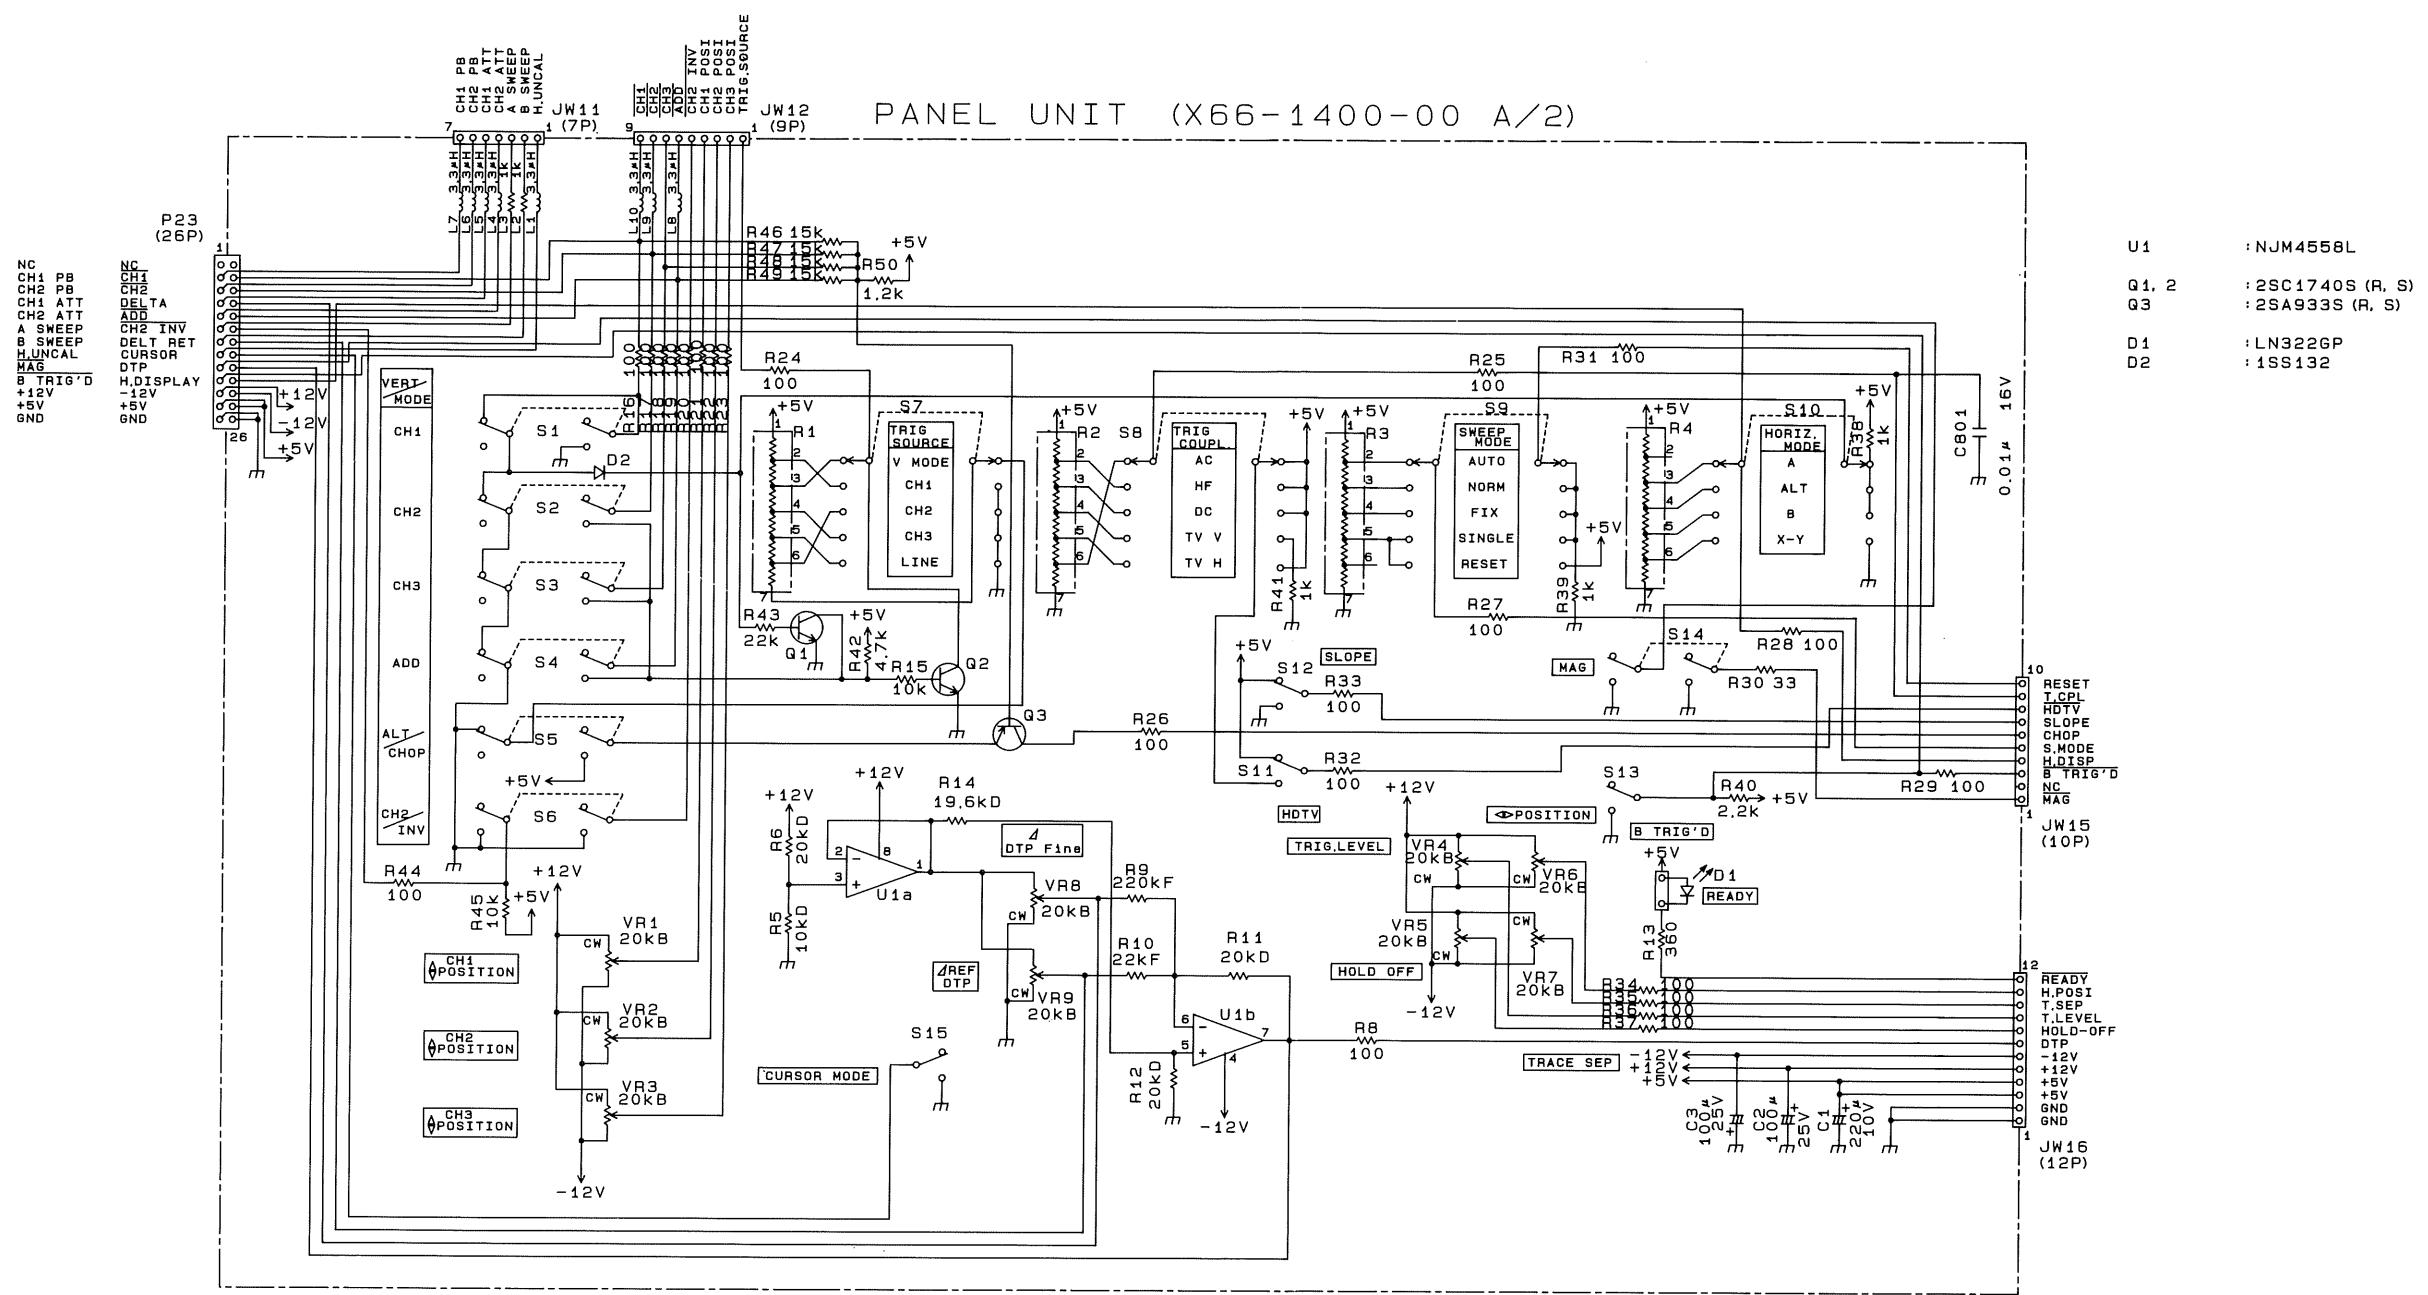


CS-5235 SCHEMATIC DIAGRAM

PANEL UNIT (X66-1400-01)

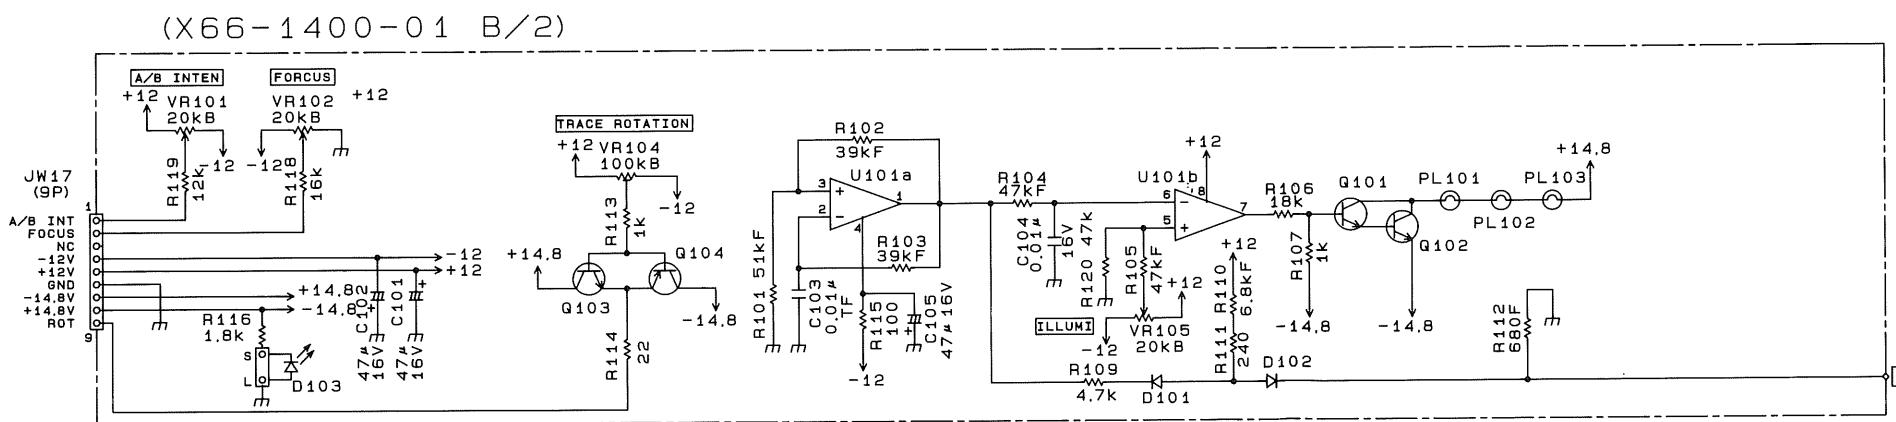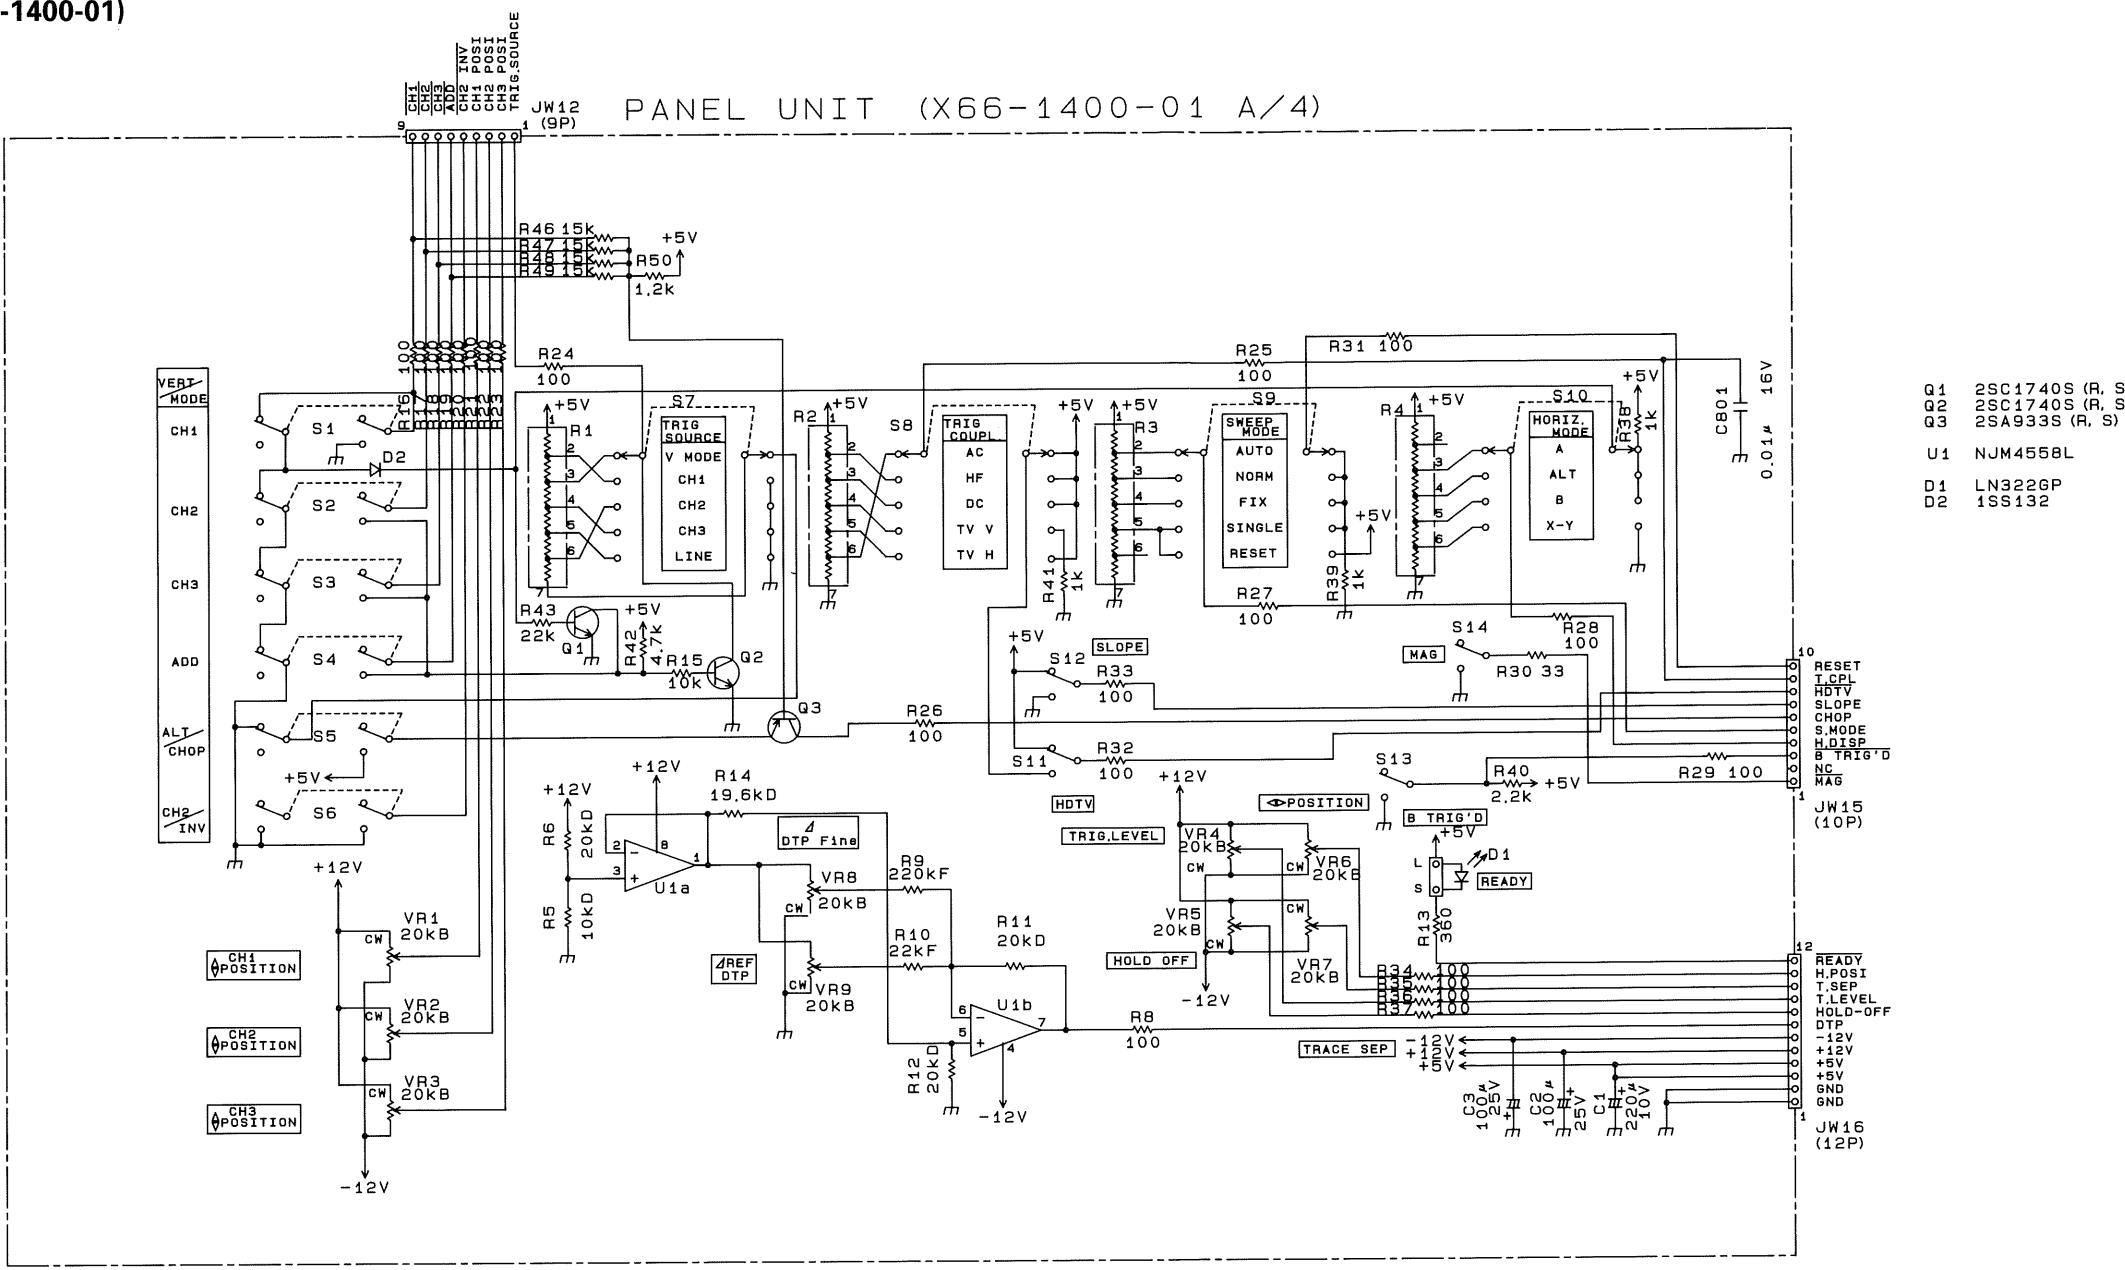

VERTICAL UNIT (X73-2070-00)

CS-5230 SCHEMATIC DIAGRAM

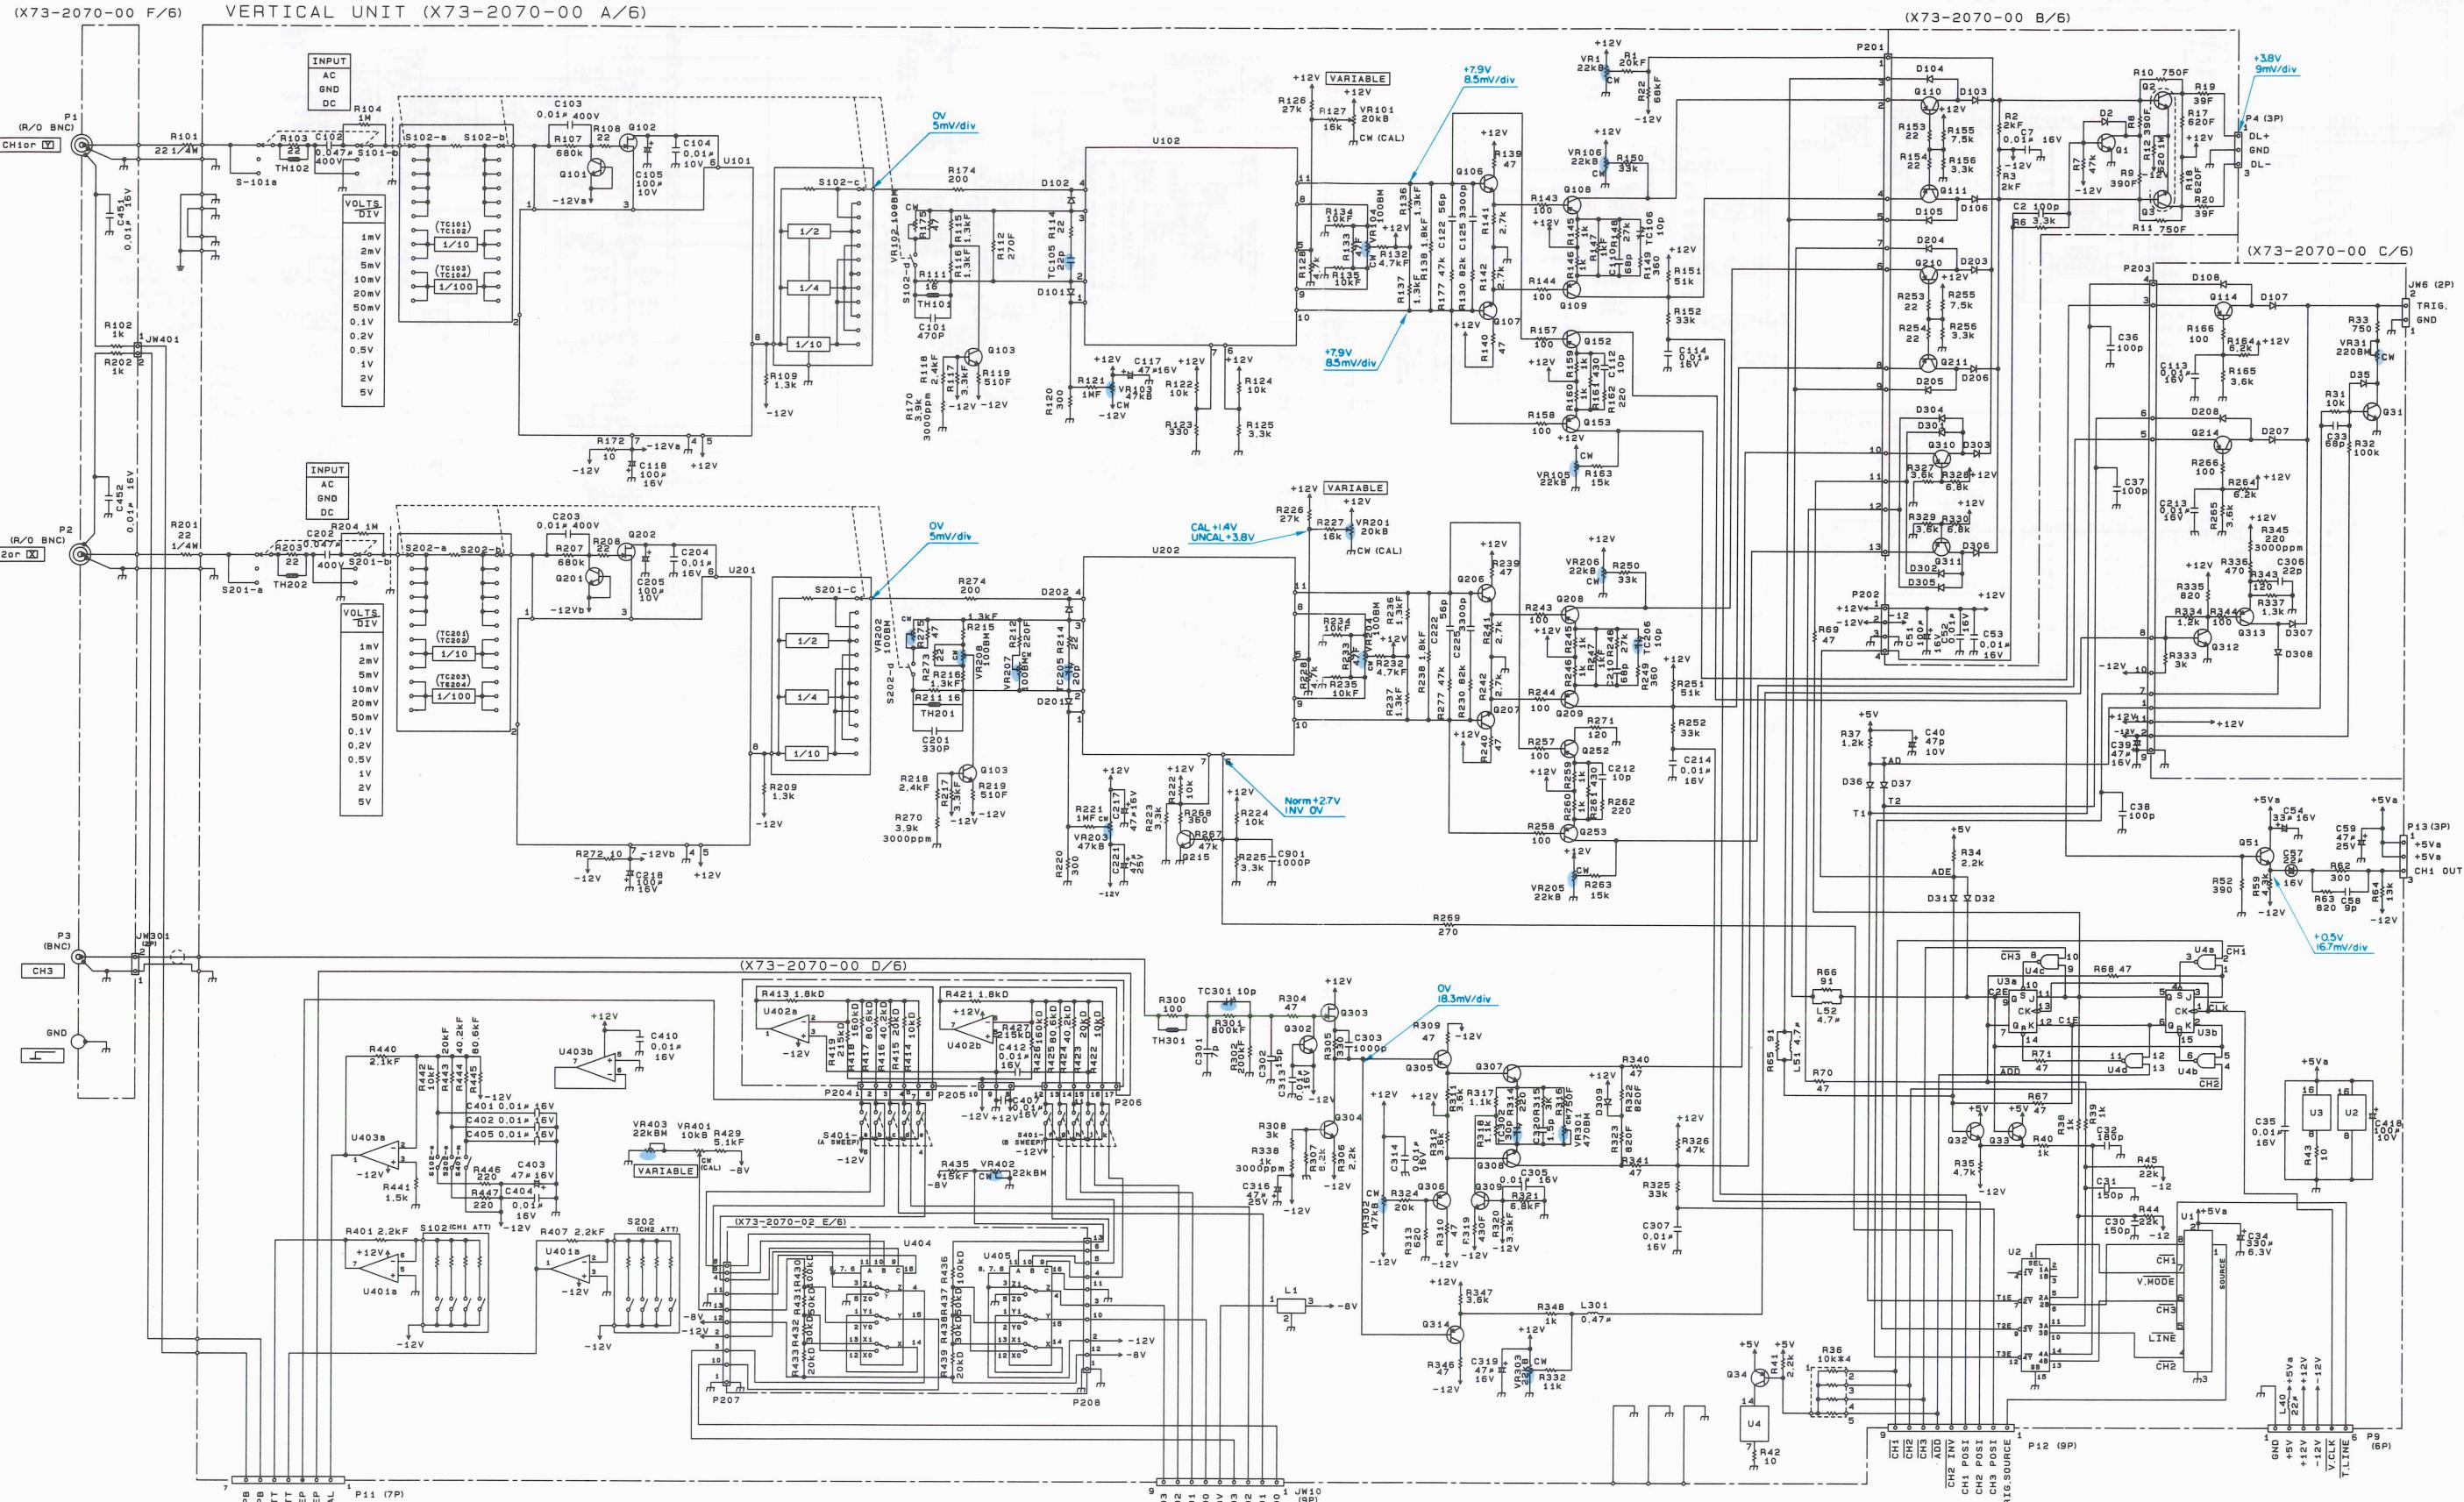

U1 : KMS01
U2 : SN74LS158N
U3 : SN74LS112AN
U4 : SN74LS00N
U101, 201 : KMC13
U102, 202 : KMC12
U401 : NJM072L
U402 : NJM072D
U403 : NJM4558L
U404, 405 : TC4053BP

Q1, 33, 215 : 2SC1740S (R, S)
Q2, 3, 106, 107, 206, 207 : 2SA1161
Q34 : 2SC3779 (D)
Q51, 101, 201, 301 : 2SC1923 (O)
Q102, 202, 303, 304, 307~309, 312 : 2SK404 (E)
Q103, 203, 304, 307~309, 312 : 2SC1907

G108~114, 114, 114, 114, 214, 305 : 2SC4059 (K)
G109~114, 114, 114, 114, 214, 305 : 2SC4059 (K)

BS03 BS01 BS02 AS03 AS02 ASD1 ASD0 1 (JP10)

Q112, 113, 212, 213 : 2SA1161


D20, 31, 32, 35~37, 101~108, 201~208 : 1S132

TH101, 201 : 112-102-2

TH102, 202, 301 : 112-201-2FM


VERTICAL UNIT (X73-2070-01)

CS-5235 SCHEMATIC DIAGRAM

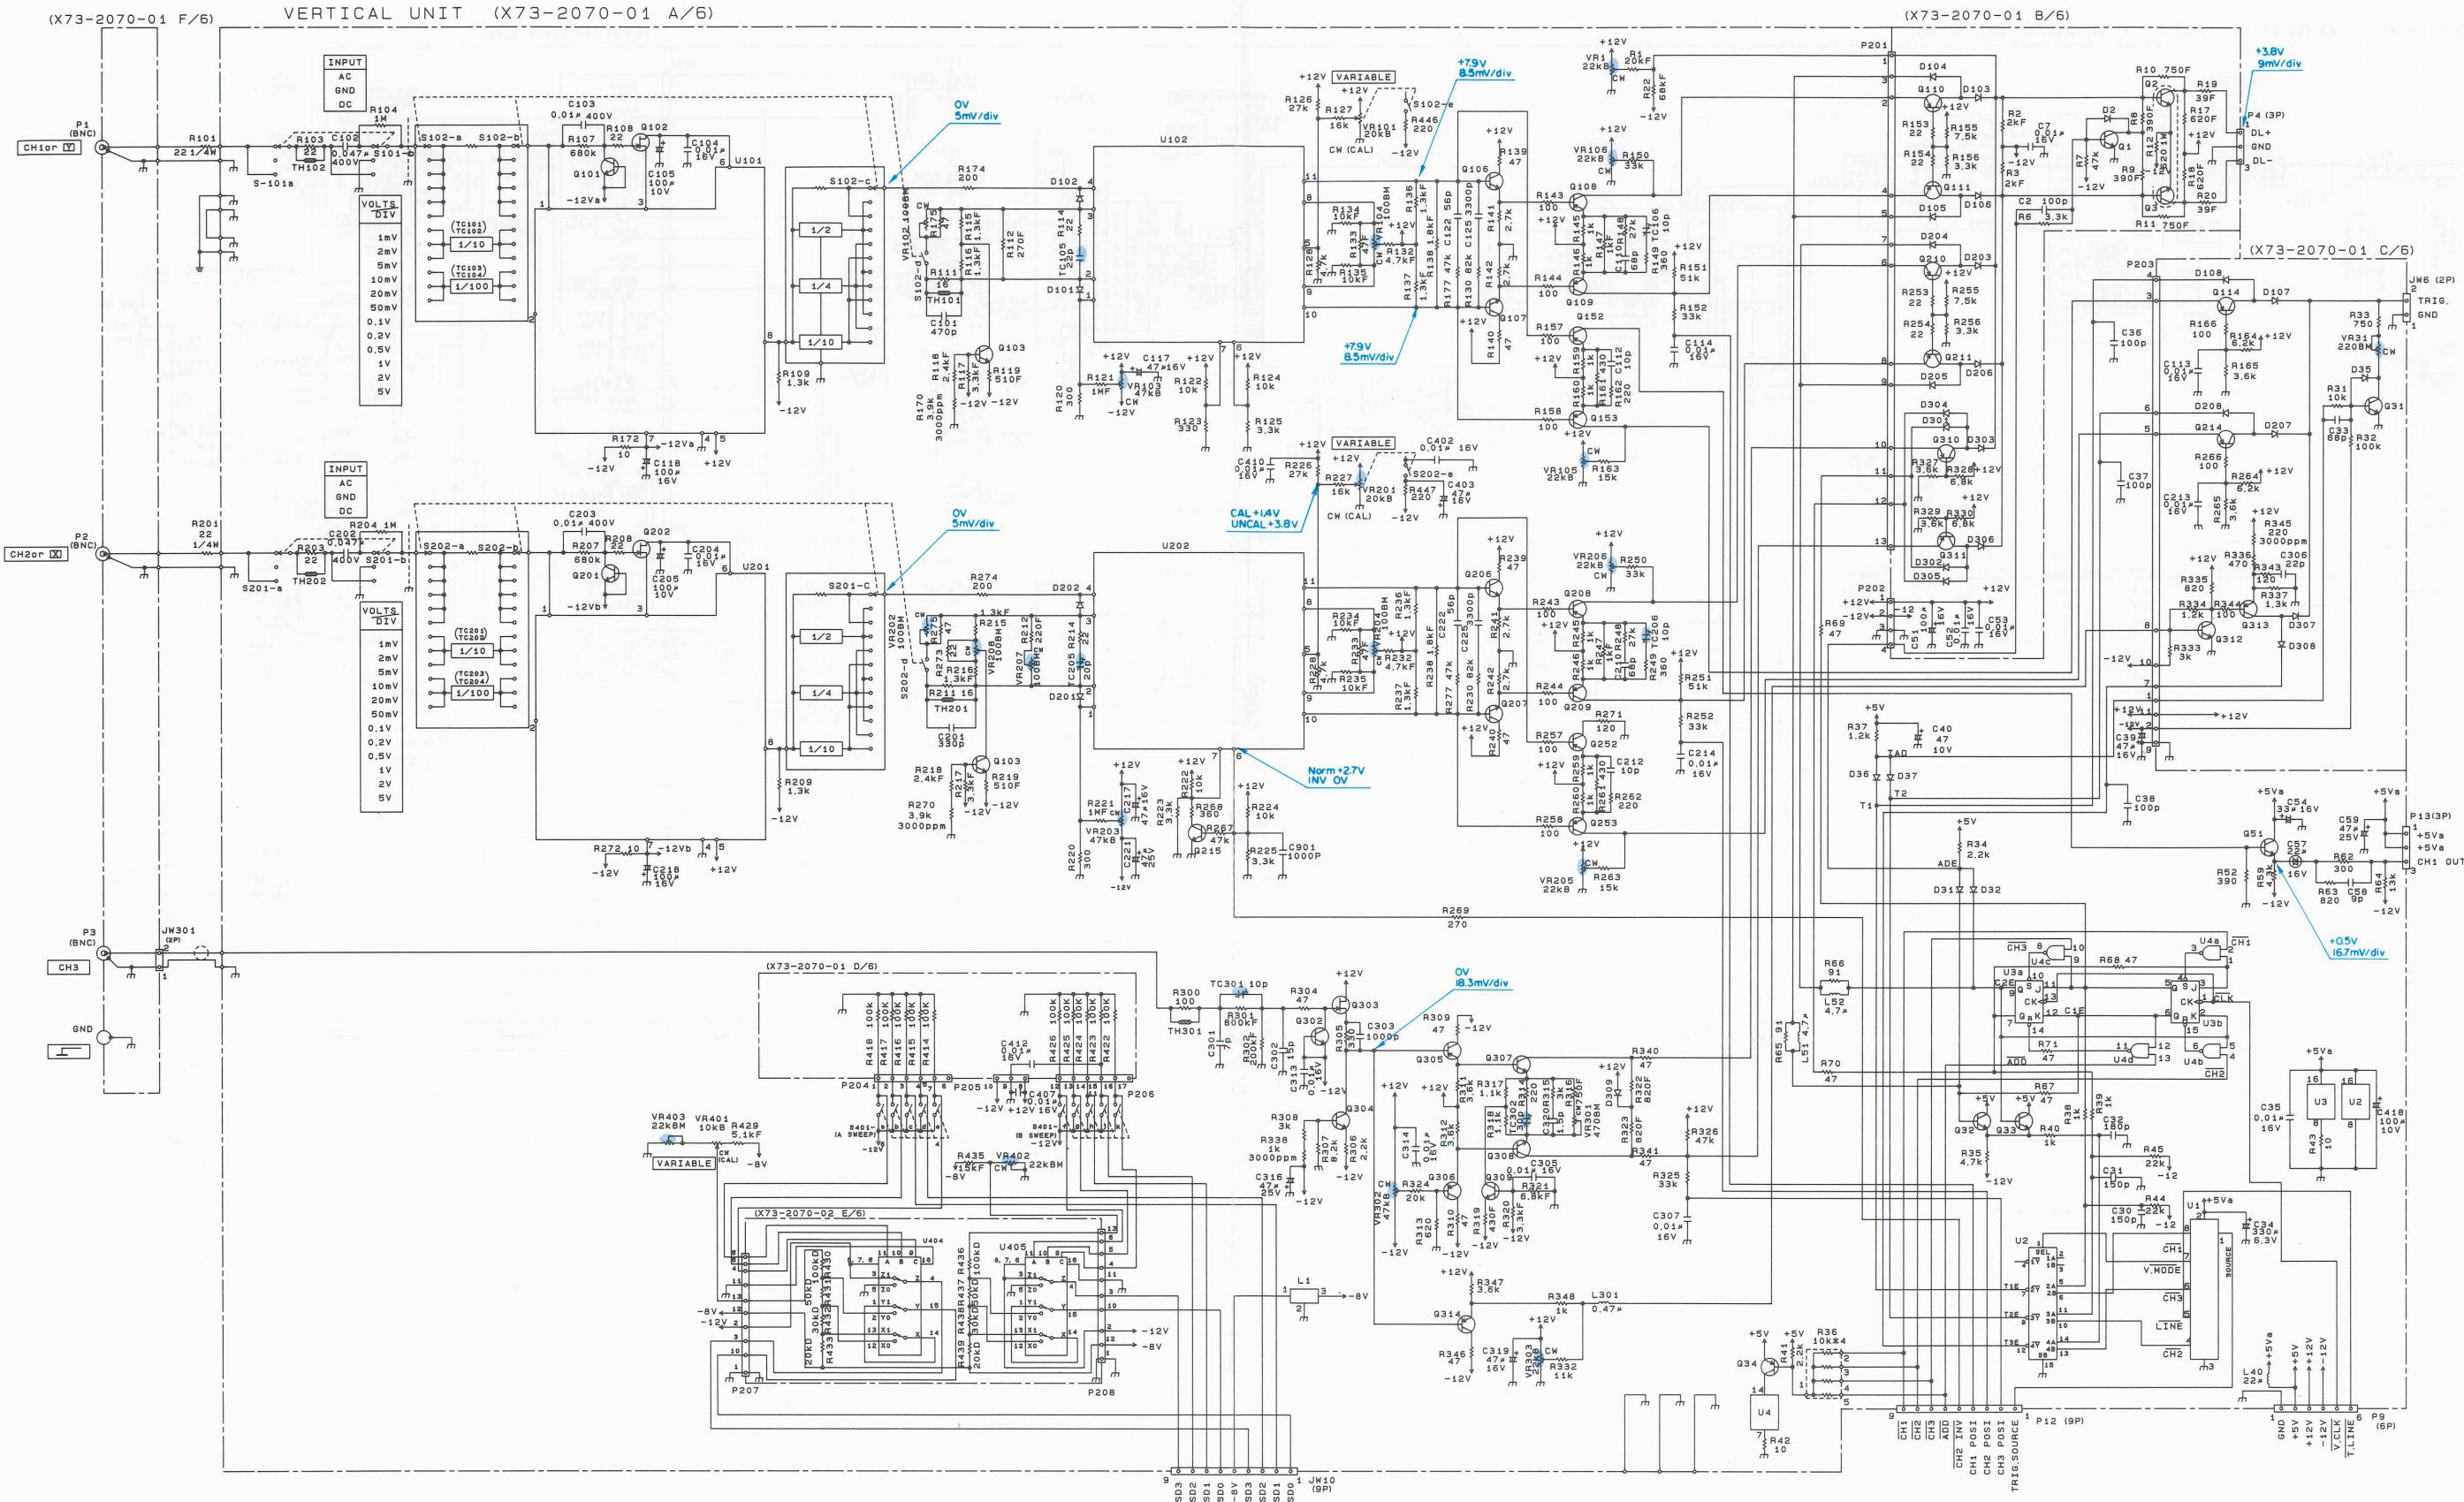

HORIZONTAL UNIT (X74-1580-00)

HORIZONTAL UNIT (X74-1580-00)

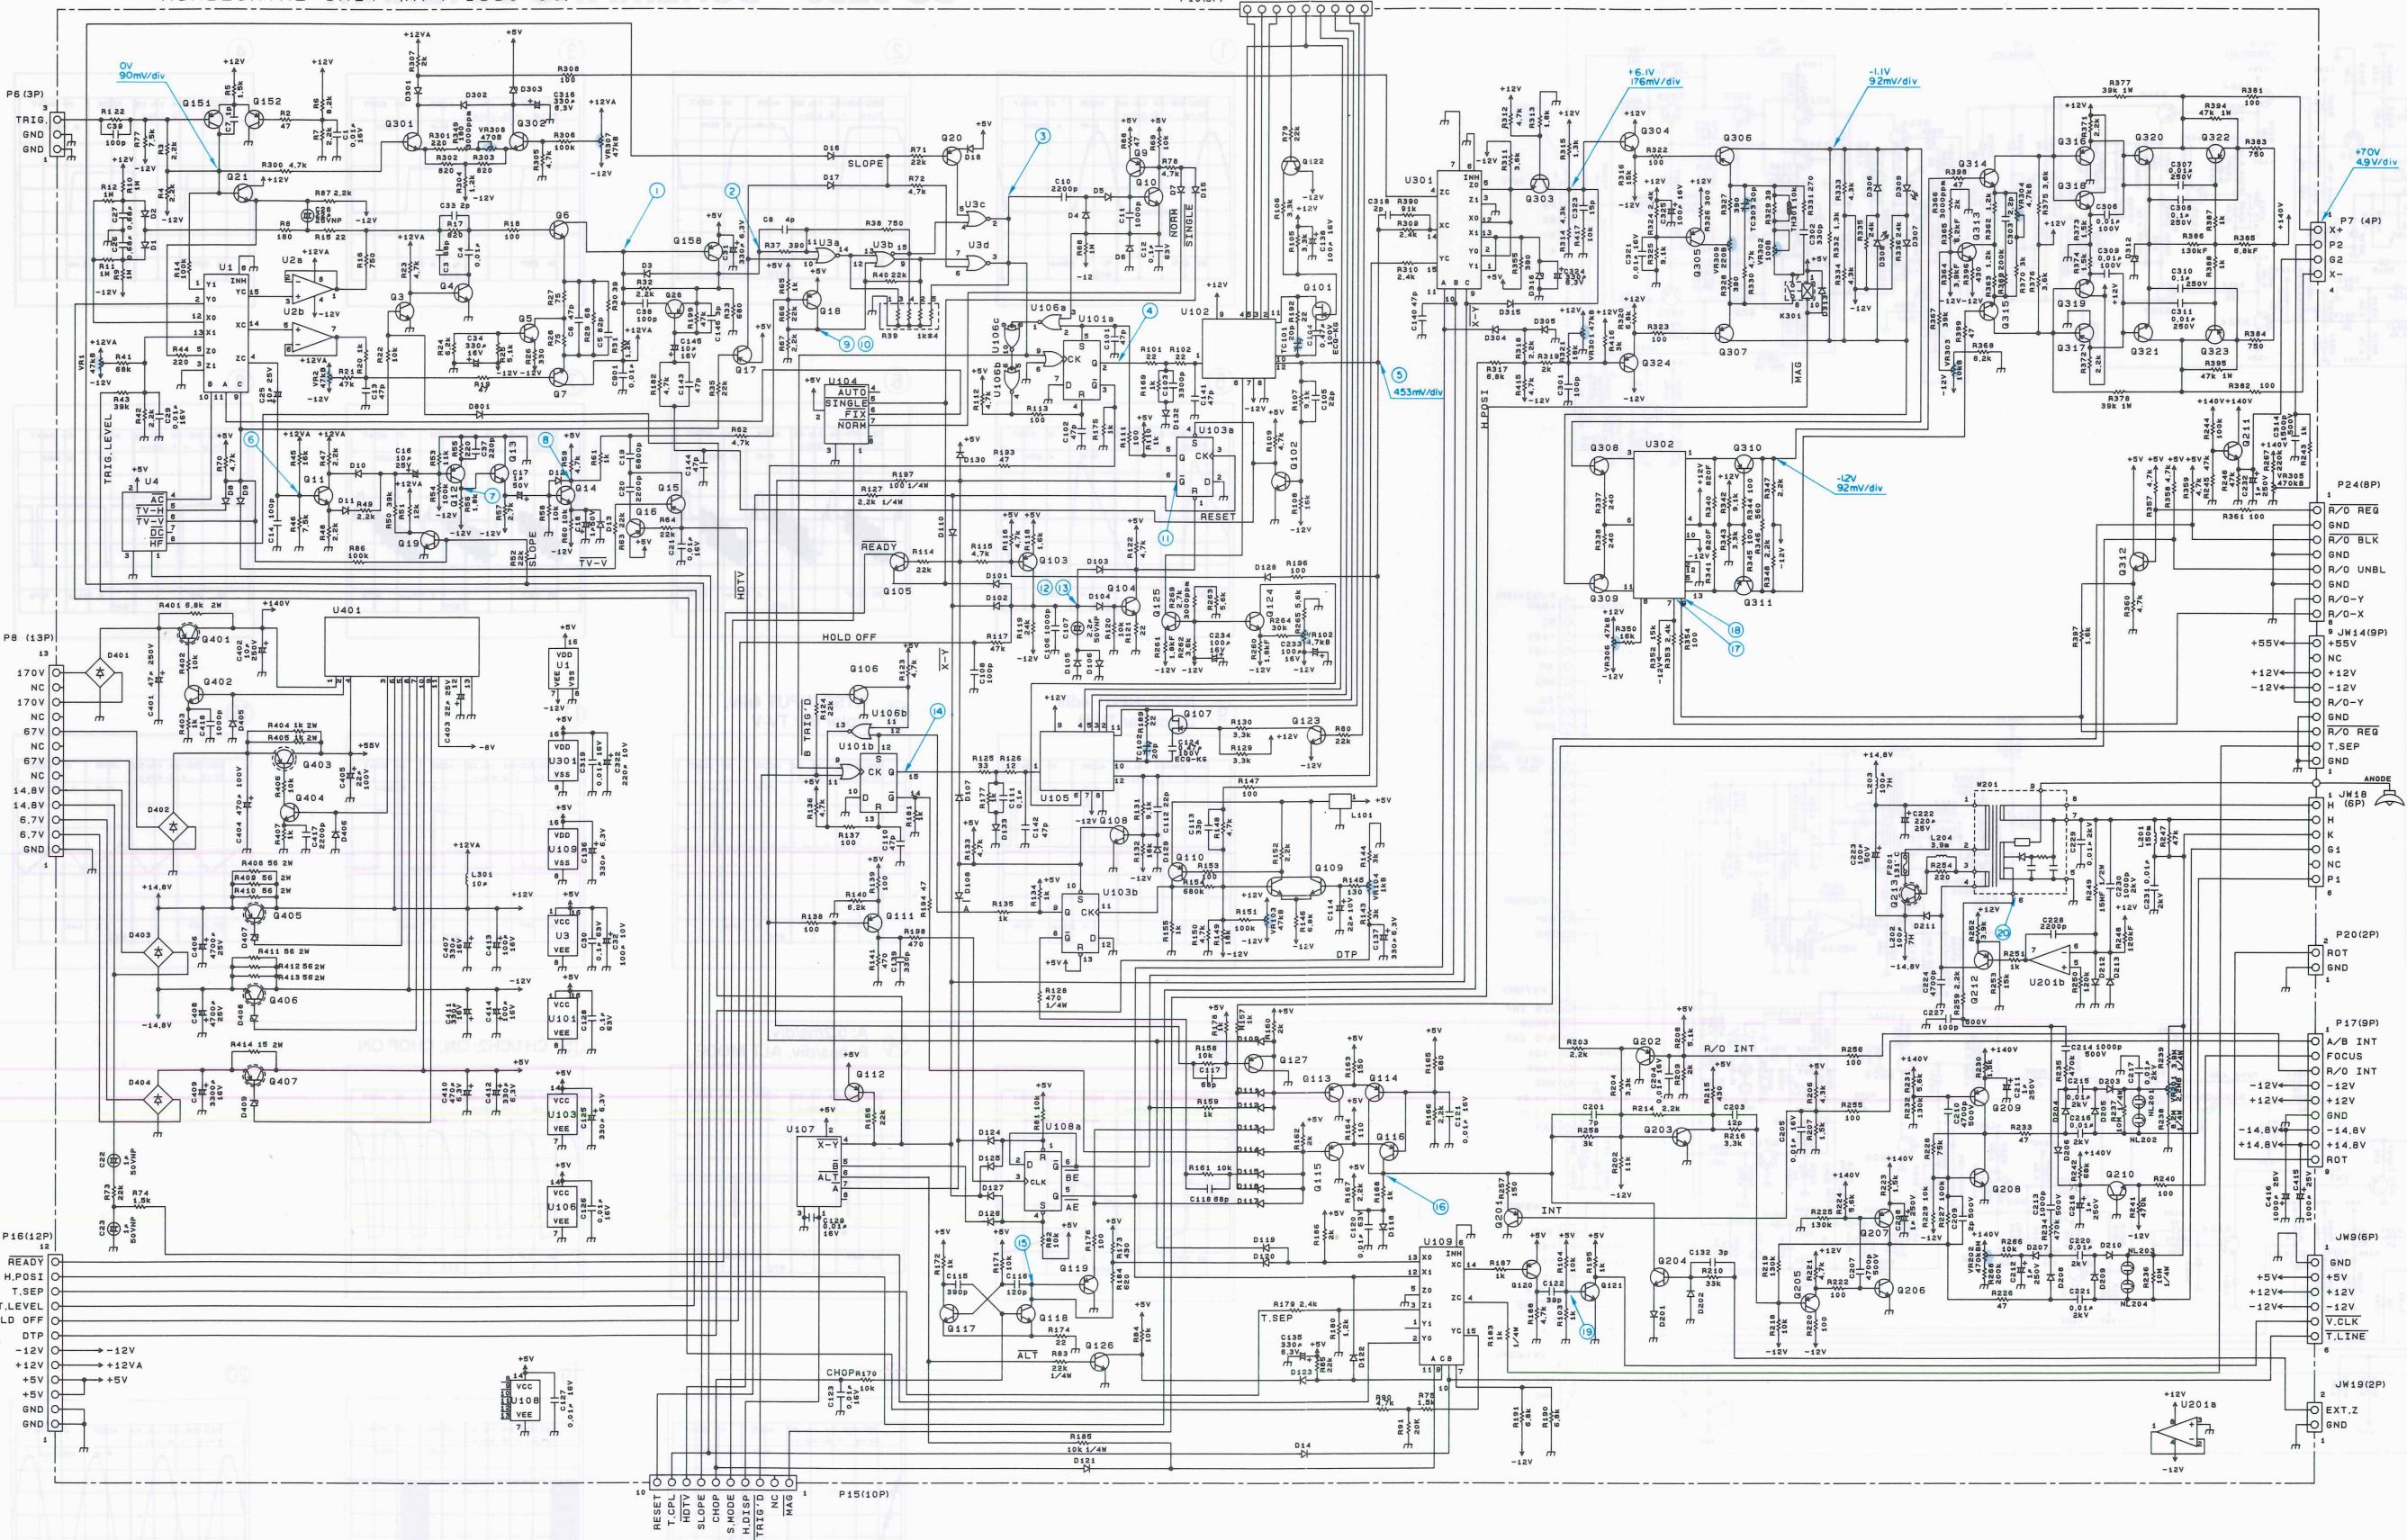

Q21. 314, 315. 31
Q101, 107
Q109
Q206, 208
Q207, 209
Q210. 211. 402. 403
Q213
Q320, 321
Q322, 323
Q401


319	Q403	: 2S1
1907	Q405, 407	: 2S1
170 (V)	Q406	: 2S1
3066 (G)		
2910 (S)		
1208 (S)		
C2551 (O)	D15, 12, 109, 144, 301, 306, 307, 601	: MA1
613 (E)	D6-11, 112, 108, 101, 302, 304, 305	: S1
4732 (E)		
1828 (E)		
1499 (P)	D203-210	: S1

304	D 303, 316	: MTZ 3
015 (Y)	D 308, 309	: TLR 1
406 (Y)	D 312	: MTZ 5
	D 401, 402, 404	: SV 1
	D 403	: SAV 1
0, 132, 133	D 407, 408	: MTZ 1
0	D 409	: MTZ 7
110-2-110-3		
400-0-400-0		
000-0-000-0		
	TH301	: 112-


J A
J B
F C
J A

CS-5230 SCHEMATIC DIAGRAM


①

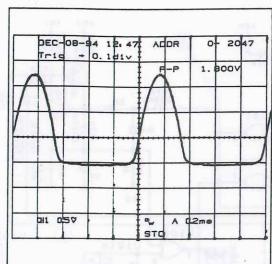


②

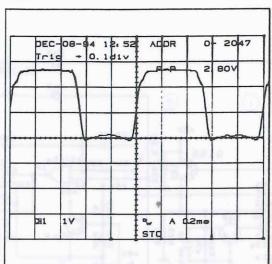


③

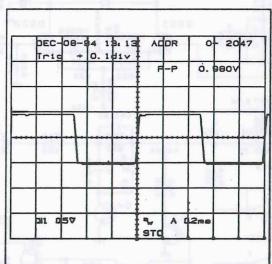


④

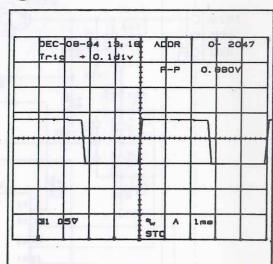


⑤

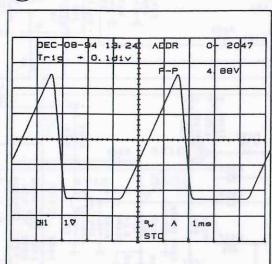




⑥

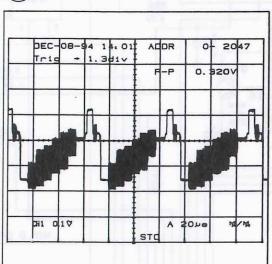


⑦

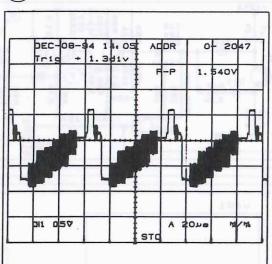


⑧

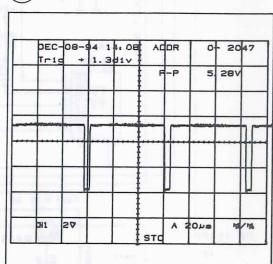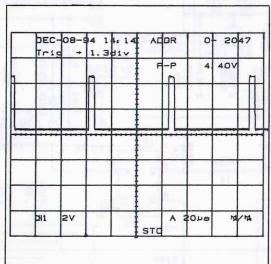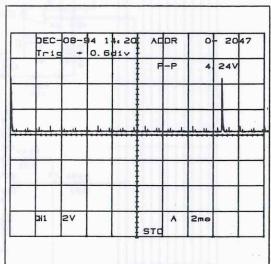⑨ NTSC INPUT 4div,
Color Bar TV-H⑩ NTSC INPUT 4div,
Color Bar TV-V



⑪

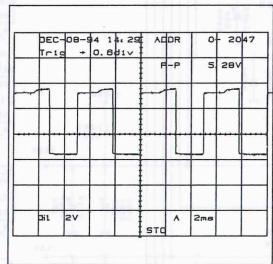



⑫

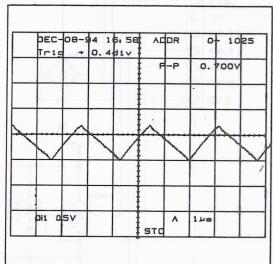


⑬

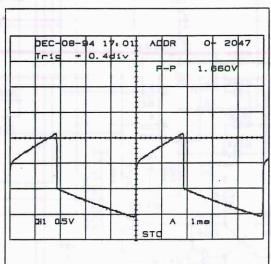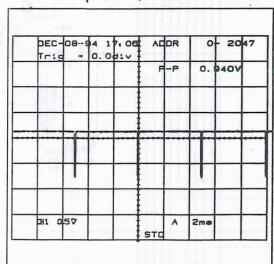⑭ A: 0.2ms/div
B: 5μs/div, ALT MODE


⑮ CH1/CH2: ON, CHOP ON

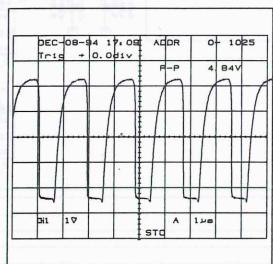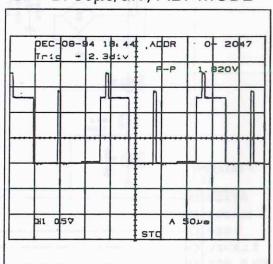⑯ A: 0.5ms/div
B: 50μs/div, ALT MODE


⑰

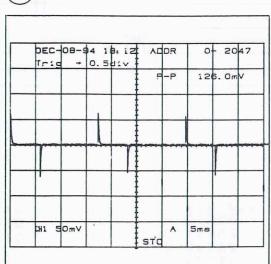


⑱

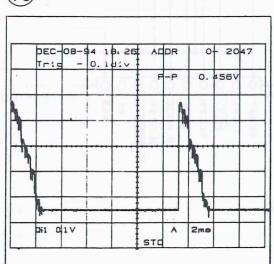


⑲

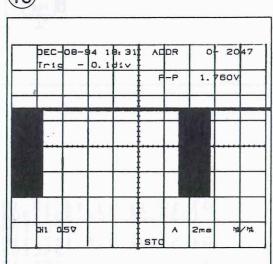


⑳

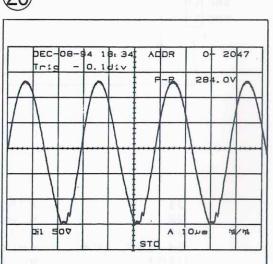

HORIZONTAL UNIT (X74-1580-01)




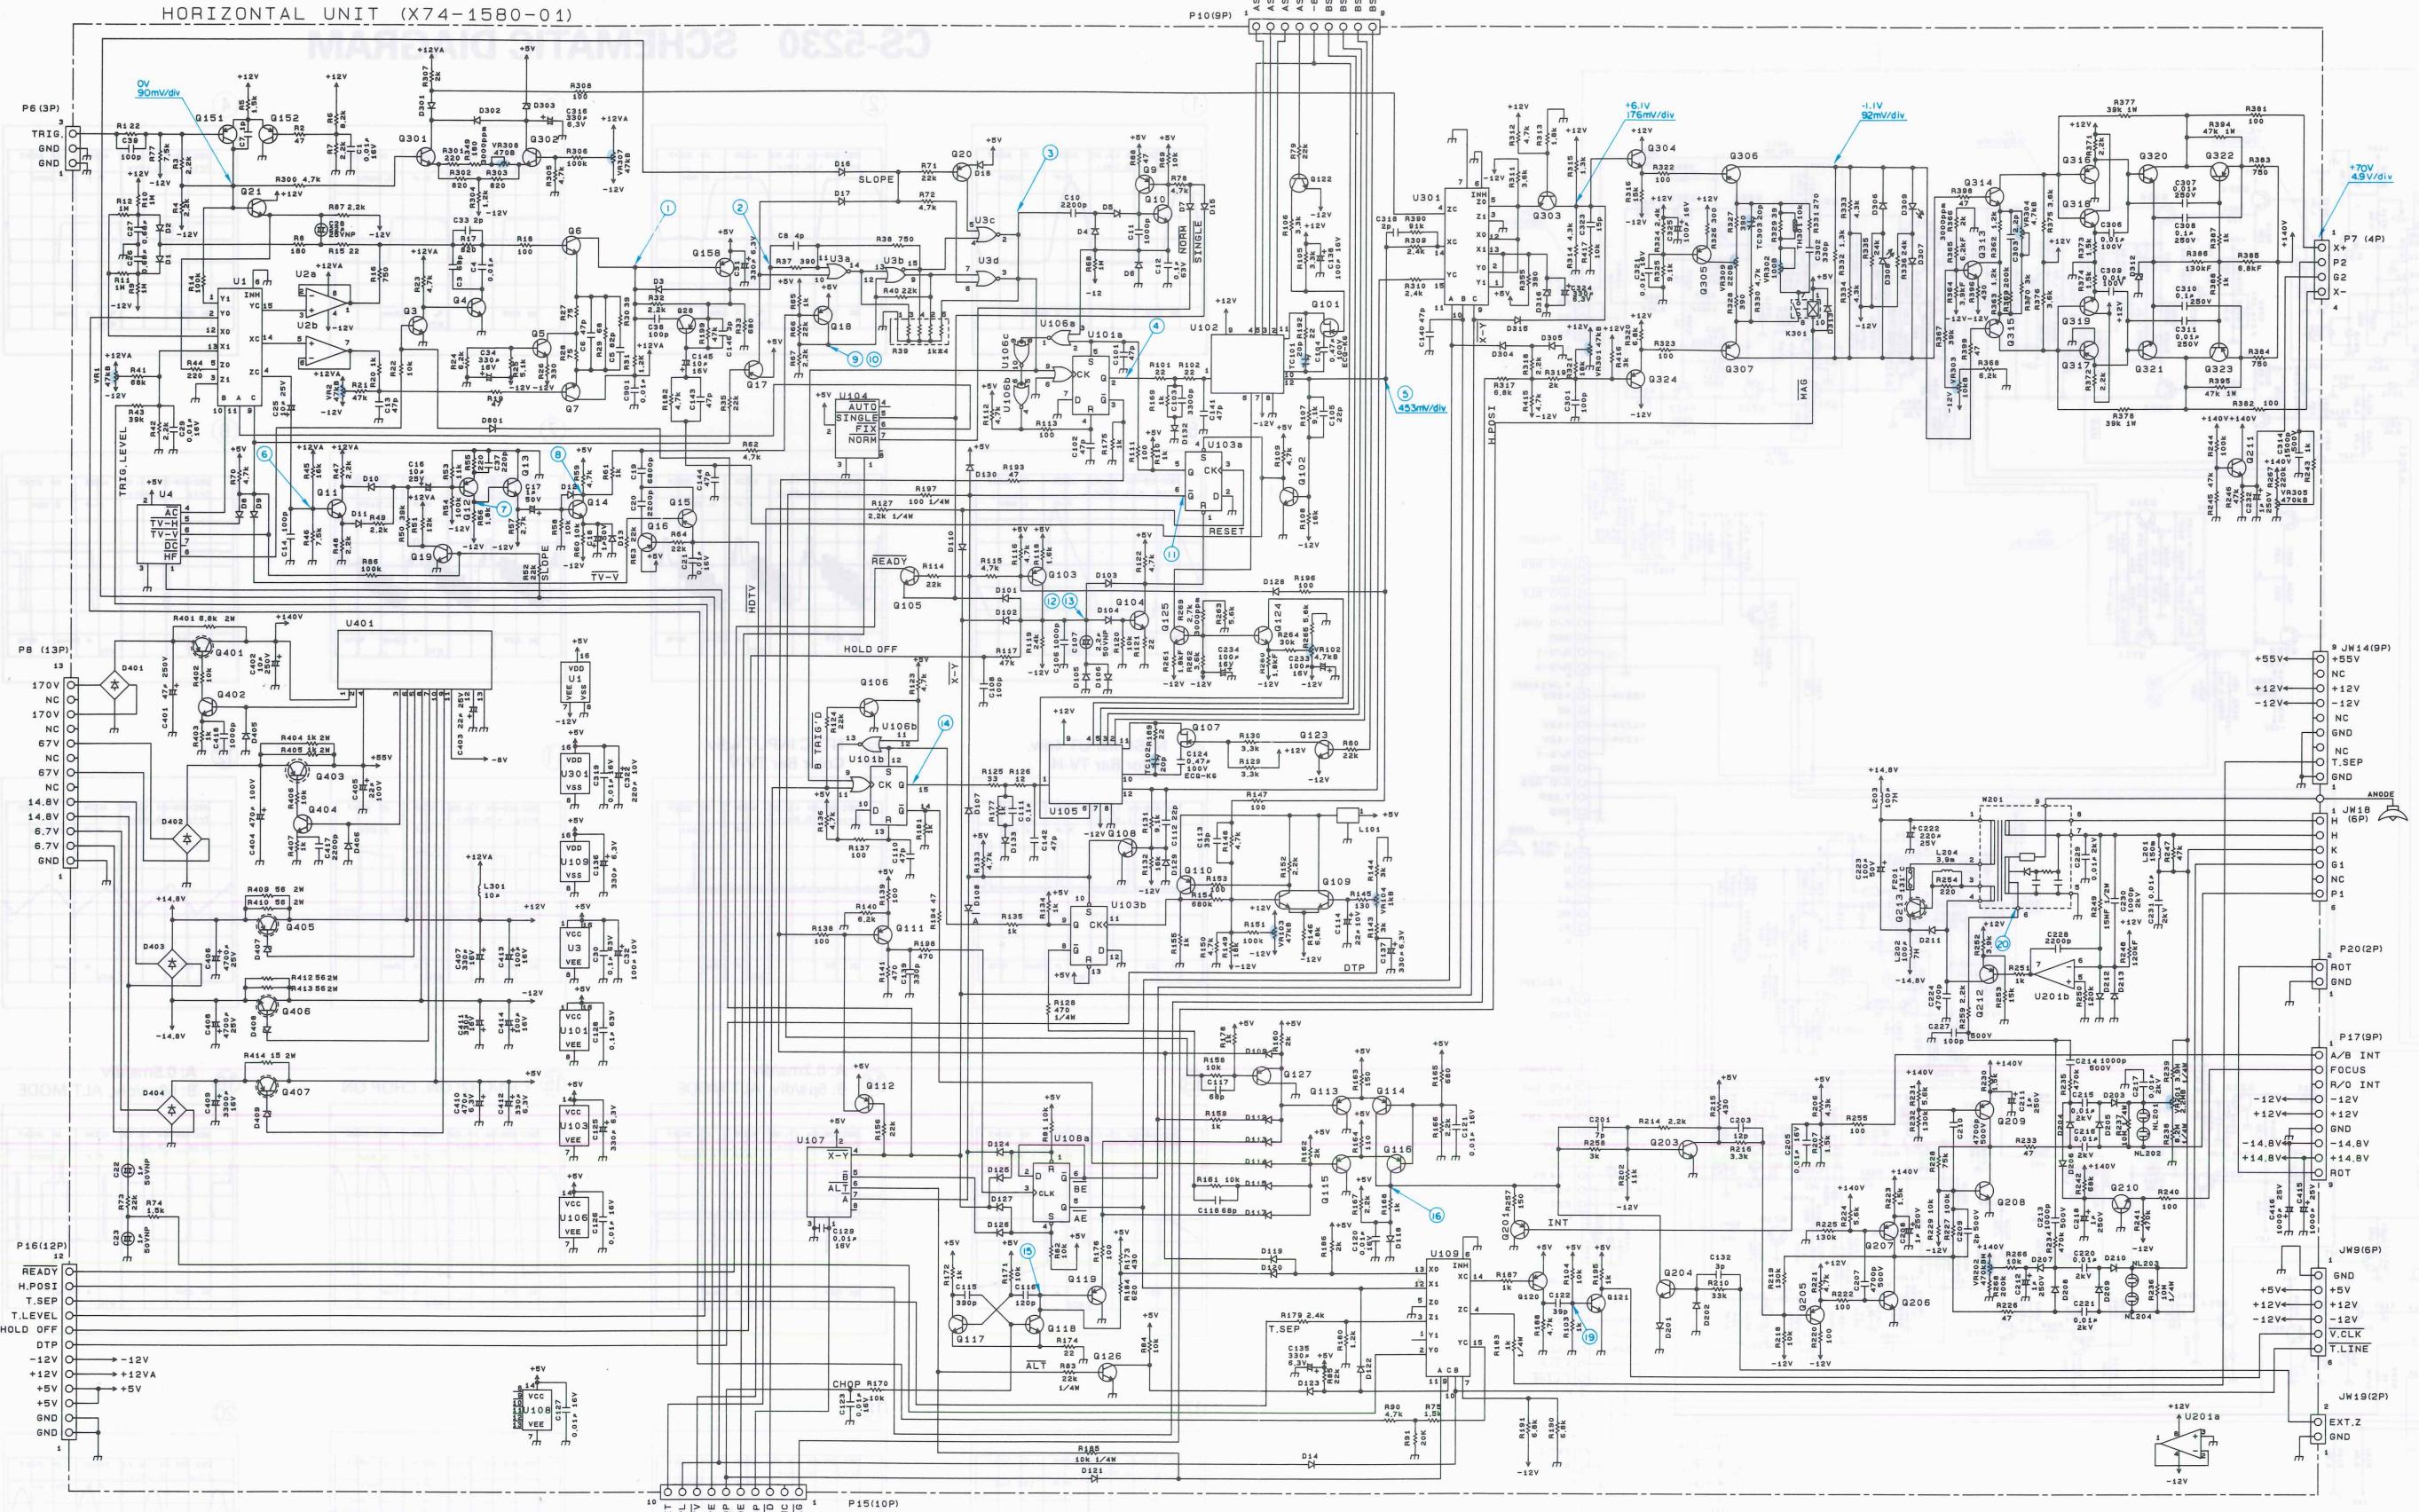


CS-5235 SCHEMATIC DIAGRAM

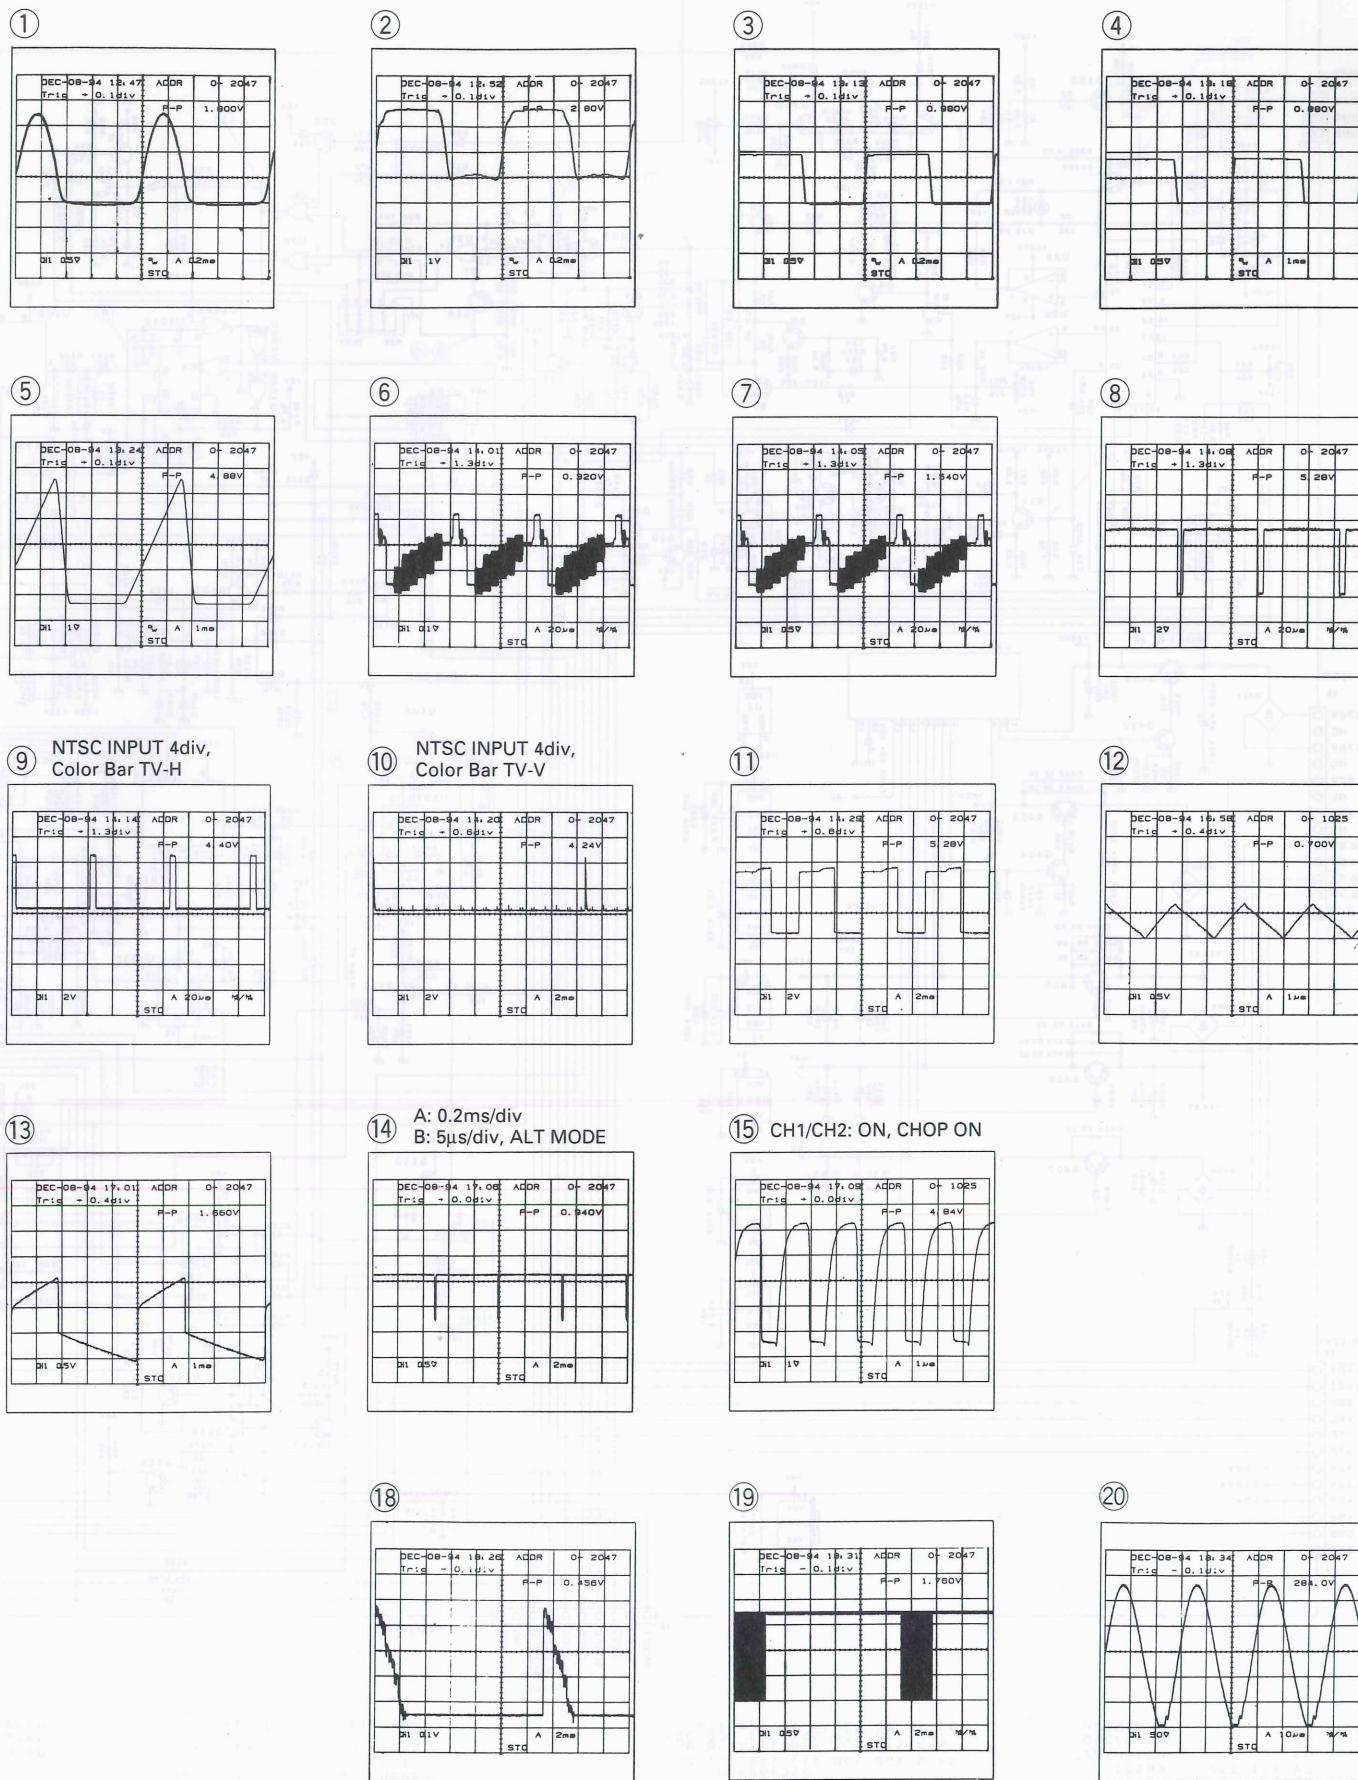





CS-5230 SCHEMATIC DIAGRAM

FINAL AMP UNIT (X80-1370-00)

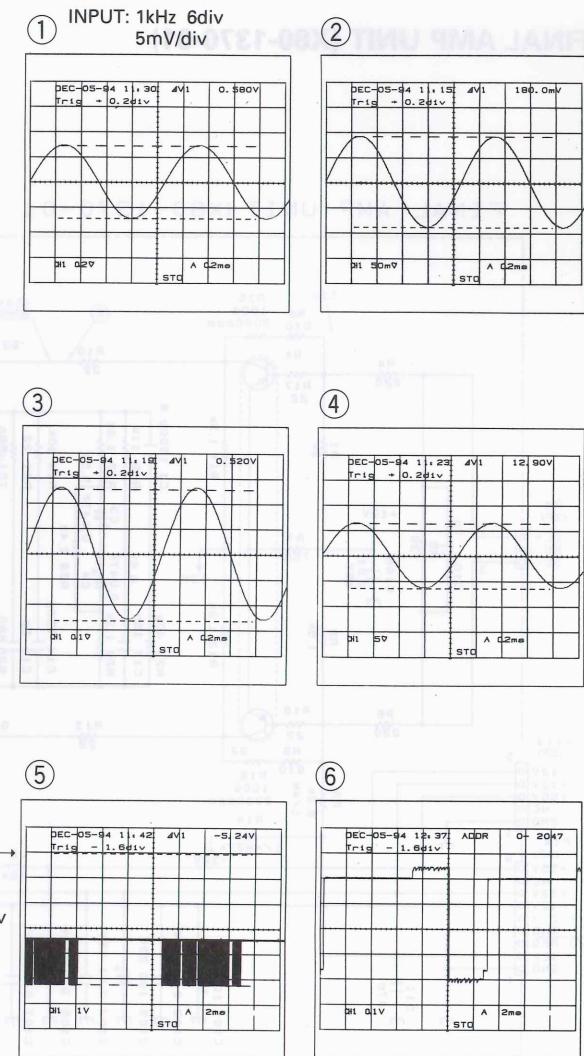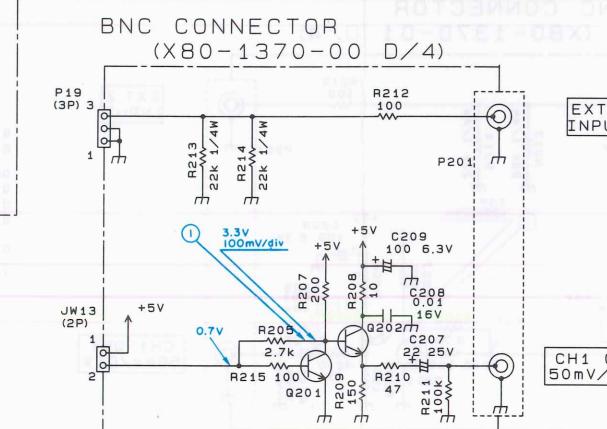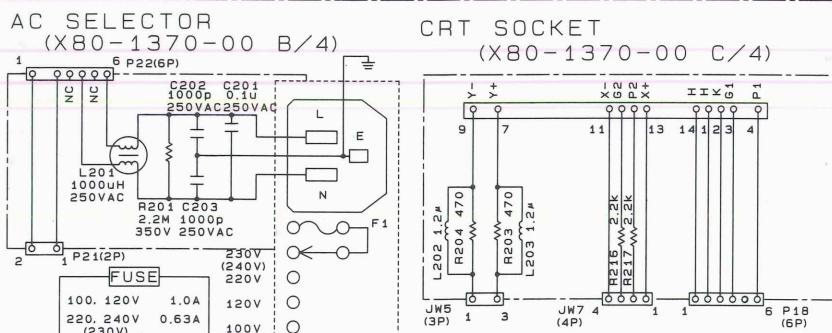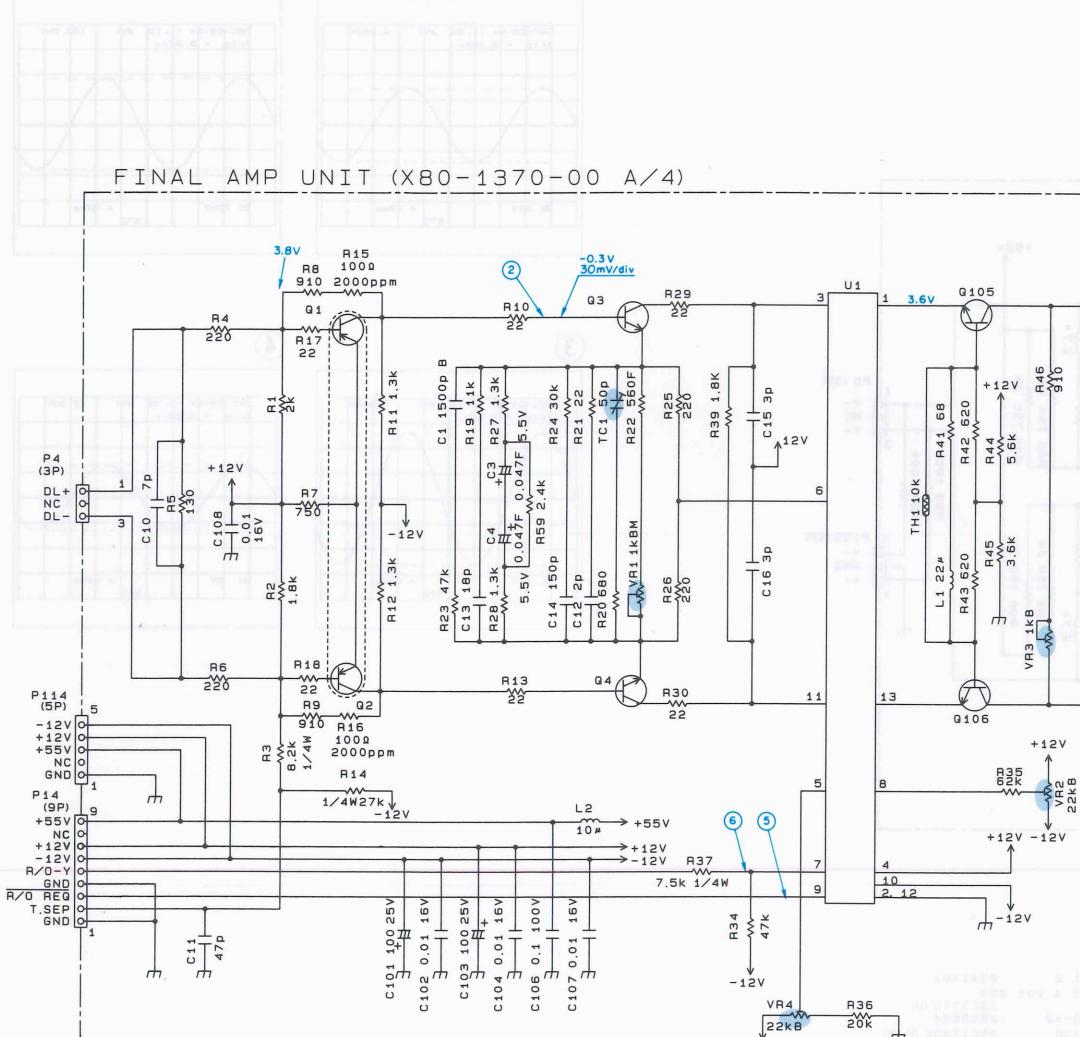

CS-5235 AI SCHEMATIC DIAGRAM


FINAL AMP UNIT (X80-1370-01)

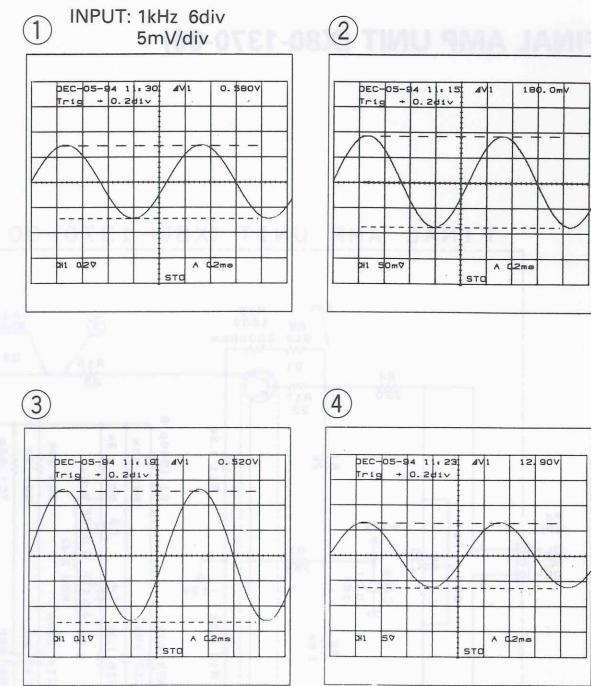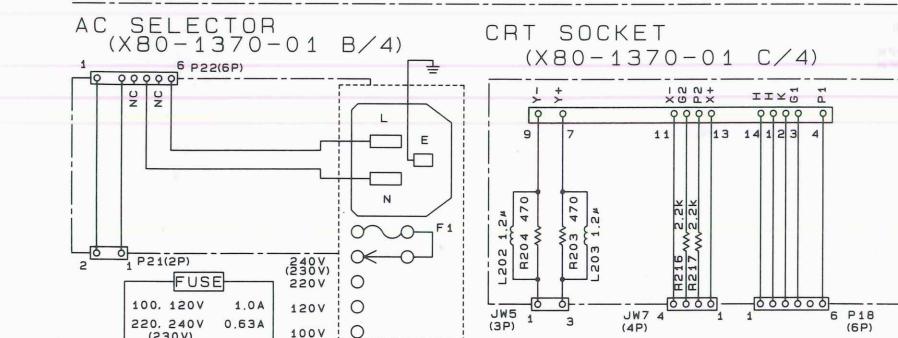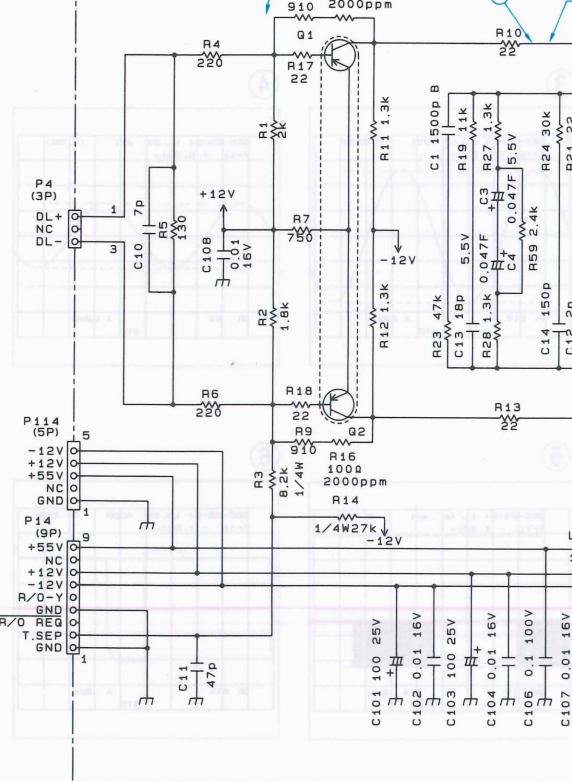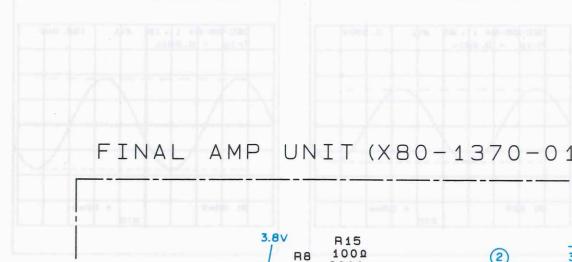


Q1.2 : 2SA1161
Q3, 4, 201, 202 : 2SC3779 (D)
Q9~12 : 2SC2644
Q100 : 2SC17405 (R, S)
Q105~108 : 2SC1907
Q113, 114 : 2SC3952 (D)
D100, 101 : MA700
TH1.2 : 112-103-2FM

CS-5230 SCHEMATIC DIAGRAM

R/O UNIT (X77-1870-00)

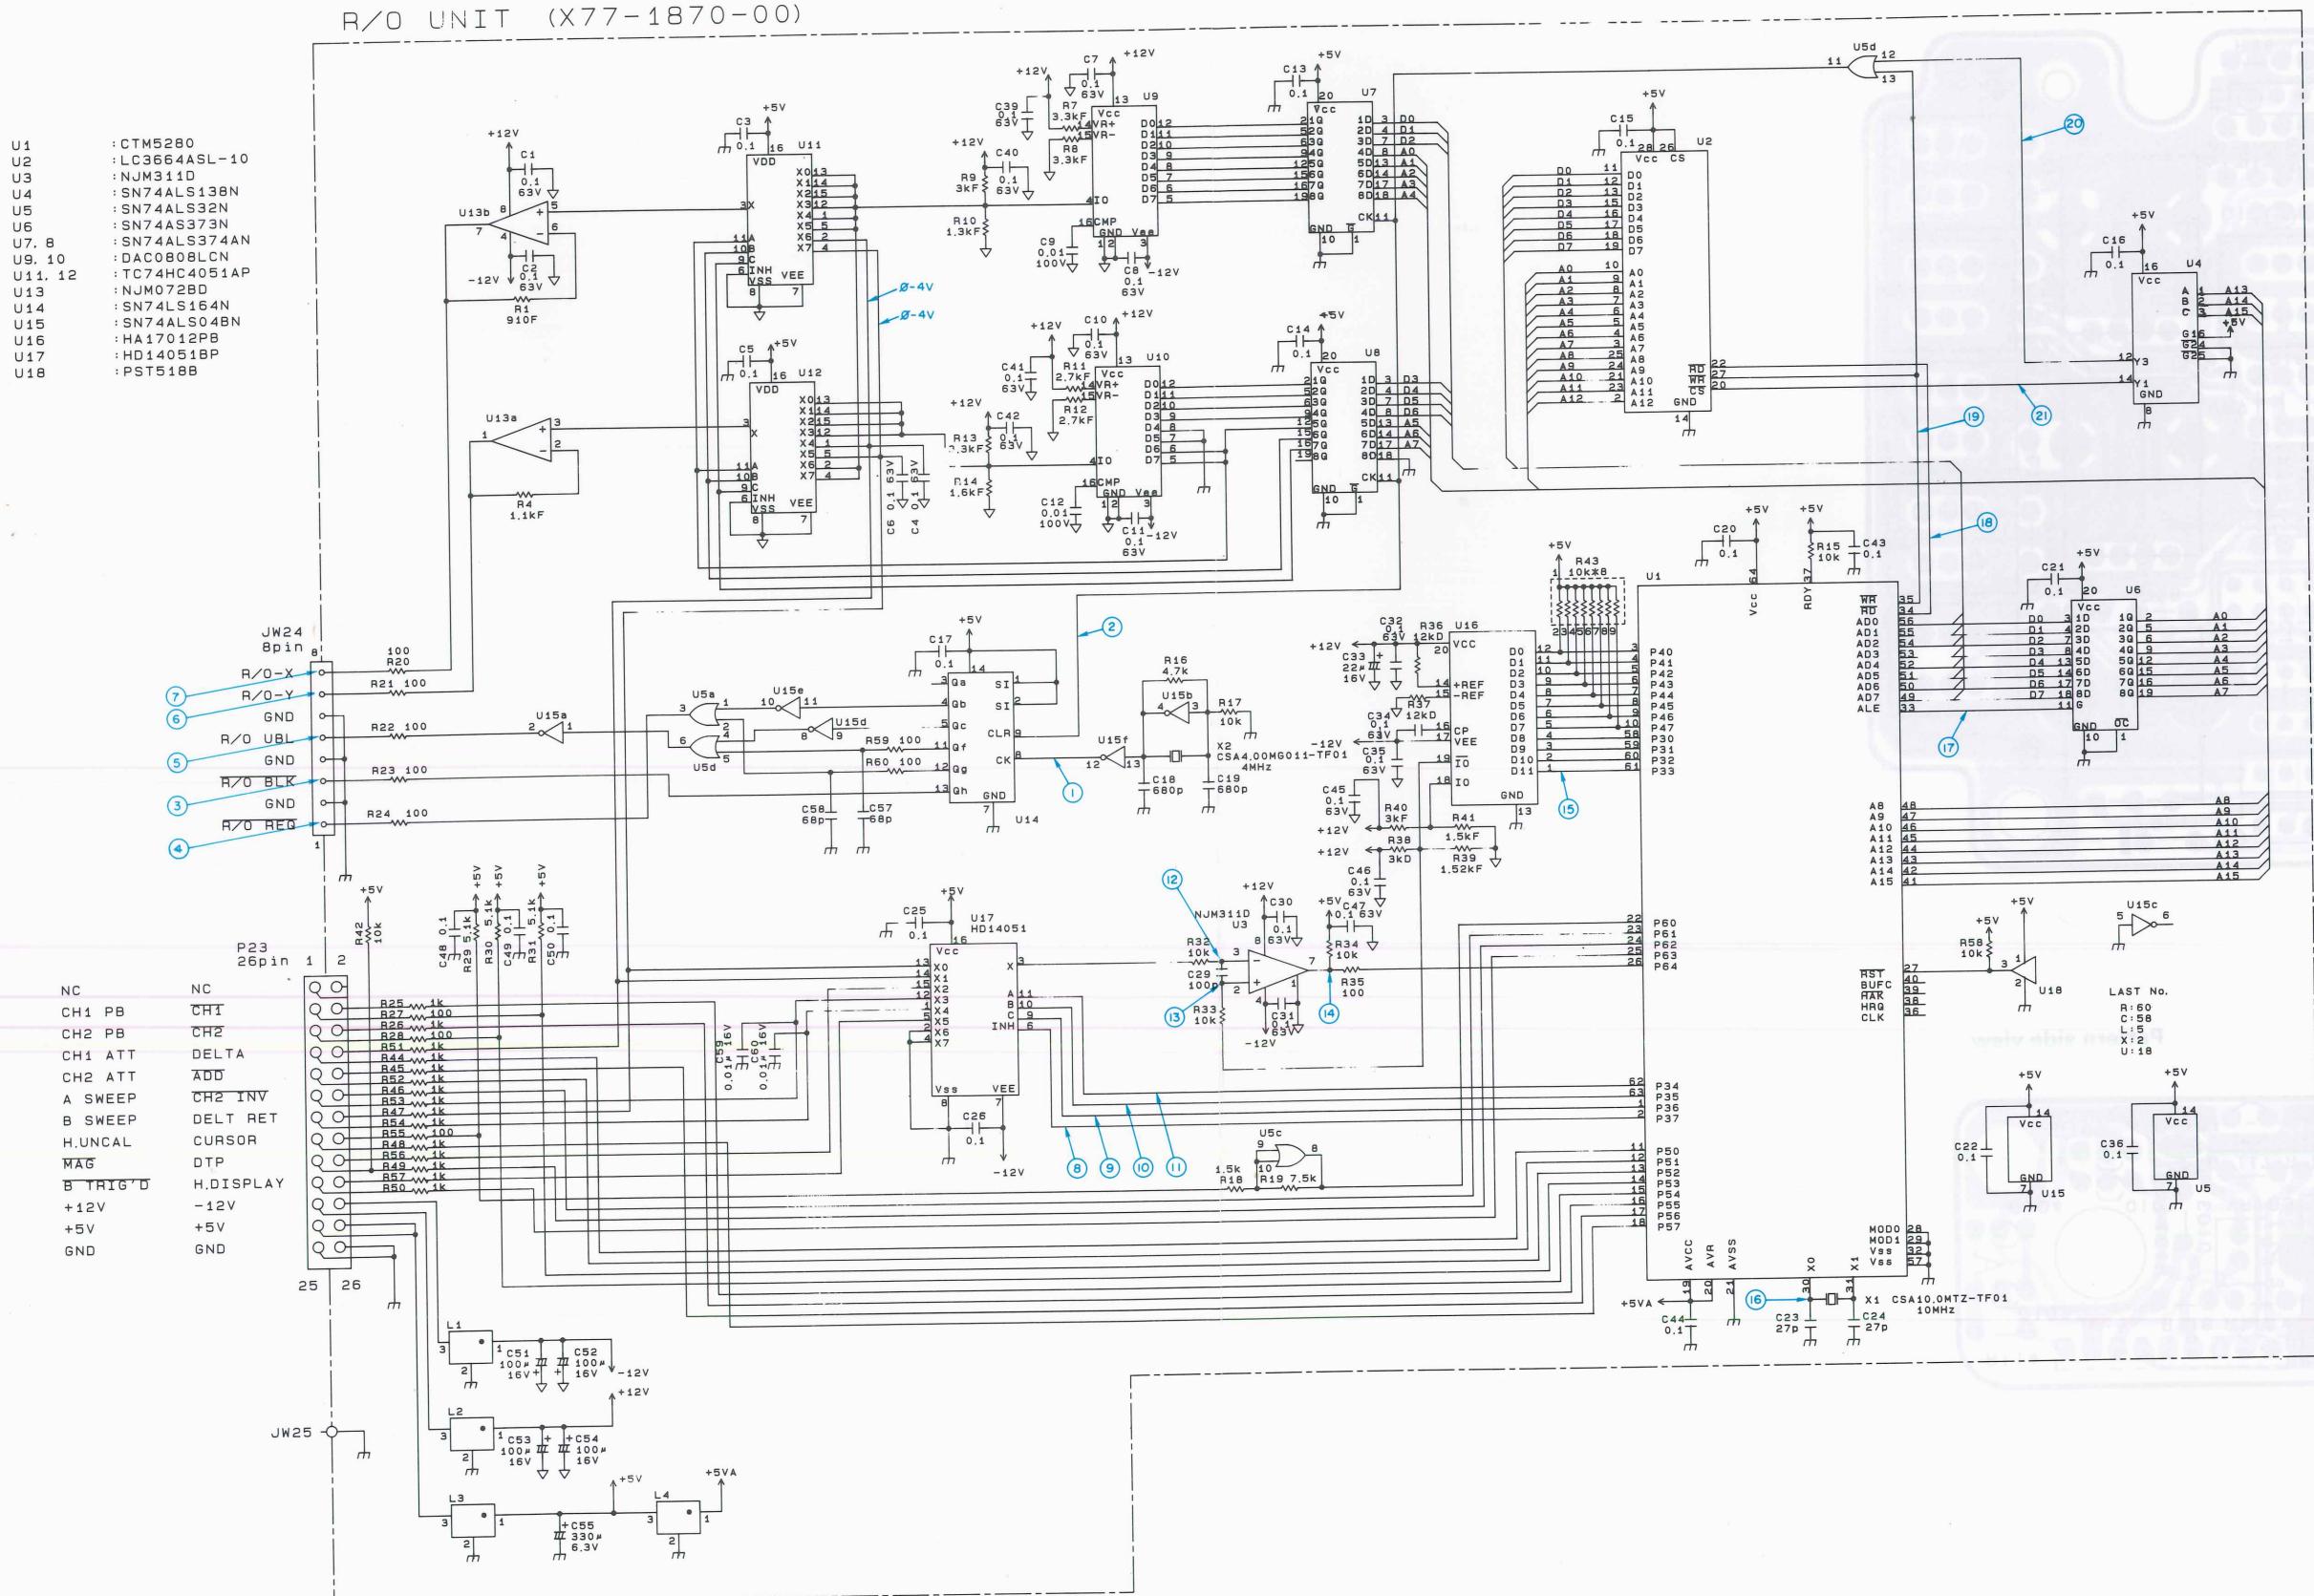

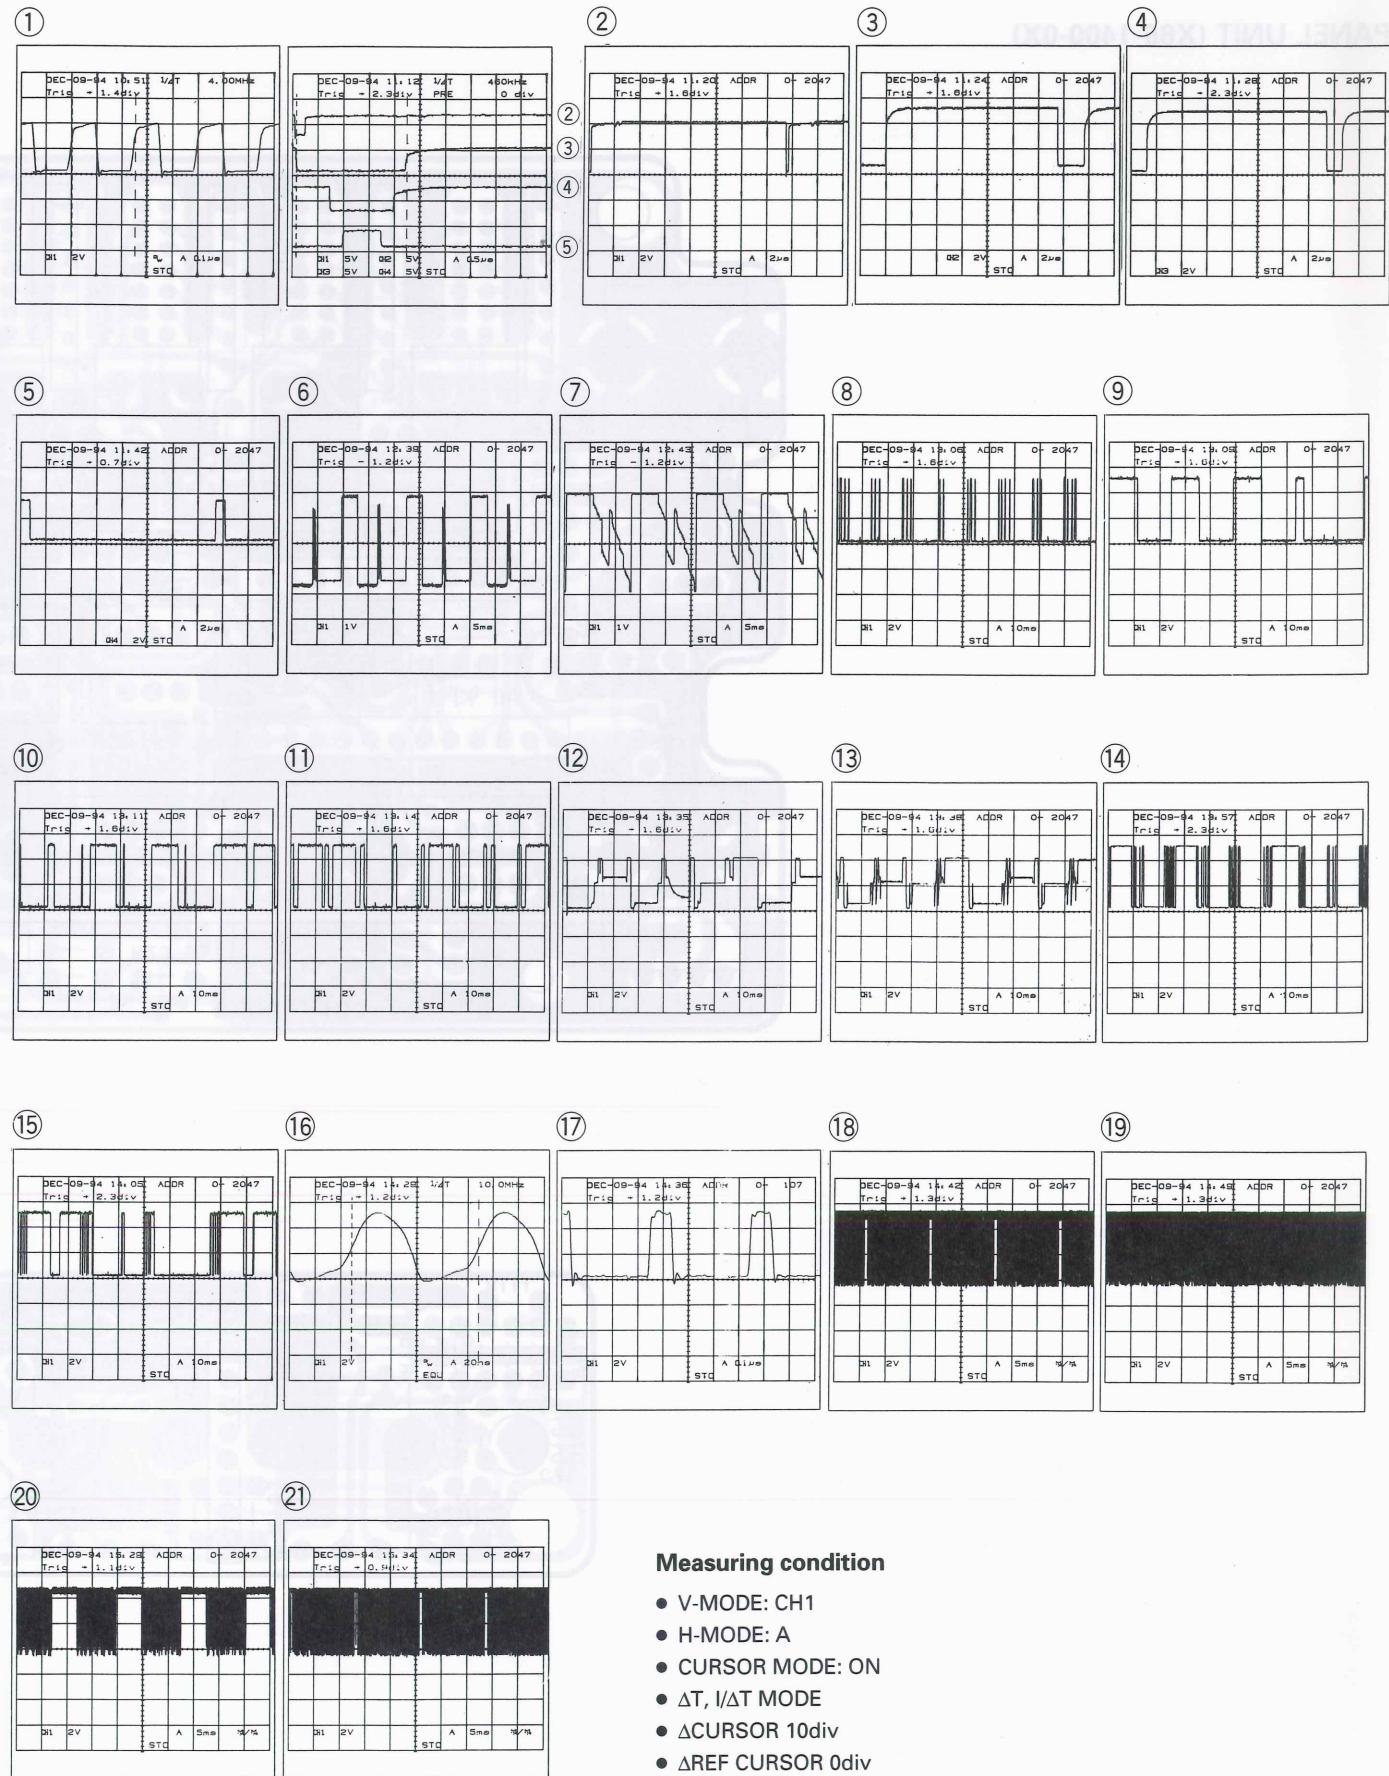


P.C. BOARD

CS-230 SCHEMATIC DIAGRAM

PANEL UNIT (X66-1400-0X)

Pattern side view

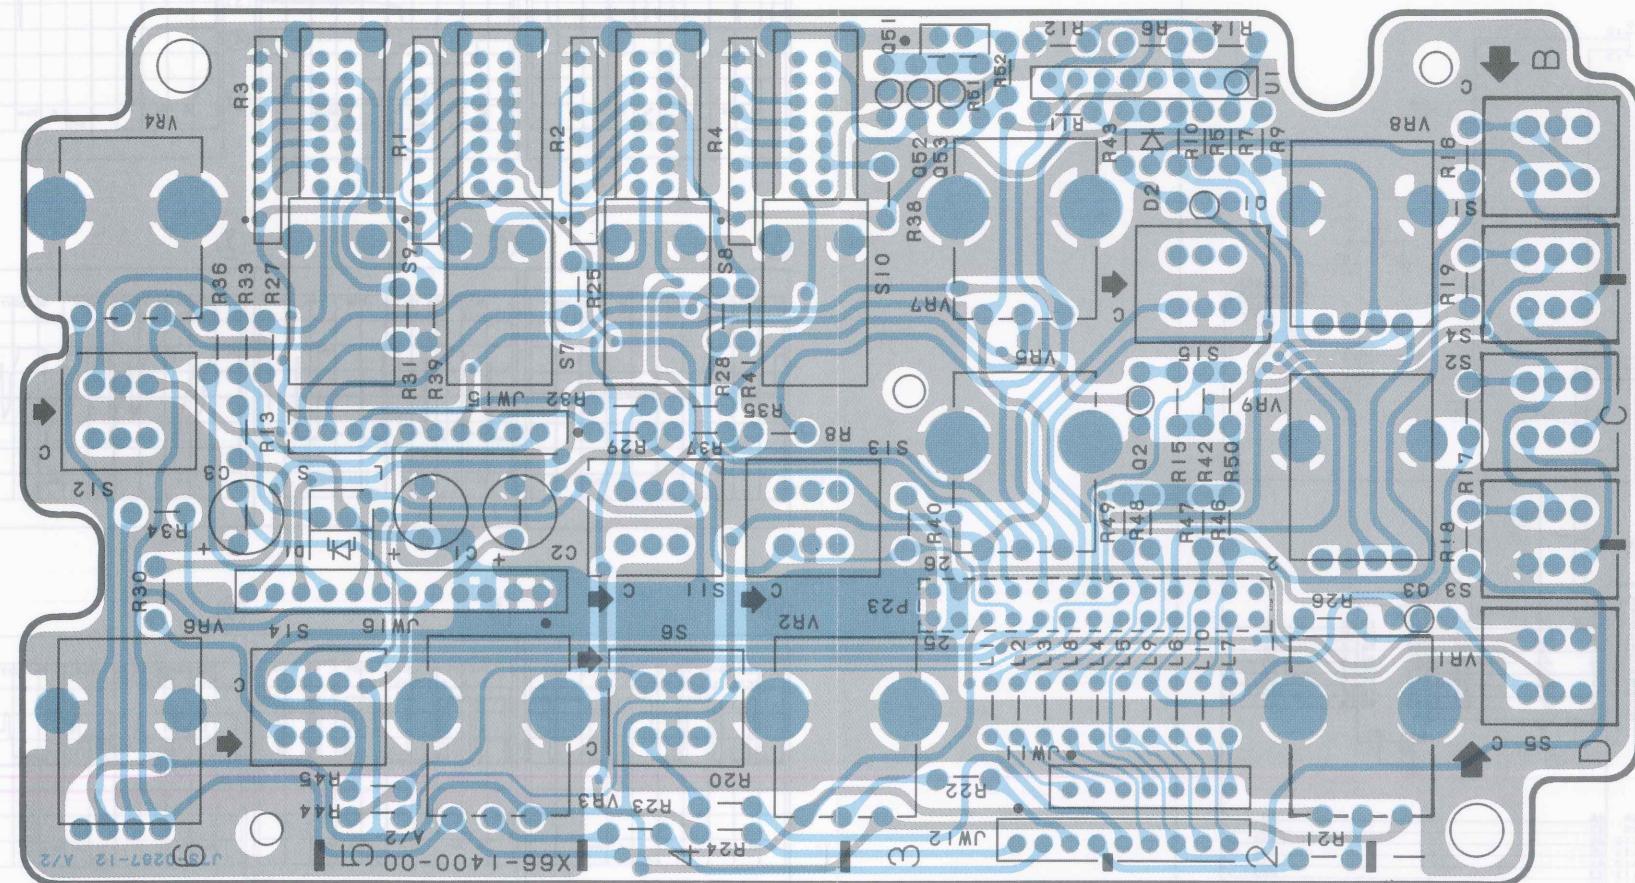

Pattern side view








- MEASURING configuration
- A-MODE CH1
- H-MODE A
- CURSOR MODE ON
- AT-VAT MODE
- CURSOR 10qin
- FREE CURSOR area


P.C. BOAR

VERTICAL UNIT (X73-2070-0X)

Pattern side vi

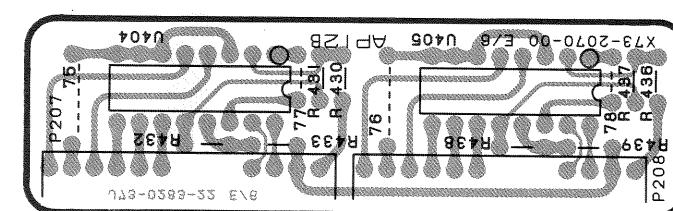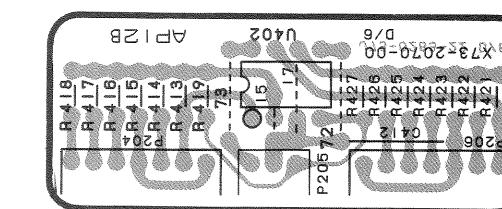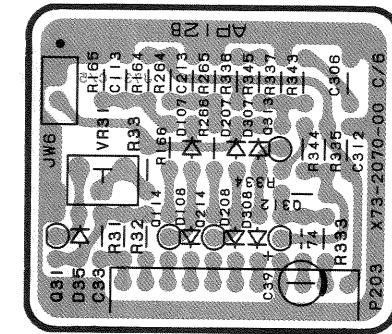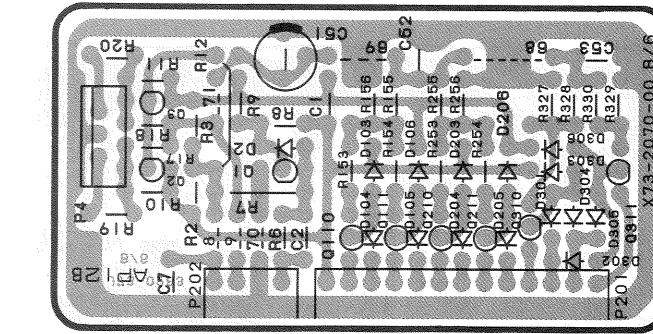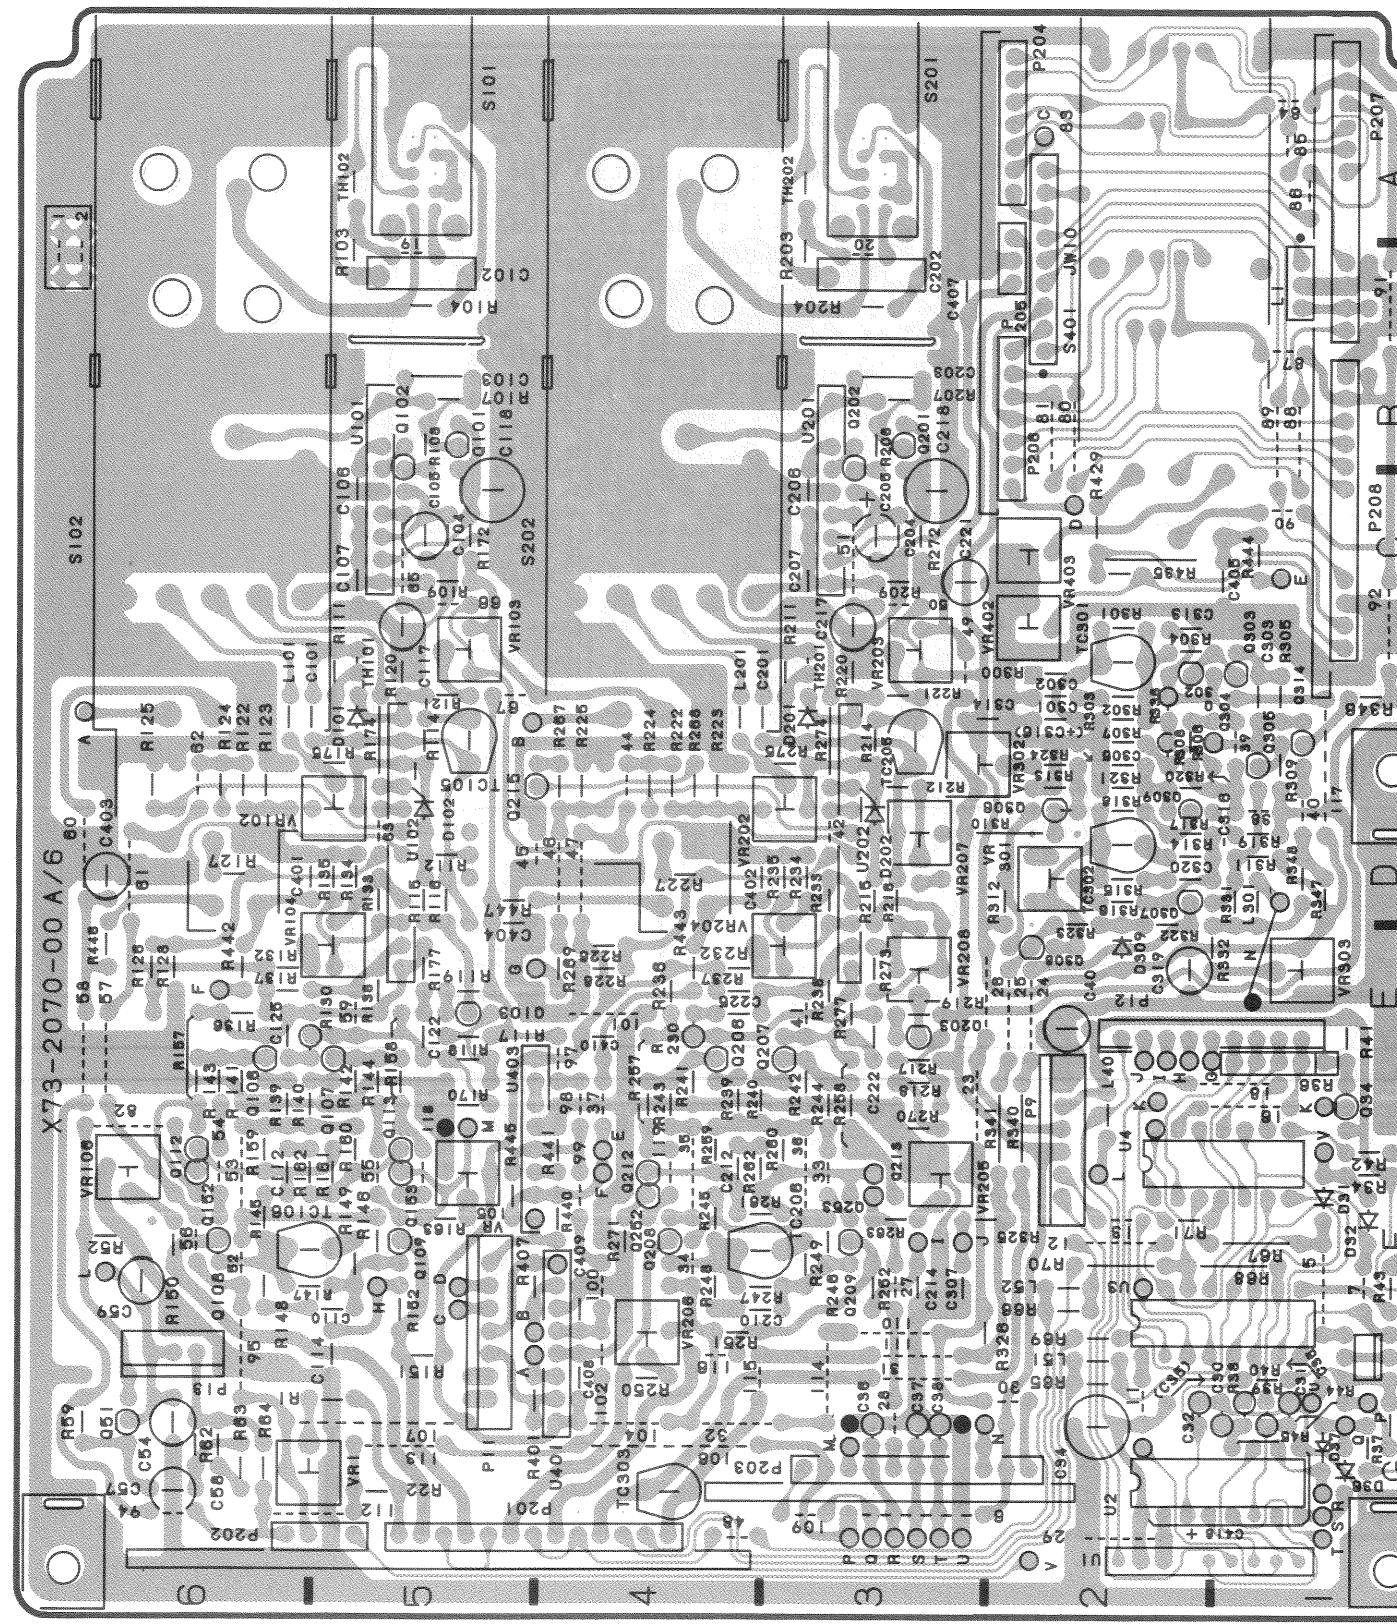


Pattern side view

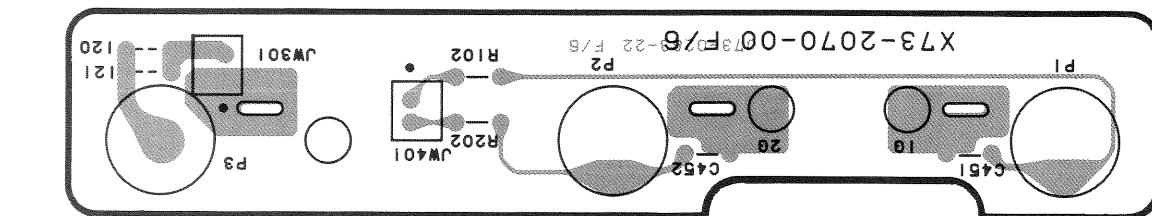

P.C. BOARD

HORIZONTAL UNIT (X74-1580-0X)


Pattern side view

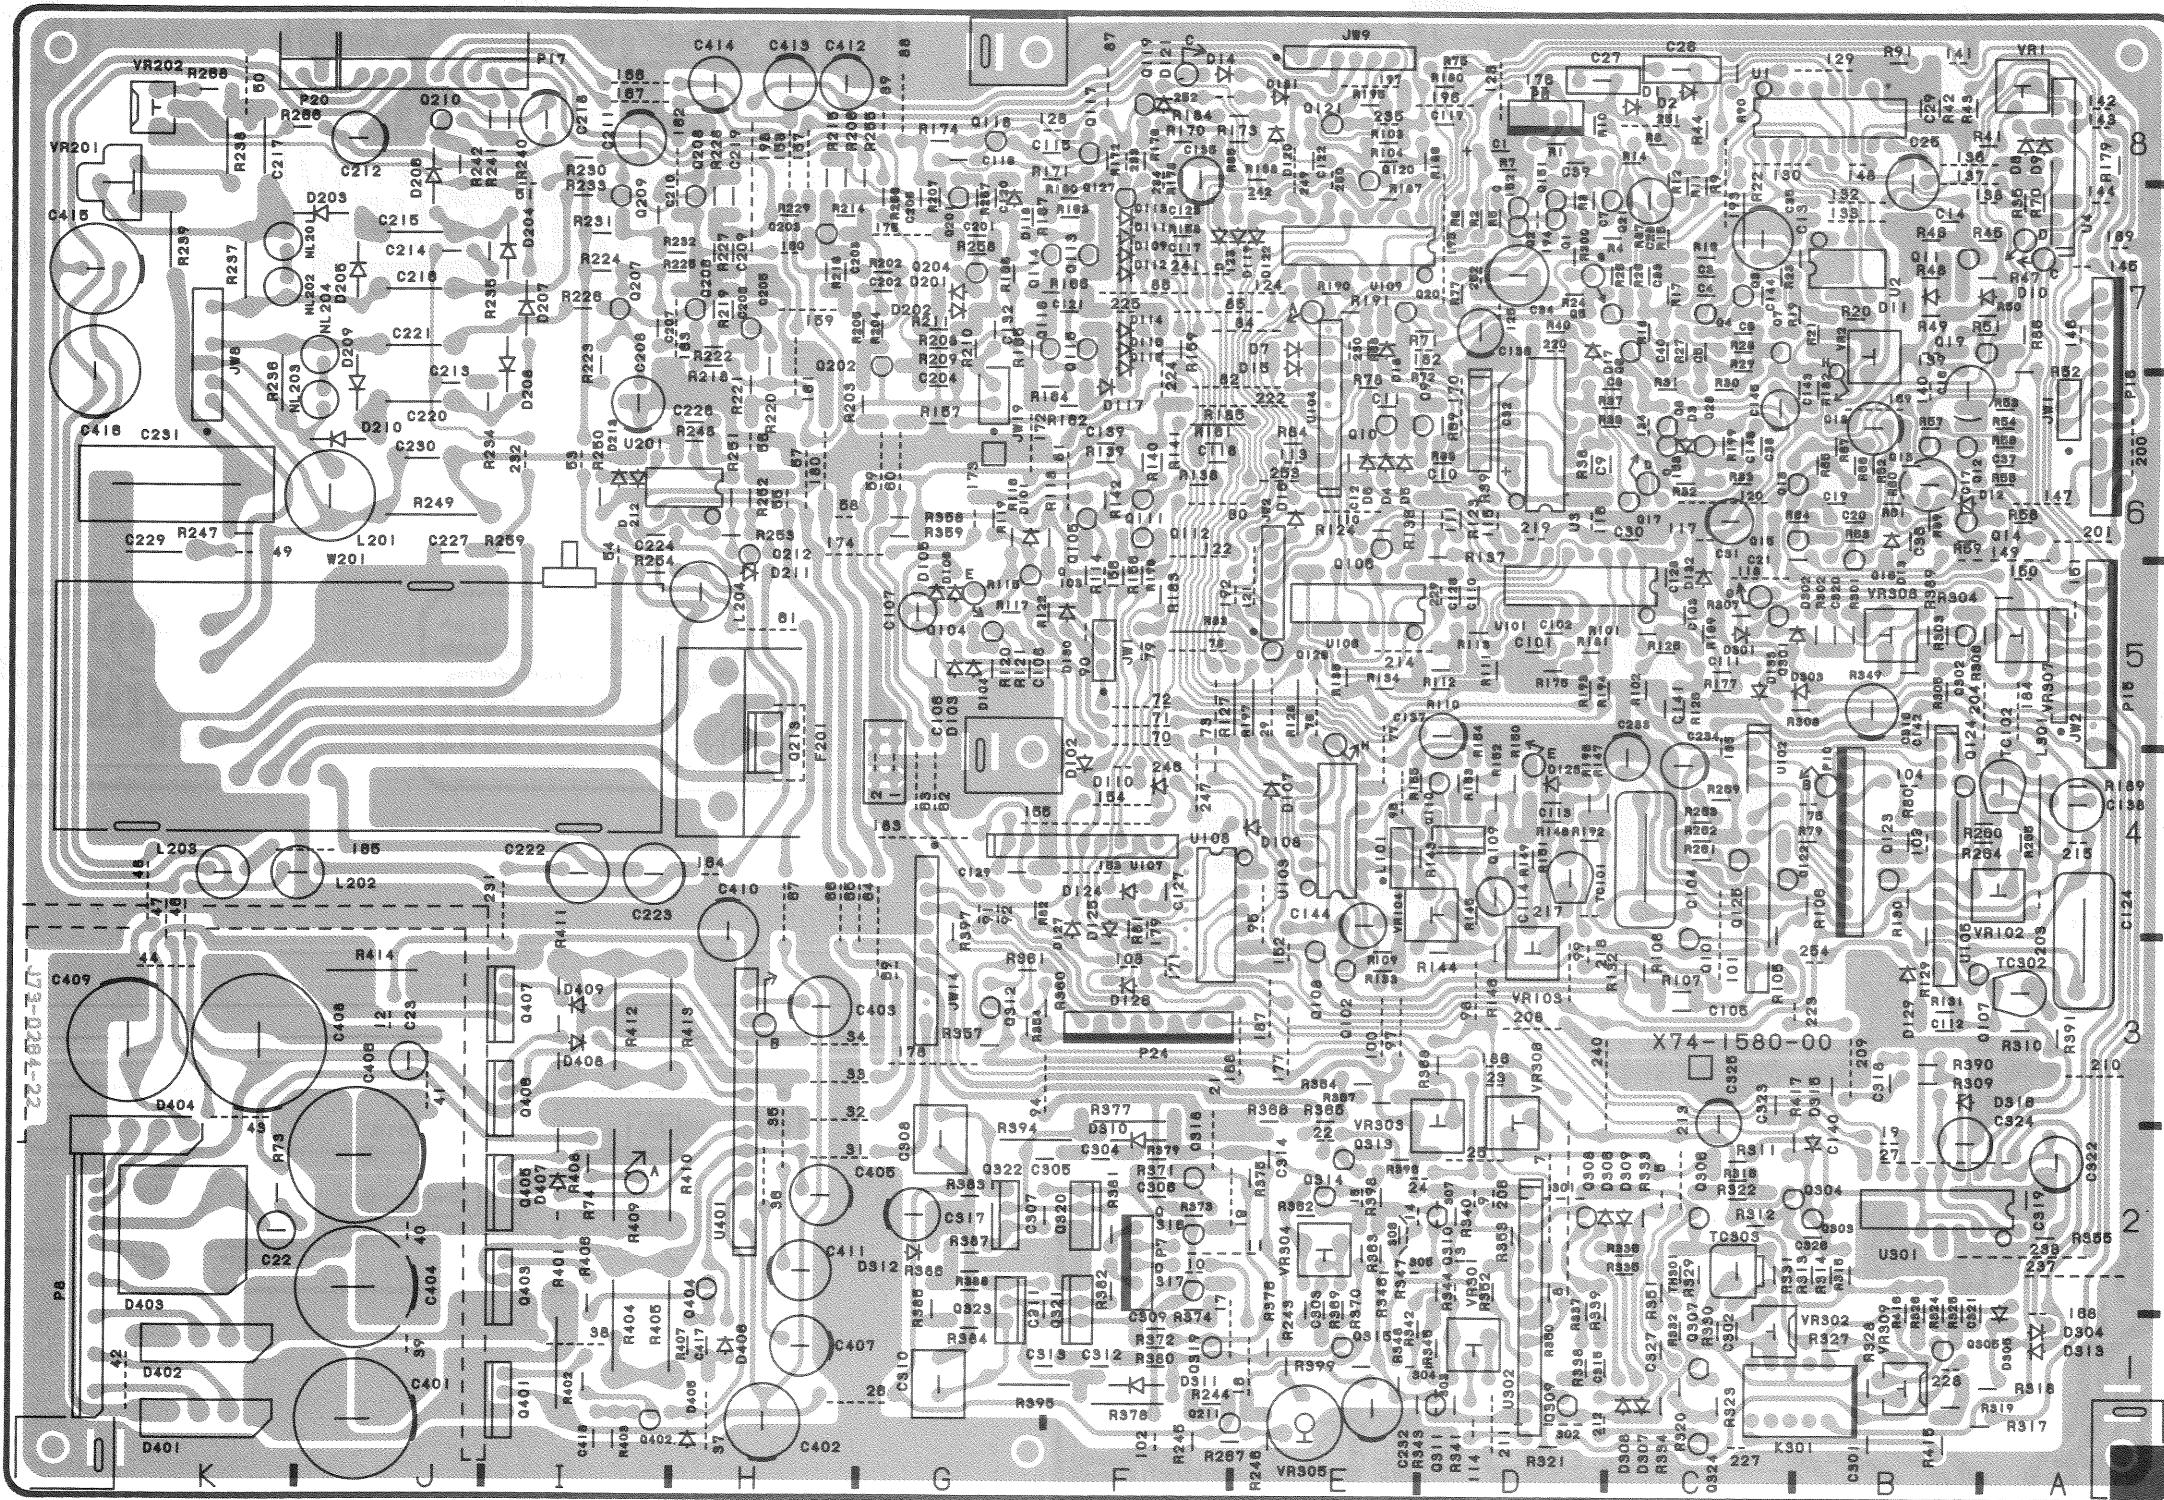

P.C. BOARD


R/O UNIT (X77-1870-0X)

DRIVE ARM UNIT (X80-1820-0X)


















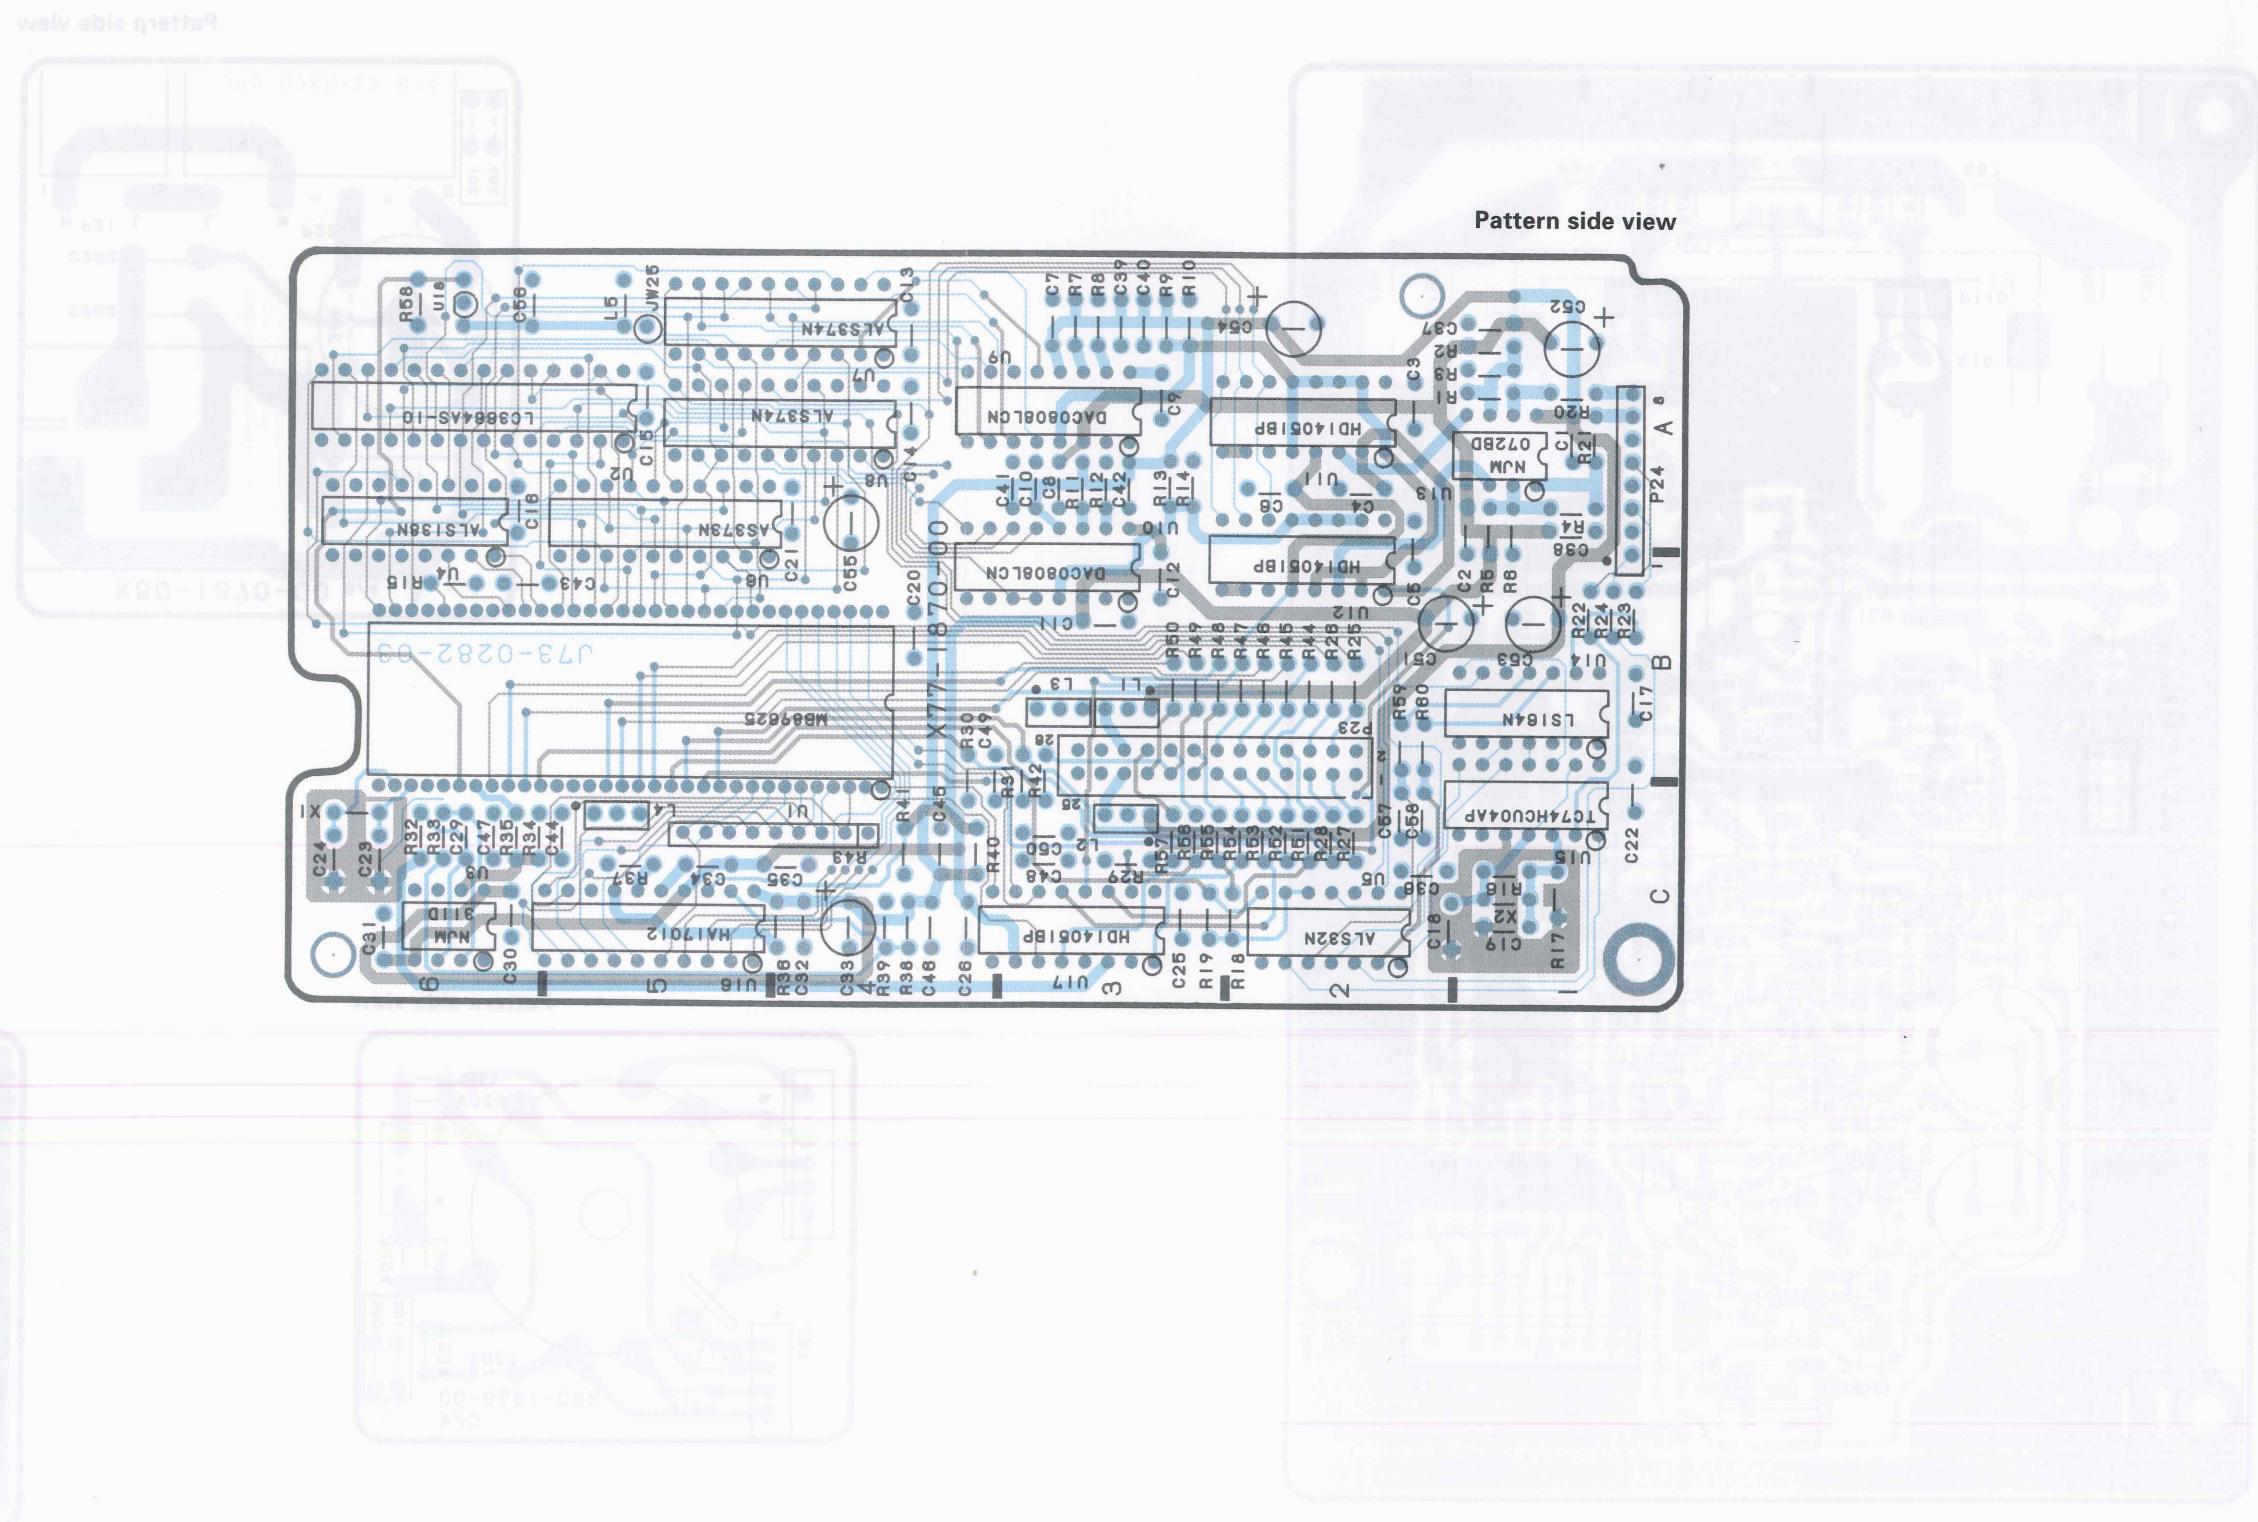


P.C. BOARD


FINAL AMP UNIT (X80-1370-0X)

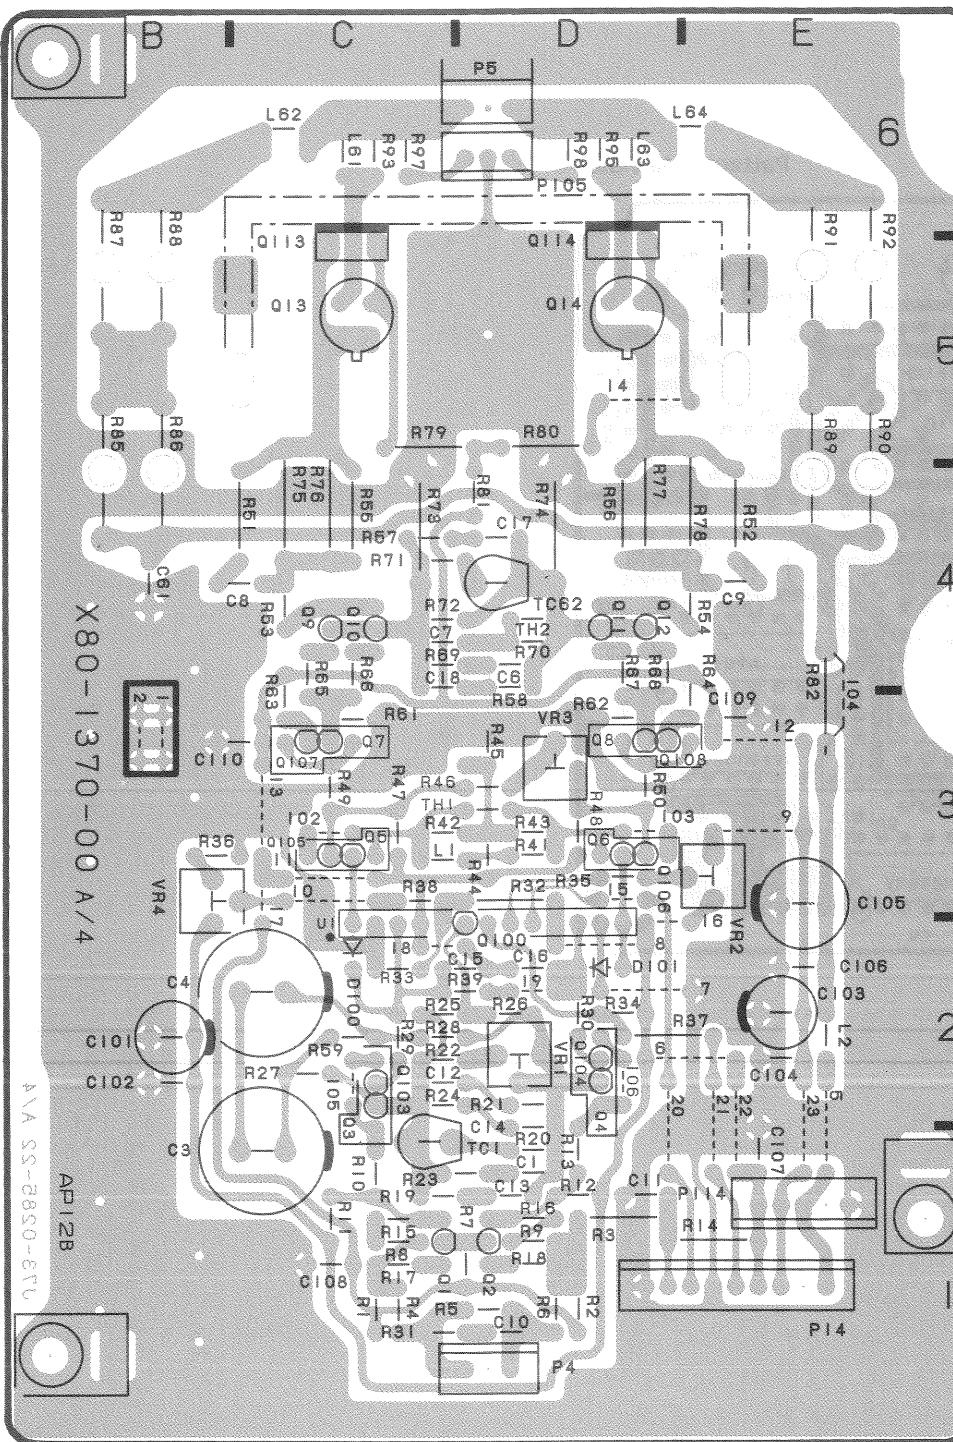

SEMICONDUCTORS

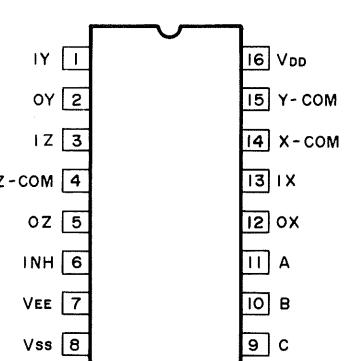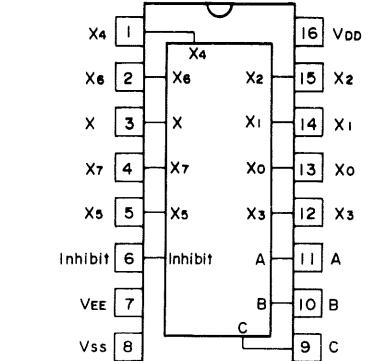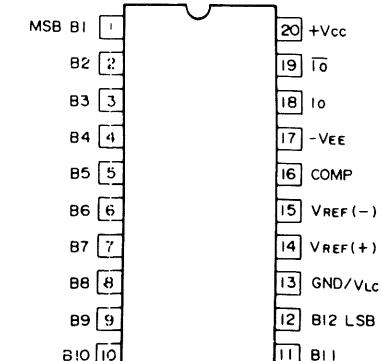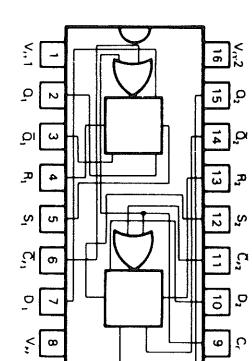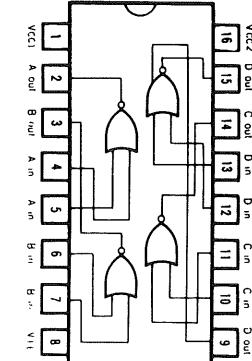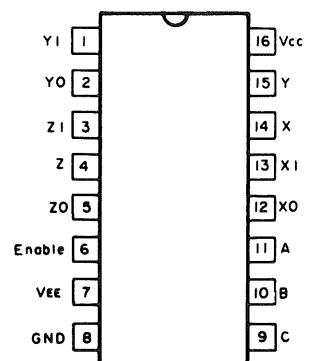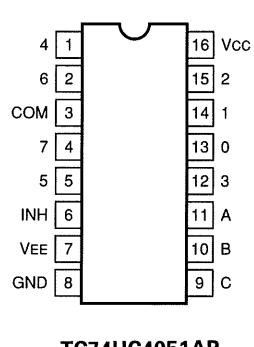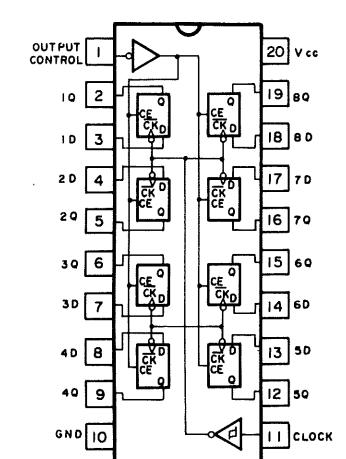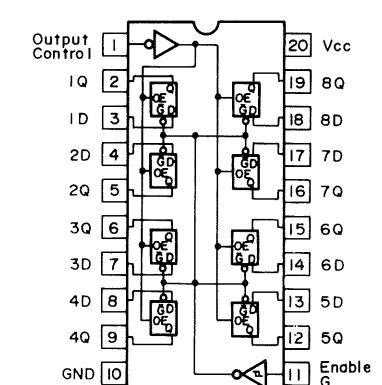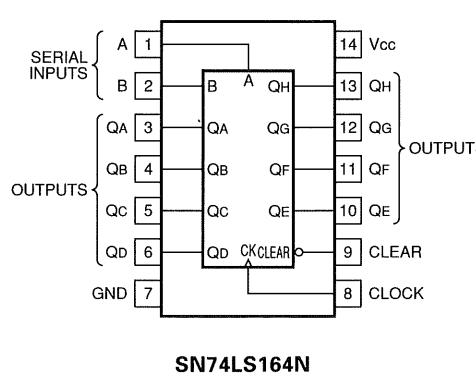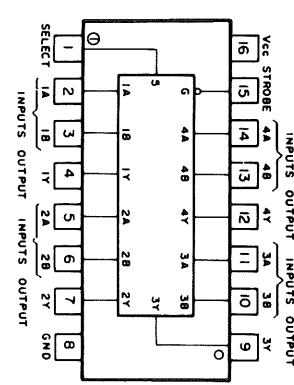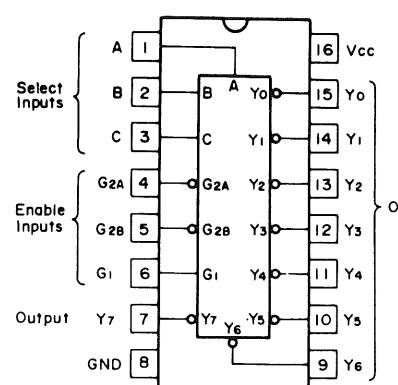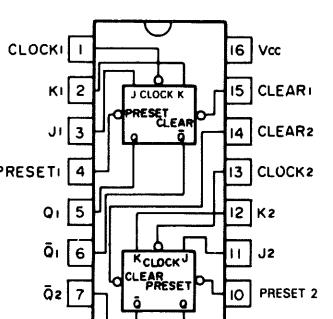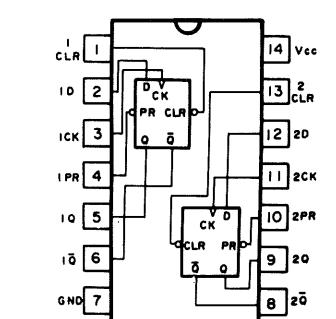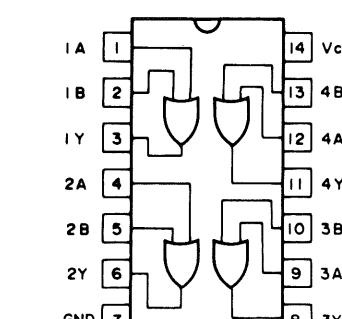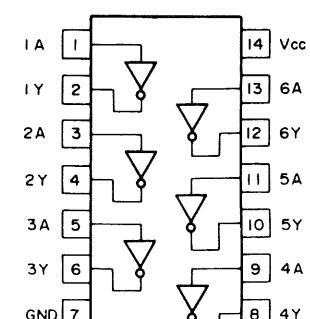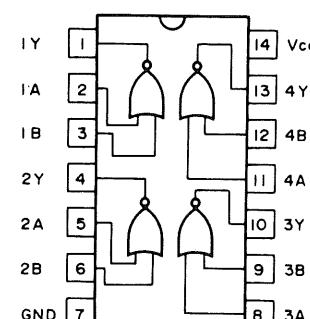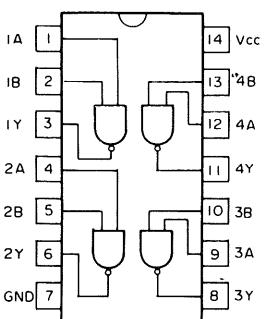


SEMICONDUCTORS



NJM072BD



NJM072D

NJM4558D

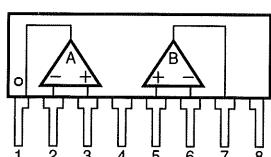


NJM072L


NJM4558L




NJM311D

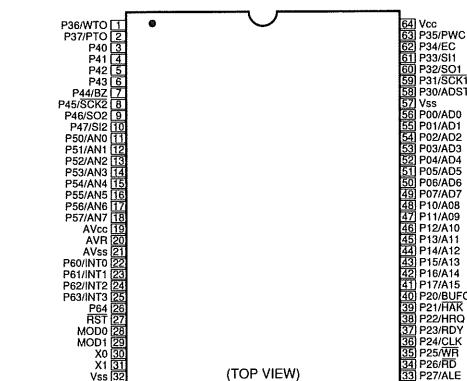


CTM5280

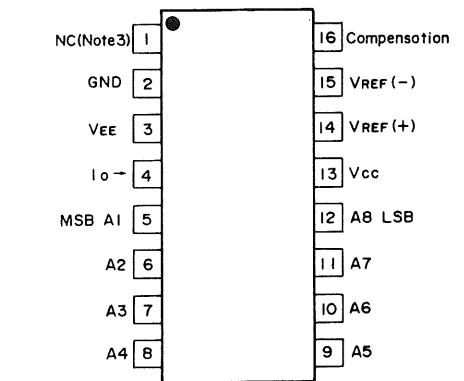


DAC0808LCN

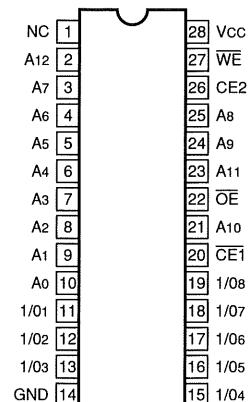


LC3664ASL-10

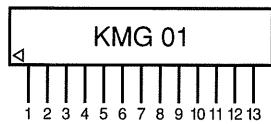


1. MIX signal output A
2. GND
3. Signal input A
4. + power supply
5. Bias setting
6. External control
7. R/O character signal input
8. R/O character position input
9. R/O switching signal
10. - power
11. Signal input B
12. GND
13. MIX signal output B

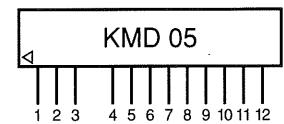


1. Sweep gate input
2. Sweep range input A
3. Sweep range input B
4. Sweep reference voltage input
5. Sweep range input C
6. Offset input
7. - power
8. GND
9. + power
10. External capacitor connection
11. External FET connection
12. Sweep signal output




1. Analog signal input
2. + power
3. GND
4. Digital signal output A
5. Digital signal output B
6. Digital signal output C
7. Digital signal output D
8. Digital signal output E



1. Signal input
2. Compensation
3. FET (source) connection
4. GND
5. + power
6. FET (drain) connection
7. - power
8. Signal output

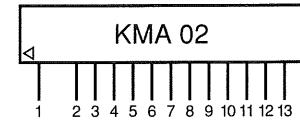


1. +140 V output
2. +140 V control
3. +55 V control
4. +55 V output
5. +12 V control
6. +12 V output
7. -12 V control
8. -12 V output
9. +5 V control
10. +5 V output
11. Sweep time reference voltage output
12. External capacitor connection
13. GND

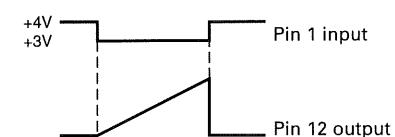


Analog signal input [V]	Output				
	A	B	C	D	E
0.25 ~ 0.45	L	H	H	H	H
0.95 ~ 1.15	H	L	H	H	H
1.65 ~ 1.85	H	H	L	H	H
2.35 ~ 2.55	H	H	H	L	H
3.05 ~ 3.25	H	H	H	H	L

L : 1.0 [V] max
H : 4.5 [V] min


SEMICONDUCTORS




PST518B




2SA720 (R)
2SA1005 (K)
2SA1208 (S)
2SC1318A (R)
2SC1907
2SC1923 (O)
2SC2551 (O)
2SC2910 (S)

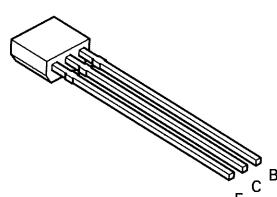

2SA933S
2SC1740S (R,S)




2SA1161
2SC2644
2SC3779 (D)




2SA1304




2SA1459 (K)




2SA1499 (P)




2SA1828 (E)
2SC4732 (E)




2SC1252




2SC3066 (G)




2SC3952 (D)




2SD613 (E)





2SK170 (V)

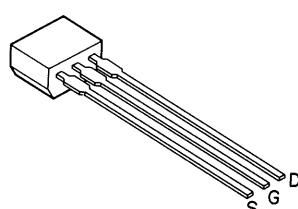

2SK404 (E)



S1VB60



S4VB20F

A product of
KENWOOD CORPORATION
14-6, Dogenzaka 1-chome, Shibuya-ku, Tokyo 150, Japan