


150MHz READOUT OSCILLOSCOPE
CS-6020

SERVICE MANUAL

KENWOOD CORPORATION

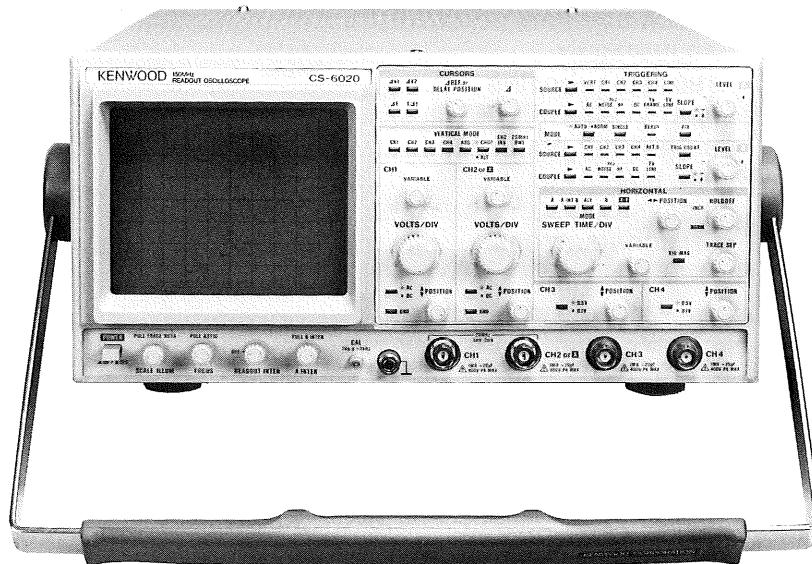

WARNING

1. The following instructions are for use by qualified personnel only. To avoid electric shock, do not perform any servicing other than contained in the operating instructions unless you are qualified to do so.
2. High voltage up to 12000 volts DC is present when the oscilloscope is operating. Line voltage (100 to 240 VAC) is present on the power transformer, on-off switch, fuse holder, and line voltage selector, any time the oscilloscope is connected to an AC power source, even if turned off. Always observe caution whether the AC plug is removed from the AC power source. Contacting exposed high voltage could result in fatal electric shock.

CONTENTS

SPECIFICATIONS	3
SAFETY	6
CIRCUIT DESCRIPTION	7
BLOCK DIAGRAM	13
ADJUSTMENT	14
TROUBLESHOOTING	27
PARTS LIST.....	59
SCHEMATIC DIAGRAM.....	77
P.C. BOARD	84
DISASSEMBLY	96
SEMICONDUCTORS	97

SPECIFICATIONS

CRT		150 mm rectangular with internal graticule
Acceleration Voltage		20 kV
Display Area		8 × 10 div (1 div = 10 mm)
VERTICAL AXIS (CH1 and CH2)		
Sensitivity		5 mV/div to 5 V/div ± 2% (10 °C to 35 °C) 1 mV/div to 2 V/div ± 4% (10 °C to 35 °C)
Attenuator		12 steps, 1 mV/div to 5 V/div in 1-2-5 sequence Vernier control for fully adjustable sensitivity between steps
Input Impedance		1 MΩ ± 1%, 20 pF ± 3 pF
Frequency Response		
5 mV/div to 5 V/div	DC; DC to 150 MHz, within –3 dB AC; 5 Hz to 150 MHz, within –3 dB	
	DC; DC to 20 MHz, within –3 dB AC; 5 Hz to 20 MHz, within –3 dB	
Rise Time		2.3 ns or less (5 mV/div to 5 V/div) 17.5 ns or less (1 mV/div, 2 mV/div)
Signal Delay Time		More than 10 ns on the CRT screen
Crosstalk		–40 dB or less (at 1 kHz)
Operating Modes	CH1	CH1 single trace display, and dual to quad trace display in combination with other channel (s)
	CH2	CH2 single trace display, and dual to quad trace display in combination with other channel (s)
	CH3	CH3 single trace display, and dual to quad trace display in combination with other channel (s)
	CH4	CH4 single trace display, and dual to quad trace display in combination with other channel (s)
	ADD	CH1 + (± CH2) added display, and dual to quad trace display in combination with other channel (s)
	ALT	Dual to quad trace alternating
	CHOP	Dual to quad trace chopped
Channel Polarity		Normal or inverted, channel 2 only inverted
Bandwidth Limiting		Approx. 20 MHz
Chop Frequency		Approx. 500 kHz
Delay Time Difference		CH1 to CH2 ; 0.5 ns or less CH1, CH2 to CH3, CH4 ; 1 nsec or less
Non-distorted Maximum Amplitude		More than 8 div (DC to 150 MHz)
⚠ Maximum Input Voltage		800 Vp-p or 400 V (DC + AC peak)
VERTICAL AXIS (CH3 and CH4)		
Sensitivity		0.1 V/div, 0.5 V/div, ± 2% (10 °C to 35 °C)
Input Impedance		1 MΩ ± 1%, 20 pF ± 3 pF
Coupling Method		DC coupling
Frequency Response		DC to 150 MHz, within –3 dB
Rise Time		2.3 ns or less (at 150 MHz)
⚠ Maximum Input Voltage		800 Vp-p or 400 V (DC + AC peak)
HORIZONTAL AXIS (Input thru CH2)		
Operating Modes		With HORIZ. MODE switch, X-Y operation is selectable CH1 to CH4 and ADD ; Y axis CH2 ; X axis
Sensitivity		Same as vertical axis (CH2)
Input Impedance		Same as vertical axis (CH2)
Frequency Response	DC	DC to 2 MHz, within –3 dB
	AC	5 Hz to 2 MHz, within –3 dB
X-Y Phase Difference		3° or less at 100 kHz
⚠ Maximum Input Voltage		Same as vertical axis (CH2)

SPECIFICATIONS

SWEEP			
Type	A	A sweep	
	A INT B	B sweep waveform is displayed as an intensified portion of the A sweep.	
	ALT	A sweep (intensified for duration of B sweep) and B sweep (delayed sweep) alternating	
	B	B sweep	
	X-Y	X-Y oscilloscope	
Sweep Time	A	20 ns/div to 0.5 s/div, ± 2% (10 °C to 35 °C), in 23 ranges, in 1-2-5 sequence Vernier control provides fully adjustable sweep time all ranges.	
	B	20 ns/div to 5 ms/div, ± 2% (10 °C to 35 °C), in 17 ranges, in 1-2-5 sequence Vernier control provides fully adjustable sweep time all ranges.	
Sweep Magnification		× 10 (ten times) ± 5% (A and B)	
Linearity		20 ns/div to 0.5 s/div : ± 3% (± 5%, at × 10 MAG)	
Holdoff		Continuously variable for A sweep from NORM to more than five times	
Trace Separation		B sweep can be separated from A sweep up to 4 divisions downward, continuously adjustable.	
Delay Method		Continuous delay, Trigger delay and Trigger count	
Delay Time		Continuous delay, Trigger delay ; 0.2 to 10 times of A SWEEP TIME/DIV set value (5,000 count fullscale)	
Trigger Count		1 to 1,000 count, Max. usable frequency; 10 MHz	
Delay Accuracy		±(2% of set value + 1% of fullscale) +(0 to 100 ns)	
Delay Jitter		1/20,000 (A sweep: at 1 ms/div, B sweep: at 1 μs/div)	
TRIGGERING			
A Trigger Modes		AUTO, NORM, SINGLE, FIX	
A Trigger Source	V. MODE	Triggered by input signal selected with VERTICAL MODE selector	
	CH1	Triggered by CH1 vertical axis input signal	
	CH2	Triggered by CH2 vertical axis input signal	
	CH3	Triggered by CH3 vertical axis input signal	
	CH4	Triggered by CH4 vertical axis input signal	
	LINE	Triggered by line frequency	
A Trigger Coupling		AC, NOISEREJ, HFREJ, DC, TV FRAME, TV LINE	
A Trigger Level		± 90 ° adjustable	
A Trigger Polarity		+/-	
B Trigger Modes		Starts After Delay, B Triggerable After Delay and TRIG COUNT	
B Trigger Source	CH1	Triggered by CH1 vertical axis input signal	
	CH2	Triggered by CH2 vertical axis input signal	
	CH3	Triggered by CH3 vertical axis input signal	
	CH4	Triggered by CH4 vertical axis input signal	
B Trigger Coupling		AC, NOISEREJ, HFREJ, DC, TV LINE	
B Trigger Level		± 90 ° adjustable	
B Trigger Polarity		+/-	
Trigger Sensitivity	COUPLING	FREQUENCY RANGE	MINIMUM SYNC AMPLITUDE
	DC	DC to 50 MHz/DC to 150 MHz	1 div/1.5 div
	AC	20 Hz to 50 MHz/20 Hz to 150 MHz	1 div/1.5 div
	NOISEREJ	Two times of minimum sync amplitude.	
	HFREJ	Increased minimum sync amplitude for above 30 kHz.	
	TV FRAME	1 div (140 IRE)	
	TV LINE	1 div (140 IRE)	
AUTO: Same as above specification for above 50 Hz		FIX: Same as above specification for above 40 Hz.	

SPECIFICATIONS

Jitter	0.5 ns or less at 150 MHz at 2 ns/div sweep rate ($\times 10$ MAG on)
INTENSITY MODULATION	
Input signal	TTL level (more than 2 Vp-p), positive voltage decreases brightness
Input Impedance	Approx. 10 k Ω
Usable Frequency Range	DC to 10 MHz
⚠ Maximum Input Voltage	50 V (DC+AC peak)
VERTICAL AXIS OUTPUT (CH1 only)	
Output voltage	Approx. 50 mVp-p/div (into 50 Ω load)
Output Impedance	Approx. 50 Ω
Frequency Response	100 Hz to 150 MHz, within -3 dB (at into 50 Ω)
TRACE ROTATION	
CALIBRATION VOLTAGE	
READOUT	
Calendar	Year/Month/Day/O'clock/Minute Clock accuracy: ± 2 min./month Battery life: About 30,000 hours (at room temperature)
Set Value	CH1—CH4 scale factor (with probe detection), GND, AC/DC, V-UNCAL, ADD, INVERT, BW, A and B sweep scale factor (magnification conversion), SWEEP VARIABLE UNCAL, X-Y (CH2-X), DELAY TIME, TRIG. COUNT
Cursor Mode	$\Delta V1$ Voltage difference between Δ REF and Δ cursors on a CH1 scale factor basis
	$\Delta V2$ Voltage difference between Δ REF and Δ cursors on a CH2 scale factor basis
	ΔT Time difference between Δ REF and Δ cursors on the basis of sweep scale factor
	$1/\Delta T$ Frequency between Δ REF and Δ cursors on the basis of sweep scale factor
	RATIO: Voltage ratio and time ratio between Δ REF and Δ cursors, supposing 5-division on the CRT as 100%
	PHASE: Phase difference between Δ REF and Δ cursors, supposing 5-division on the CRT as 360°
Cursor Meas-urement	Resolution 10 bits
	Measurement accuracy $\pm 3\%$
	Measurement range Vertical direction: ± 3.6 div or more from the CRT center Horizontal direction: ± 4.6 div or more from the CRT center
POWER REQUIREMENT	
Line Voltage	100 V/120 V/220 V/240 V AC $\pm 10\%$
Line Frequency	50/60 Hz
Power Consumption	Maximum 75 W
DIMENSIONS (W×H×D)	310 (332) × 150 (163) × 400 (448) mm () dimensions include protrusion from basic outline dimensions
WEIGHT	Approx. 9.6 kg
ENVIRONMENTAL	
Within Specifications	10°C to 35°C, 85% max. relative humidity
Full Operation	0°C to 40°C, 85% max. relative humidity
ACCESSORIES SUPPLIED	
Probe	PC-31 (READOUT compatible probe) × 2 Attenuation.....1/10 Input impedance.....10 M Ω $\pm 1\%$, 14 pF $\pm 10\%$
Replacement Fuse	1.2 A \times 2, 0.8 A \times 2
Instruction Manual	1

* Circuit and rating are subject to change without notice due to developments in technology.

SAFETY

SAFETY

Before connecting the instrument to a power source, carefully read the following information, then verify that the proper power cord is used and the proper line fuse is installed for power source. The specified voltage is shown at the fuse holder of the AC inlet. If the power cord is not applied for specified voltage, there is always a certain amount of danger from electric shock.

Line voltage

This instrument operates using ac-power input voltages that 100/120/220/240 V at frequencies from 50 Hz to 60 Hz.

Power cord

The ground wire of the 3-wire ac power plug places the chassis and housing of the oscilloscope at earth ground. Do not attempt to defeat the ground wire connection or float the oscilloscope; to do so may pose a great safety hazard. The appropriate power cord is supplied by an option that is specified when the instrument is ordered.

The optional power cords are shown as follows in Fig. 1.



Plug configuration	Power cord and plug type	Factory installed instrument fuse	Line cord plug fuse	Parts No. for power cord and plate
	North American 120 volt/60 Hz Rated 15 amp (12 amp max; NEC)	1.2 A, 250 V Fast blow 6×30 mm	None	Cord: E30-1820-05
	Universal Europe 220 volt/50 Hz Rated 16 amp	North Europe 0.8 A, 250 V Slow blow 5×20 mm	None	Cord: E30-1819-05
		Other Europe 0.8 A, 250 V Fast blow 6×30 mm		
	U.K. 240 volt/50 Hz Rated 13 amp	0.8 A, 250 V Fast blow 6×30 mm	0.8 A Type C	—
	Australian 240 volt/50 Hz Rated 10 amp	0.8 A, 250 V Fast blow 6×30 mm	None	Cord: E30-1821-05
	North American 240 volt/60 Hz Rated 15 amp (12 amp max; NEC)	0.8 A, 250 V Fast blow 6×30 mm	None	—
	Switzerland 240 volt/50 Hz Rated 10 amp	0.8 A, 250 V Fast blow 6×30 mm	None	—

Fig. 1 Power Input Voltage Configuration

CIRCUIT DESCRIPTION

Vertical Attenuator Circuit (X75-1180-00)

The attenuators for channel 1 and channel 2 are operated by the signals from the panel, and AC/DC/GND input coupling and attenuation of 1/1, 1/10, and 1/100 are switched.

The vertical input signal from the BNC input terminal passes through the attenuator and is input to the buffer amp formed by U101 and Q101 (CH2: U201 and Q201). U101 is a source follower and constant current supply and Q101 is for input protection. The input signal is impedance converted by these components and is input to the 1st amp formed by U102 and Q102 (CH2: U202, Q202). A differential signal is created here, and the 1st amp for channel 2 contains an INV circuit which switches the inversion transistor ON/OFF using the data from the R/O unit.

U1 and U2 produce a voltage signal from the serial data from the R/O unit, and this serial data is converted to a 0/5 V parallel signal. Although inversion is not possible on the channel 1 side, the same circuit as the channel 2 circuit is used for circuit stability, and the bias of the inversion transistor is fixed at the off state. The channels 1 and 2 input signals are input to the vertical preamp unit after passing through the 1st amp.

The channels 3 and 4 input signals are input to the 1/1 or 1/5 attenuator as selected by the K301 (CH4 : K401) relay. The signal is then input to the buffer amp formed by Q301 and 302 (CH4: Q401, 402). Q301 is a source follower, Q302 is a constant current supply, and Q303 is for input protection. The signal is impedance converted by this amp. The signal is then input to the 1st amp formed by Q304 and 305 (CH4: Q404, 405). This amplifier produces a differential signal. The channel 3 and channel 4 signals are input to the vertical preamp unit after passing through the 1st amp.

Switch Unit (X69-1150-00)

* Switch Matrix

All of the contact switches on the panel form a switch matrix. Pins 1, 2, 3, 4, and 15 of U9 are all low when a contact switch is not pressed, and the output (D0 to D7) is at +5 V.

When a switch is pressed, the output of the switch (one of D0 through D7) goes to low due to Pin 15, 1, 2, 3, or 4 of U9 going to low. The output from D0 through D7 is connected to the R/O unit, and when any of these outputs goes to low, an interrupt is applied to the CPU and serial data is sent to U9. U9 which receives data from the R/O unit, first switches all of Pins 15, 1, 2, 3, and 4 to high and

then switches each pin to low. The resulting voltage from the output (D0 to D7) is used to determine which switch was pressed.

* Panel LED

The corresponding LEDs on the panel are illuminated when Pins 15 and 1 through 7 of U2 through U8 go from high to low. Serial data from the R/O unit is sent to U2 through U8, and the LED to be illuminated is selected according to that signal.

* Rotary Encoder

Rotary encoders are used for the VOLTS/DIV and SWEEP TIME controls for channel 1 and channel 2. The data from these encoders is received by the R/O unit. Refer to the section on the R/O unit regarding operation.

Panel Unit (X66-1050-00)


* VR (VR1 to 10), Uncal Search

Variable resistors (VR) are used for setting the position, V-variable, trig level, hold off, and T-sep for each channel. Both terminals of each of the VRs are connected to +/− 10 V, +10 V-GND, or +5 V and GND, and the set voltage is sent to the various units.

The collector of Q1, 2 (CH1) or Q3, 4 (CH2) goes from 0 V to approximately +5 V when V-VARIABLE is set to the UN-CAL state, voltage is supplied to the R/O unit, and the UN-CAL mark (●) appears on the screen.

* Comparator, Endless VR

Endless VRs are used in four locations: horizontal variable, horizontal position, Δ, and Δ REF. As shown in Fig. 1, two resistance elements are used alternately for this operation. The output voltage is received by the R/O unit. U1a supplies stable voltage to each terminal of the endless VRs.

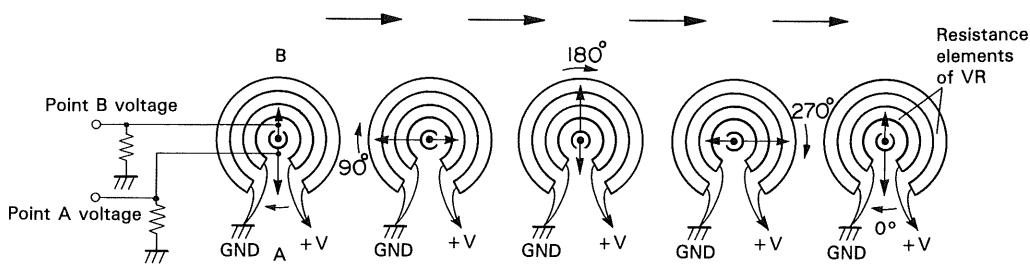

CIRCUIT DESCRIPTION

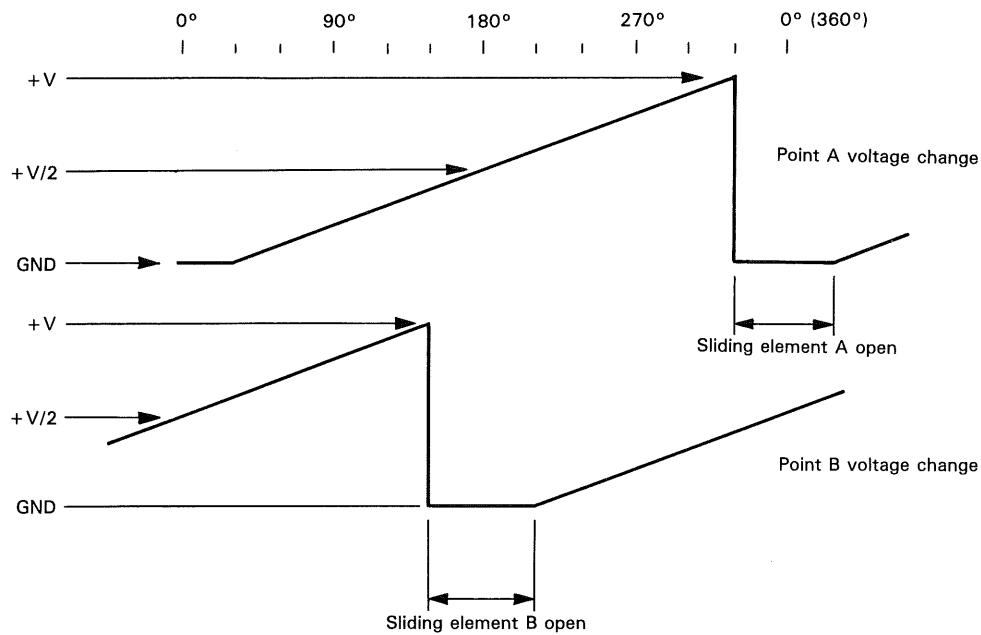


Fig. 1 Endless VR Operation

High Voltage Unit (X68-1510-00)

* Blanking Circuit

This is a circuit for amplifying the blanking signal from the horizontal unit. The signal input from P19 passes through the Q8 emitter follower, and is input to Q6 for amplification. Q5 is a constant current supply for Q6 and Q7 is a transistor for absorbing current. Negative feedback is applied to this by R26, and the degree of amplification is determined by R26 and R358 of the horizontal unit. The blanking signal amplified to high voltage is then applied to G1 of the CRT from the high voltage oscillation circuit (described below) using D8 through D10. The G1 potential from K (cathode) is set a low level, and the brightness decreases as this level decreases.

The voltage of the blanking signal of the horizontal unit is altered according to the INT VR of the VR unit, altering the brightness which results.

The output from Q6, ie., the amplified blanking signal, is input to Q4. The brightness is altered by the auto-focus so that the focus point is not lost.

Q3 is a constant current supply for Q4. The signal is then overlapped with the high voltage level using D4 through 7, in the same manner, and the resulting signal is applied to the P1 terminal of the CRT after the potential is controlled by VR23 of the VR unit.

* High Voltage Oscillation Circuit

Oscillation at 30 kHz is invoked by Q1, and becomes high voltage by the high voltage block. U1 and Q2 provide negative feedback for control.

Power Supply Unit (X68-1500-00)

The power supply circuits is comprised of six regulated output systems ($+5$, $+/-10$, $+15$, $+60$, and $+140$ V) and two unregulated systems ($+/-13$ V).

The regulated outputs are all with reference to -10 V. This -10 V output uses a 5 V Zener diode (D5) as reference, and is obtained by the drive transistor (Q6) and op amp U3. Other regulated output is obtained using op amps (U1, 2, and 3) and transistors (Q1, 3, 5, 6, 7, and 8), with this -10 V output as reference.

The unregulated output of $+/-13$ V uses the voltage before regulation to obtain regulated output of $+/-10$ V.

VR Unit (X81-2330-00)

* Calibration Voltage Generation Circuit

Op amp U1 is used as an oscillator, and the DC voltage is switched using D1 to generate a 1kHz square wave.

* Scale Illumination Circuit

This circuit drives an illumination lamp with the Q6 emitter follower as an output stage. D4 and 5 are used for switching to provide one-shot illumination.

* Trace Rotation Circuit

This circuit drives a coil for rotation by the Q2 and 3 emitter followers.

* Intensity Circuit

This circuit has three 20KB VRs, A SWEEP, B SWEEP, and R/O, both ends are connected to $+/-10$ V, and the set voltage is sent to the horizontal unit to create a blanking signal. The R/O VR is equipped with an ON/OFF switch.

CIRCUIT DESCRIPTION

Final Unit (X80-1100-00)

* Vertical Amplification System — Vertical Final Preamp to Vertical R/O Switching to Vertical Final Amp

The signal output from the vertical preamp unit and which passed through the delay line, is input to the vertical amplification system of the final unit. The signal first passes through the Q1 and Q2 emitter followers, and is input to Q3 and Q4 for amplification. Q203 and 204 alternately select Q3 and Q4 which amplify the waveform for output of characters on the CRT screen by the R/O function and Q201 and Q202 which amplify the character information sent from the R/O unit. When the ROREQ signal from the R/O unit is high, Q204 is switched ON, Q3 and 4 are switched ON, Q203 is switched OFF, and Q201 and 202 are switched OFF. The signal is amplified and the character information is not input. When the ROREQ signal is low, the opposite occurs, and the character information is amplified without signal input. The signal then enters the Q5 and 6 base grounded amp, is impedance converted by the Q7 and 8 emitter follower, is input to the final amp formed by Q9, 10, 13, 11, 12, and 14, and is input to the deflection plate of the CRT.

* Horizontal Amplification System — Horizontal Final Preamp to Horizontal R/O Switching to Horizontal Final Amp

The signal sent from the horizontal unit is input to the Q101, 102 base grounded amp, and is amplified by Q103, 104 after passing through D101, 102, 105 and 106 for excessive input limiting. In the same manner as the vertical system, Q208, 209 switches between the amp for signal formed by Q103, 104 and the amp for characters formed by Q206, 207.

Following this, the signal is input to the Q105, 106 base grounded amp, is impedance converted by the Q107, 108 emitter follower, is amplified by Q109, 110, is impedance converted by the Q112, 113 emitter follower, and is input to the Q114, 115 amp. Q116, 117 form a constant current supply to supply a fixed current level to Q114, 115. Negative feedback is applied to the output by R114, 145, 153, and 154, and the degree of amplification is determined by R144, 145, 153, 154 and R152, 133. This configuration provides stability and allows for amplification with high amplitude.

Vertical Preamp Unit (X73-1760-00)

The channel 1 and channel 2 signals output from the ATT unit enter the vertical preamp unit and are first input to the buffer amp formed by Q101 (CH2: Q201). The signals are then input to the X5 and X1 amps. The X5 amp is formed by Q102 (CH2: Q202) and the X1 amp by Q103 and 104 (CH2: Q203, 204). Switching between the amps is by Q105 and 106. When Q105 is ON, Q106 is OFF and the X5 amp is selected. When Q106 is ON, Q105 is OFF and the X1 amp is selected. The signal which passed through Q108, 109 (CH2: Q208, 209) cascode connected to Q102, 103, 104 (CH2: Q202, 203, 204) is input to the 1/1, 1/2, or 1/4 ATT, switched by the K101 (CH2: K201) relay. The signal emerging from the ATT is impedance converted by Q112, 113 (CH2: Q21, 213), and input to Q114, 115 (CH2: Q214, 215). There is a vertical variable circuit formed by R169,

170, D103, 104, 150, 151, 152, 153, 154, and 155 (CH2: R269, 270, D203, 204, 250, 251, 252, 253, 254, and 255) between the cascode connections. This circuit applies the DC signal for variable control sent from the panel by V101 (CH2: V201) to the cathode of the diode to divert the current, altering the diode impedance to vary the gain.

The CH1 and CH2 signals emerging from the cascode amp which forms the 3rd amp are impedance converted by the buffer amp formed by Q119, 120 (CH2: 219, 220), and input to the amp for trig signal output (formed by Q601 to 604), Q528 and 529 cascode connected to Q501 and 502. Between the cascode amps, there is an amp for POSI variation by Q503, Q504 (CH2: Q507, 508) and a CH selection circuit formed by Q1 and 2 (CH2: Q3, 4). Although the trigger signal output amp is a balanced circuit using Q601 and 602 (CH2: 605, 606), only Q601 (CH2: Q605) actually extracts the trigger signal, and this component is cascode connected to Q603 (CH2: Q607). Subsequent explanation on this trigger amp will be given below.

* CH3 and 4 3rd Amp to Select SW

Q301 and 302 (CH4: Q401, 402) are cascode connected to Q304 and 305 (CH4: 404, 405) of the attenuator unit, and there are resistors and capacitors for gain control and frequency response correction between them. The signal emerging from the cascode amp enters the buffer amp formed by Q304, 305 (CH4: Q404, 405), is impedance converted, and input to the 1st trig amp.

The input to the trig amp is approximately 50% of the output from the 3rd amp, and a balance circuit is formed by Q609 and 610 (CH4: Q613, 614) for balancing. However, the signal extracted as the trigger signal is actually only the signal from the Q609 side (CH4: Q613). Subsequent explanation on this trigger amp will be given below.

The signal output from the 3rd amp will be input to the trig amp and V. mode select switch. This is formed by Q509, 510 (CH4: Q513, 514) and Q5, 6 (CH4: Q7, 8). When the V. mode is selected, Q5, 6 (CH4: Q7, 8) are OFF, and the signal passes through D505, 506 (CH4: D507, 508), and is input to the mix amp. When this mode is not selected, Q5, 6 (CH4: Q7, 8) are ON, and the signal is cancelled. This operation is the same for channels 1 and 2. Q511, 512 (CH4: Q515, 516) between Q509, 510 (CH4: Q513, 514) and Q5, 6 (CH4: Q7, 8) form a POSI variable amp which changes the bias of Q512 (CH4: Q516) to vary the position, according to the DC voltage from the panel.

* Mix Amp to 4-ch Amp to T. SEP Amp to 20 MHz BW SW

The signals which passed through the select switches for the various channels and diodes D501 through 508, are input to the mix amp formed by Q528, 529. Q518 is ON when ADD is selected in the V. mode. The impedance of the signal is then converted by the buffer amp formed by Q519, 520, and input to the T. SEP amp formed by Q522 and 523. In this T. SEP amp, the B SWEEP position is altered by input of a control signal to the base of Q523 for switching so that the amp only operates by the B sweep signal.

The impedance of the signal which passed through the T. SEP amp is converted by the buffer amp formed by Q524, 525, and the signal is input to the delay line. A switch for performing 20 MHz BW is formed by Q526, 527, a low-pass

CIRCUIT DESCRIPTION

filter is formed by C509, 510, and the circuit functions as a 20 MHz BW. The signal then passes through a delay line and is input to the final unit.

* 1st Trig Amp — Trig Select — 2nd Trig Amp

The trigger signal extracted by Q601 and 602 (CH1), Q605 and 606 (CH2), Q609 and 610 (CH3), and Q613 and 614 (CH4) is input to the amps formed by Q603 and 604 (CH1), Q607 and 608 (CH2), Q611 and 612 (CH3), and Q615 and 616 (CH4). It is then input to trig select after impedance conversion. At this time, a portion of the channel 1 signal is split to the CH1 out amp formed by Q621 and 622, and a portion of the channel 2 passes through Q620 and becomes the X signal for the X-Y mode.

Trig select is a switch formed by D601, 602, 603, and Q623 to 621. When the various transistors are switched on by the CH select logic signal, the diode connected to the transistor has reverse polarity and goes off. The diode can be switched on by switching the transistor off, and the trigger signal will be output to the amp in the next stage. D601 receives the A trig, D602 receives the B trig, and D603 receives the line trig.

The trigger signal received by trig select is impedance converted by the 2nd trig amp formed by Q617 and 632 (A trig) and Q618 and 633 (B trig), and is then sent to the horizontal unit.

* Control of vertical preamp unit

The following signals are sent from the R/O unit for control of the vertical preamp unit.

- (1) Serial data this signal is sent from the R/O unit together with the clock signal, and input to U1, U2, U3, U4, U5, U6, U7, and U8 for conversion to parallel data.

The following are controlled by this signal:

- X1 and X5 amp switching
- 1/1, 1/2, 1/4 ATT switching
- V-MODE switching
- 20 MHz BW limit
- Trigger signal selection

- (2) Voltage supplied directly from panel voltage between 0 V and 10 V is created by the variable resistors on the panel, and is input as a signal to the vertical preamp unit through the R/O unit.

- POSI variation
- V-VAR

The above are the signals externally input for control.

Horizontal Unit (X74-1480-00)

The trigger signals (ATR, BTR signal) supplied from the vertical preamp unit (X73-760-00) are input to the trig preamps. The A trig preamp is formed from Q1 and Q2, etc., and the B trig preamp is formed from Q14 and Q15, etc. When a TV signal is input, TV coupling is selected to amplify the TV sync signal. The control signal to perform this is output from U29, and the gain of Q1 and Q14 is changed by switching with Q9 to correspond to the TV sync signal. The trigger level is altered after the signal passes through the trig preamp. The trigger level of A-sweep is altered by U21 and the level of B-sweep by U22. The level is switched by the U16 analog switch by panel switch operation, and the FIX signal, TV signal, and A BLVL signal are selected. The

input signal with trigger level altered is input to the trig amp formed by Q5, Q6, Q7 and Q17, Q18, and Q19. When coupling is set to HFREJ by operation of the panel switch, a control signal is output from U29, Q8 or Q20 is switched on, and the high frequency components are attenuated. The signal is input to the Schmitt circuit formed by U1 or U2 after passing through the trig amp. The hysteresis width of the Schmitt circuit is altered by the noise rejection control signal output from U29, allowing stable triggering even for input signals containing noise. The control signal output from U30 determines whether the slope is positive or negative. The signal output from the A-sweep Schmitt circuit is input to the auto freerun circuit formed by Q103 and Q104 to control U39 according to the auto or normal mode. This sets the unit to the sweep mode or trigger standby mode. The signal output from the B-sweep Schmitt circuit is input to U3b and Q127. The signal input to Q127 is converted to the TTL level and input to U8, U9, and U10. U8, U9, and U10 form a trigger counter circuit which is comprised from a counter IC. The signal output from the Schmitt circuit is input as the clock signal to this counter, the counter is incremented until it reaches the trigger counter data set by U30 and U31, and a B-sweep is then triggered. The AS signal output from Q of U3a is input to Q109 of the A-sweep circuit, performing start and stop control of the A-sweep. U24b in the A-sweep circuit takes the analog voltage supplied from the R/O unit and amplifies it to 5 V at range 1, 2.5 V at range 2, and 1 V at range 5. The current is determined by this voltage and the aggregate resistance selected by the U17 analog switch. This determines the sweep time.

The AS signal output from Q of U3a and the BS signal output from Q of U3b are input to the blanking circuit formed by U4, the UNBL signal is generated from ROUBL, ROINT, BINT, AINT, etc., and supplied to the high voltage unit (X68-1510-00).

In the same manner as the A-sweep circuit, U26D in the B-sweep circuit amplifies the analog voltage fed from the R/O unit, and determines the current by the U18 analog switch to determine the sweep time.

The A-sweep signal output from Q116 and the B-sweep signal output from Q134 are input to the mix amp formed by U19, Q302, Q303, Q304, Q306, and Q307. In this circuit, the analog voltage supplied from X10 MAG and the R/O unit are amplified by U27, and H-POSI control is performed. The signals output from this circuit are fed to the final unit (X80-1060-00) as the X+ and X- signals.

Switching between A-sweep and B-sweep is controlled by U7, and this signal is sent to the mix amp and blanking circuit. The switching signal for chopping of A-sweep and B-sweep is generated by the circuit formed by Q403 and Q404. The chop frequency at this time is 500 kHz.

Delayed sweep is performed by comparing the voltage of the A-sweep output from Q116 and the DTP signal supplied from the R/O unit by the delay comparator formed by Q102, U25, etc., and the position to start the B-sweep is determined. The signal to start the B-sweep at this time is input to the logic circuit for B-sweep formed by U13a, b, c, and U6, and the signal to output the BS signal is sent to U3b. In the single sweep mode, the SGL signal supplied from the R/O unit is input to the A-sweep logic circuit formed by

CIRCUIT DESCRIPTION

U11b, U12d, and U5, and the A-sweep trigger standby mode is selected when the RESET signal is input. There is also a 1-shot ILLM circuit which illuminates a lamp for approximately 1 second when the single sweep is completed. This circuit is formed from U12, Q405, Q406, C405, and C406, etc.

Readout unit (X77-1490-00)

The R/O unit contains an 8-bit Z-80A CPU, and has two major functions: control of the operation of the various sections and the output of CRT character information.

The basic clock which forms the basis for the timing of all IC operations is generated by the 10 MHz oscillator formed by U11d and X1. The 10 MHz CLK is used for operation of U33 (R/O controller), and this clock signal is divided to 1/4 by U10 to create the 2.5 MHz CLK. This clock signal is used for operation of the U5 CPU (Z-80A) and as a control signal for sending data and addresses to U33.

Changes in information from the switch unit (X69-1150-00) and the timing, clock, and soft timers for the CRT display are all realized through interrupts which are sent to the CPU. Changes at the switch unit include interrupts issued when a pushbutton switch is pressed and when the rotary encoders used for VOLTS/DIV and SWEEP/DIV are rotated. When a switched is pressed, one of lines D0 through D7 of U24 connected as a data bus for switch information goes to "L". U14e goes to "L" causing Q of U21a to also go to "L", notifying the CPU that a switch position has been changed.

When CRT information is changed by operation of the switches or variable resistors on the panel, the timing for updating the CRT indication is output every 13.5 μ s from U33. The change is latched to U21a, and indicated to the CPU as an interrupt. The CPU recognizes this interrupt and performs processing to update the CRT indication.

U12, U13, U17, and U18 form the import section which outputs the data decoded by U6 and U8 to the data bus. U12 is an import IC for evaluating the probe detection (1/1 to 1/10), battery capacity, and status of the CH1 and CH2 variables. Probe detection and variable status are fetched by the CPU approximately every 15 μ s, and evaluated and processing performed. The B1 battery capacity is monitored by U46a, and when the level drops below approximately 2.4 V, the status (H level) is fetched from the import at POWER ON, and "BATT DOWN" is displayed on the CRT screen. U13 is an import IC for interrupt evaluation, and it determines whether an interrupt such as rotary encoder (CH1, CH2, SWEEP), 2 msec, clock, switch, or CRT indication has been transmitted to the CPU.

U17 receives the A-phase and B-phase status of the rotary encoder, receives and evaluates the movement of the endless VR, and receives and evaluates the single ready state. Reception and evaluation of the endless VR movement is made by having U35 compare the endless VR voltage and D/A convertor (U37) voltage, to determine whether the endless VR has been rotated. U18 is an IC for fetching data from the panel switches, and it receives the state when a switch is pressed.

U6 through U9 are a decoder circuit, and U6 uses PAL. The PAL has a circuit configuration capable of decoding the import and output clocks, ROM, and RAM. U7 through U9 de-

code individual information selected by U9.

U8 outputs the decoded information from import U12, 13, 17, and 18, and the latch CLK (VLC, HLC, ALC, and LLC) for serial transfer.

U19 outputs the latch CLK (SLC) for serial transfer and the shift CLK (ASC, LSC, SSC, HSC, VSC).

U7 outputs the data latch CLK for serial transfers, the interrupt latches (U20, U21, U22, and U23), and the RESET pulse. The data latch CLK is also used as the CLK for latching the data for serial transfers by U16.

A blanking signal is applied during serial transfer to prevent the effects of noise on the waveform. This blanking is output from Pin 21 of U33.

U1 is RAM, and 2 K \times 8 bit memory is used. This SRAM is backed up by B1 when the power is off, and the power is switched by U19 when the power is turned on/off. Switching is performed by the U4 power reset IC, and a reset signal is supplied to U3, U5, and U19 at 4.4V +/- 0.2 V. U2 is a software ROM, and both 16 K and 32 K can be used by switching by R128 and R256.

Although CTM5020 (U33) can be directly connected to 8080-type CPUs, direct connection of address and data is not possible with the Z-80 due to the absence of an ALE terminal. For this reason an ALE signal is generated by the ADD/DATA SELE circuit formed by U27, U28, U23b, U14b and d, U25b, and U29c to allow connection with U33.

The software timer needed for CPU operation is created by U26 as a 2 ms timer. This is latched to U20a every 2 ms to indicate an interrupt to the CPU.

U3 is backed up by lithium battery B1 when the power is off, and the 32.768 kHz basic clock from the crystal oscillator operates. An interrupt signal is output from U3 once every minute, and is latched to U20b. The calender indication on the CRT is advanced one minute by the input of this interrupt.

The U37 D/A convertor creates the voltage output for endless VR comparison, the analog control voltage used by the horizontal unit (X74-1480-00), and the cursor control voltage. The latter control voltage is switched by the U41 analog switch, and is output once every 4 ms by time division. This output control is performed by AX0 through AX3 of U33, and AX3 is a control terminal to prevent the comparison voltage being output to the control voltage when this voltage for endless VR comparison is output from the U37 D/A convertor.

The cursor control voltage (Δ and Δ REF) output from U41 is switched with R/O-Y and R/O-X by the U40 and 43 analog switches, and output to the final amp.

There are analog control voltages used by the horizontal unit: A-vari, B-vari, DTP, and H-posi.

A-vari and B-vari output the reference voltages for sweep A and sweep B, and the voltage determined by the 1-2-5 range is output (during CAL). During UNCAL, the A-vari and B-vari voltage changes and the sweep time changes. At this time, the voltage is changed so that the amount of variation changes at the various ranges so that variation rate corresponds to the rotational speed of the endless VR. The count distribution is 2000 for range 1, 1000 for range 2, and 400 for range 5, and the amount of change per step is altered every 10, 6, and 2 counts respectively. A-vari passes through the U47b buffer amp with the voltage level

CIRCUIT DESCRIPTION

maintained by the hold circuit and B-vari passes through the U47a buffer amp before both are fed to the horizontal unit (X74-1480-00).

The following is a description of the operation of the rotary encoder used for switching volts/div and sweep time.

The rotary encoder has two outputs, and rotation to the right or left is determined by the output resulting from the phase difference.

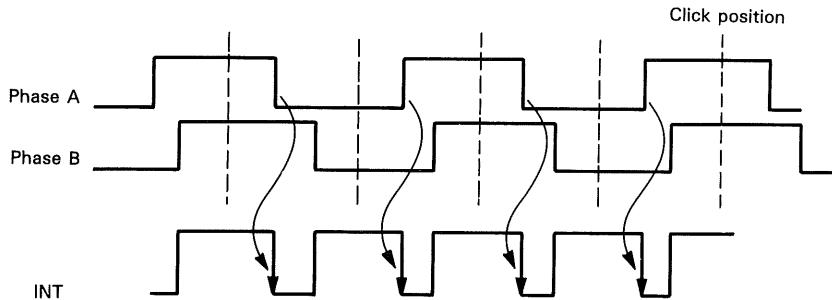


Fig. 2

Figure 2 shows the output waveforms of the rotary encoder, and phases A and B have the output waveforms indicated. In the case of the CH1 VOLTS/DIV rotary encoder, for example, the outputs from phases A and B are input to U29b and U31c respectively. U29 and U31 form a Schmitt circuit, eliminating chattering occurring when the rotary encoder is rotated, and shaping the waveforms to resemble those shown in the above diagram. (This is performed to prevent spurious operation.)

The signal with the waveform shaped is input to U30c, output as the INT signal shown in Figure 2. Q of U22a goes to "L" at the point indicated by the arrow and an interrupt signal is sent to the CPU. When the CPU enters the interrupt state, it immediately evaluates the status of phases A and B, determines the rotation to the right or left by the status of the change, and performs the appropriate processing. (The figure shows rotation to the right.)

U31a and U31b form the Schmitt for the CH2 VOLTS/div rotary encoder, U30d receives the signal after waveform shaping, and U23a receives the INT signal. U31d and U30a form the Schmitt for the CH2 Sweep Time/div rotary encoder, U30b receives the signal after waveform shaping, U22b receives the INT signal.

The DTP adds two analog voltages and is a 5000 count FS. These analog voltages are V-Delay and C-Delay. V-Delay is counted up to 4000 counts with C-Delay as 0 V, and is added by U45b. Following this, V-Delay and C-Delay are decreased one count each until 5000 counts are reached. This is equivalent to doubling the D/A resolution. The added DTP voltage passes through the U46b buffer amp, and is fed to the horizontal unit (X74-1480-00).

The voltage from the endless VRs used for cursor, H-POSI, and H-VARI is received by the U34 analog switch, and the control signal for selecting the endless VR is selected by VX0 to VX2 of U33. The output of the endless VR selected by U34 is input to U35, and compared with the voltage output from D/A convertor U37 by U35. As the U37 D/A convertor is a 12-bit unit and 8 bits are output to the D/A (U33 DAO to DA7), the upper 4 bits are latched by U36 and the

remaining 8 bits are then output. The discrete circuit formed by Q1, Q2, etc., and connected to Pin 17 of U37 is a DC-DC convertor circuit used to supply -11 V to the D/A convertor.

The H-POSI voltage is supplied to the horizontal unit through the hold circuit.

A random can method (X-Y display) is used for character display, and the U32 character generator is controlled by the character counter of the U33 R/O controller and the dot counter.


One cycle for readout indication is divided into four, and consists of lower characters, upper characters, Δ REF cursor, and Δ cursor.

Character data having a basic configuration of 5×7 dots is input to the U32 character generator. The 3 bits from DO0 to DO2 are X-axis data, the four bits DO3 to DO6 are the Y-axis data, and DO7 is the character start/end control signal. The digital signal output from U32 is converted to the analog voltages by the U42 D/A convertor for the X-axis signal and the D/A convertor for the Y-axis signal formed by U39 and R58. These signals pass through analog switches U40 and U43, the U44 buffer amp, and are supplied to the final unit (X80-1100-00) as the R/O-X and R/O-Y character signals.

Character dot display on the CRT is controlled by the ROUB, ROB, and ROQ signals output from Pins 86, 87, and 88 of U33.

The ROB signal erases the real waveform display, the real waveform and readout are switched by the ROQ signal, and dot indication on the readout is performed by the ROUB signal.

BLOCK DIAGRAM

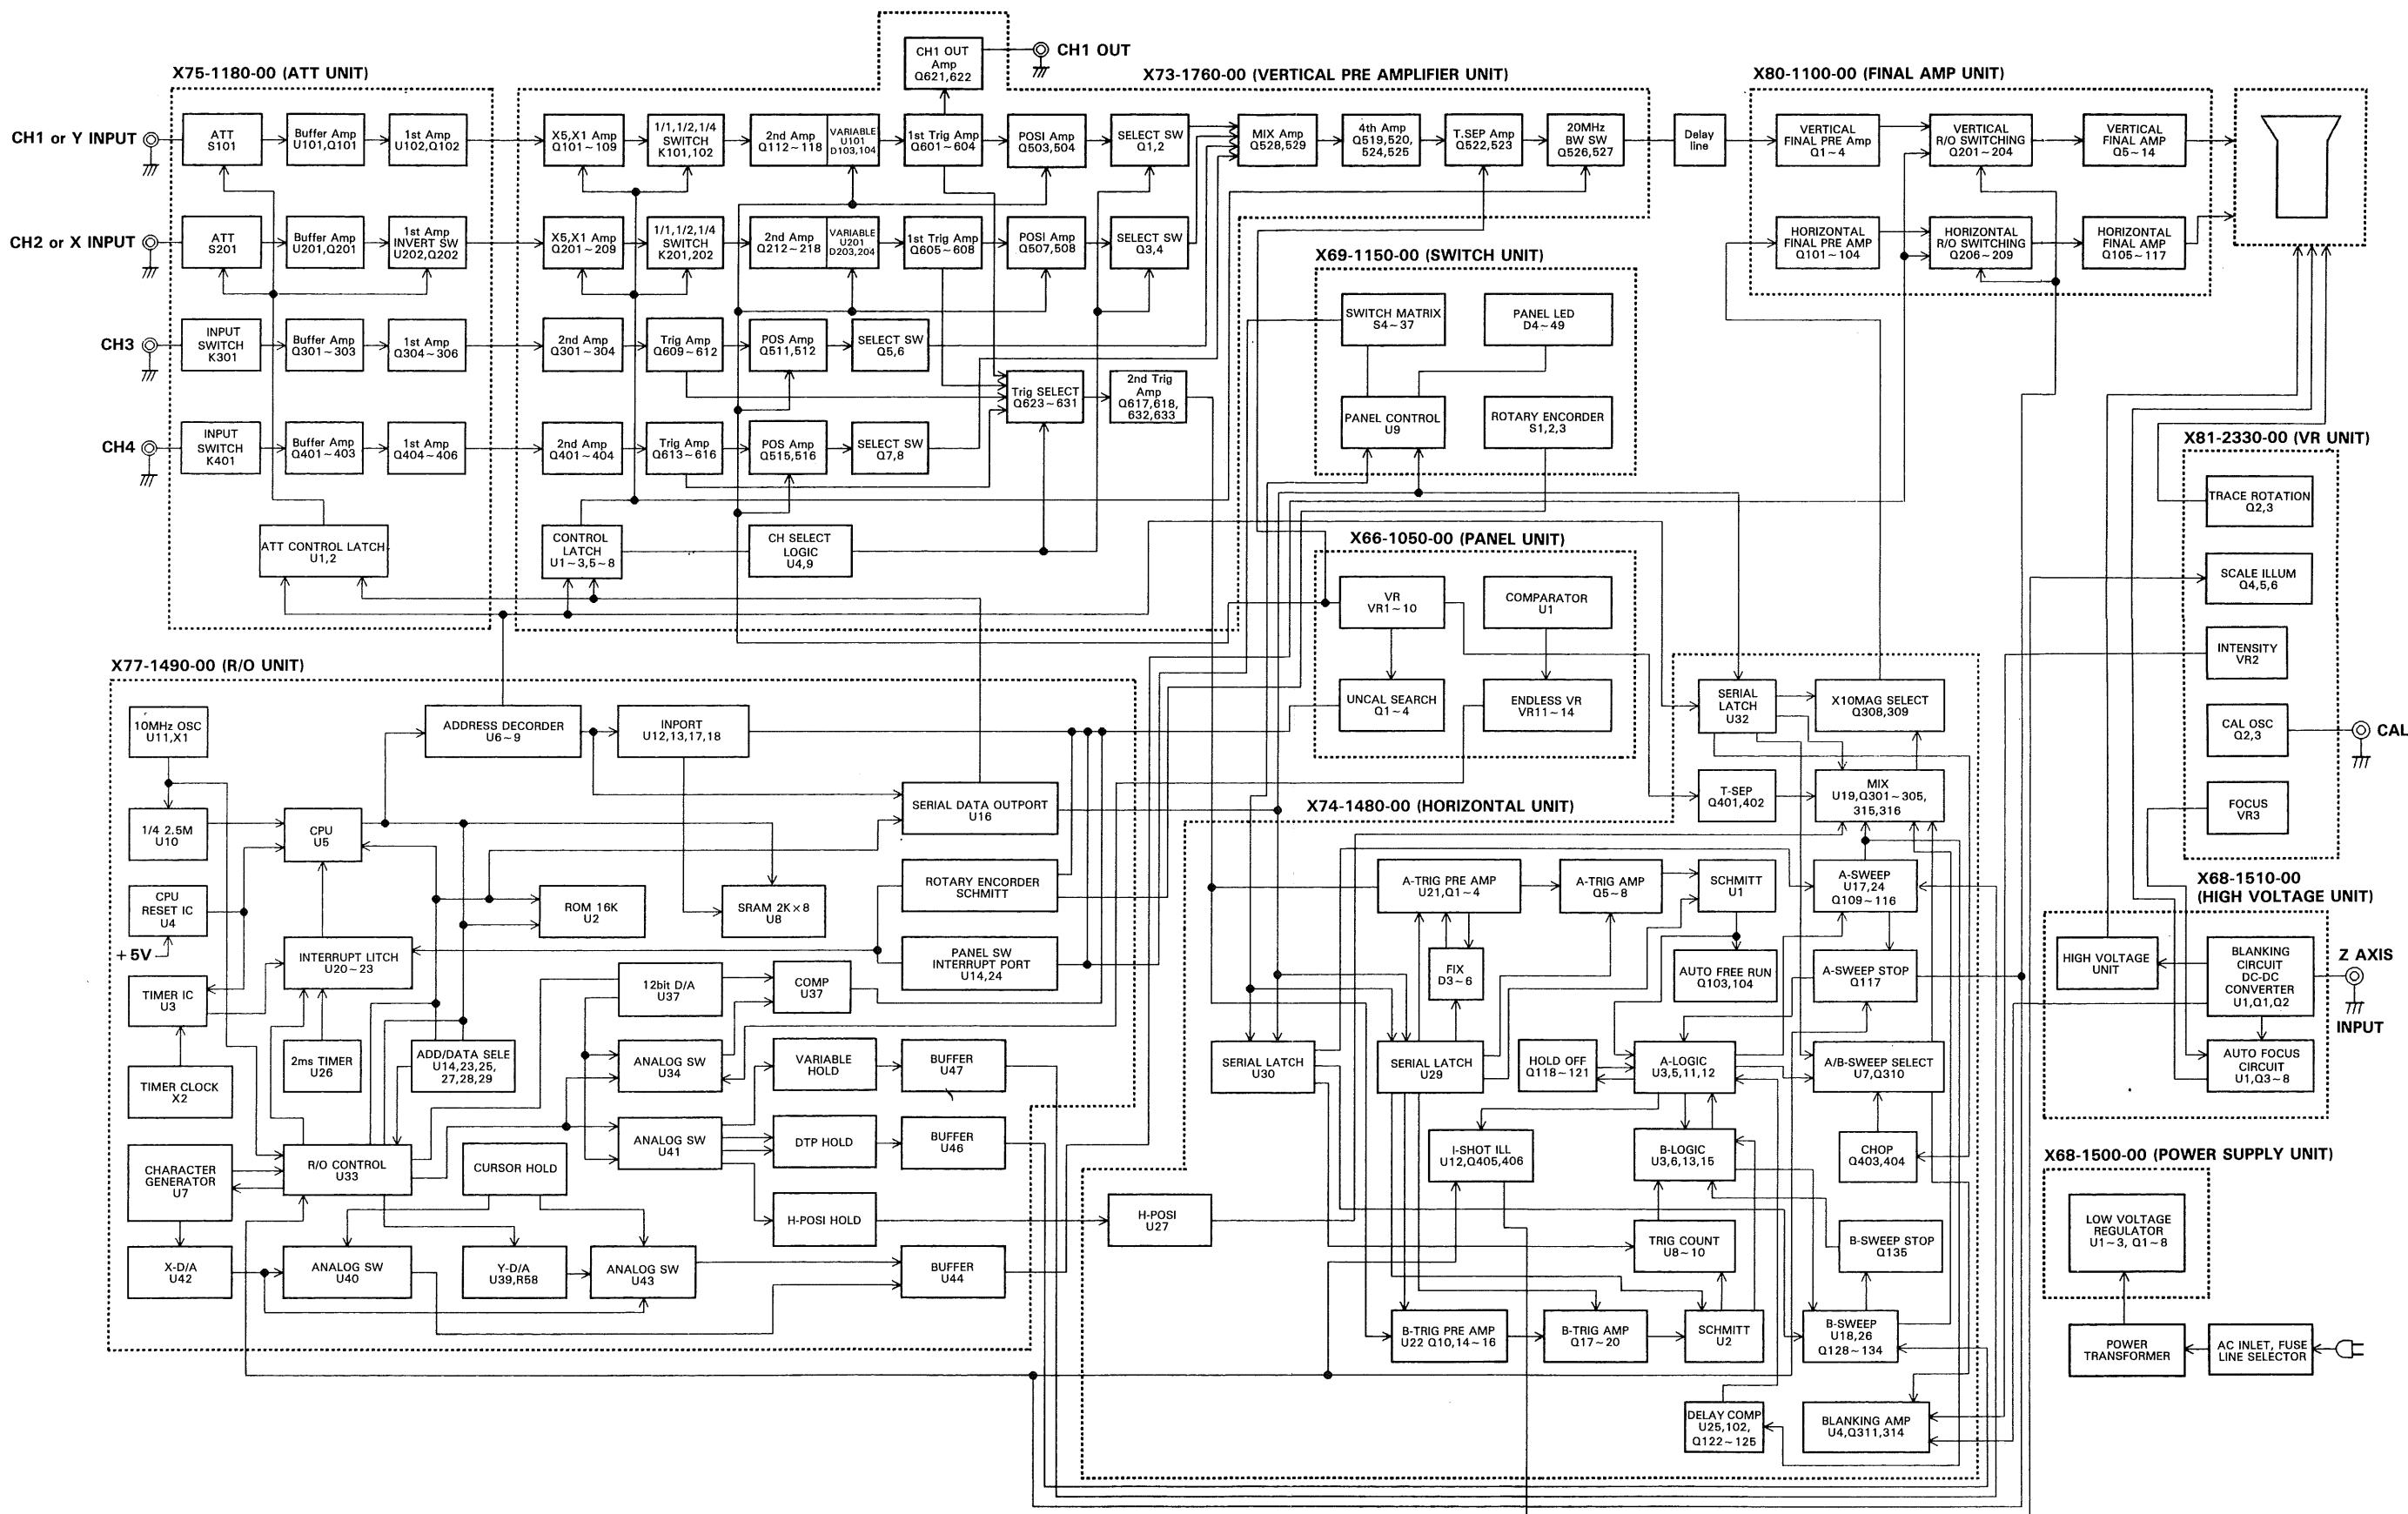

ADJUSTMENT

To obtain the best performance, periodically calibrate the unit. Sometimes, only one mode need be calibrated, while at other times, all modes should be calibrated. When one mode is calibrated, it must be noted that the other modes may be affected. When calibrating all modes, perform the calibration in the specified sequence.

The following calibration required an accurate measuring instrument and an insulated adjusting flat blade screwdriver. If they are not available, contact your dealer. For optimum adjustment, turn the power on and warm up the scope sufficiently (more than 30 minutes) before starting.

Before calibrating the scope, check the power supply voltage.

TEST EQUIPMENT REQUIRED

The following instrument or their equivalent should be used for making adjustment.

Test Equipment	Model	Minimum Specification
Digital Multi-Meter	DL-706 (KENWOOD)	Impedance: More than 10 MΩ, Measuring range: 0.01 V to 199 V
Sine-Wave Generator	651 B (YHP)	Frequency: 10 Hz to 10 MHz, constant voltage over tuning range
Sine-Wave Generator	SG-503 (Tektronix)	Frequency: 50 kHz to 100 MHz, Output impedance: 50 Ω, constant voltage over tuning range
Square-Wave Generator	PG-506 (Tektronix)	Output signal: 1 kHz, Amplitude: 10 mVp-p to 10 Vp-p, Accuracy: within ±1%, Rise time: 35ns or less 100 kHz, Rise time: 1 ns or less
Q Meter	4343B (YHP)	—
Color Pattern Generator	CG-911A (KENWOOD)	—
Oscilloscope	475A (Tektronix)	Sensitivity: more than 5 mV Frequency response: More than 250 MHz
Time-Marker Generator	TG-501 (Tektronix)	Time mark: 0.5 s to 0.1μs repetitive waveform
High-Voltage Probe	—	Input Impedance: 1000 MΩ
Termination	—	Impedance: 50 Ω Accuracy: within 3%
Termination	—	3 watts type impedance: 50 Ω
Attenuator	—	— 20 dB attenuation (50 Ω)

Table 1

PREPARATION FOR ADJUSTMENT

Control Settings

The control settings listed below must be used for each adjustment procedure.

Exceptions to these settings will be noted as they occur. After completing a adjustment, return the controls to the following settings.

NAME OF KNOBS	POSITION
INTEN	12 o'clock, A INTEN
READOUT INTEN	Fully counterwise
FOCUS, ASTIG	Optimum position
CH1, CH2, CH3, CH4 ▲ POSITION	Mechanical center
◀ ▶ POSITION/x10MAG	Mechanical center/push
VARIABLE, H.VARIABLE (VOLTS/DIV, SWEEP TIME/DIV)	CAL
AC-GND-DC (CH1 and CH2)	DC (GND at no signal)
VERTICAL MODE	CH1
TRIGGERING COUPLING	AC
TRIGGERING SOURCE	CH1
TRIGGERING LEVEL	Mechanical center
TRIGGERING MODE	AUTO
VOLTS/DIV (CH1 and CH2)	10 mV/DIV
SWEEP TIME/DIV	1 ms/DIV
HORIZONTAL MODE	A
HOLDOFF	NORM

Table 2

ADJUSTMENT

1. POWER SUPPLY AND CRT SECTION ADJUSTMENTS

Item	Adjustment VR (TC)	P.C.B.	Procedure
- 10 V	VR1	X68-1500	Adjust VR1 so that the voltage at pin 8 of the connector P17 is - 10.00 V.
Intensity	VR1	X68-1510	Display the spot on the CRT screen, and adjust VR1 so that the spot disappears when the INTEN knob is set to the 9 o'clock position.
Focus Center	VR2	X68-1510	Push the FOCUS knob in (for the FOCUS operation) and then set it to the mechanical center position. Pull the knob out (for the ASTIG operation), display a spot on the screen, and adjust the ASTIG control and VR2 to minimize the dimension of the spot.
CRT Center	VR513	X73-1760	VERTICAL MODE: CH1, CH2, ADD Make the luminescent line overlap at each ▲ position. Adjust VR513 so that the luminescent line is moved to the center of the CRT screen.
Vertical Center Voltage	VR3	X80-1100	Turn off R/O. In the state of CRT Center Adjustment, adjust VR3 so that the voltage at pin 1 of the connector P14 becomes 37.5 V.
Horizontal Center Voltage	VR102	X80-1100	Engage the CH1 mode. Activate the X-Y operation mode, and set so that the spot moves to the center of the CRT. Adjust VR102 so that the voltage at pin 1 of the connector P15 becomes 67.5 V.
R/O Vertical Gain	VR4	X80-1100	Set the ΔV VR control to "MIN" and "MAX" (○ ○) in turns. Adjust VR102 so that the separation between these two settings for the cursor is of 8 divisions of the scale.
R/O Vertical Position	VR201	X80-1100	In the state of the R/O Vertical Gain Adjustment, adjust VR201 to meet the following scale values: 0 division — ○ 8 divisions — ○
R/O Horizontal Gain	VR101	X80-1100	Set the ΔT VR control to "MIN" and "MAX" (○ ○) in turns. Adjust VR101 so that the separation between these two settings for the cursor is of 10 divisions of the scale.
R/O Horizontal Position	VR202	X80-1100	In the state of R/O Horizontal Gain Adjustment, adjust VR202 to meet the following scale values: 0 division — ○ 10 divisions — ○


2. VERTICAL SECTION ADJUSTMENTS

Item	Adjustment VR (TC)	P.C.B.	Procedure
CH2 Balance	VR201	X75-1180	Adjust VR201 so that even when the CH2 INV switch is turned ON/OFF repeatedly, the luminescent lines does not move.
CH2 Position	VR101	X75-1180	Short between pin 1 and pin 3 at P5. Set the vertical mode to "CH1", "CH2", then "ADD". Set it to the scale center by "▲ POSITION". Remove the short-circuiting. Adjust VR101 so that the deviated luminescent line comes to the scale center.
CH1 Step ATT Balance	VR103 VR101	X73-1760	Adjust VR103 so that the position of the luminescent line does not change even when the vertical attenuator is selected between 1 and 2 mV range. Switch the range between 2 and 5 mV ranges, and perform the same adjustment using VR101.

ADJUSTMENT

Item	Adjustment VR (TC)	P.C.B.	Procedure
CH2 Step ATT Balance	VR203 VR201	X73-1760	Adjust in the same way as for CH1.
CH1 Position Center	VR503	X73-1760	CH1 POSITION : Mechanical center position CH1 VOLTS/DIV : 0.1 mV Adjust VR503 so that the trace is located on the center of the screen.
CH2 Position Center	VR506	X73-1760	Adjust in the same way as for CH1.
CH3 Position Center	VR509	X73-1760	Adjust in the same way as for CH1.
CH4 Position Center	VR512	X73-1760	Adjust in the same way as for CH1
CH1 Variable Balance	VR104	X73-1760	Adjust VR104 so that the position of the luminescent line does not change even if the VARIABLE knob is rotated. Vary the settings of the VOLTS/DIV and VARIABLE controls and see if the trace position also moves; if it does, adjust VR103, 101 and 104 again.
CH2 Variable Balance	VR204	X73-1760	Adjust in the same way as for CH1.
CH1 Gain	VR501	X73-1760	CH1 VOLTS/DIV: 10 mV Input a square wave signal having an amplitude of 50 mV, and adjust VR501 so that the CRT amplitude becomes 5 div.
CH1 1 mV Range Gain	VR102	X73-1760	CH1 VOLTS/DIV: 1 mV Input a square wave signal having an amplitude of 5 mV, and adjust VR102 so that the CRT amplitude becomes 5 div.
CH2 Gain	VR504	X73-1760	Adjust in the same way as for CH1.
CH2 1 mV Range Gain	VR202	X73-1760	Adjust in the same way as for CH1.
CH3 Gain	VR507	X73-1760	CH3 VOLTS/DIV: 0.1 mV Input a square wave signal having an amplitude of 50 mV, and adjust VR507 so that the CRT amplitude becomes 5 div.
CH4 Gain	VR501	X73-1760	Adjust in the same way as for CH1.
CH1 Waveform Shaping	TC105 TC103	X75-1180	AC-GND-DC: DC Apply 1 kHz square wave to CH1 input (with the amplitude extending over 4 to 6 div). Set CH1 VOLTS/DIV to 0.1 V range (and 1 V range), and adjust TC105 (and TC103) so that the waveform becomes flat in both ranges.
CH1 Input Capacity	TC104 TC102	X75-1180	AC-GND-DC : DC CH1 VOLTS/DIV : 10 mV Connect the capacity meter to the CH1 input, and measure the input capacity in the 10 mV range. Adjust TC104 and TC102, alternately, so that the input capacity in the 0.1 V and the 1 V ranges equals the same capacity as in the 10 mV range.
CH2 Waveform Shaping	TC205 TC203	X75-1180	Adjust in the same way as for CH1.
CH2 Input Capacity	TC204 TC202	X75-1180	Adjust in the same way as for CH1.
CH3 Waveform Shaping	TC302	X75-1180	Apply 1 kHz square wave to CH1 input (with the amplitude extending over 4 to 6 div). Set CH3 volts/div to 0.5 V range, and adjust TC302 so that the waveform becomes flat.

ADJUSTMENT

Item	Adjustment VR (TC)	P.C.B.	Procedure
CH3 Input Capacity	TC301	X75-1180	Connect the capacity meter to the CH3 input, and measure the input capacity in the 0.1 V range. Adjust TC301, so that the input capacity in the 0.5 V range equals the same capacity as in the 0.1 V range.
CH4 Waveform Shaping	TC402	X75-1180	Adjust in the same way for CH3.
CH4 Input Capacity	TC401	X75-1180	Adjust in the same way for CH3.
CH1 Square Wave Characteristics	TC101 TC501 VR502	X73-1760	<p>CH1, 2 VOLTS : 10 mV CH1, 2 AC-GND-DC : DC SWEEP TIME/DIV : 1 μs $\times 10$ MAG : ON</p> <ul style="list-style-type: none"> • Input a 1 MHz square wave signal into CH1 (with a CRT amplitude of 6 div.). * Adjust TC101 so that the overshoot is maximized. * Set a TC or the VR to an adjustment angle as shown in Figure 1 or 2 to bring about ± 0.2 division of the scale. • Input the 1 MHz square wave signal into CH2 (with the CRT amplitude of 6 div.). * Adjust TC201 so that the overshoot is maximized. * Set a TC or the VR to an adjustment angle as shown in Figure 1 to bring about ± 0.2 division of the scale.
	TC1 TC2 VR1	X80-1100	
	TC101	X75-1180	
CH2 Square Wave Characteristics	TC201 TC502 VR505	X73-1760	<p>CH3, 4 : 0.1 V/div. * Set a TC or VR to an adjustment angle as shown in Figure 1 to bring about ± 0.2 division of the scale.</p> 
	TC201	X75-1180	
CH3 Square Wave Characteristics	TC503 VR508	X73-1760	<p>CH3, 4 : 0.1 V/div. * Set a TC or VR to an adjustment angle as shown in Figure 1 to bring about ± 0.3 division of the scale.</p> 
CH4 Square Wave Characteristics	TC504 VR511	X73-1760	

ADJUSTMENT

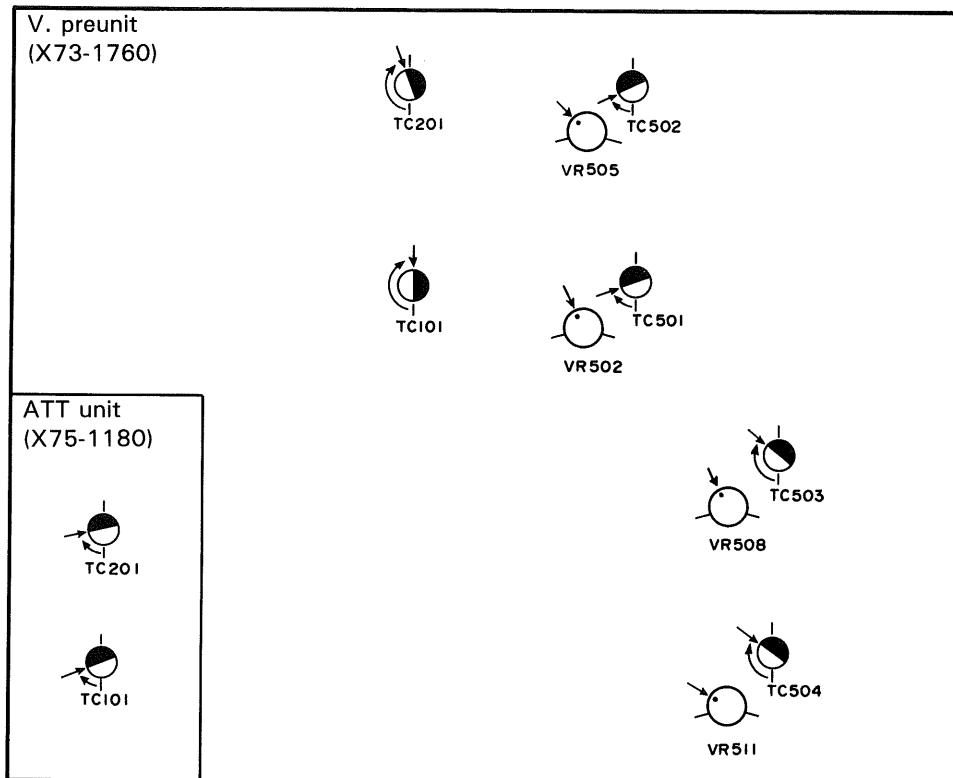
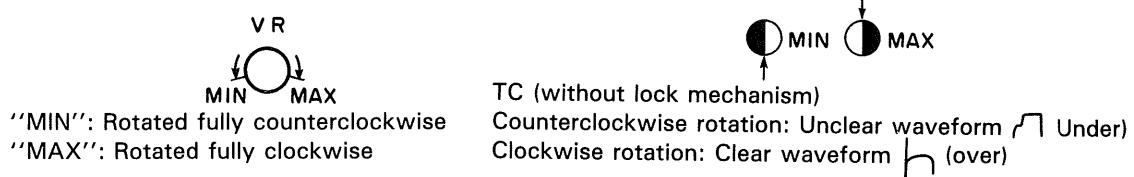


Fig. 1

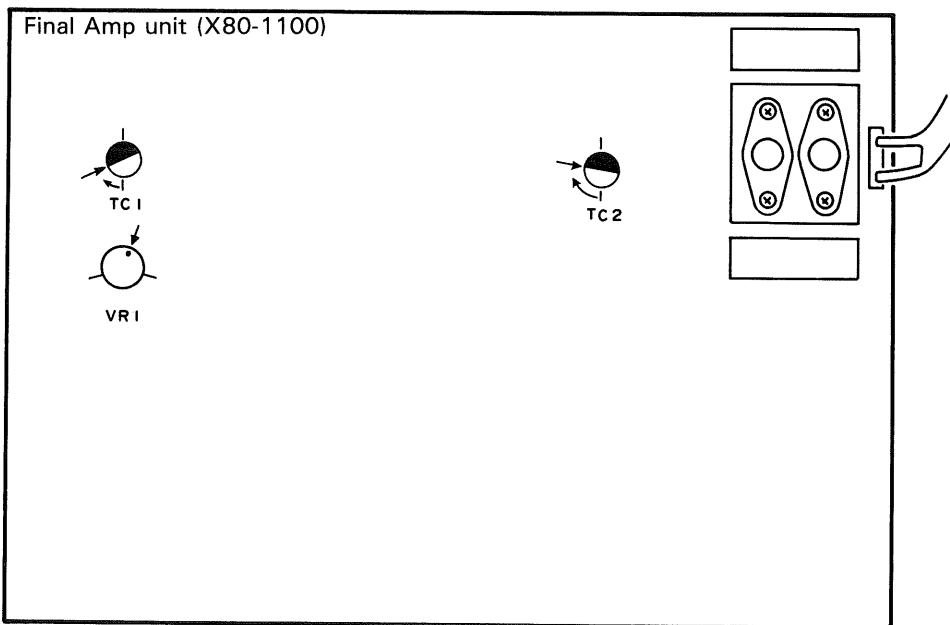


Fig. 2

ADJUSTMENT

3. TRIGGER SECTION ADJUSTMENTS

Item	Adjustment VR (TC)	P.C.B.	Procedure
FIX Level Center	VR1	X74-1480	<p>TRIGGERING MODE : FIX SOURCE : CH1 COUPLING : AC CH1 VOLTS/DIV : 10 mV</p> <p>Input a 1 kHz sine wave into CH1, and adjust the oscillator so that the CRT amplitude becomes 6 div.</p> <p>Adjust VR1 so that start point of the luminescent line is at the center of the CRT (vertical direction).</p>
A TRIG. DC Coupling	VR601(CH1) VR602(CH2) VR603(CH3) VR604(CH4)	X73-1760	<p>After adjusting the trigger level center, set the TRIGGERING COUPLING to the DC position.</p> <p>Adjust VR601 so that the start point of the luminescent line is at the same position as in the AC mode.</p>
B TRIG. Level Center	VR4	X74-1480	<p>TRIGGERING MODE : AUTO SOURCE : CH2 COUPLING : AC LEVEL : Mechanical center CH2 VOLTS/DIV : 10 mV</p> <p>Input a 1 kHz sine wave to CH2, and adjust the oscillator so that the CRT amplitude becomes 6 div.</p> <p>Adjust VR4 so that start point of the luminescent line is at the center of the CRT (vertical direction).</p>
B TRIG. DC coupling	VR3	X74-1480	<p>Set the TRIGGERING COUPLING to the DC position.</p> <p>Adjust VR3 so that the start point of the luminescent line is at the same position as in the AC mode.</p>

4. HORIZONTAL SECTION ADJUSTMENTS

Item	Adjustment VR (TC)	P.C.B.	Procedure
A SWEEP Time	VR301	X74-1480	<p>SWEET TIME/DIV: 1 ms Input a 1 ms marker signal into CH1. Adjust VR301 so that the peak of the marker signal matches the CRT scale divided in 1 div.</p>
	VR103	X74-1480	<p>SWEET TIME/DIV: 1 ms ~ 5 ms Adjust VR103 in the same way as for 1 ms adjustment.</p>
	VR307	X74-1480	<p>SWEET TIME/DIV: 1 ms Input a 1 ms marker signal into CH1, and match the peak of the marker signal with the CRT scale divided in 1 div. Set to the X10 MAG status, and adjust VR307 so that the interval between peaks becomes 10 div.</p>
	VR103	X80-1100	<p>SWEET TIME/DIV: 0.2 μs Input a 0.2 μs marker signal into CH1. Set to the X10 MAG status, and adjust the horizontal POSITION so that the peak of the waveform is at the vertical scale line at the center of the CRT. Release the X10 MAG mode and adjust VR103 so that the peak of the waveform matches the vertical scale line at the center of the CRT.</p>

ADJUSTMENT

Item	Adjustment VR (TC)	P.C.B.	Procedure
B SWEEP Time	VR302	X74-1480	<p>SWEEP TIME/DIV: 1 ms Input a 1 ms marker signal into CH1. Adjust VR302 so that the peak of the marker signal matches the CRT scale divided in 1 div.</p>
	VR104	X74-1480	<p>SWEEP TIME/DIV: 1 ms ~ 5 ms Input a 1 ms ~ 5 ms signal into CH1, and adjust in the same way as for 1 ms</p>
	TC102	X74-1480	<p>SWEEP TIME/DIV: 2 μs Input a 2 μs marker signal into CH1, and adjust in the same way as for 1 ms adjustment.</p>
	TC303	X74-1480	<p>SWEEP TIME/DIV: 20 ns Input a 20 ns marker signal into CH1, and adjust in the same way as for 1 ms adjustment.</p>
A Sweep Position	VR304	X74-1480	<p>HORIZ. MODE : A SOURCE : VERT VERTICAL MODE : CH1 A SWEEP TIME/DIV : 0.5 ms TRIG. MODE : AUTO</p> <p>Apply a 0.5 ms marker signal to CH1 to display a waveform to the center of the CRT screen. Rotate the $\blacktriangleleft\triangleright$ POSITION control to maximum clockwise. Measure the deviation between the starting point of the trace and the center of the graticule line. Next, rotate the $\blacktriangleleft\triangleright$ POSITION control to maximum counterclockwise and measure the distance between the 12th peak of the waveform and the center of the graticule line. Adjust VR304 so that these deviations will have the same width.</p>
B Sweep Position	VR305	X74-1480	<p>HORIZ. MODE : ALT SLOPE : + A, B INTEN : Fully counterwise</p> <p>Operate \downarrow TRACE SEP control to separate the A sweep and B sweep. Set the A VARIABLE to CAL. Adjust VR305 to align the starting point of B sweep with that of A sweep in the horizontal position.</p>
X Gain	VR303	X74-1480	<p>CH2 VOLTS/DIV : 10 mV TRIGGERING MODE : X-Y</p> <p>Input the square wave signal having an amplitude of 50 mV into CH2, and adjust VR303 so that the CRT amplitude in the horizontal direction becomes 5 div.</p>
X Position	VR306	X74-1480	<p>VERTICAL MODE : CH2 CH2 AC-GND-DC : GND</p> <p>Set the scope controls to display a trace to the graticule center. Adjust VR306 to position to trace to horizontal graticule when switched the HORIZ. MODE switch to X-Y position. Clockwise rotation of channel 2 position control should move up to 5 divisions upward and counterclockwise rotation should move up to 5 divisions downward.</p>

ADJUSTMENT


Item	Adjustment VR (TC)	P.C.B.	Procedure
Delay time	VR101 VR102	X74-1480	<p>HORIZ. MODE : ALT CH1 AC-GND-DC : GND A SWEEP TIME/DIV : 1 ms B SWEEP TIME/DIV : 0.2 μs</p> <p>Rotate the DELAY POSITION control to 0.20 position and set the scope controls to coincide A trace with the left end of the graticule scale, using the horizontal position control.</p> <p>Adjust VR101 to position B trace (intensified portion) to 0.2 div position.</p> <p>Adjust VR102 to position B trace to 10 div. position (right end of the graticule scale) when rotated the DELAY POSITION control to 10.00 position.</p>
CAL Voltage	VR5 VR6	X81-2330	<p>Apply a CAL signal to channel 1 input.</p> <p>Adjust VR5 so that one period becomes 0.1 ms (10 div.).</p> <p>Adjust VR6 so that the amplitude becomes 0.2 V (5 div.)</p>

ADJUSTMENT

HIGH VOLTAGE UNIT (X68-1510-00)




Pattern side

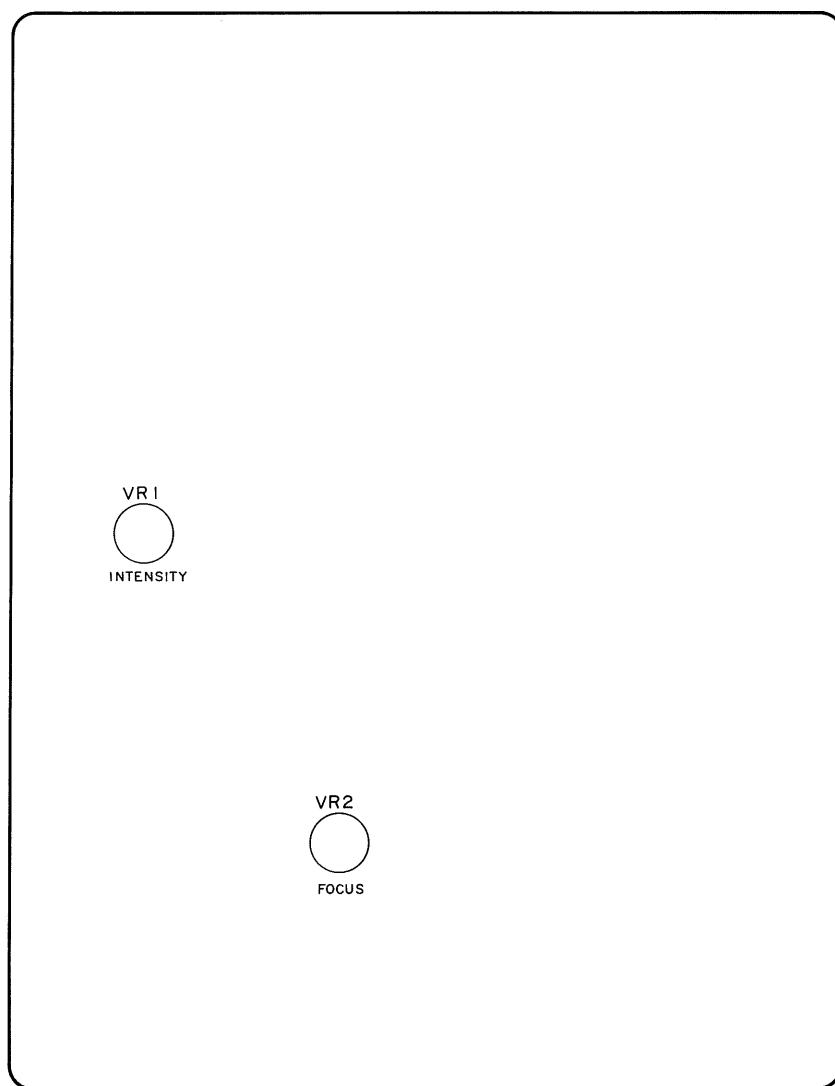


ADJUSTMENT

VERTICAL PRE AMPLIFIER UNIT (X73-1760-00)

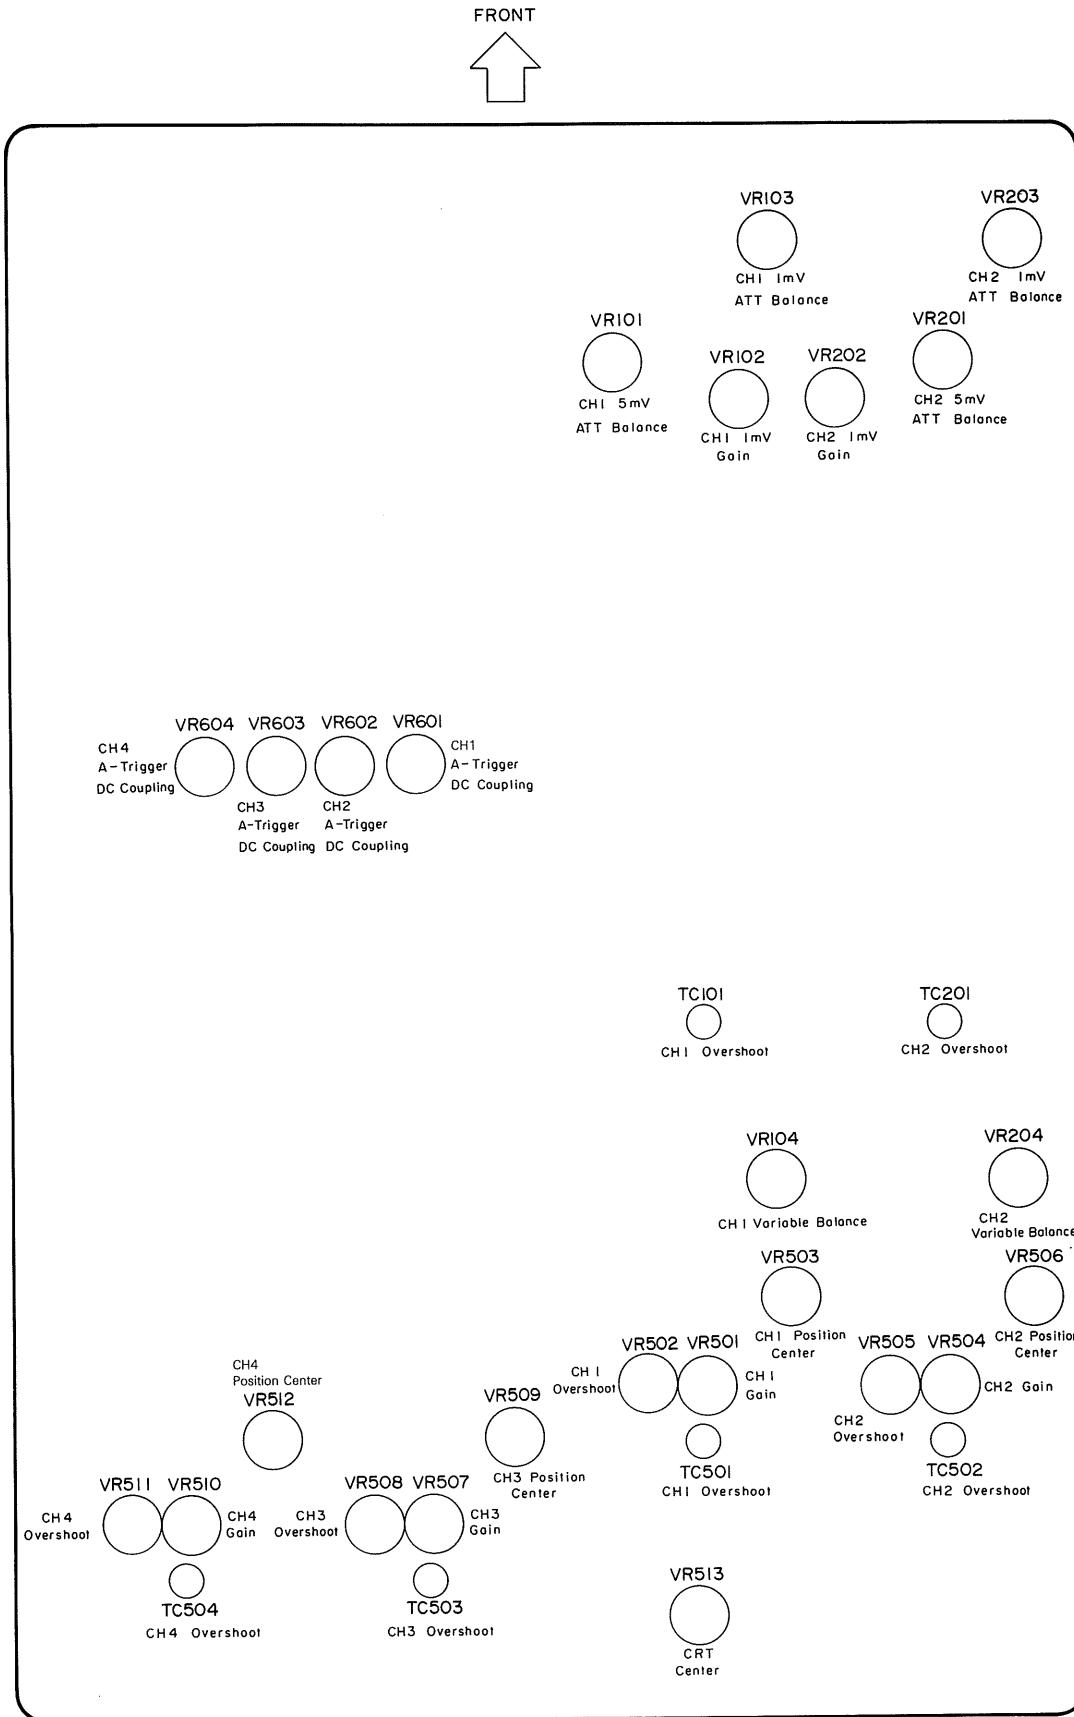

ADJUSTMENT


HORIZONTAL UNIT (X74-1480-00)

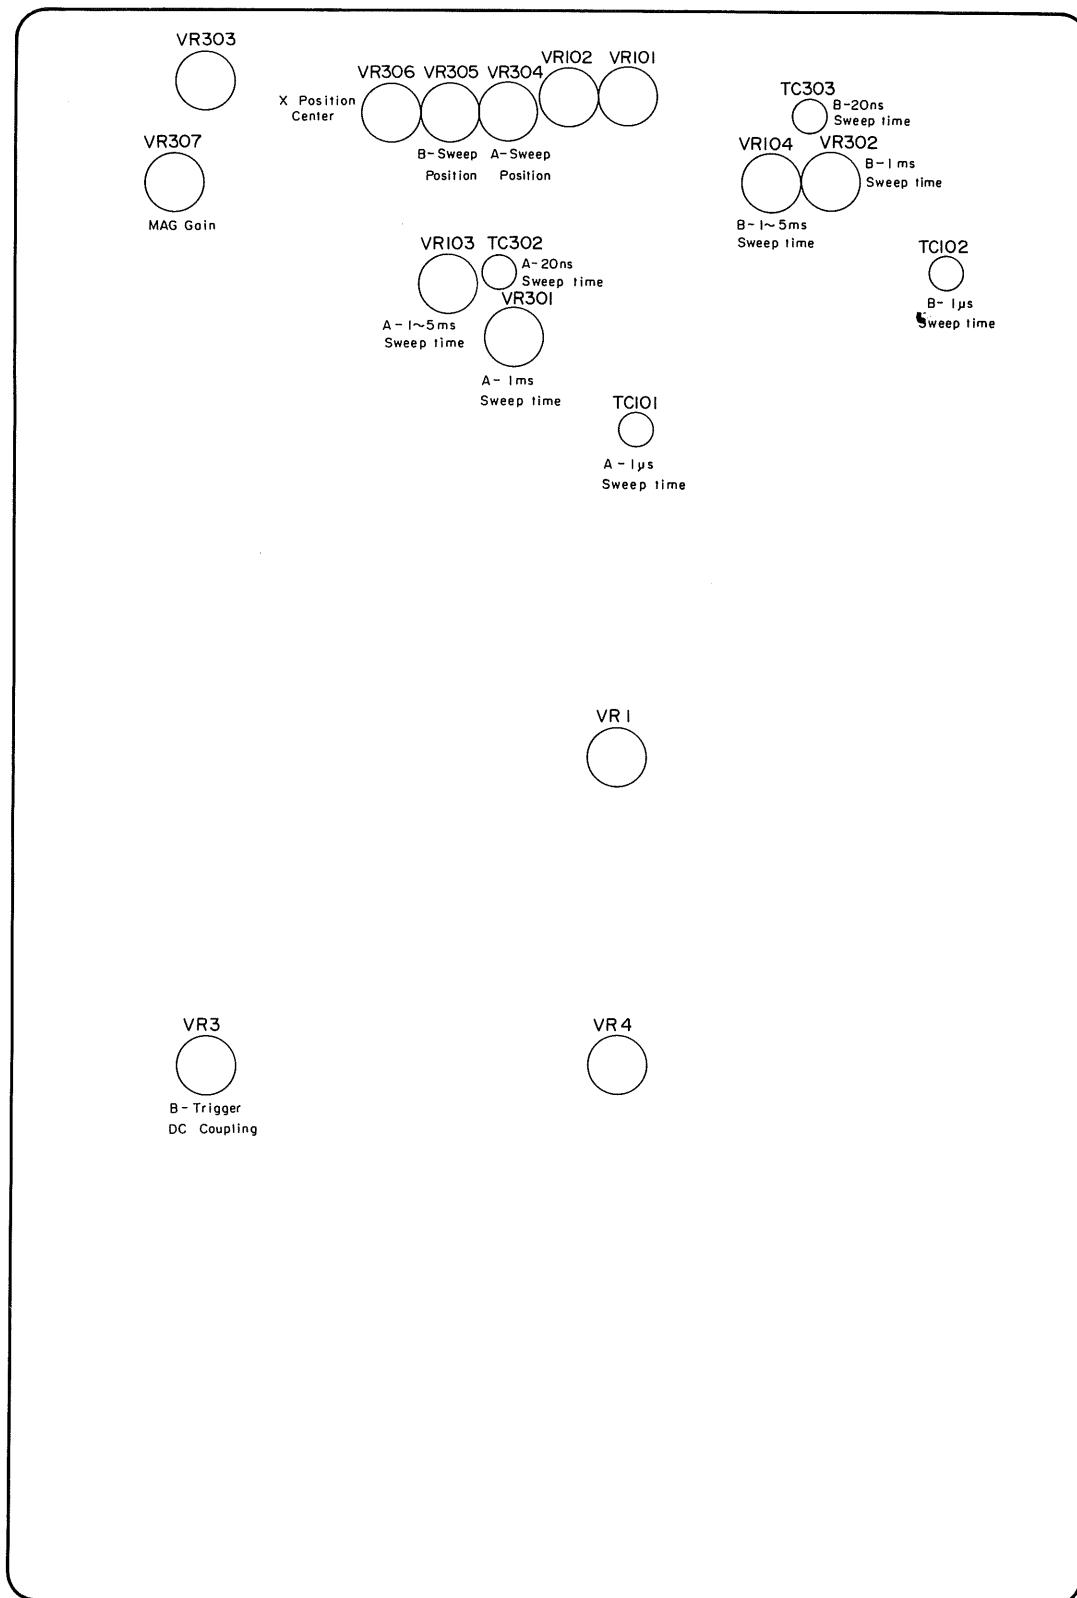


FRONT

ADJUSTMENT

ATT UNIT (X75-1180-00)

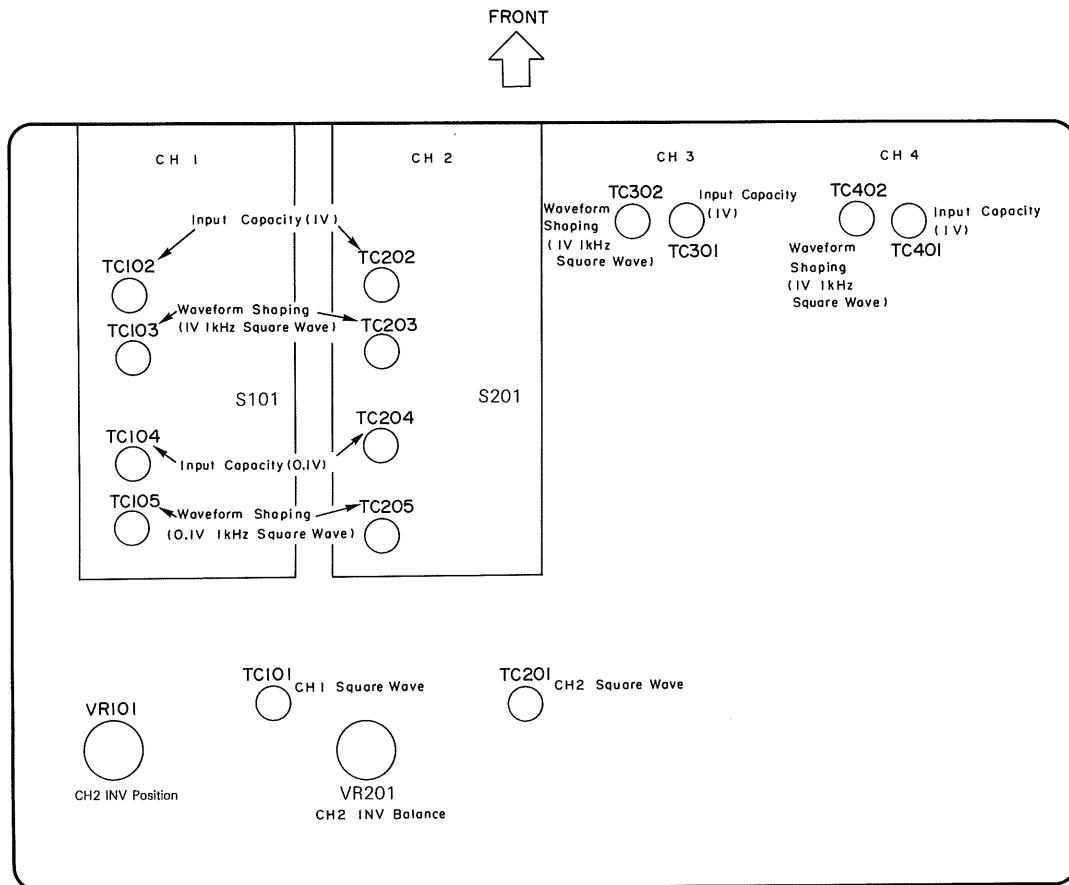


VOLUME UNIT (X81-2330-00)

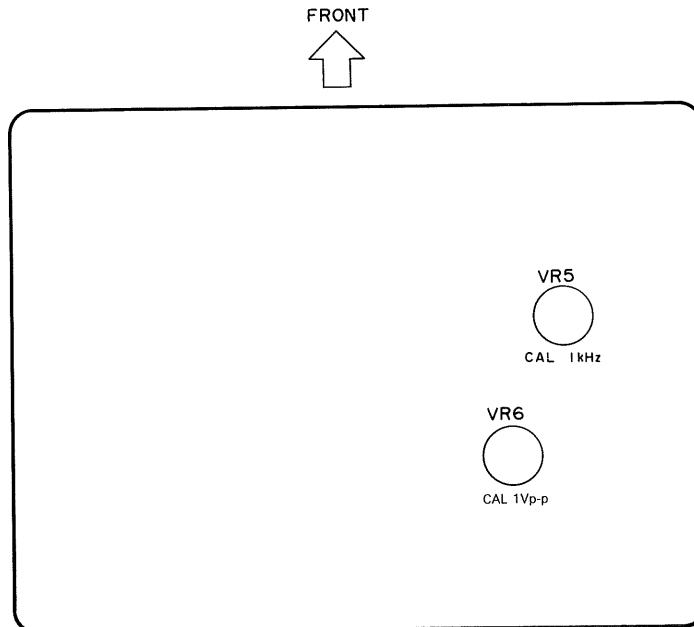


ADJUSTMENT

FINAL AMP UNIT (X80-1100-00)

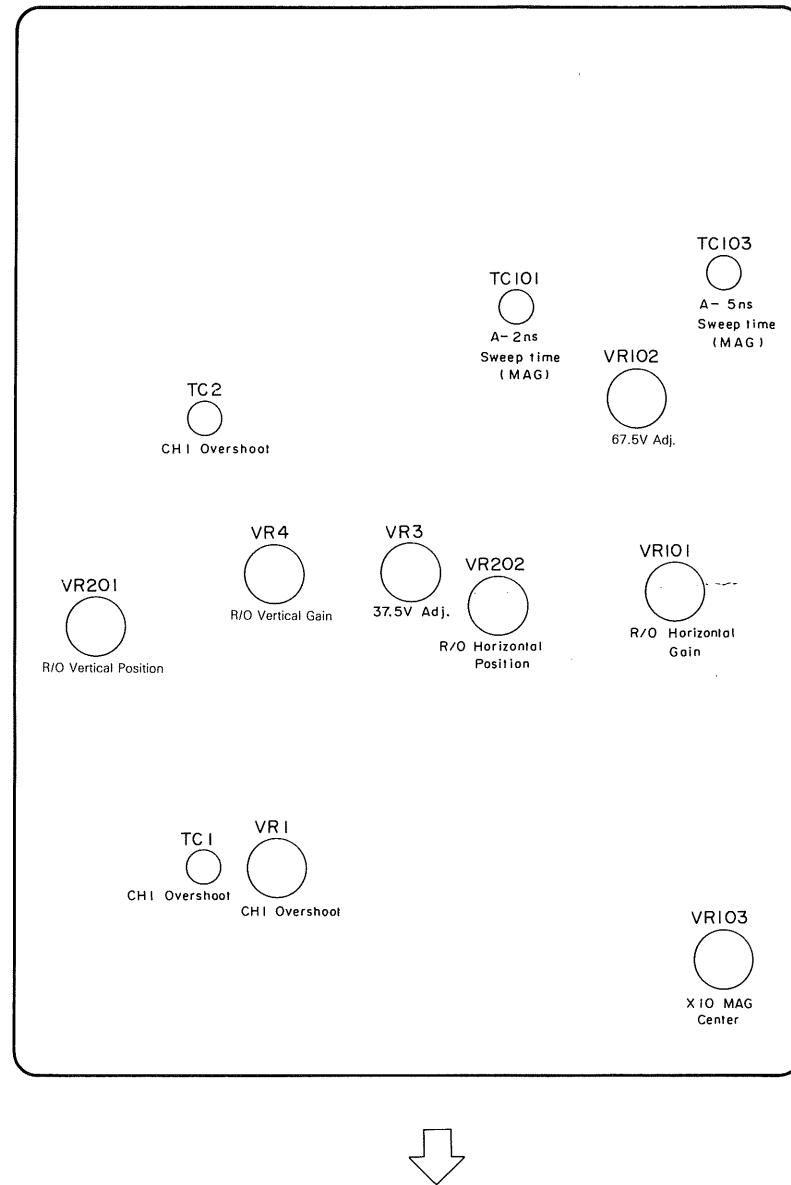

ADJUSTMENT

POWER SUPPLY UNIT (X68-1500-00)

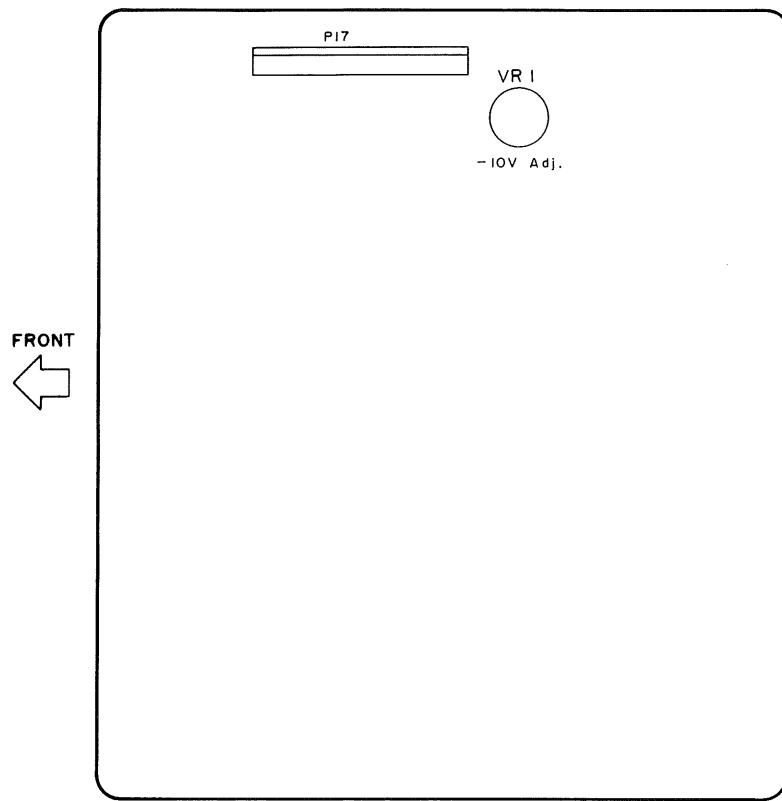

TROUBLESHOOTING

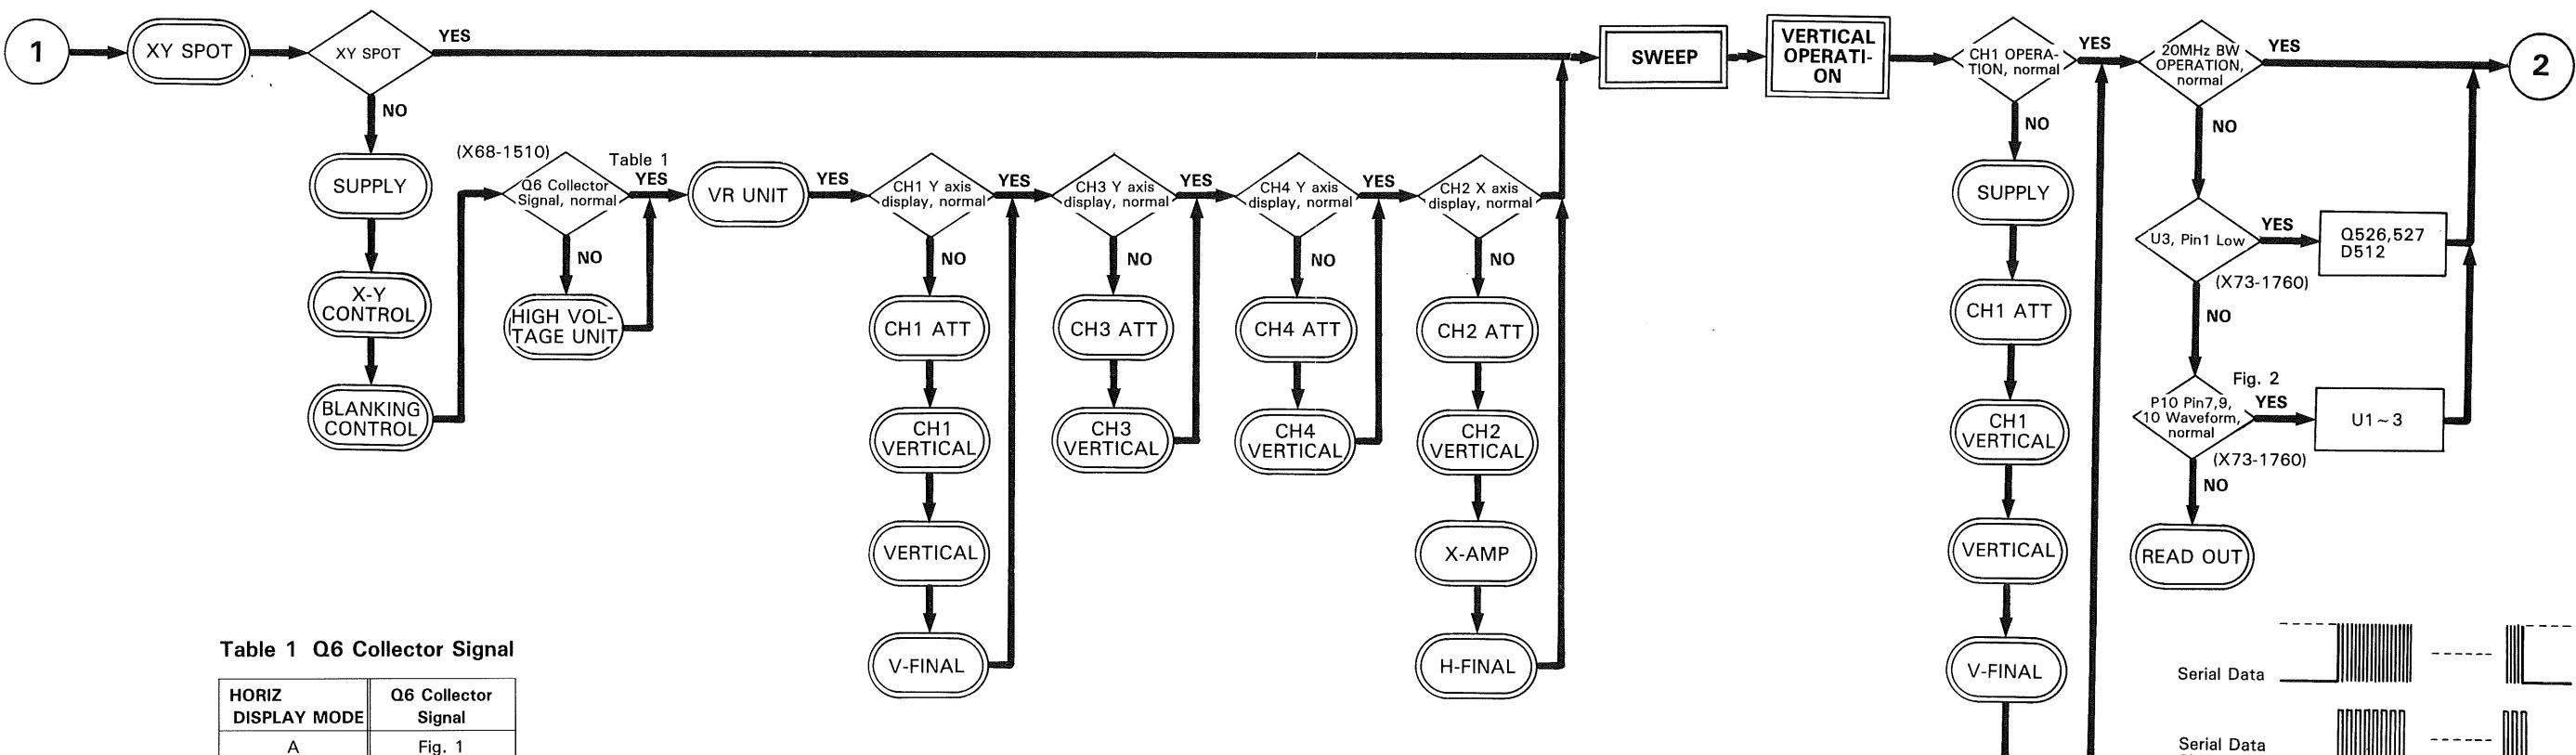
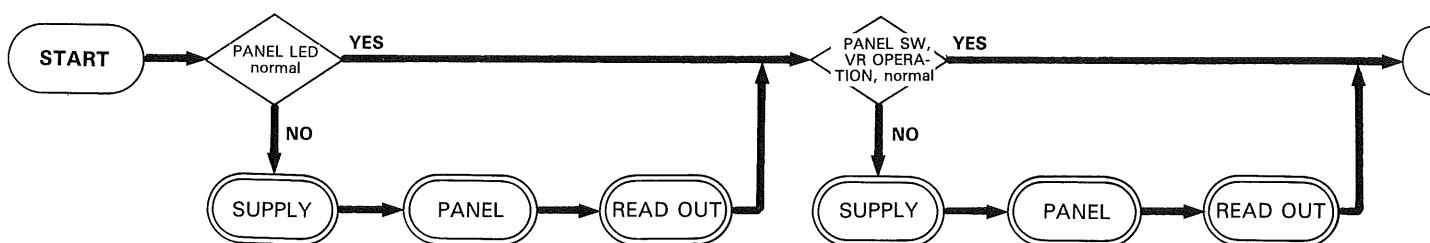


Table 1 Q6 Collector Signal

HORIZ DISPLAY MODE	Q6 Collector Signal
A	Fig. 1
A INT B AFT. D	Fig. 1
ALT AFT. D	Fig. 1
B AFT. D	Fig. 1
X-Y	30 ~ 60V

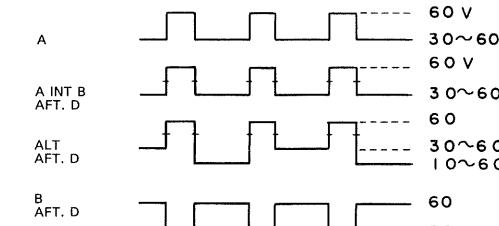


Fig. 1 Q6 Collector Signal




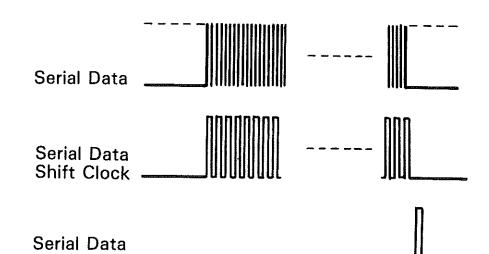


Fig. 2 Serial transmit timing chart

	Panel SW SCAN	Panel LED Control	ATT UNIT Control	V UNIT Control	H UNIT Control
Serial Data	P1 Pin 4 (SD)	P1 Pin 1 (LD)	P4 Pin 9 (AD)	U16 Pin 16 (VD)	U16 Pin 19 (HD)
Serial Data Shift Clock	P1 Pin 5 (SSC)	P1 Pin 2 (LSC)	P4 Pin 8 (ASC)	U9 Pin 14 (VSC)	U9 Pin 10 (HSC)
Serial Data Latch Clock	P1 Pin 6 (SLC)	P1 Pin 3 (LLC)	P4 Pin 7 (ALC)	U8 Pin 11 (VLC)	U8 Pin 7 (HLC)

TROUBLESHOOTING

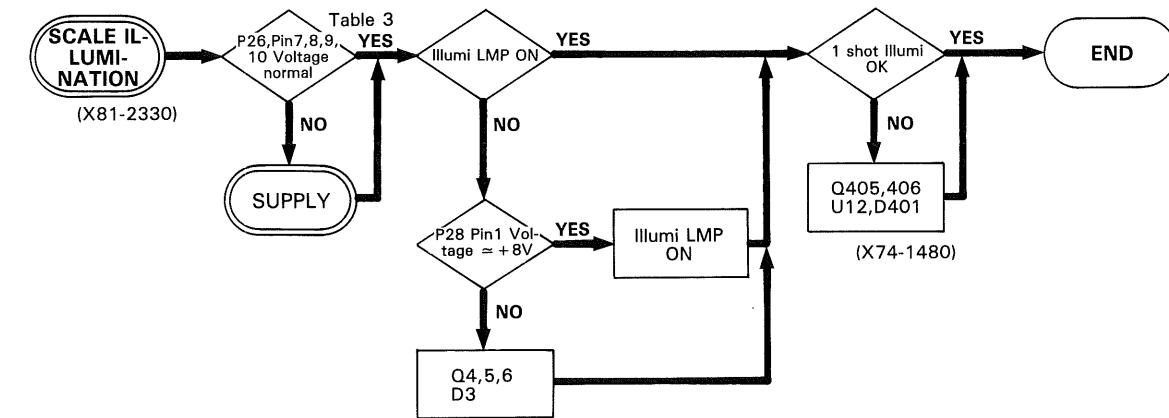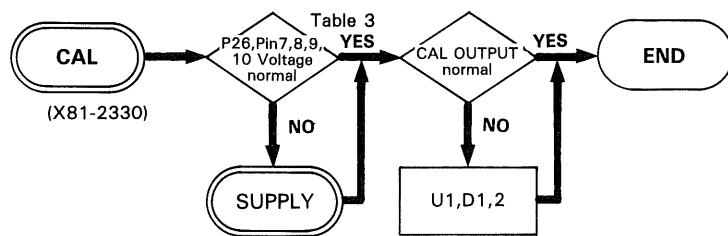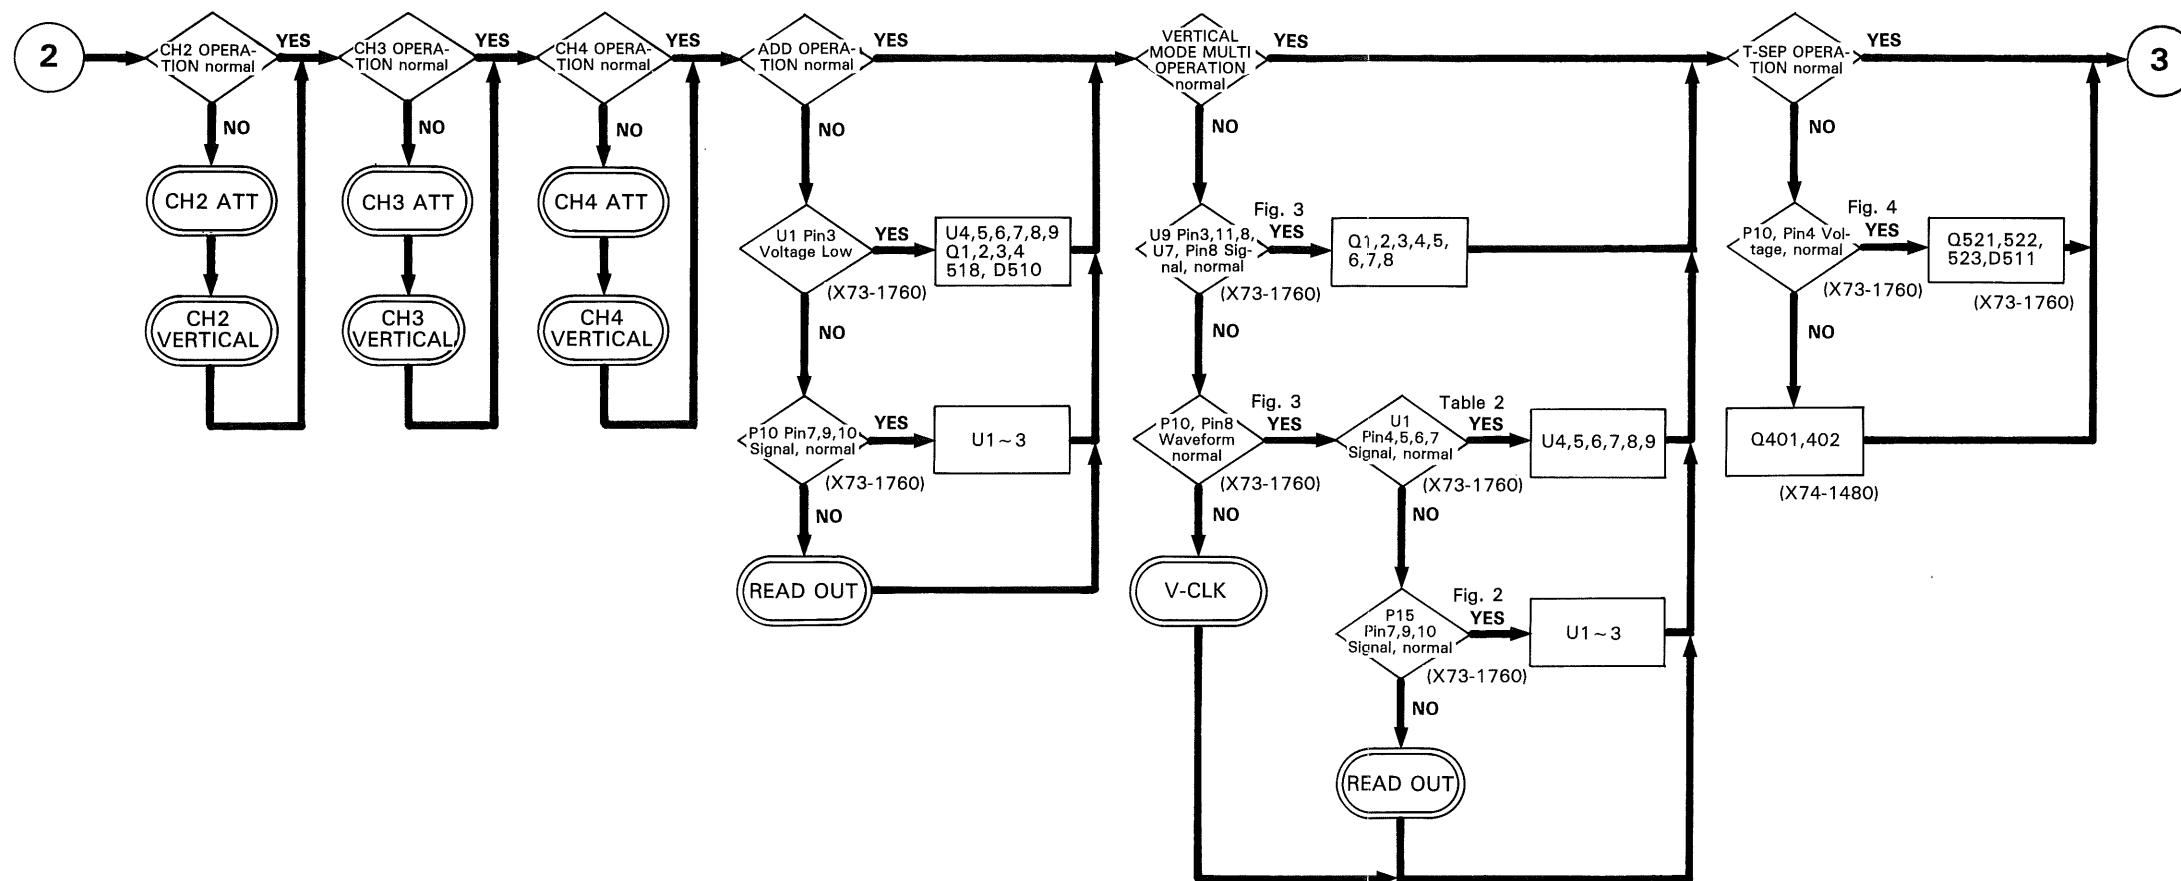

TROUBLESHOOTING

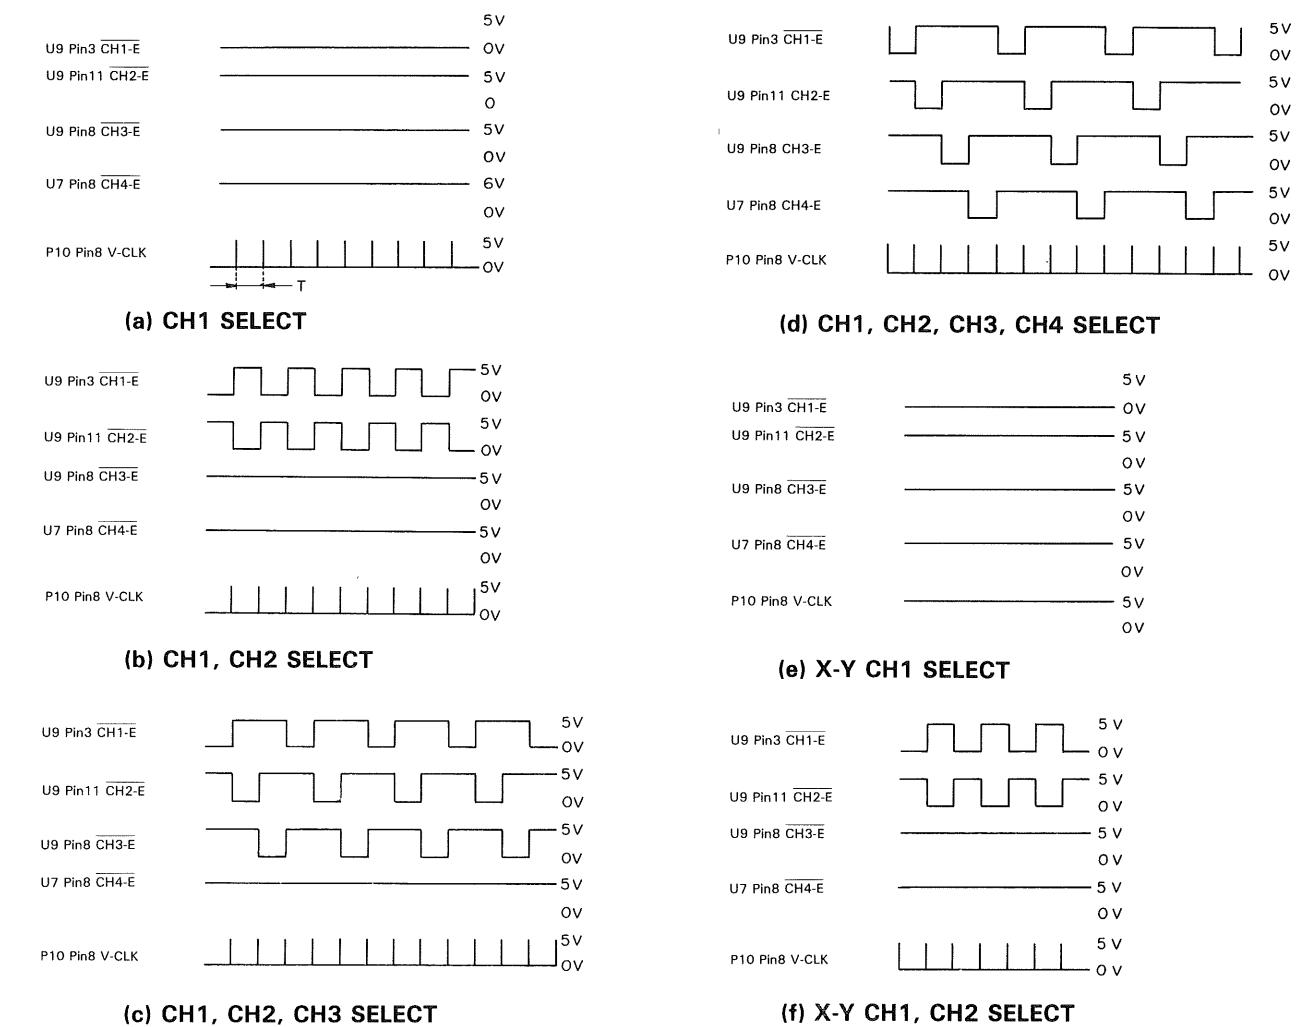
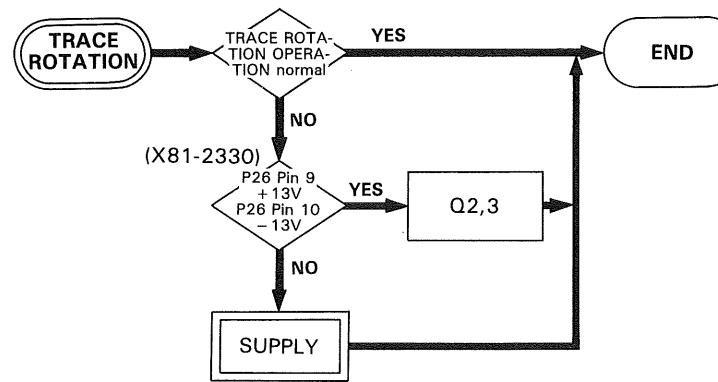


Fig. 3 VERTICAL CH SELECT WAVEFORM

T: H-MODE A, A INT B, B, X-Y
42 μ s: 24kHz

T: H-MODE ALT
84 μ s: 12kHz

Table 2 U1, CH SELECT Voltage

CH SELECT	U1				
	Pin3	Pin4	Pin5	Pin6	Pin7
CH1					L
CH2					
CH3			L		
CH4				L	
ADD	LOW				




Fig. 4 P10, Pin4 Waveform

Table 3 Voltage

P26 Pin No.	Voltage [V]
7	+10
8	-10
9	+13
10	-13

TROUBLESHOOTING

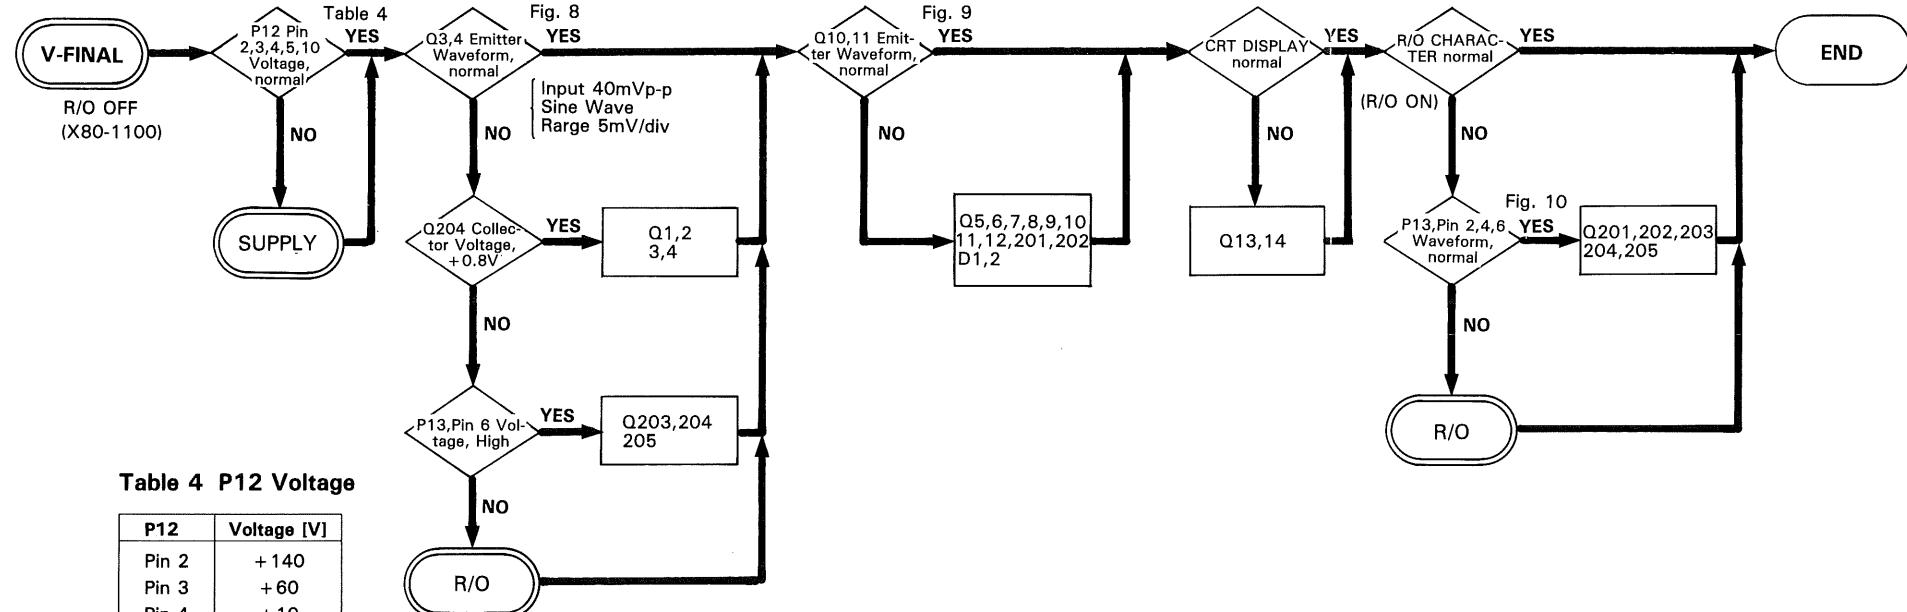
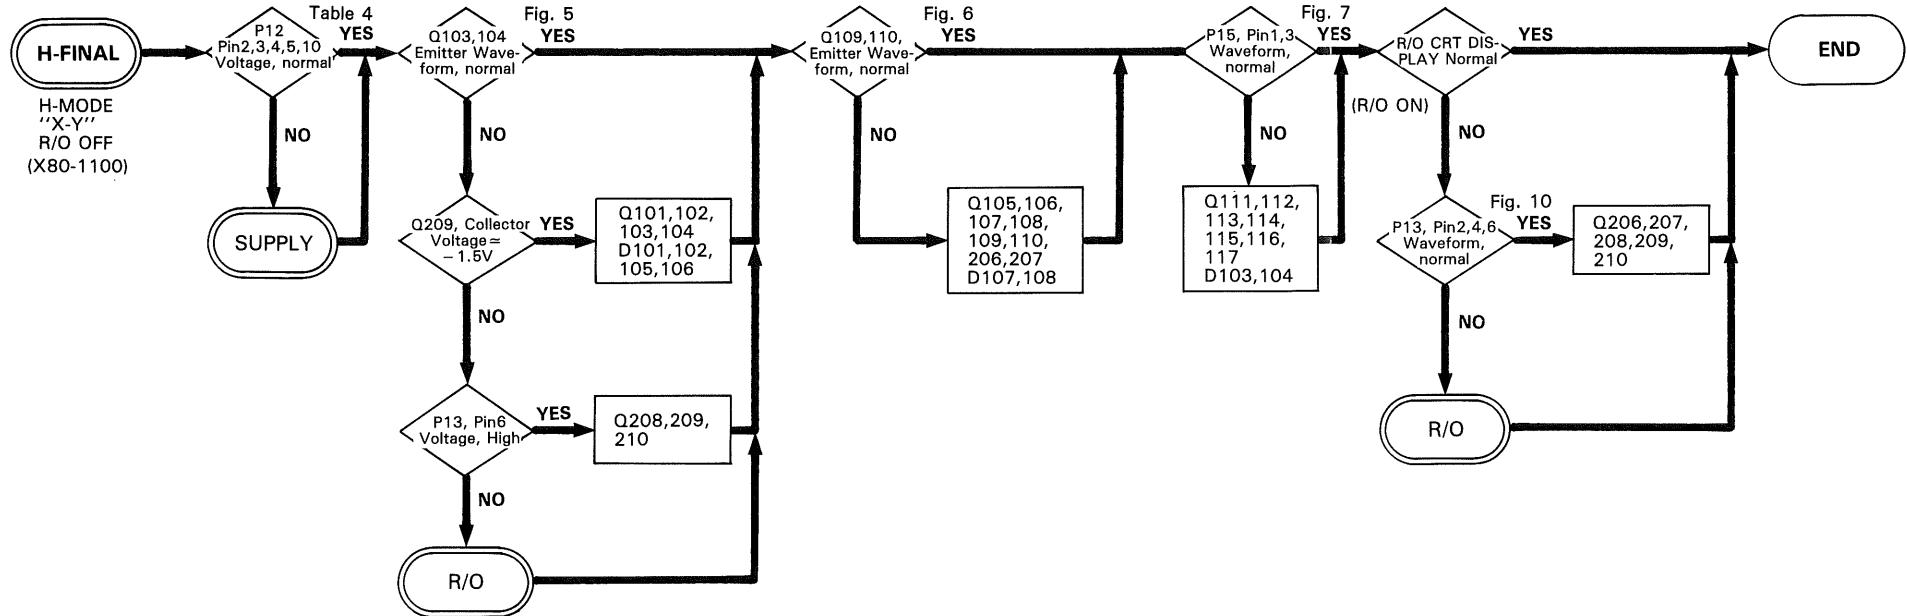


Table 4 P12 Voltage

P12	Voltage [V]
Pin 2	+140
Pin 3	+60
Pin 4	+10
Pin 5	-10
Pin10	+15

TROUBLESHOOTING

H-MODE "X-Y"
CH2 Input: 40mVp-p 1kHz Sine Wave
Volts/div: 5mV/div



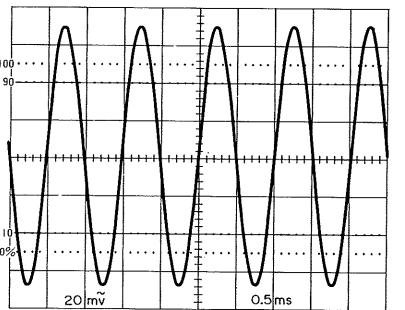


Fig. 5 DC -0.3V

Input: 40mVp-p, 1 kHz
Sine Wave
Volts/div: 5mV/div

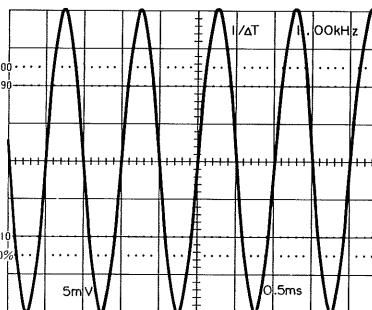

CRT

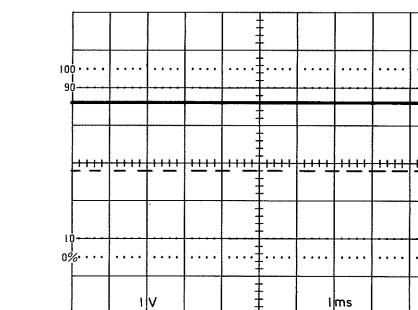

Pin 6

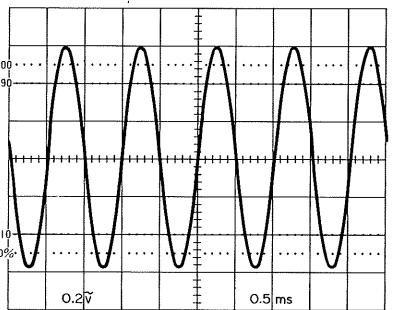


Fig. 6 DC -4V


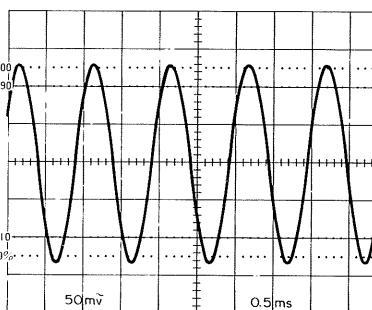


Fig. 8 DC +2.6V

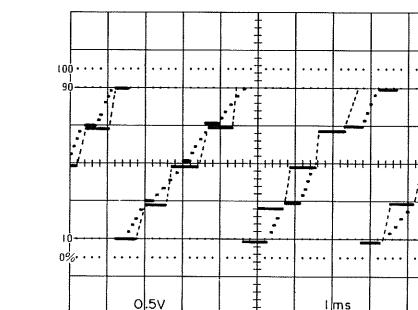

Pin 4

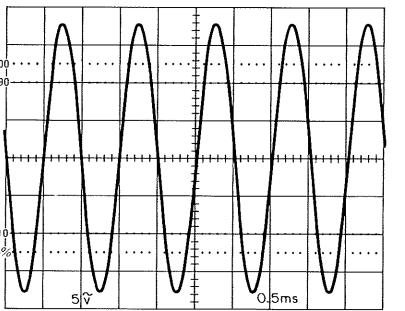


Fig. 7 DC +70V


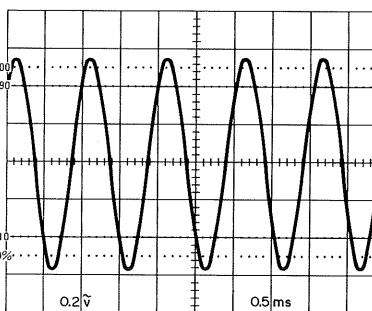


Fig. 9 DC +3.7V

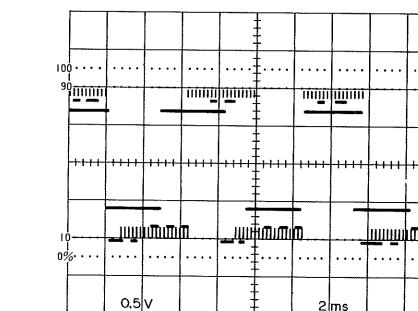

Pin 2

Fig. 10 P13. R/O Signal (R/O ON)

TROUBLESHOOTING

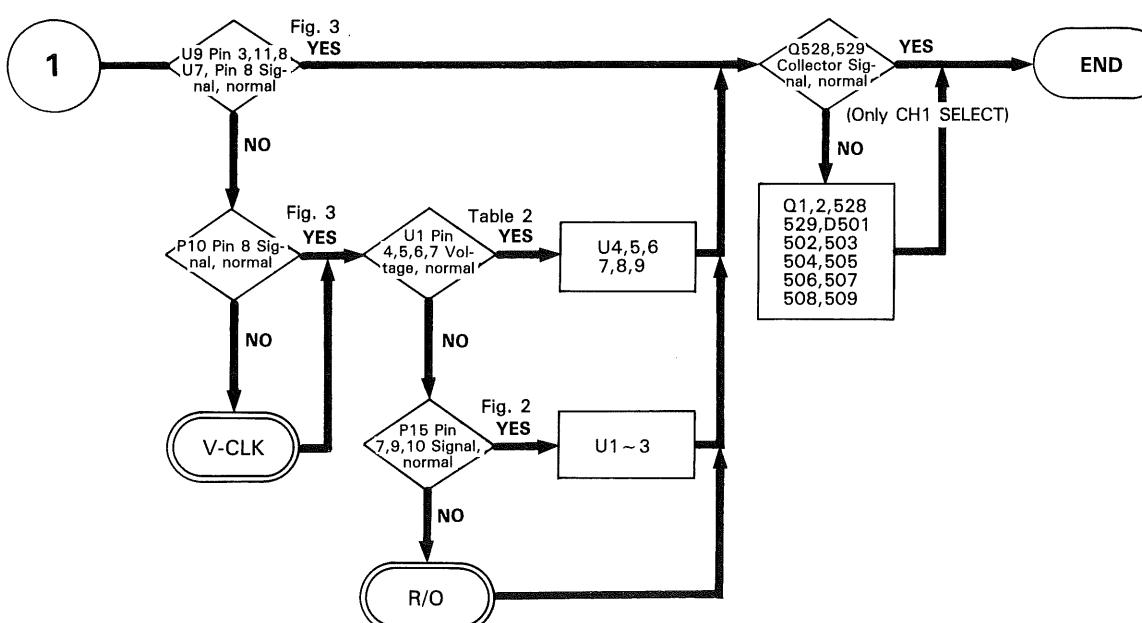
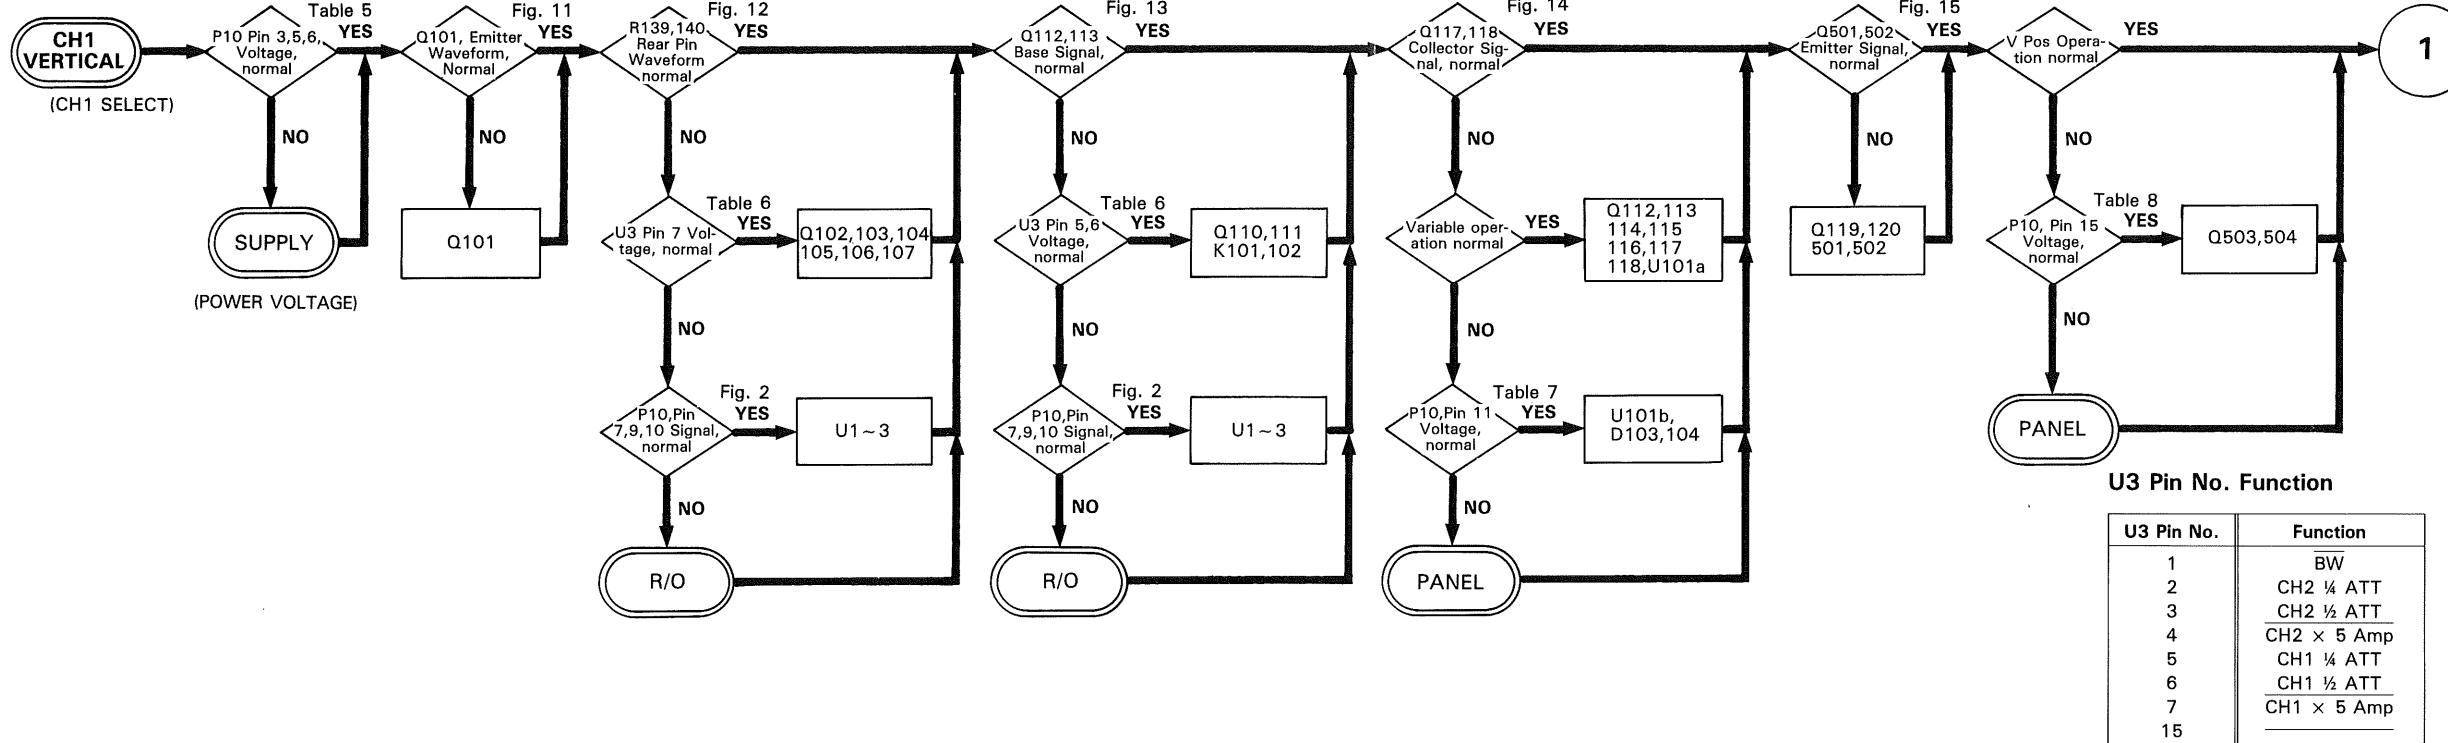


Table 5 Vpre Power Voltage

P10	Voltage [V]
Pin3	+ 10
Pin5	+ 5
Pin6	- 10

Table 6 U3 Pin Voltage

Volts/div	CH2			CH1		
	Pin2	Pin3	Pin4	Pin5	Pin6	Pin7
1 mV						
2						
5		H				
10		H	H			
20		H	H			
50		H	H			
0.1 V		H	H			
0.2		H	H			
0.5		H	H			
1.0		H	H			
2.0		H	H			
5.0		H	H			

Table 7 P10 CAL~UNCAL

P10	CAL ~ UNCAL
Pin11	0 ~ + 10V
Pin12	0 ~ + 10V

Table 8 P10 POS VR

P10	Pos VR Fully CW ~ Fully CCW
Pin15	- 10V ~ + 10V
Pin16	- 10V ~ + 10V
Pin13	- 10V ~ + 10V
Pin14	- 10V ~ + 10V

TROUBLESHOOTING

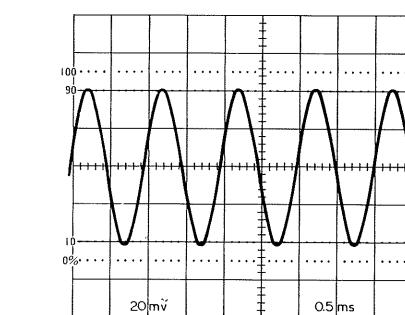
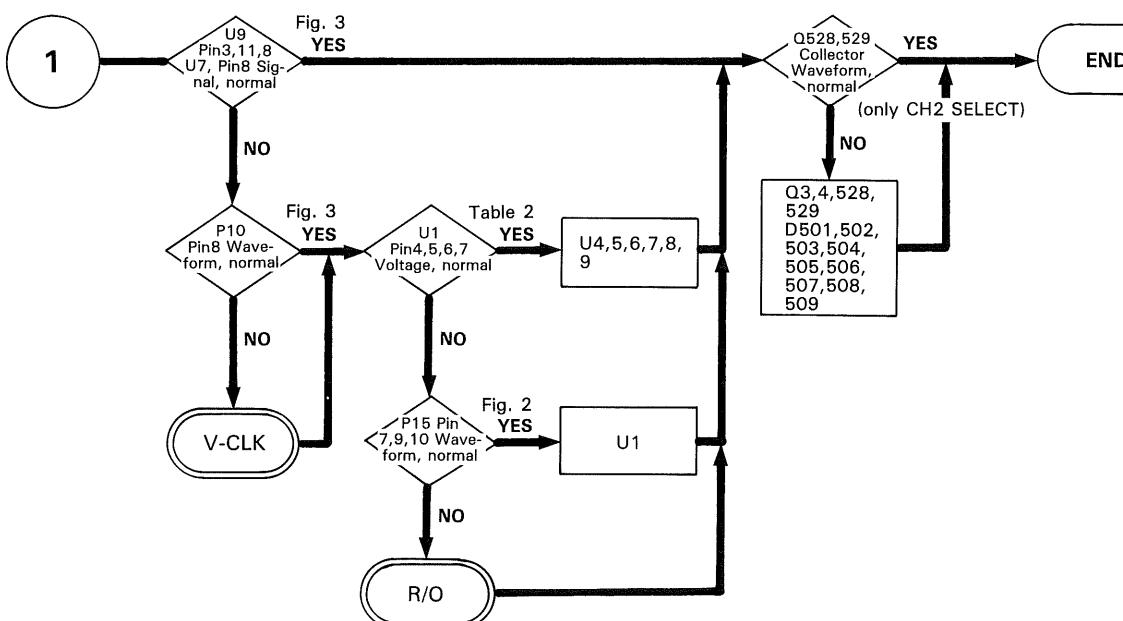
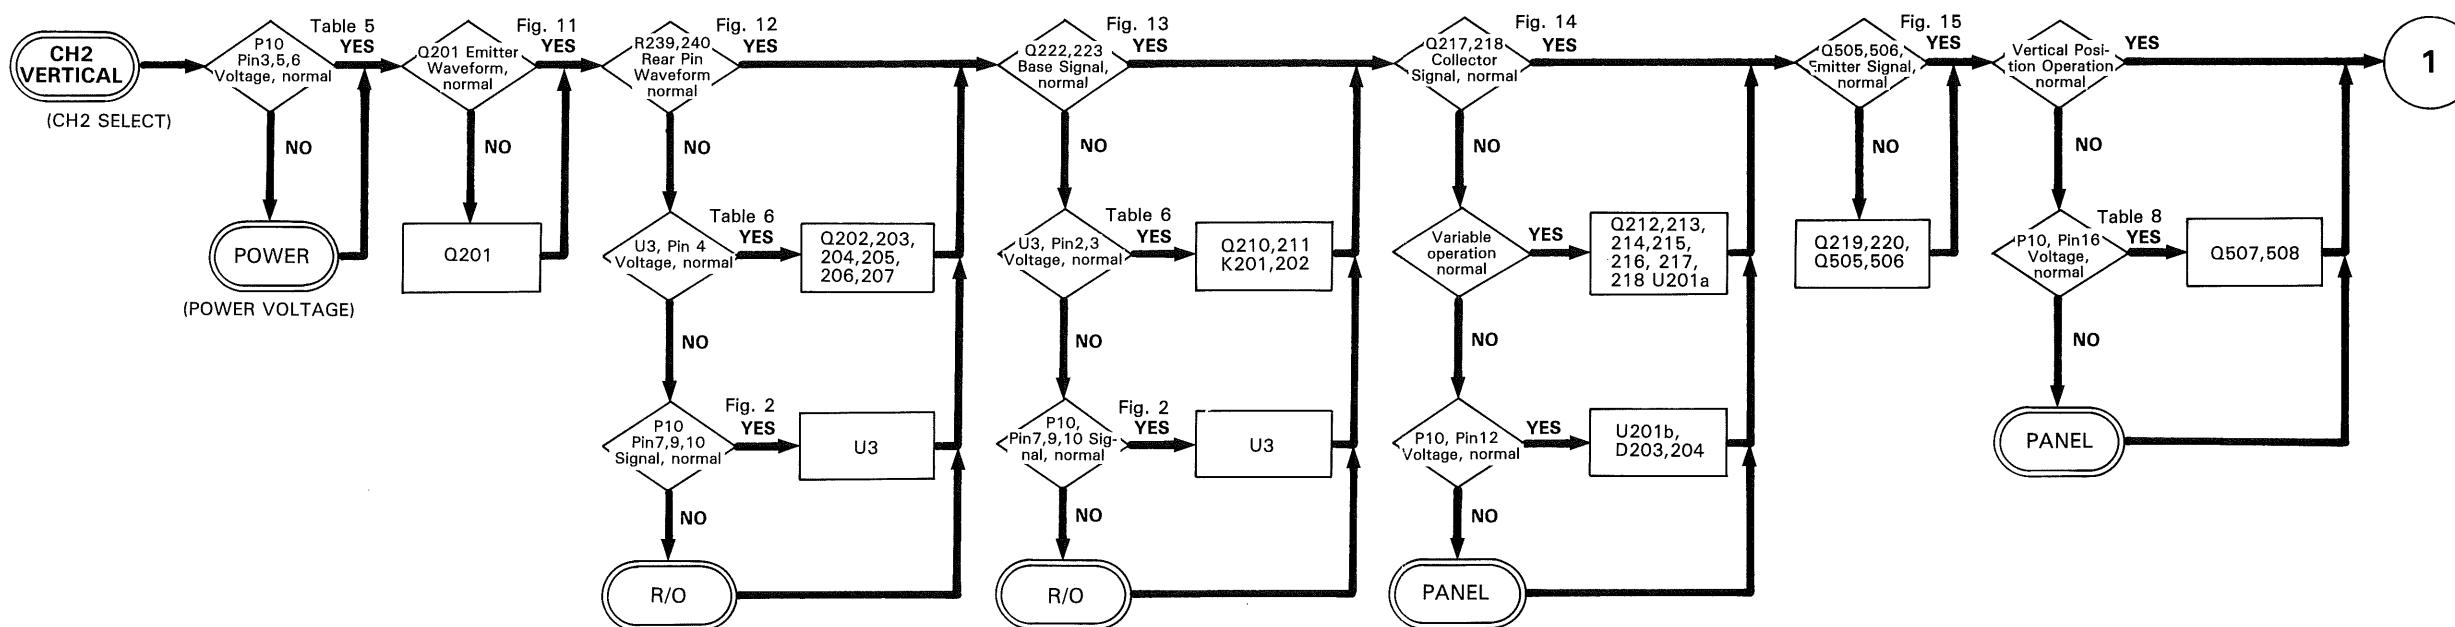


Fig. 11 DC + 6V

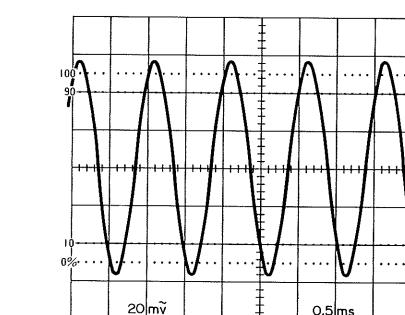


Fig. 12 DC - 1.8V

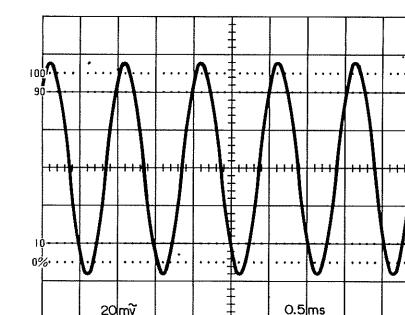


Fig. 13 DC - 1.8V

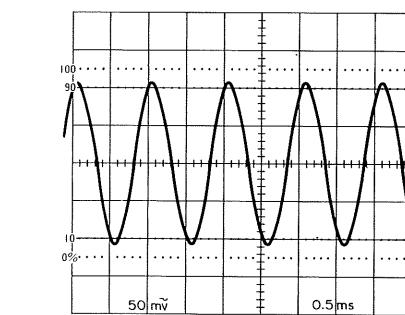


Fig. 14 DC + 4.8V


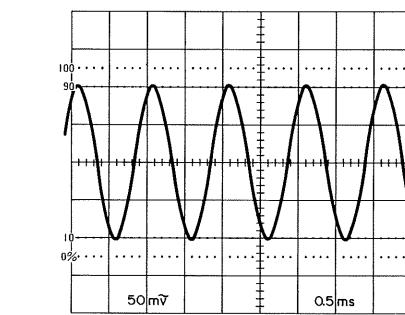


Fig. 15 DC + 4.8V

TROUBLESHOOTING

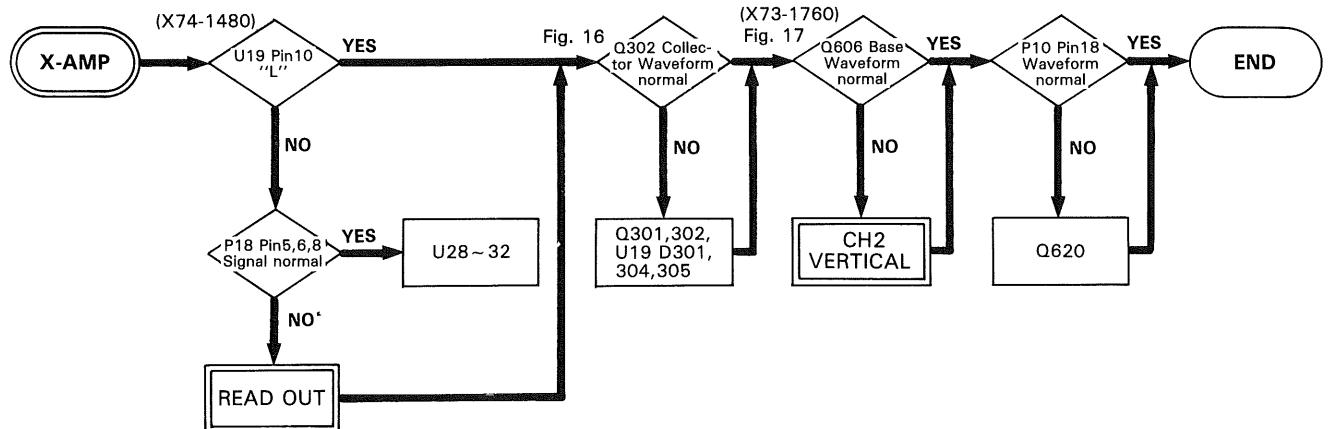

H-MODE "X-Y"
Input: 40mVp-p 1kHz
Sine Wave
Volts/div: 5mV/div

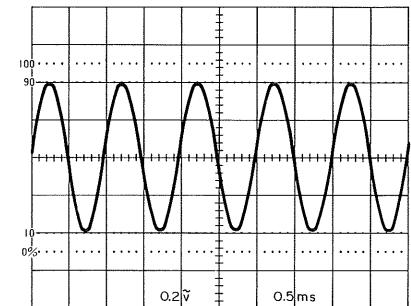


Fig. 16 DC + 2.4V

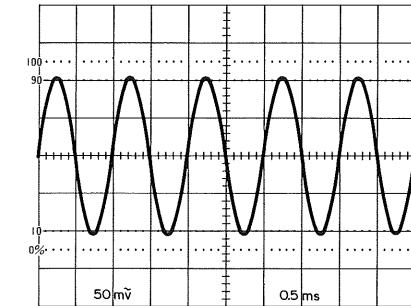


Fig. 17 DC + 5V

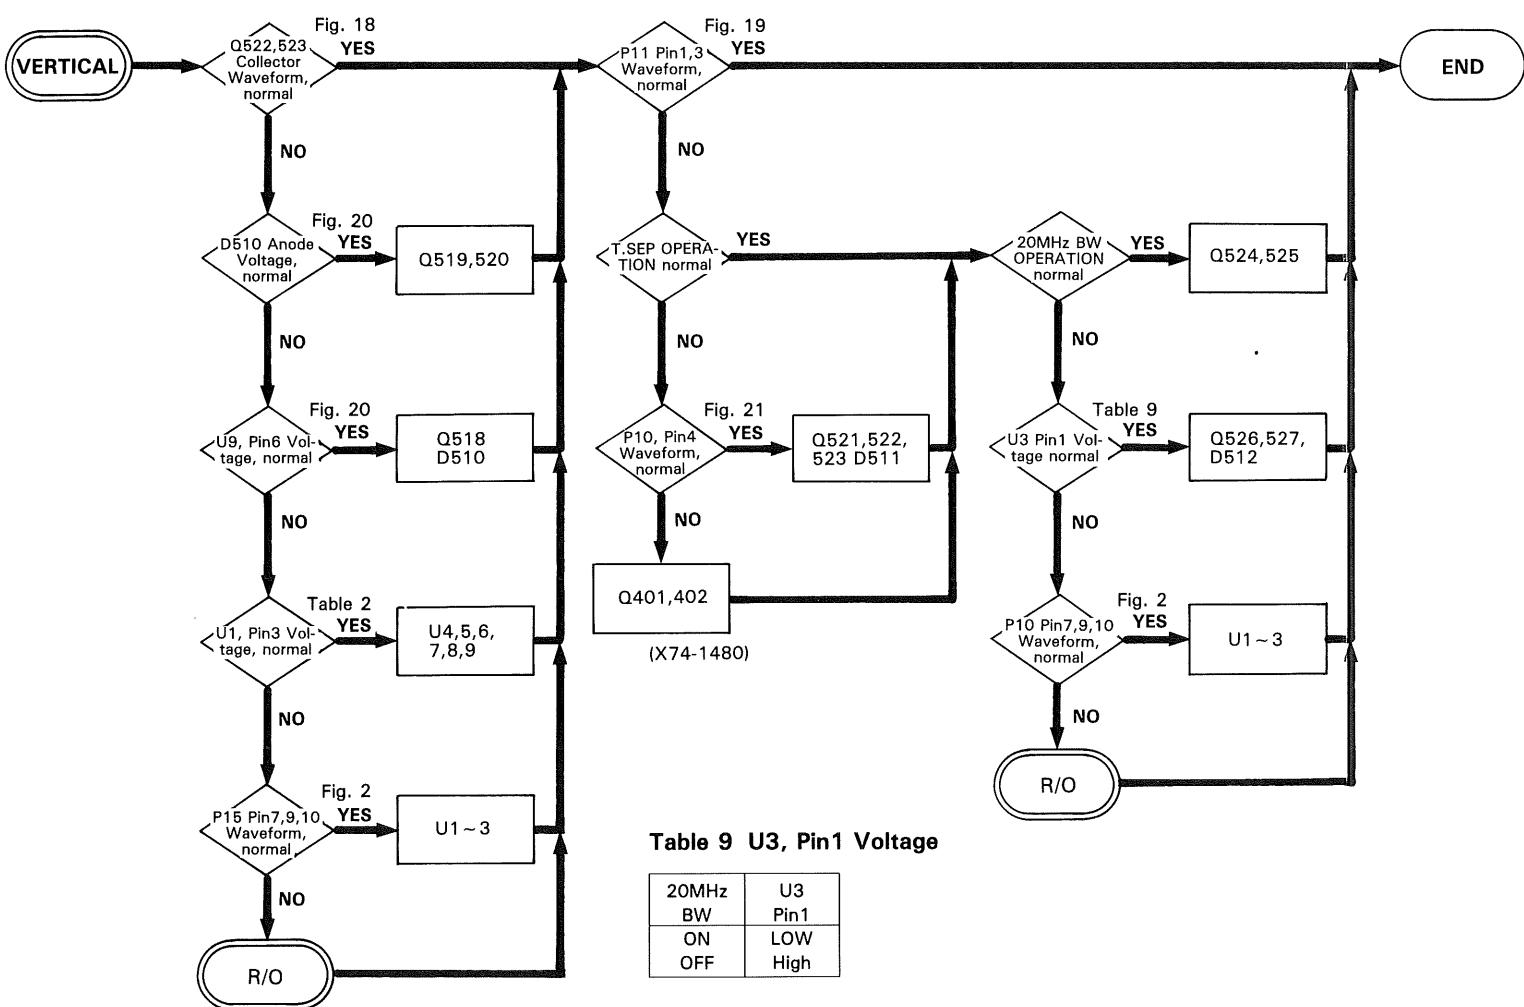


Table 9 U3, Pin1 Voltage

20MHz BW	U3 Pin1
ON OFF	LOW HIGH

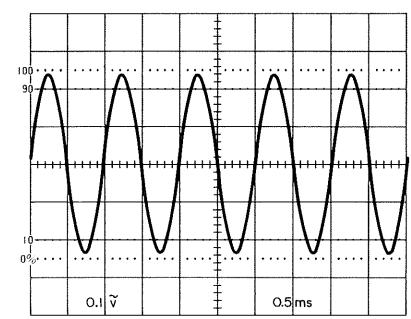


Fig. 18 DC - 5.0V



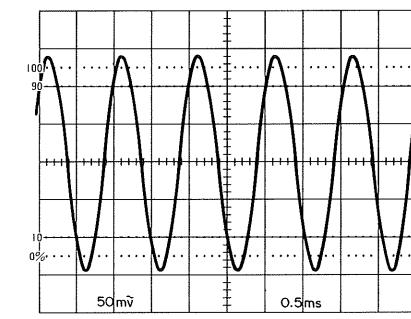



Fig. 19 DC + 5V



(a) V-MODE "ADD" + The other one




(a) T. SEP FULLY CCW



(b) V-MODE "ADD" + CH × 2



(b) T. SEP FULLY CW



(c) V-MODE "ADD" is not selected

Fig. 20 D510 Anode, U9, Pin6 Waveform

TROUBLESHOOTING

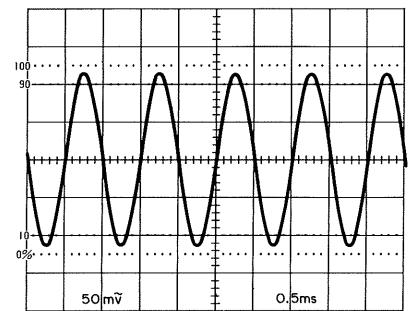
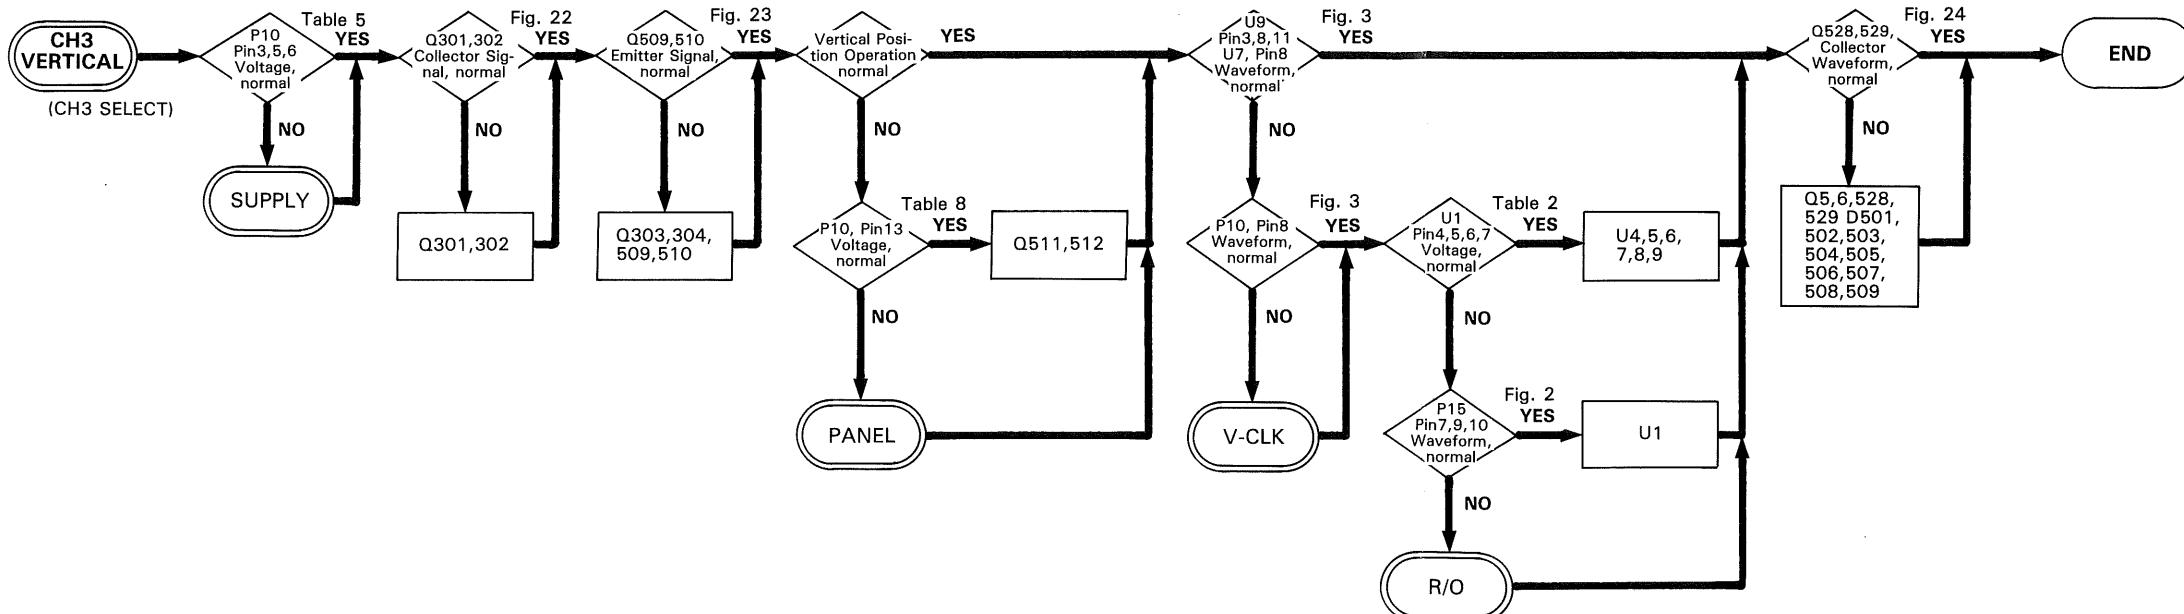


Fig. 22 DC - 5.0V

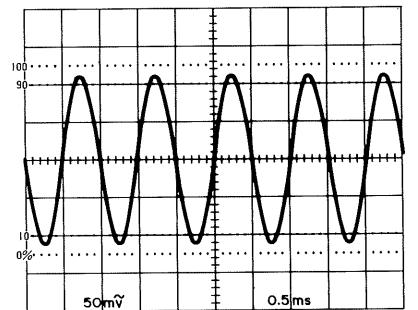


Fig. 23 DC +5.0V

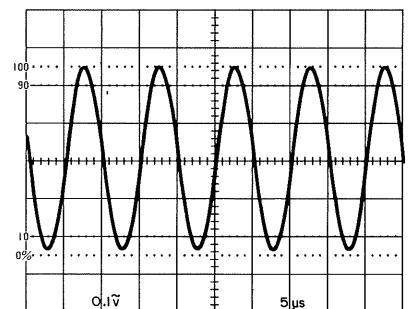
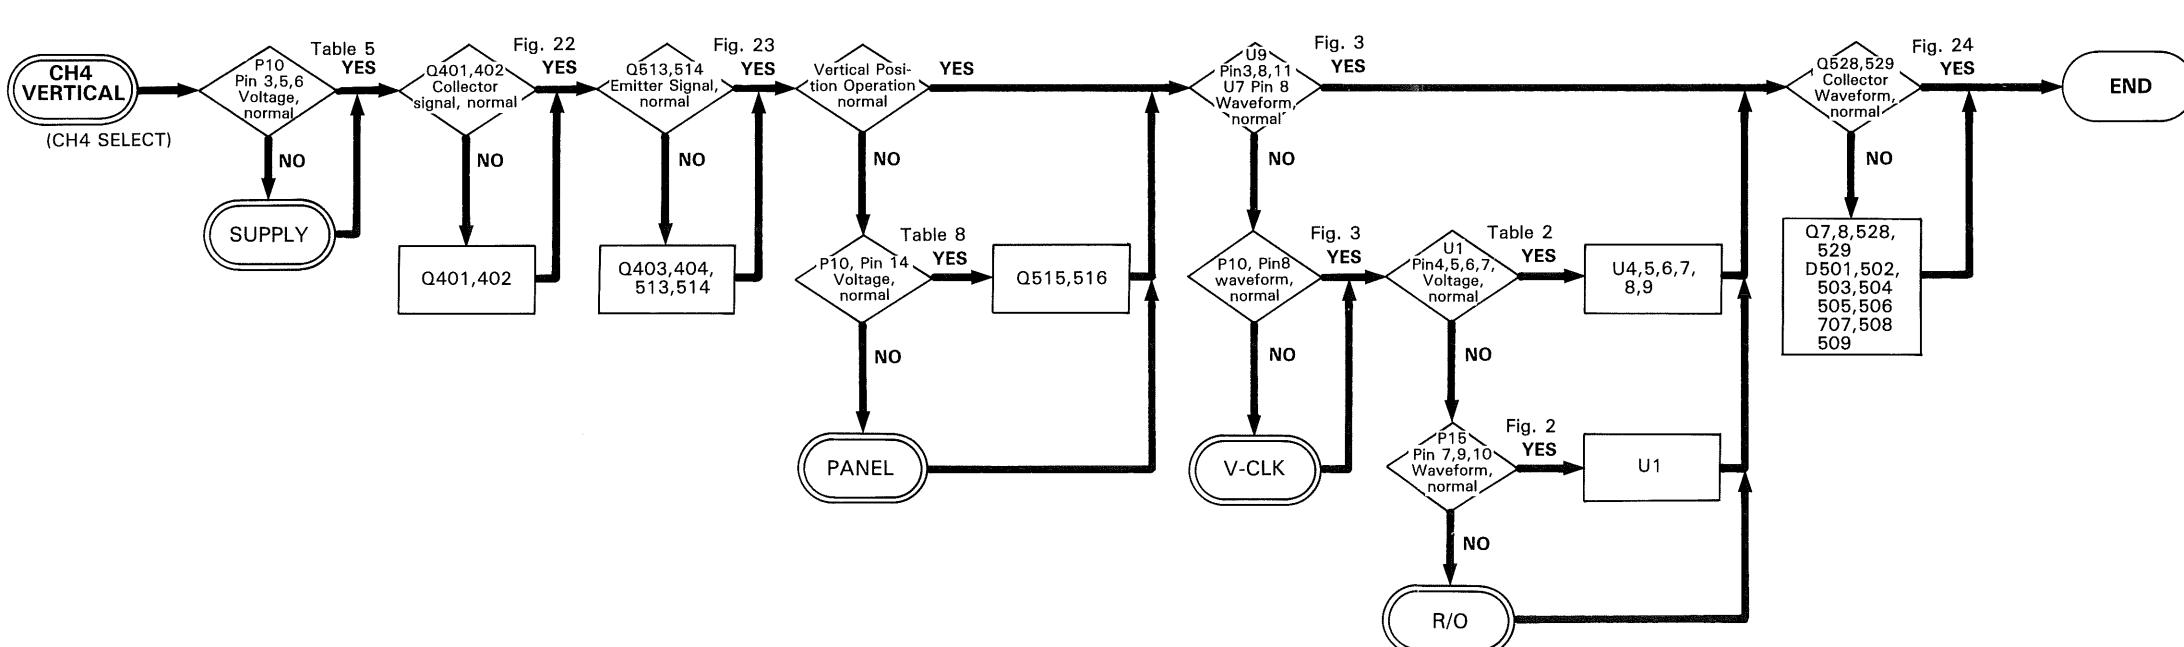


Fig. 24 DC – 5.0V
Input 0.8Vp-p Sine Wave

TROUBLESHOOTING

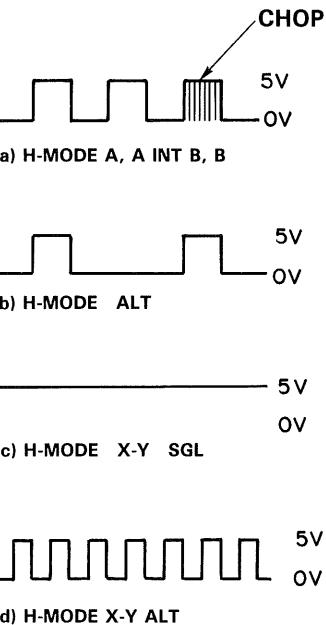
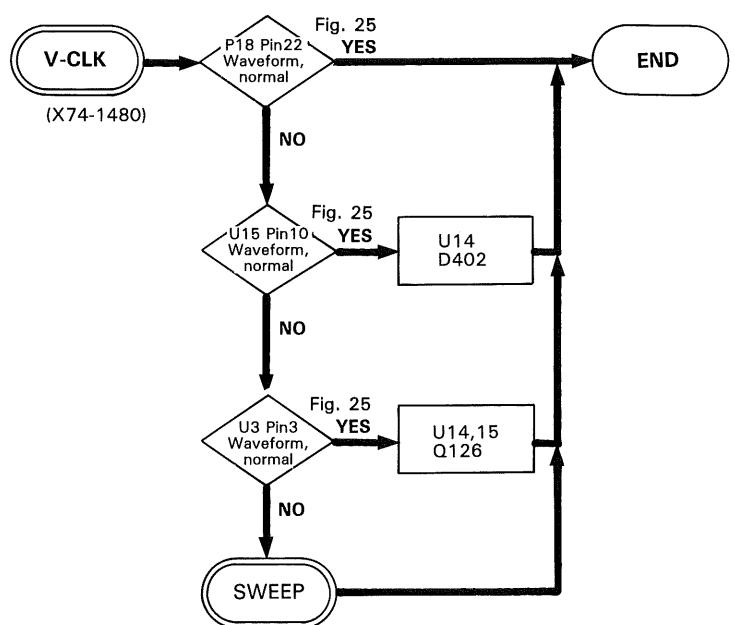


Fig. 25 Waveform

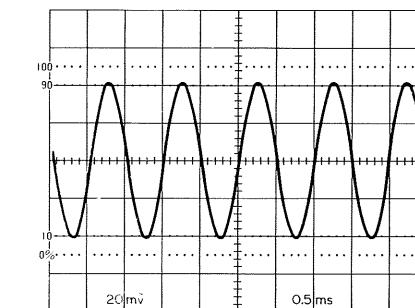
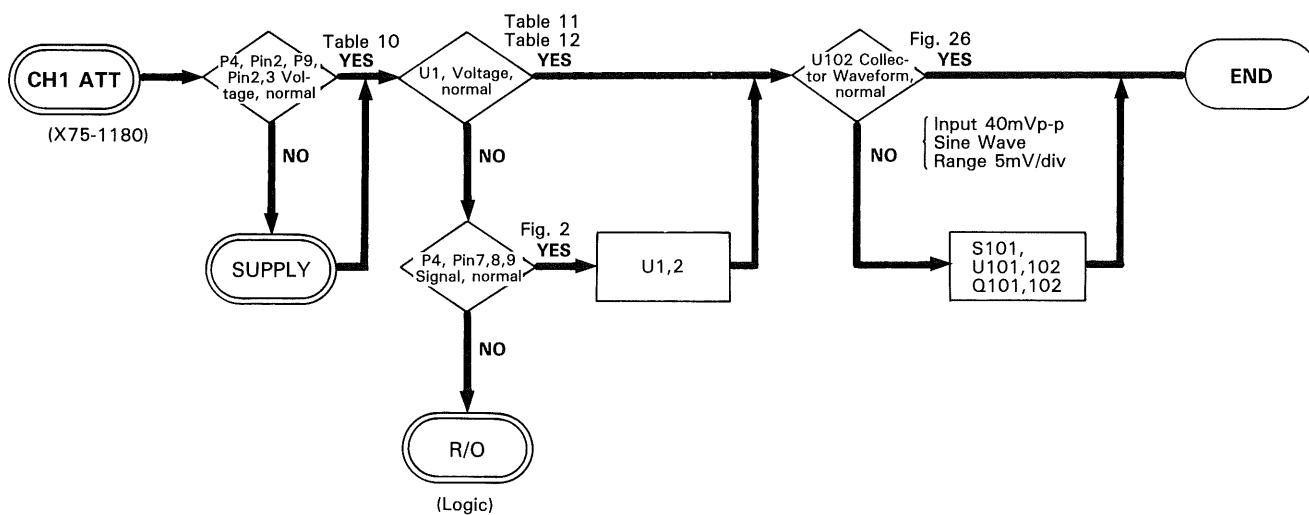


Fig. 26 DC + 5V

Table 10 INPUT Voltage

Ref. No.	Pin No.	Voltage [V]
P4	2	+ 5
P9	2	- 10
P9	3	+ 10

Table 11

Volts/div	X75-1180		X73-1760			
	1/10 ATT	1/100 ATT	× 5 Amp	× 1 Amp	1/2 ATT	1/4 ATT
1mV			○		○	
2			○		○	
5				○	○	
10				○	○	
20				○	○	
50				○	○	
0.1V	○	○				
0.2	○	○				
0.5			○	○	○	
1.0			○	○	○	
2.0	○		○	○	○	
5.0			○	○	○	

Table 12 U1, U2 FUNCTION

Pin No.	U1	U2
1	CH2 GND	
2	CH2 1/10	
3	CH2 1/100	
4	CH1 AC/DC	CH3 1/5
5	CH1 GND	CH4 1/5
6	CH1 1/10	CH2 INV
7	CH1 1/100	
15	CH2 AC/DC	

TROUBLESHOOTING

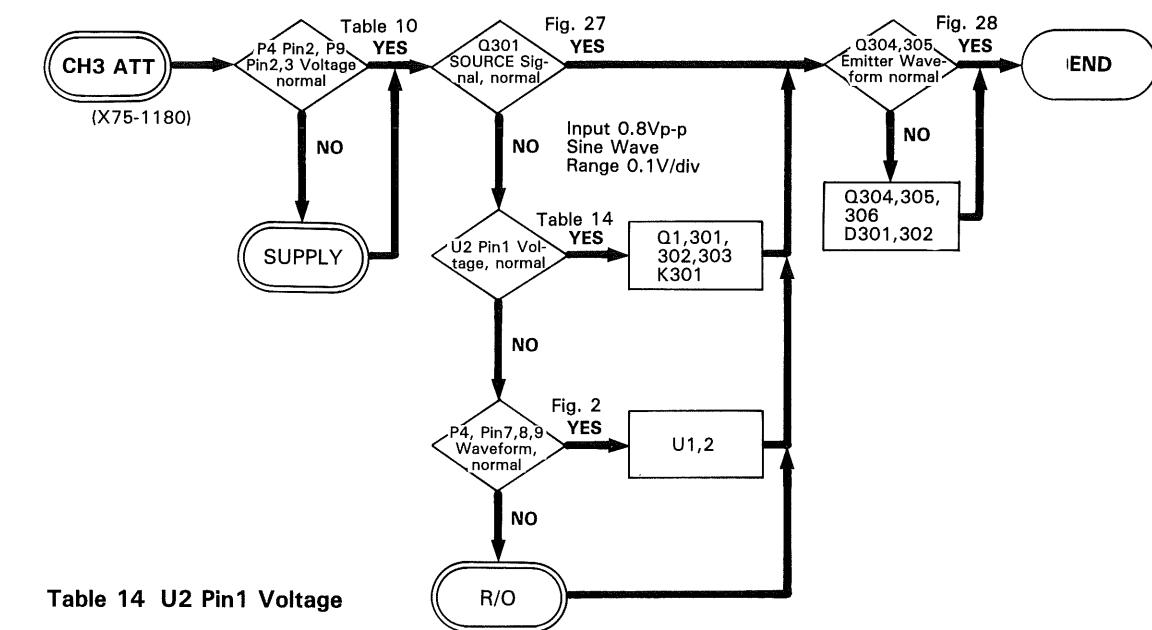
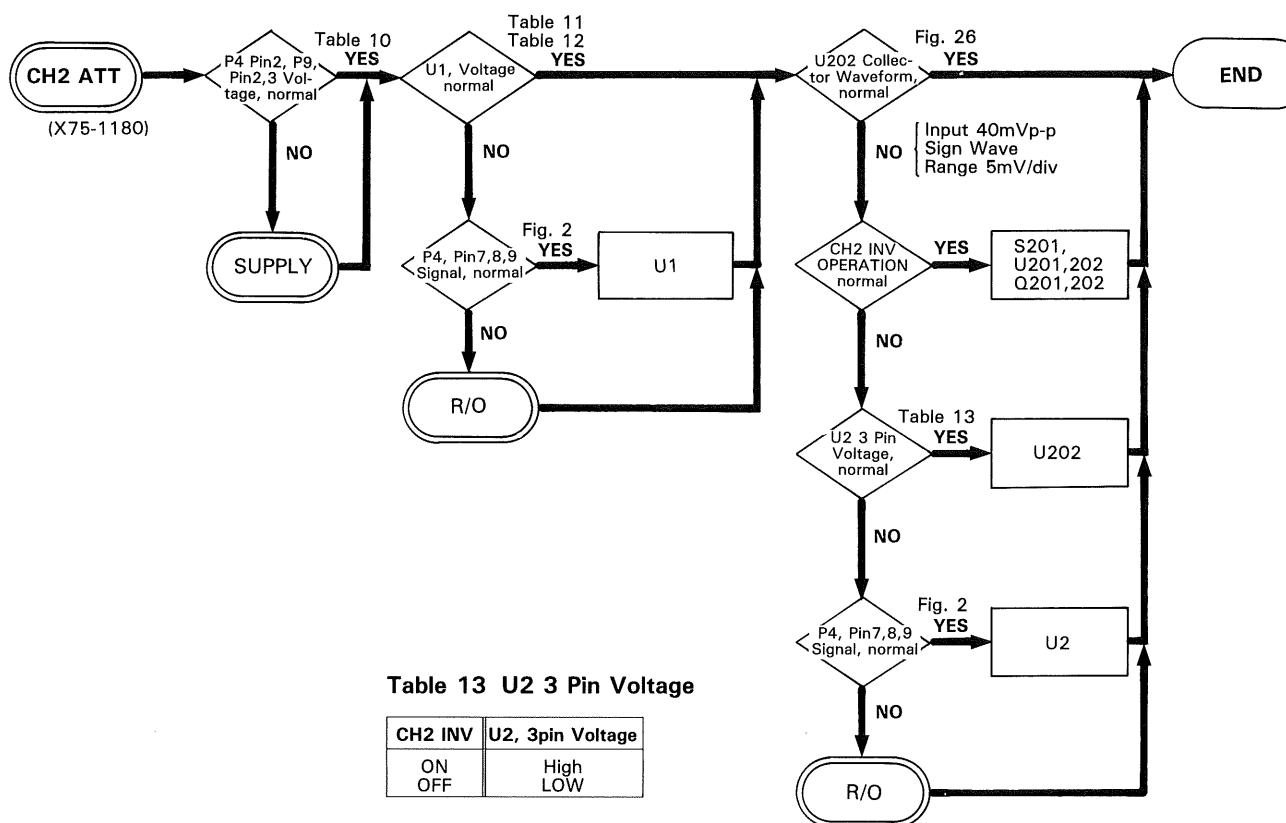


Table 14 U2 Pin1 Voltage

CH3 RANGE	U2 Pin 1
0.5 V/div 0.1 V/div	High LOW

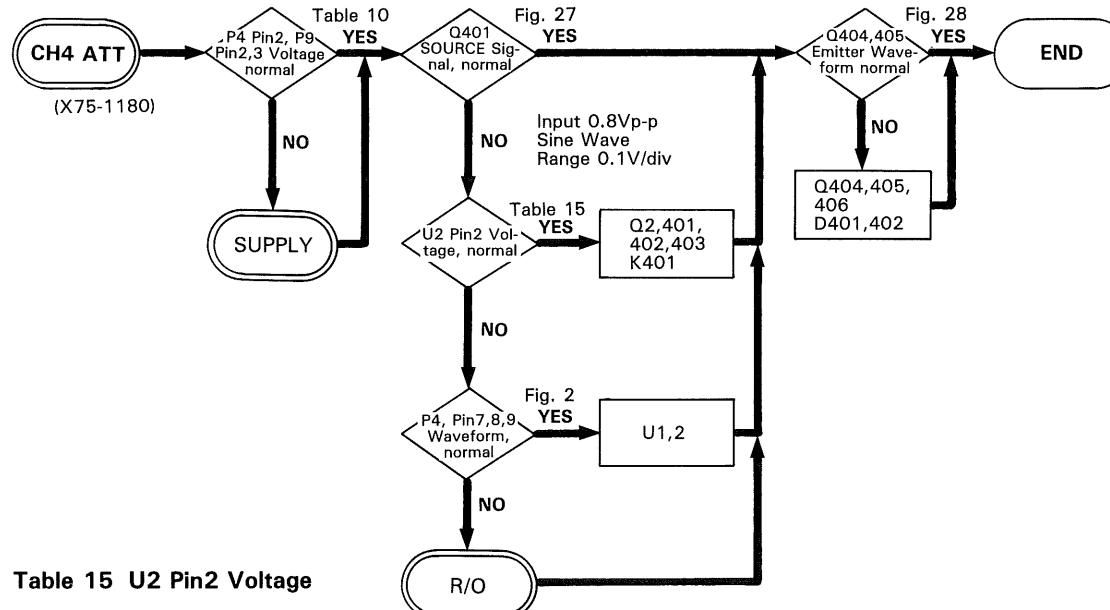


Table 15 U2 Pin2 Voltage

CH4 RANGE	U2 Pin 2
0.5 V/div 0.1 V/div	High LOW

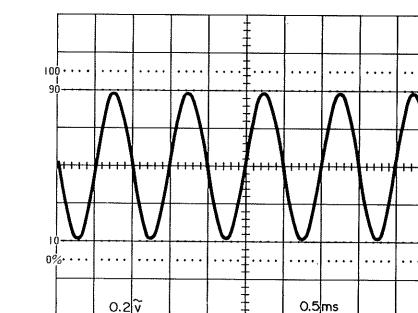


Fig. 27 DC – 0.27 V

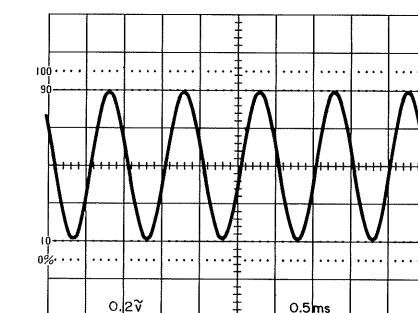


Fig. 28 DC – 1.0 V

TROUBLESHOOTING

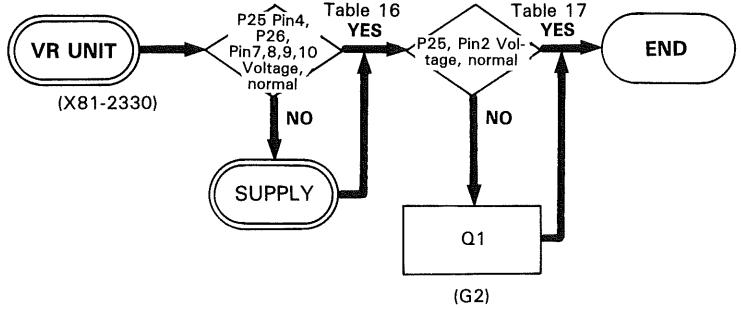


Table 16 Voltage

P25 Pin No.	Voltage [V]
4	+ 140

P26 Pin No.	Voltage [V]
7	+ 10
8	- 10
9	+ 13
10	- 13

Table 17 Voltage

P25	Voltage [V]
Pin 2	+ 20

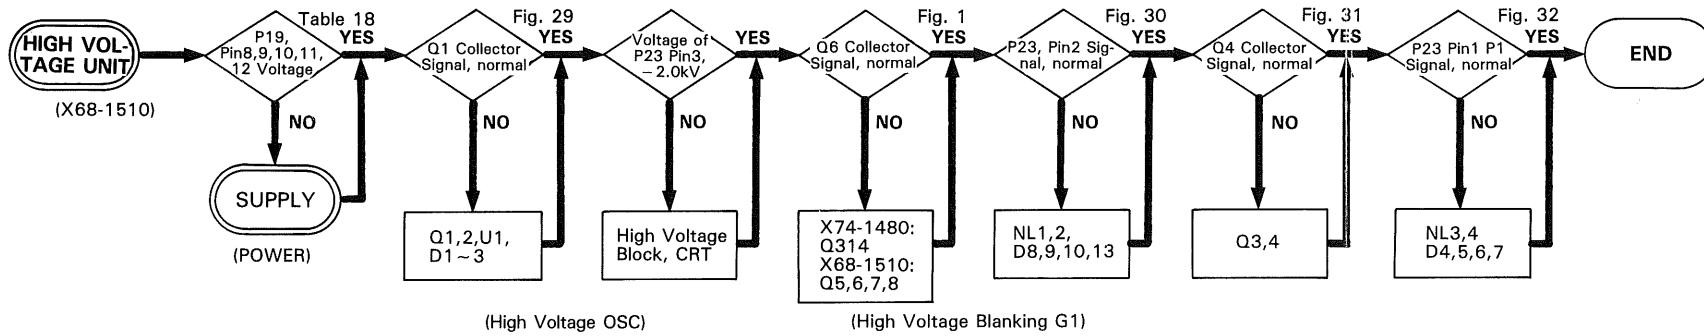


Table 18

P19 Pin No.	Voltage [V]
8	+ 10
9	- 10
10	+ 13
11	- 13
12	+ 140

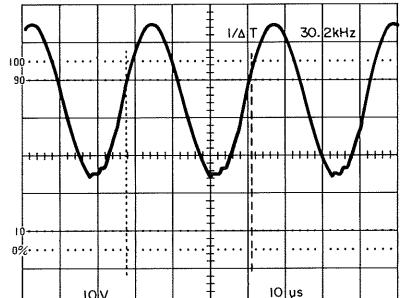


Fig. 29 Q1, Collector Waveform

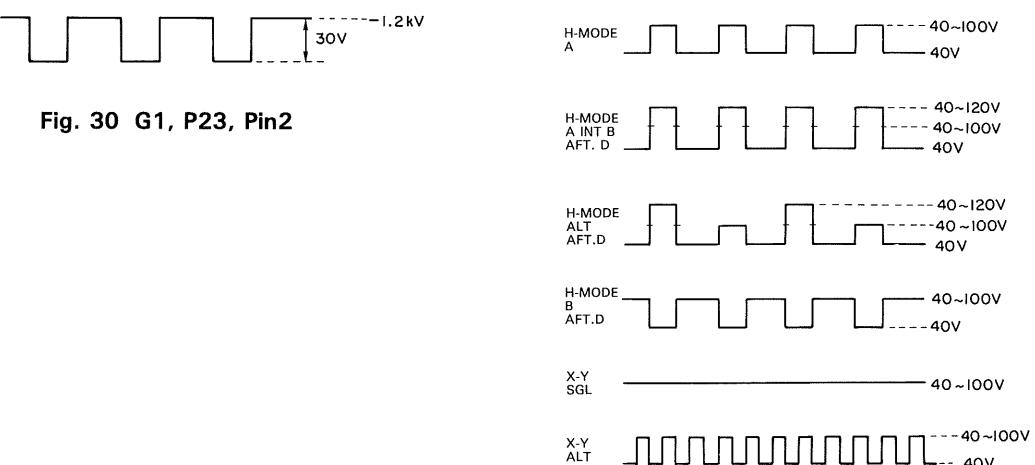


Fig. 30 G1, P23, Pin2

Fig. 31 Q4, Collector Signal

A SWEEP TIME = B SWEEP TIME
DELAY TIME MIN

TROUBLESHOOTING

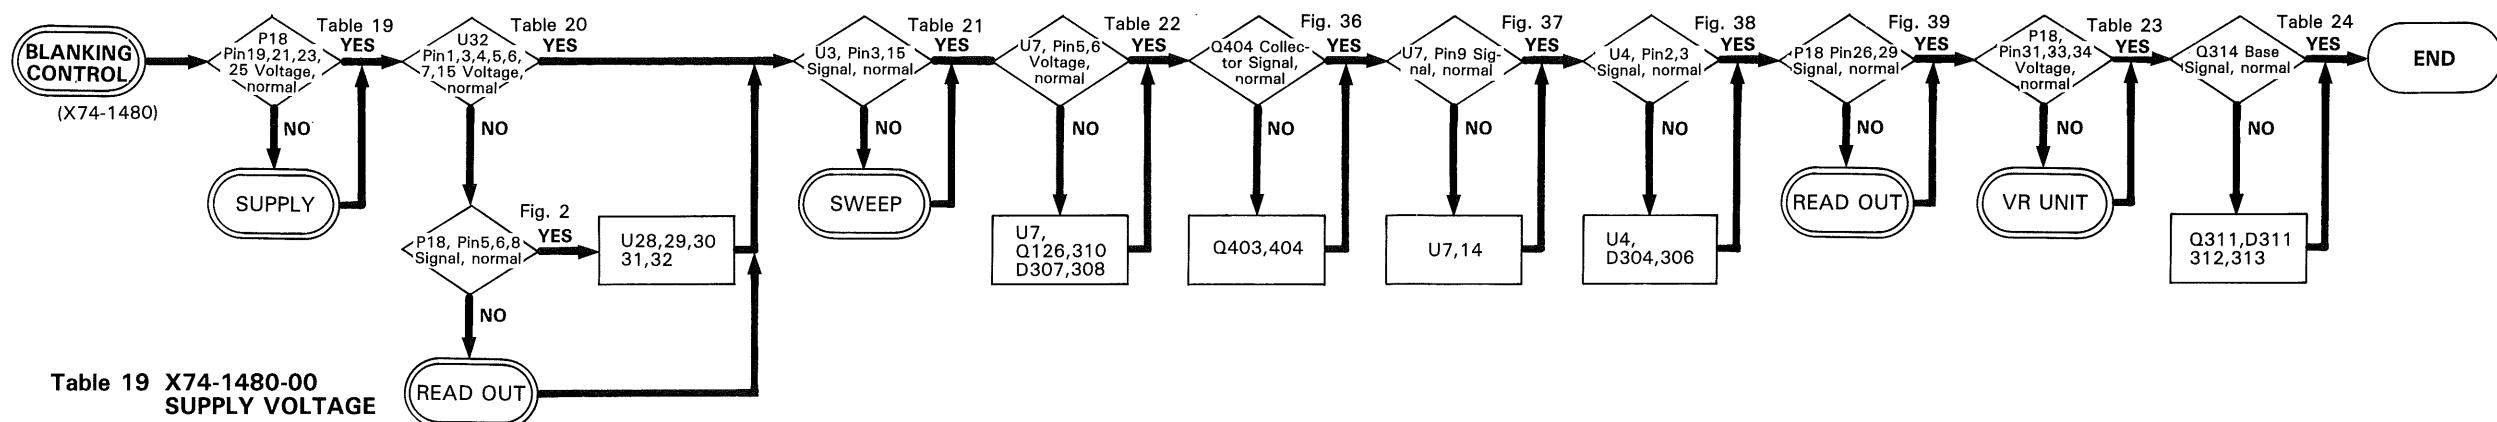


Table 20 U32 Pin VOLTAGE

HORIZ DISPLAY MODE	ALT Pin1	B Pin3	XY SGL Pin4	ATT. D Pin5	A Pin6	CHOP Pin15
A	H	H	L	H	L	V-MODE ALT "H"
A INT B	H	H	L	H	H	
AFT. D	H	H	L	L	H	
ALT	L	H	L	H	H	V-MODE CHOP "L"
NORM	L	H	L	L	H	
AFT. D	L	H	L	L	H	
B	H	L	L	H	H	
NORM	H	L	L	L	H	
AFT. D	H	L	L	L	H	
X-Y	SINGLE	H	H	H	H	
ALT	H	H	L	H	H	

Table 21 U3 Pin3, 15

HORIZ DISPLAY MODE	AS Pin3	BS Pin15
A	Fig. 33	H
A INT B	Fig. 33	H
NORM	Fig. 33	H
AFT. D	Fig. 34	↔
ALT	Fig. 33	H
NORM	Fig. 33	H
AFT. D	Fig. 34	↔
B	Fig. 33	H
NORM	Fig. 33	H
AFT. D	Fig. 34	↔
X-Y SGL	H	H

Table 22 A STATE, B STATE

HORIZ DISPLAY MODE	B STATE U7 Pin 5	A STATE U7 Pin6
A	H	L
A INT B	H	L
ALT	□□	□□
B	L	H
X-Y	H	L

Table 23 A,B, R/O INTEN Voltage

	FULLY CW INTEN MAX ~	FULLY CCW INTEN MIN
A INTEN P18 Pin33	- 10V ~ + 10V	
B INTEN P28 Pin34	- 10V ~ + 10V	
R/O INTEN P18 Pin31	- 10V ~ + 10V	

Table 24 Q314 Base Signal

HORIZ DISPLAY MODE	Q314 Base Signal
A	Fig. 35
A INT B AFT. D	Fig. 35
ALT AFT.D	Fig. 35
B AFT.D	Fig. 35
X-Y	0.5 ~ 1.8V



Fig. 33 HORIZ MODE "A"



**Fig. 34 HORIZ MODE "A INT B" "ALT"
AFT D, Delay time Min
B SWEEP TIME = A SWEEP TIME**






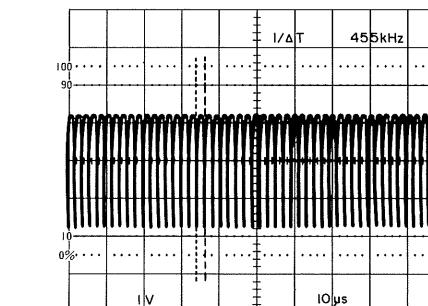


Fig. 36 Q404 Collector Signal

Fig. 35 Q314 Base Signal


TROUBLESHOOTING

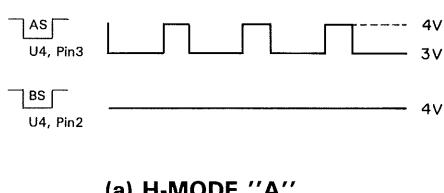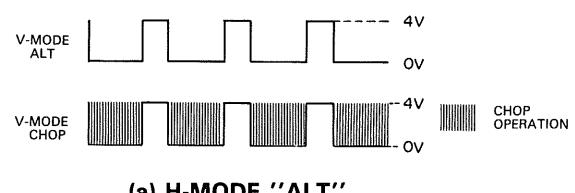


(b) H-MODE THE OTHER

Fig. 37 U7, Pin9 Signal


(b) H-MODE "A INT B"
A SWEEP TIME = B SWEEP TIME
DELAY TIME MIN

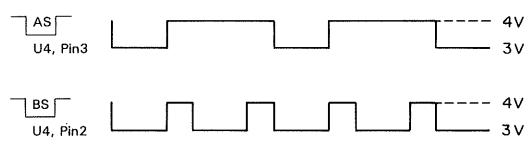


(c) H-MODE "ALT"
A SWEEP TIME = B SWEEP TIME
DELAY TIME MIN

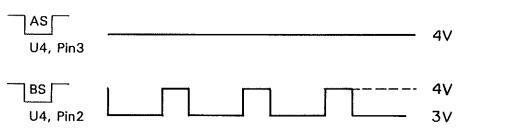

(d) H-MODE "D"
A SWEEP TIME = B SWEEP TIME
DELAY TIME MIN



(e) H-MODE "X-Y" SGL

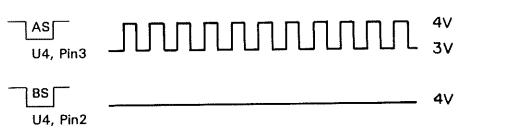

(f) H-MODE "X-Y" ALT

Fig. 38 U4, Pin2,3 Signal



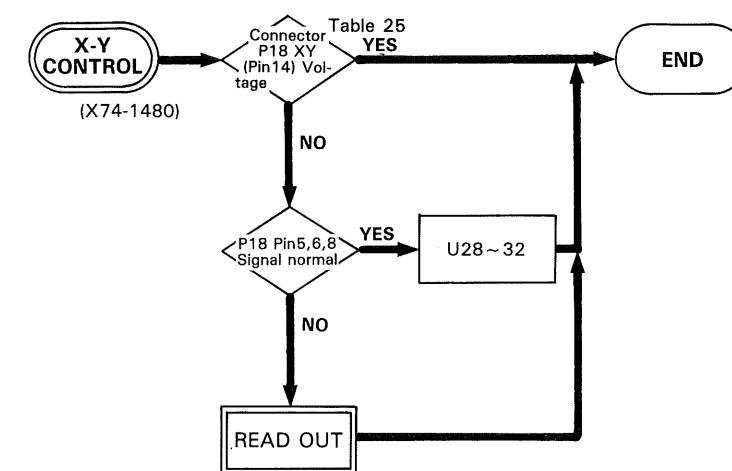


Table 25 X-Y Signal

X-Y	P18 Pin14 X-Y
ON	L
OFF	H



(a) R/O ON



(b) R/O OFF

Fig. 39 P18 Pin26, 29, R/O BLK, R/O UBL Signal

TROUBLESHOOTING

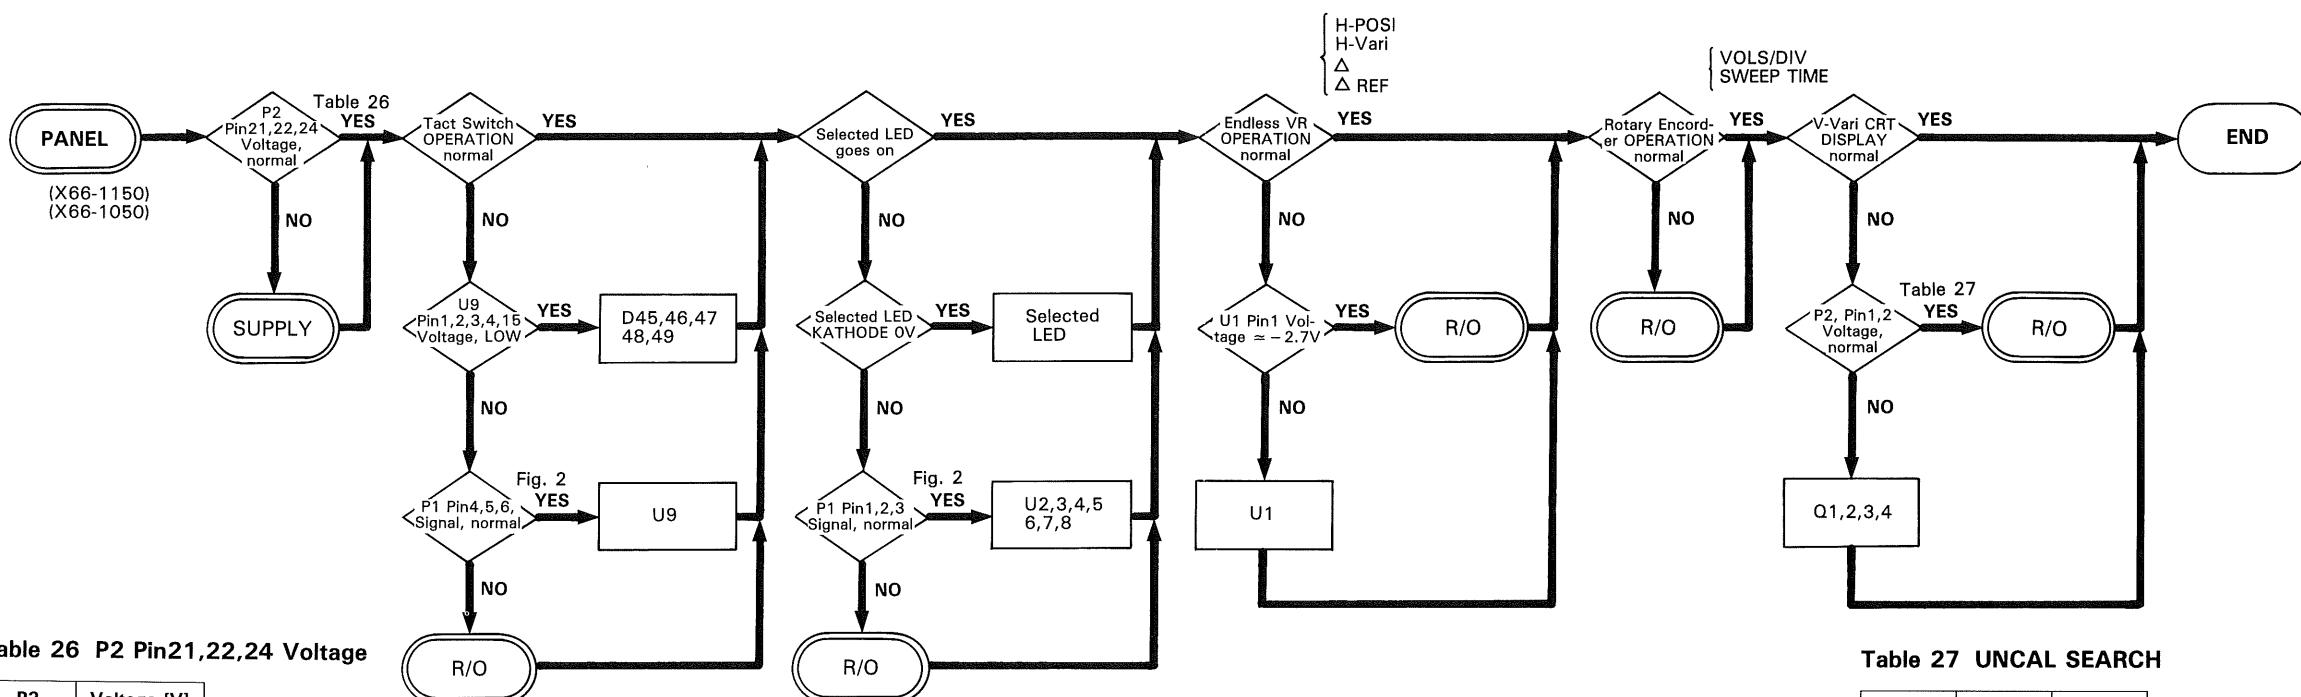




Table 26 P2 Pin21,22,24 Voltage

P2	Voltage [V]
Pin 21	+ 10
22	- 10
24	+ 5



Table 27 UNCAL SEARCH

	CH1 P2, Pin1	CH2 P2, Pin2
CAL	+0.12 [V]	+0.12 [V]
UNCAL	+4.85 [V]	+4.85 [V]



TROUBLESHOOTING

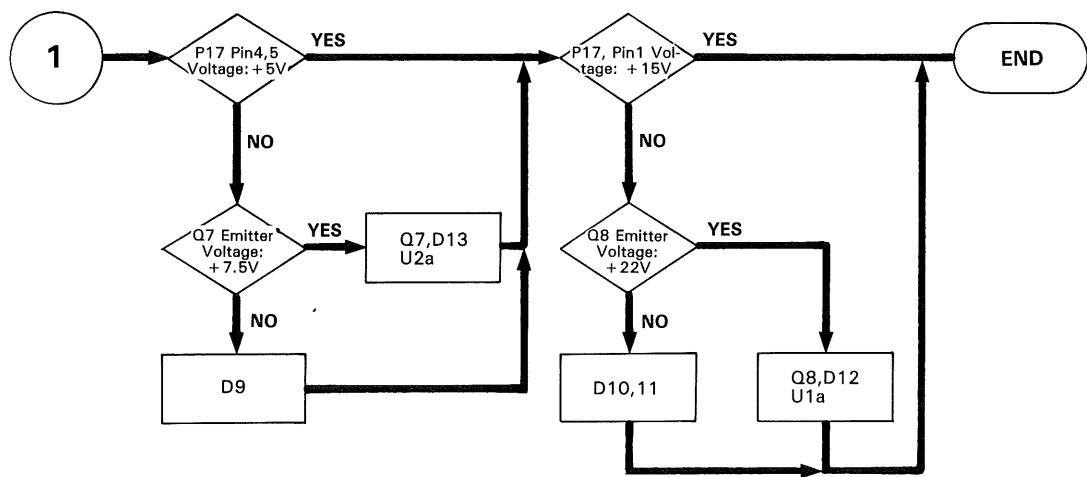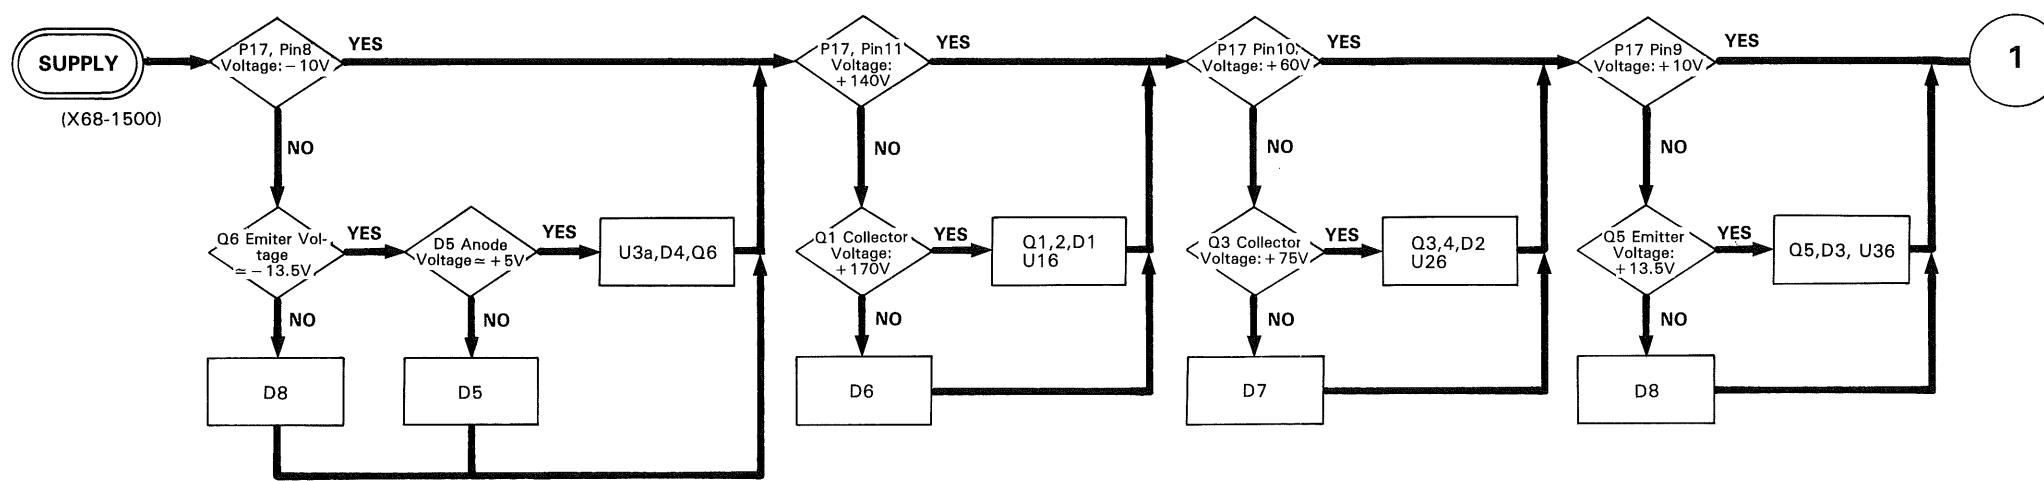



TROUBLESHOOTING

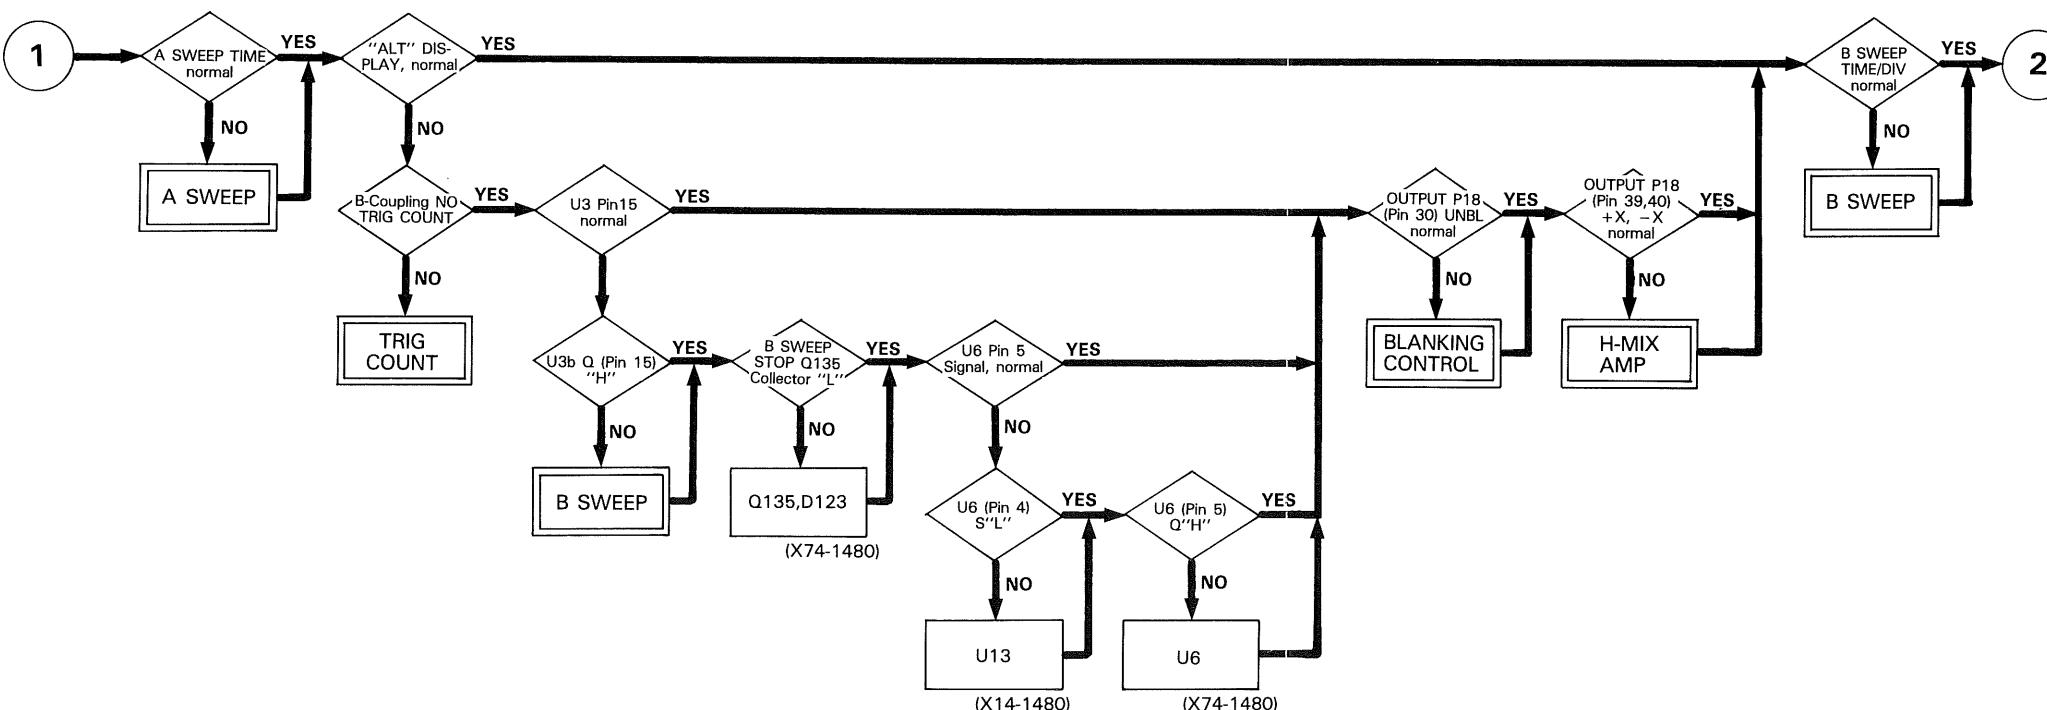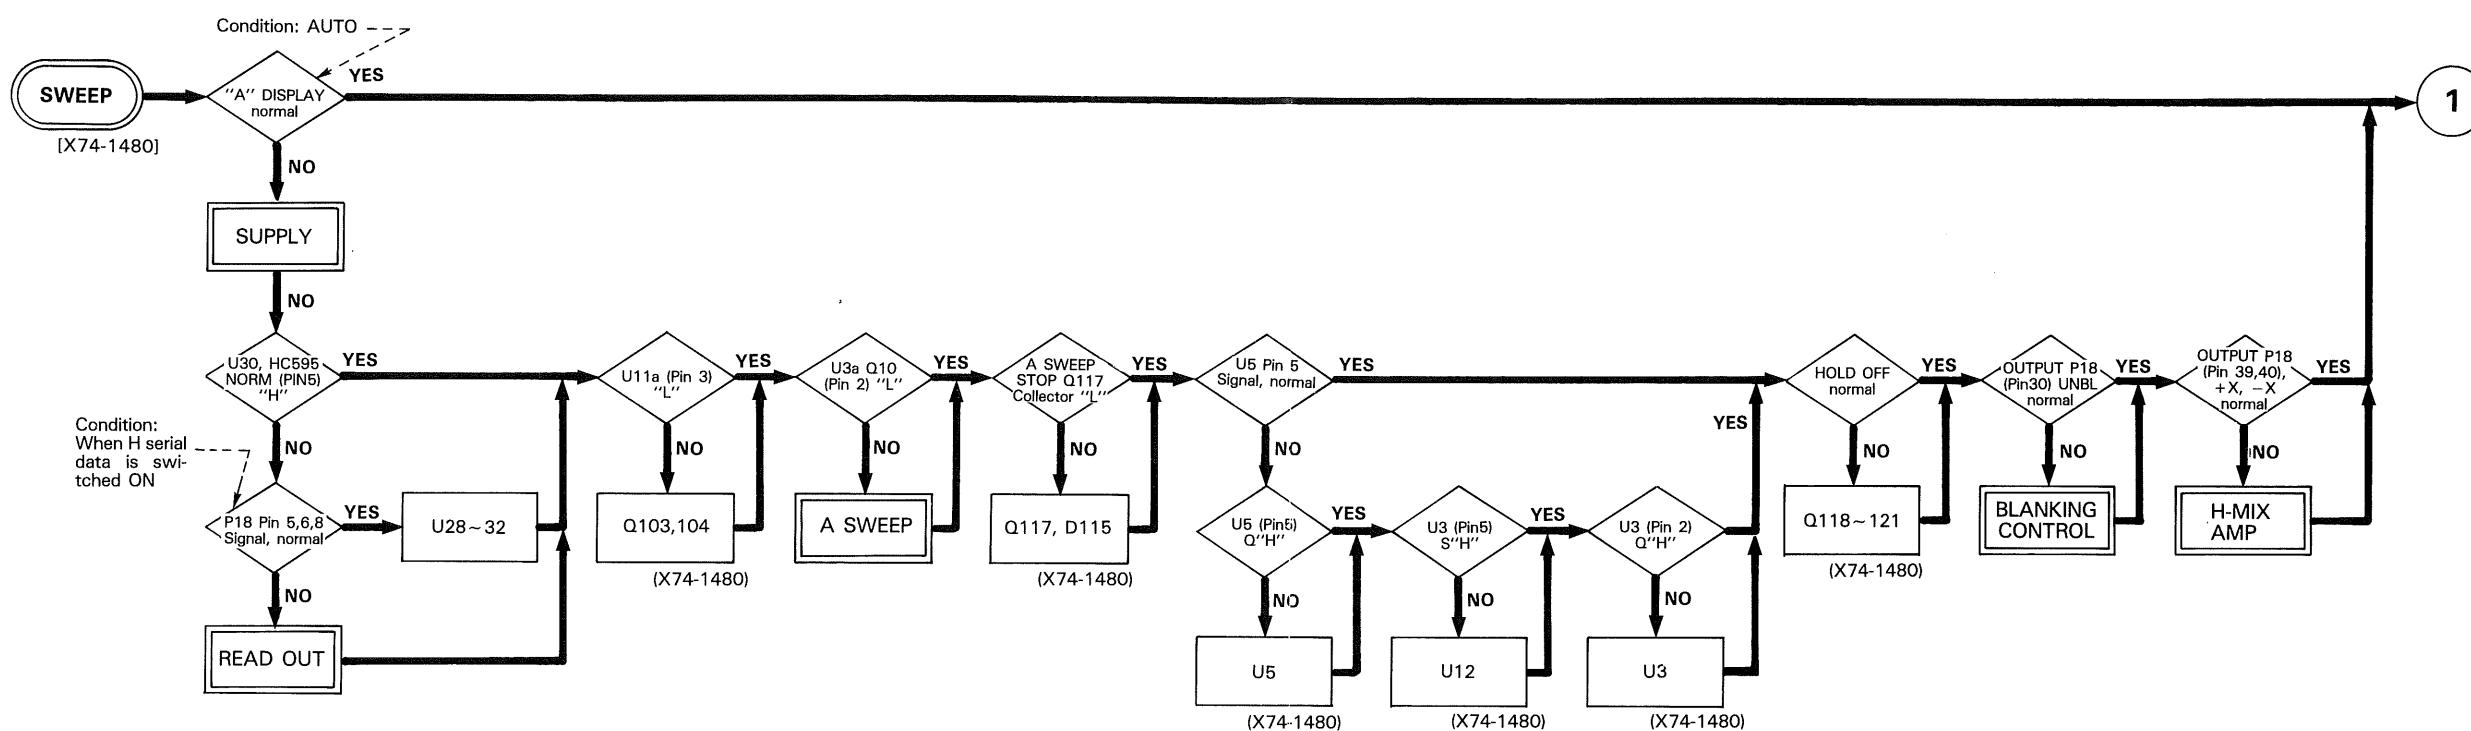

TROUBLESHOOTING

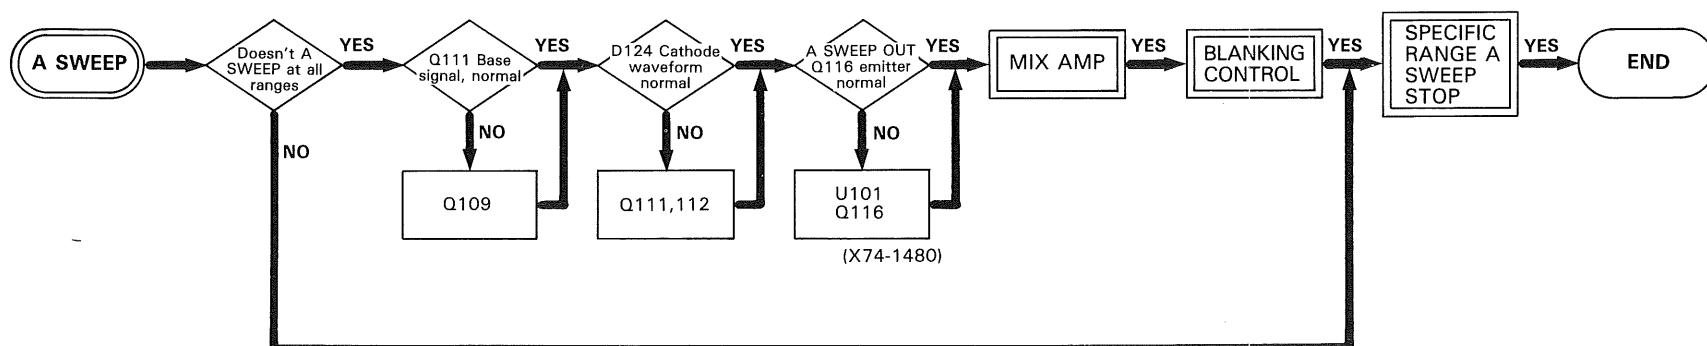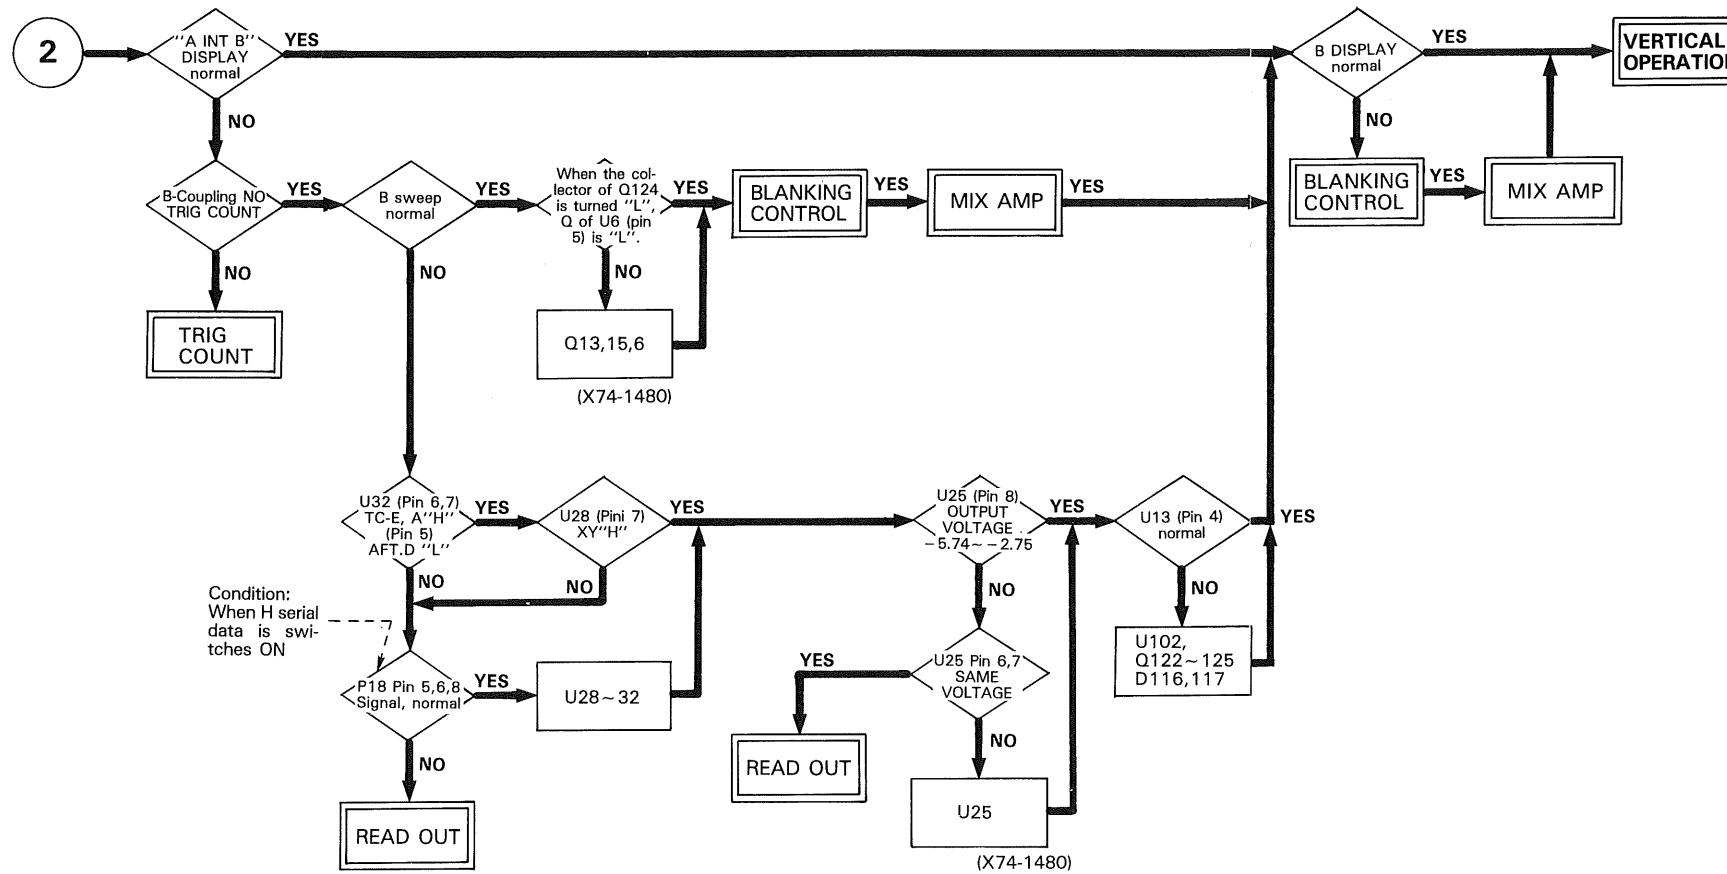

TROUBLESHOOTING

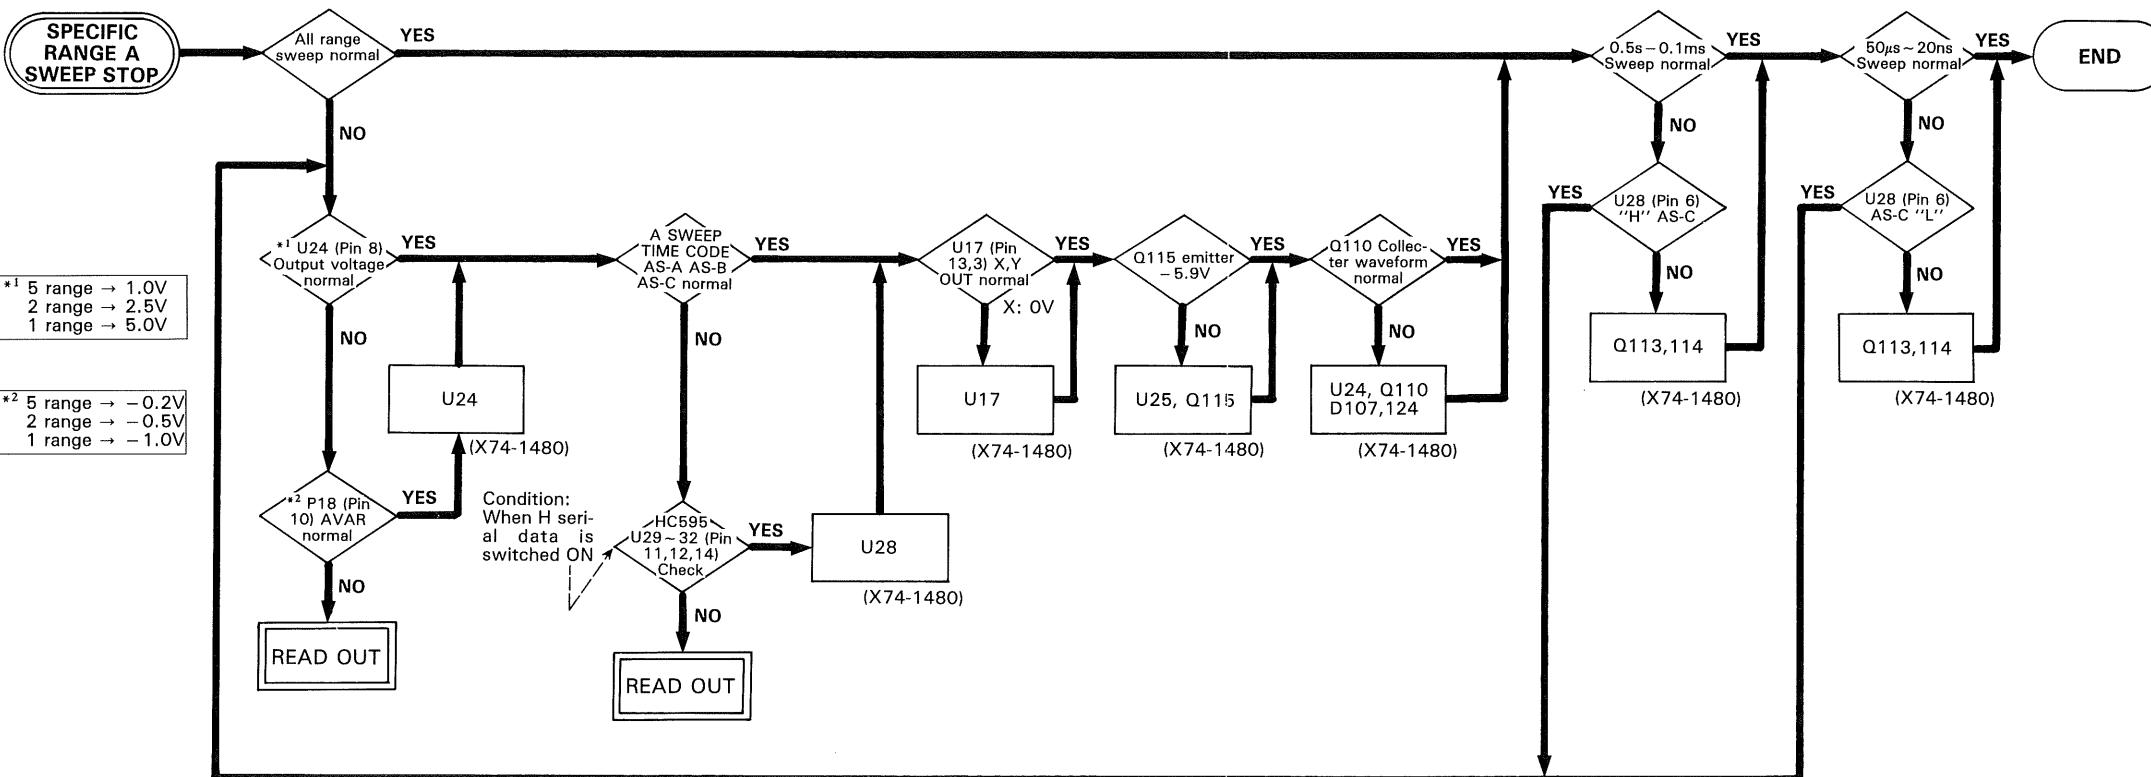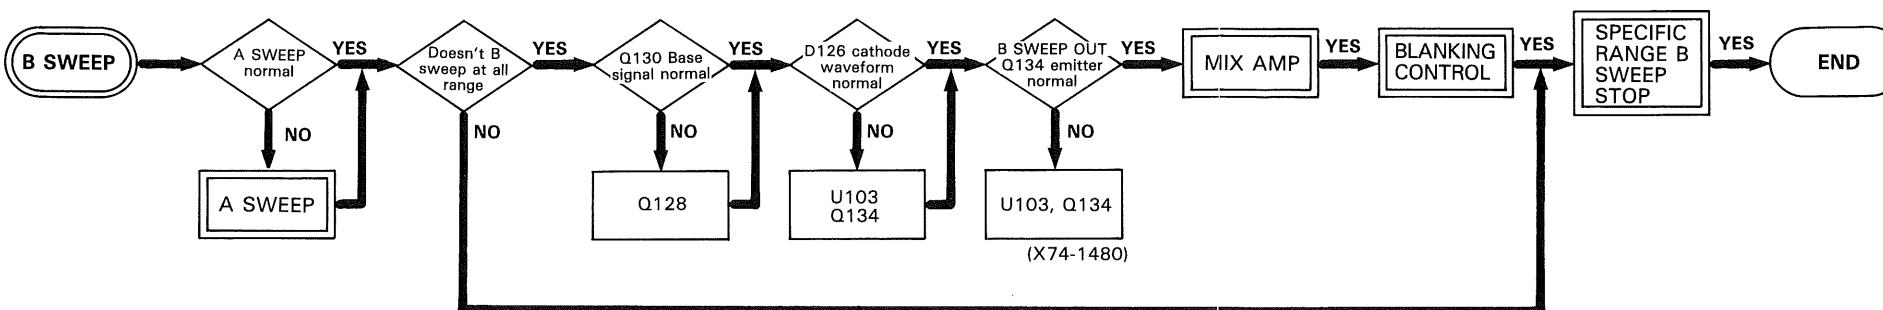

TROUBLESHOOTING




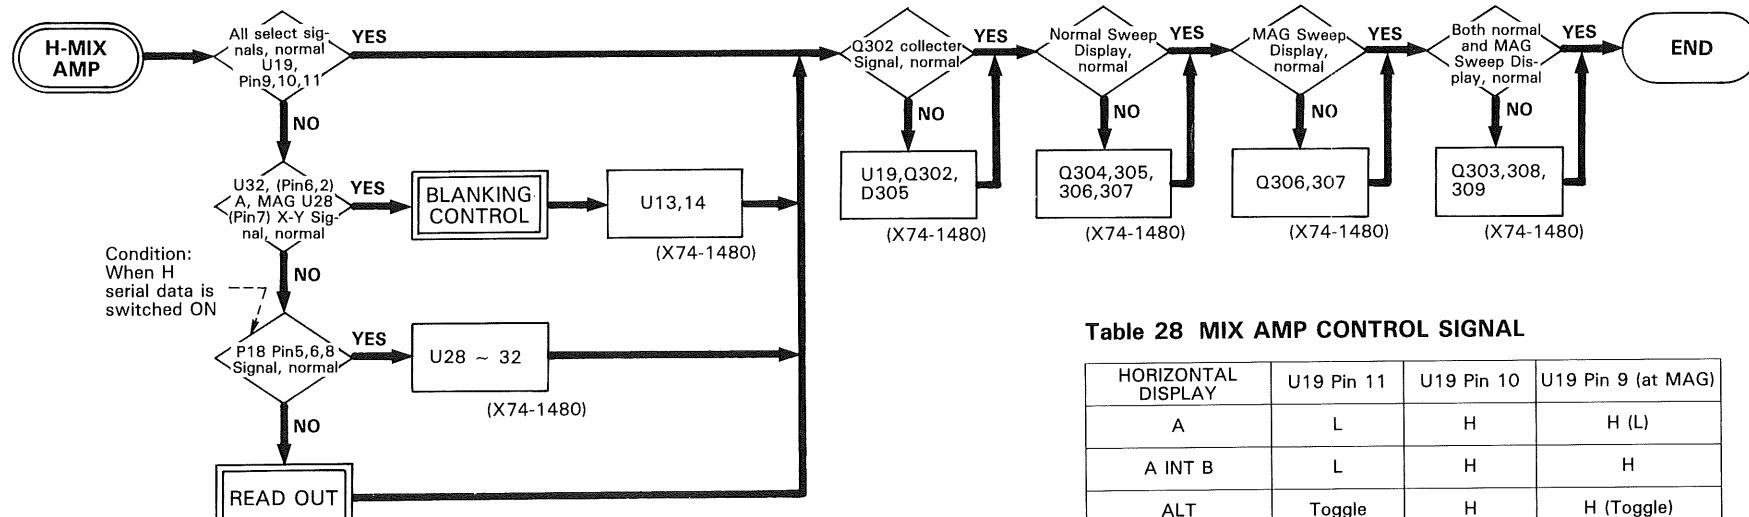




Table 28 MIX AMP CONTROL SIGNAL

HORIZONTAL DISPLAY	U19 Pin 11	U19 Pin 10	U19 Pin 9 (at MAG)
A	L	H	H (L)
A INT B	L	H	H
ALT	Toggle	H	H (Toggle)
B	H	H	H (L)
X-Y	L	L	H


TROUBLESHOOTING

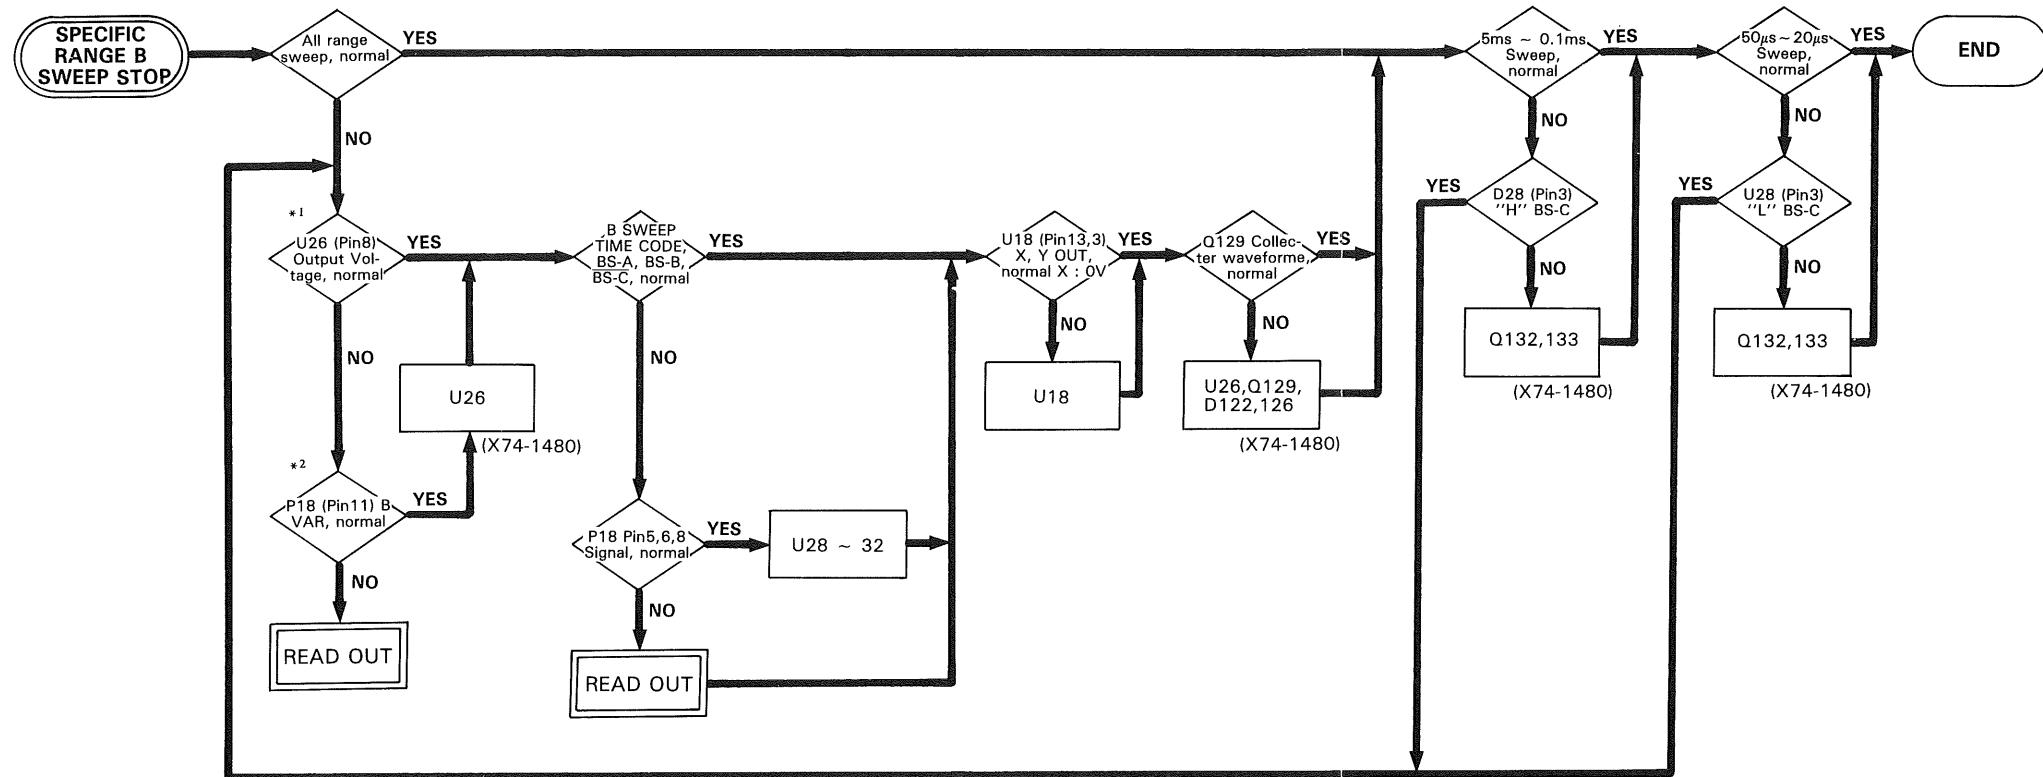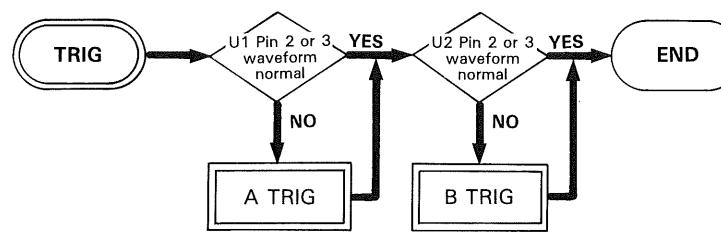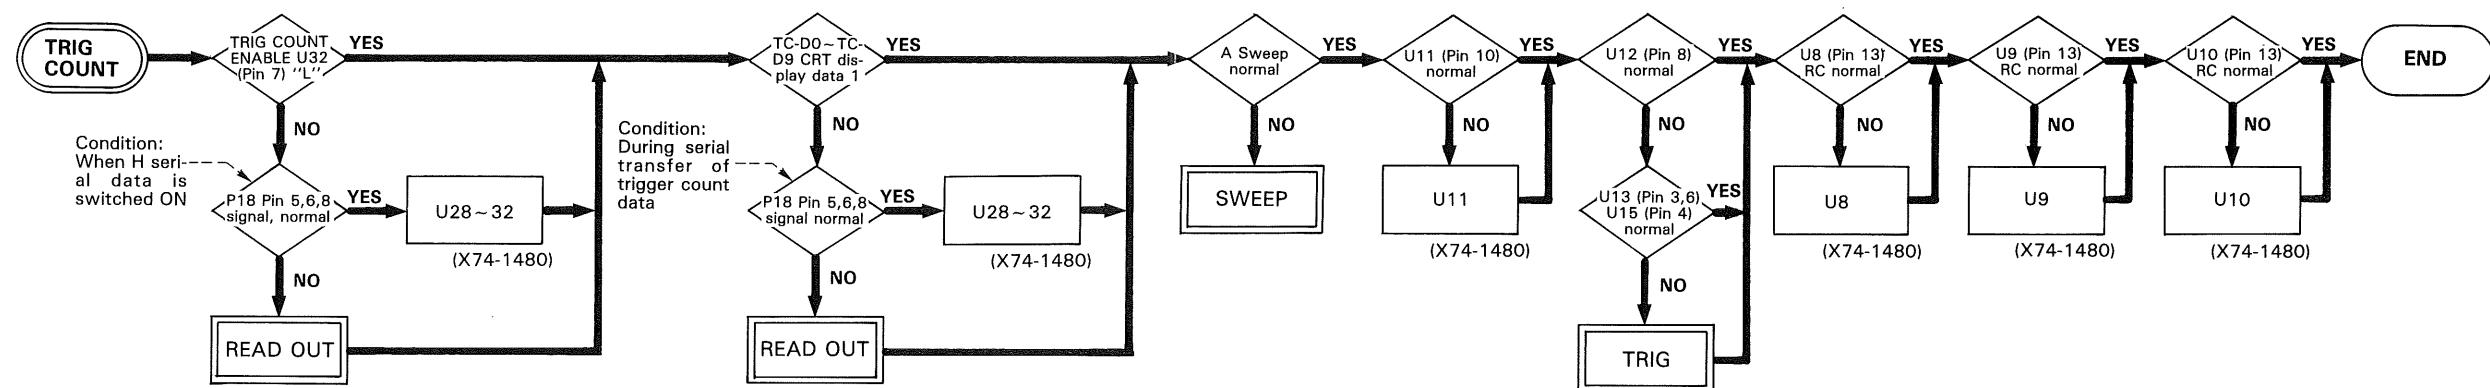



TROUBLESHOOTING

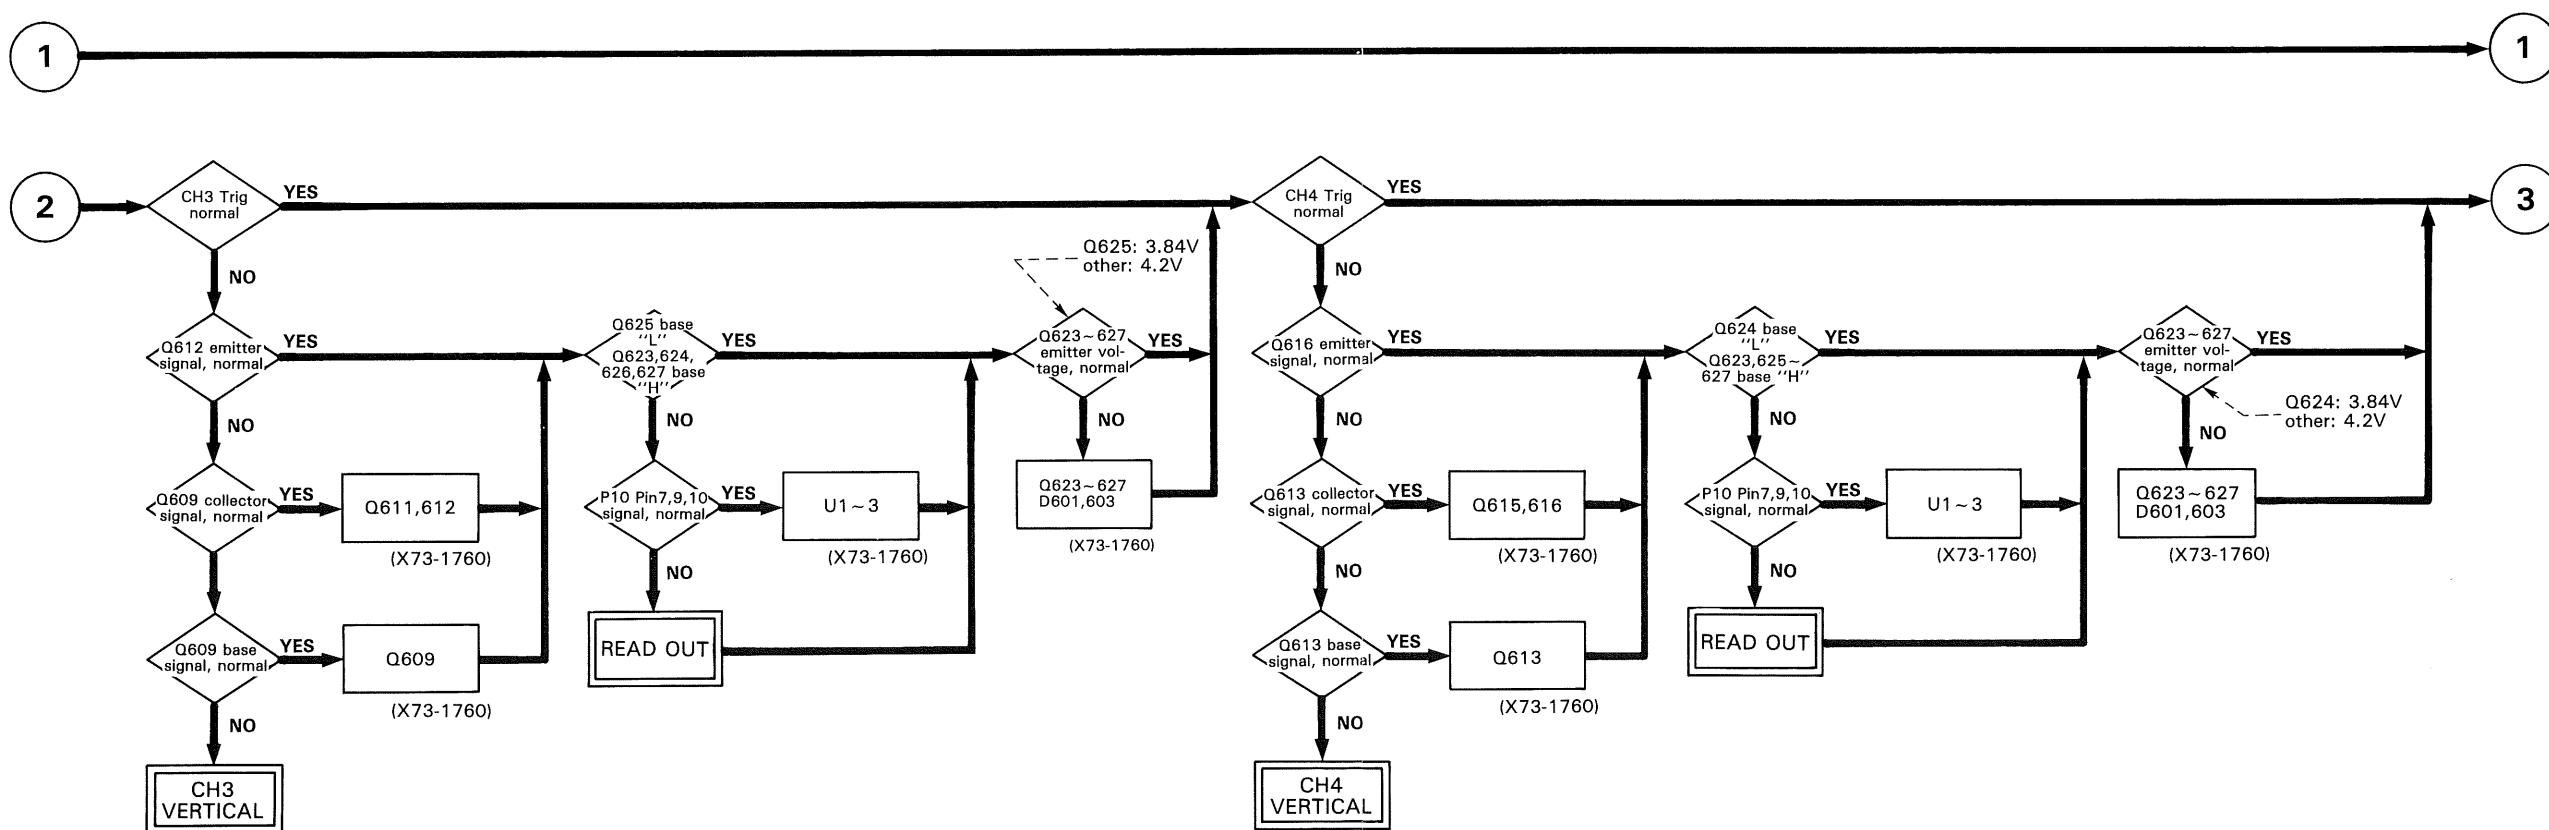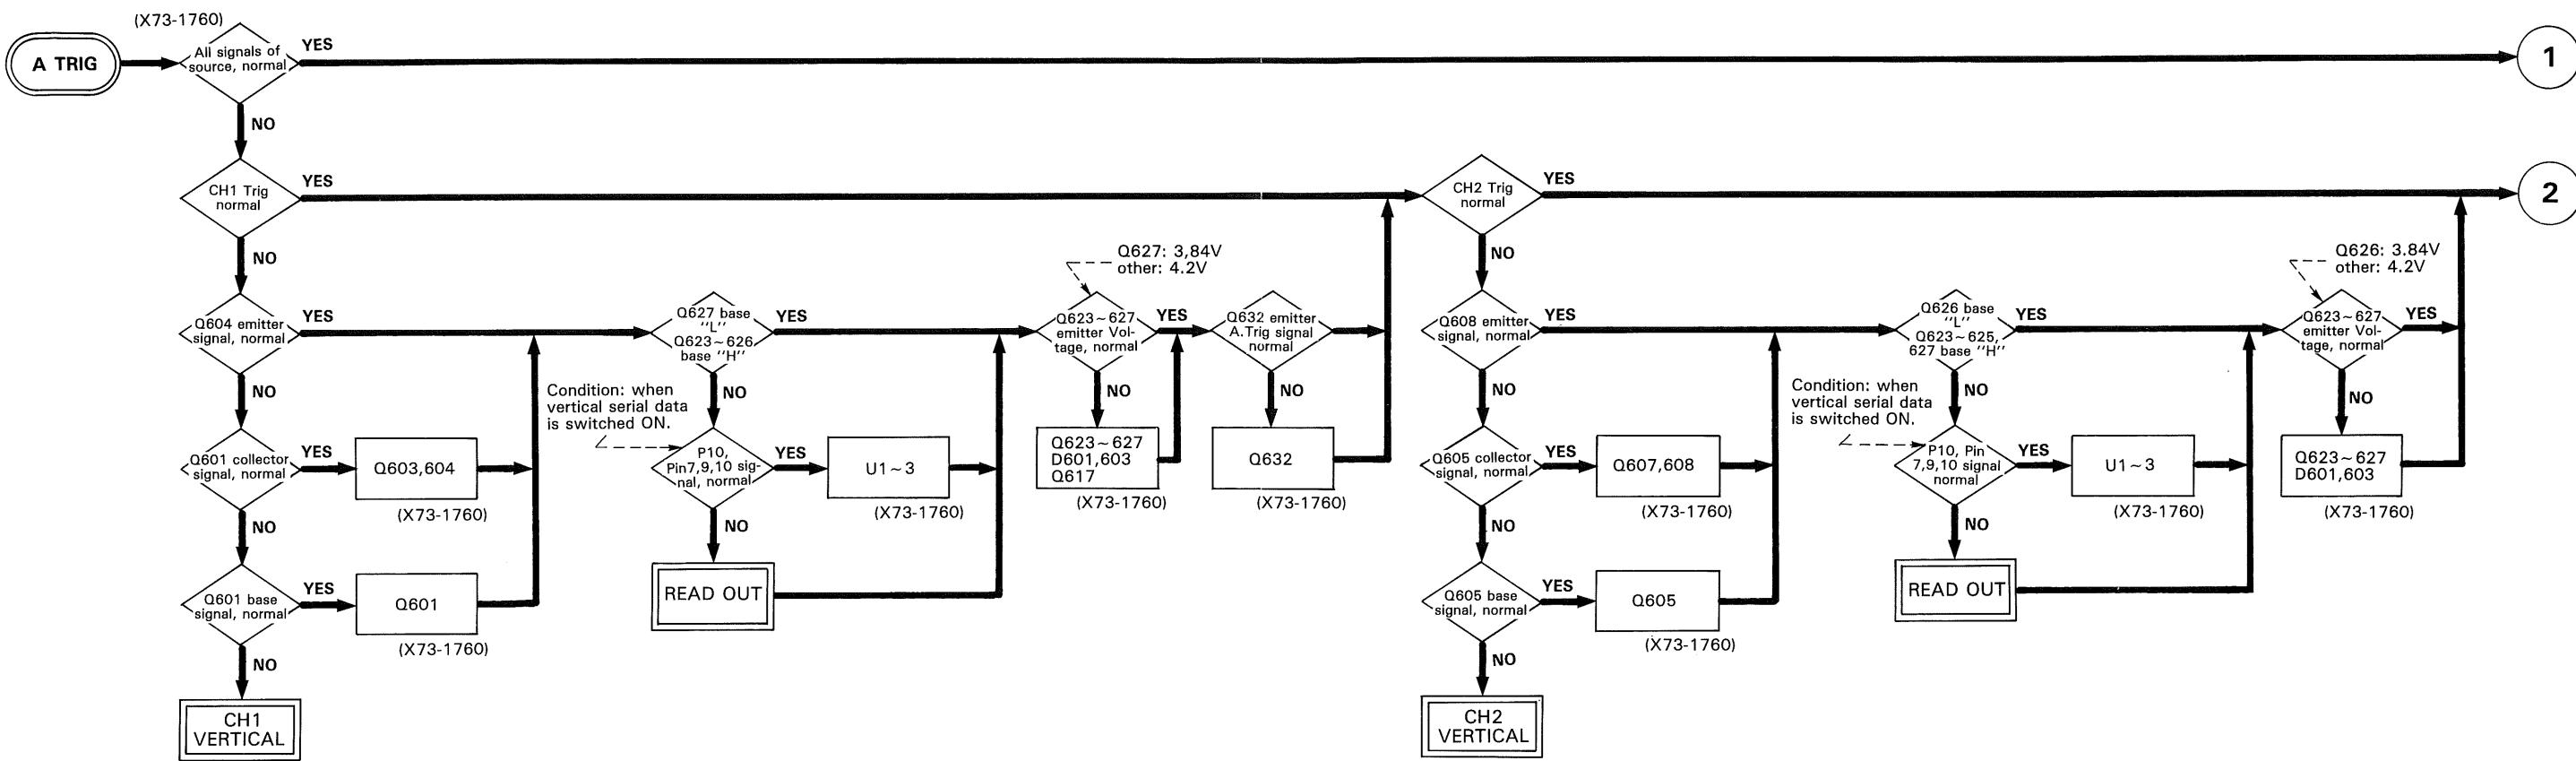

TROUBLESHOOTING

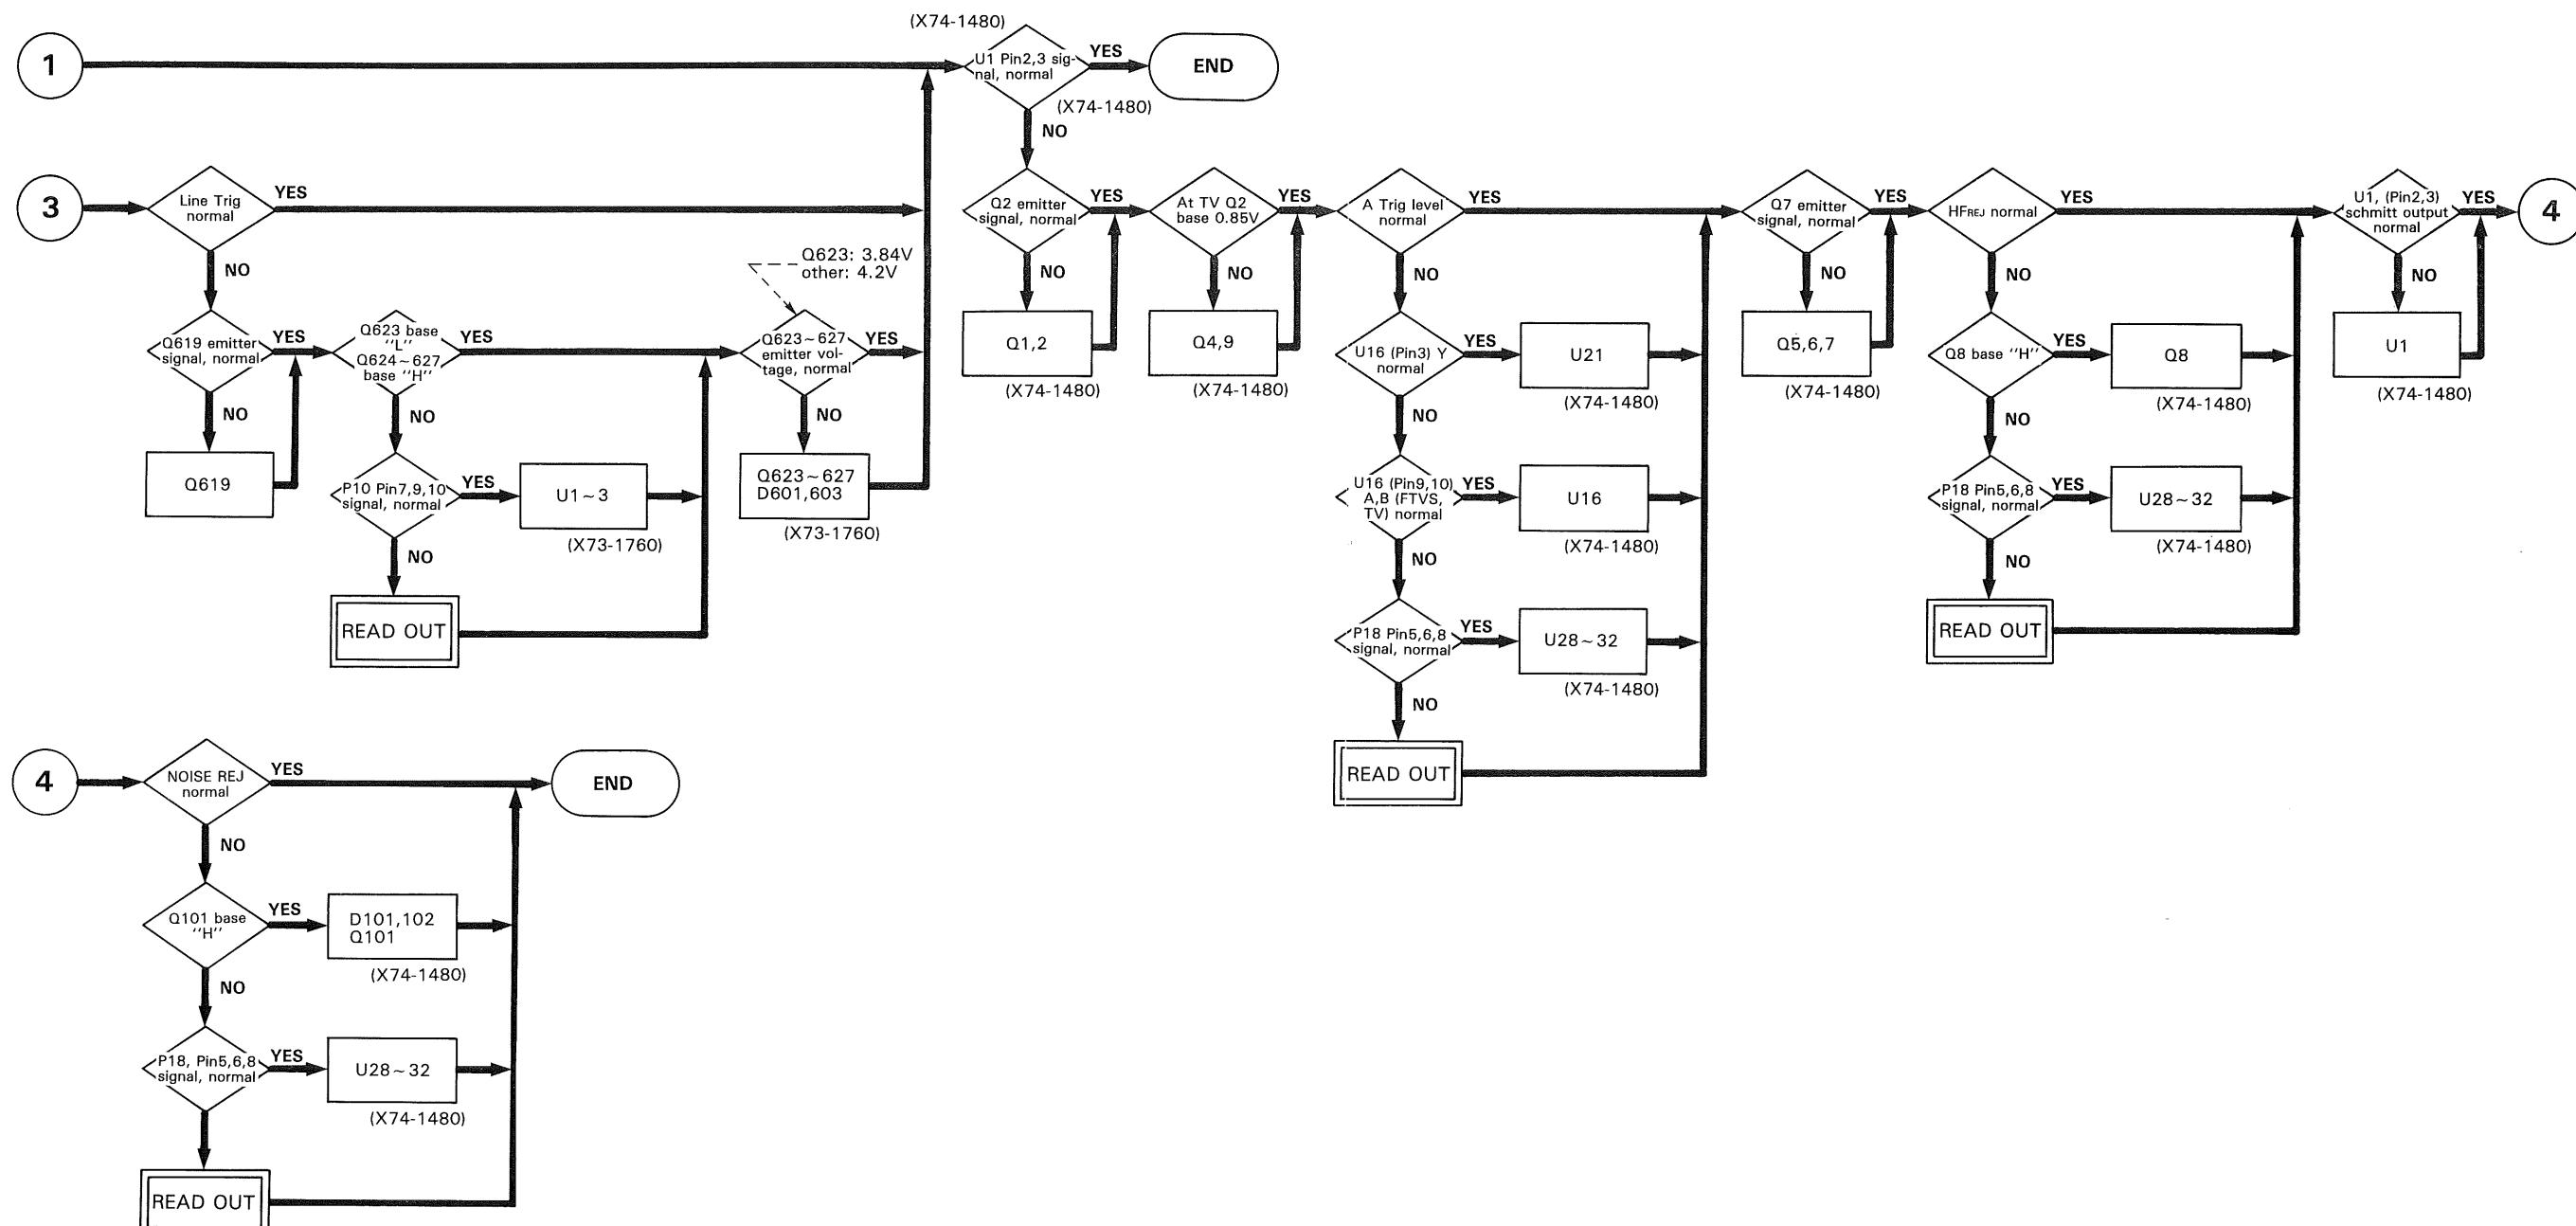

TROUBLESHOOTING

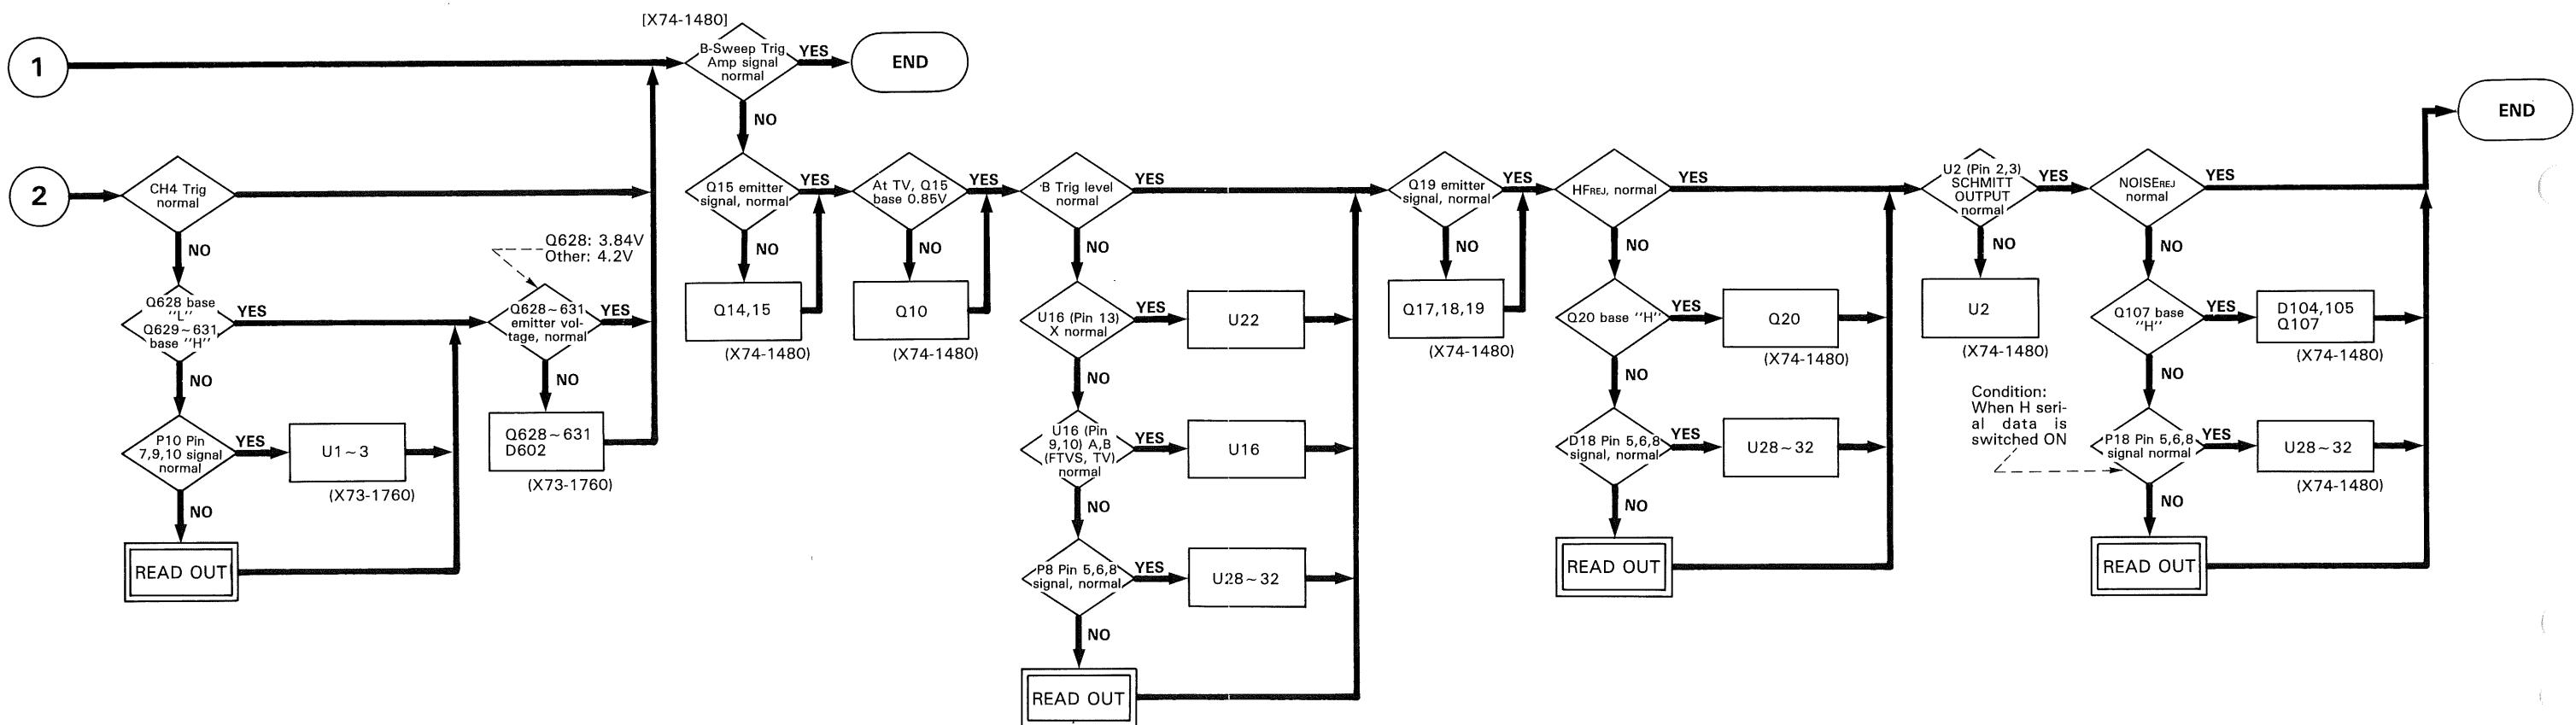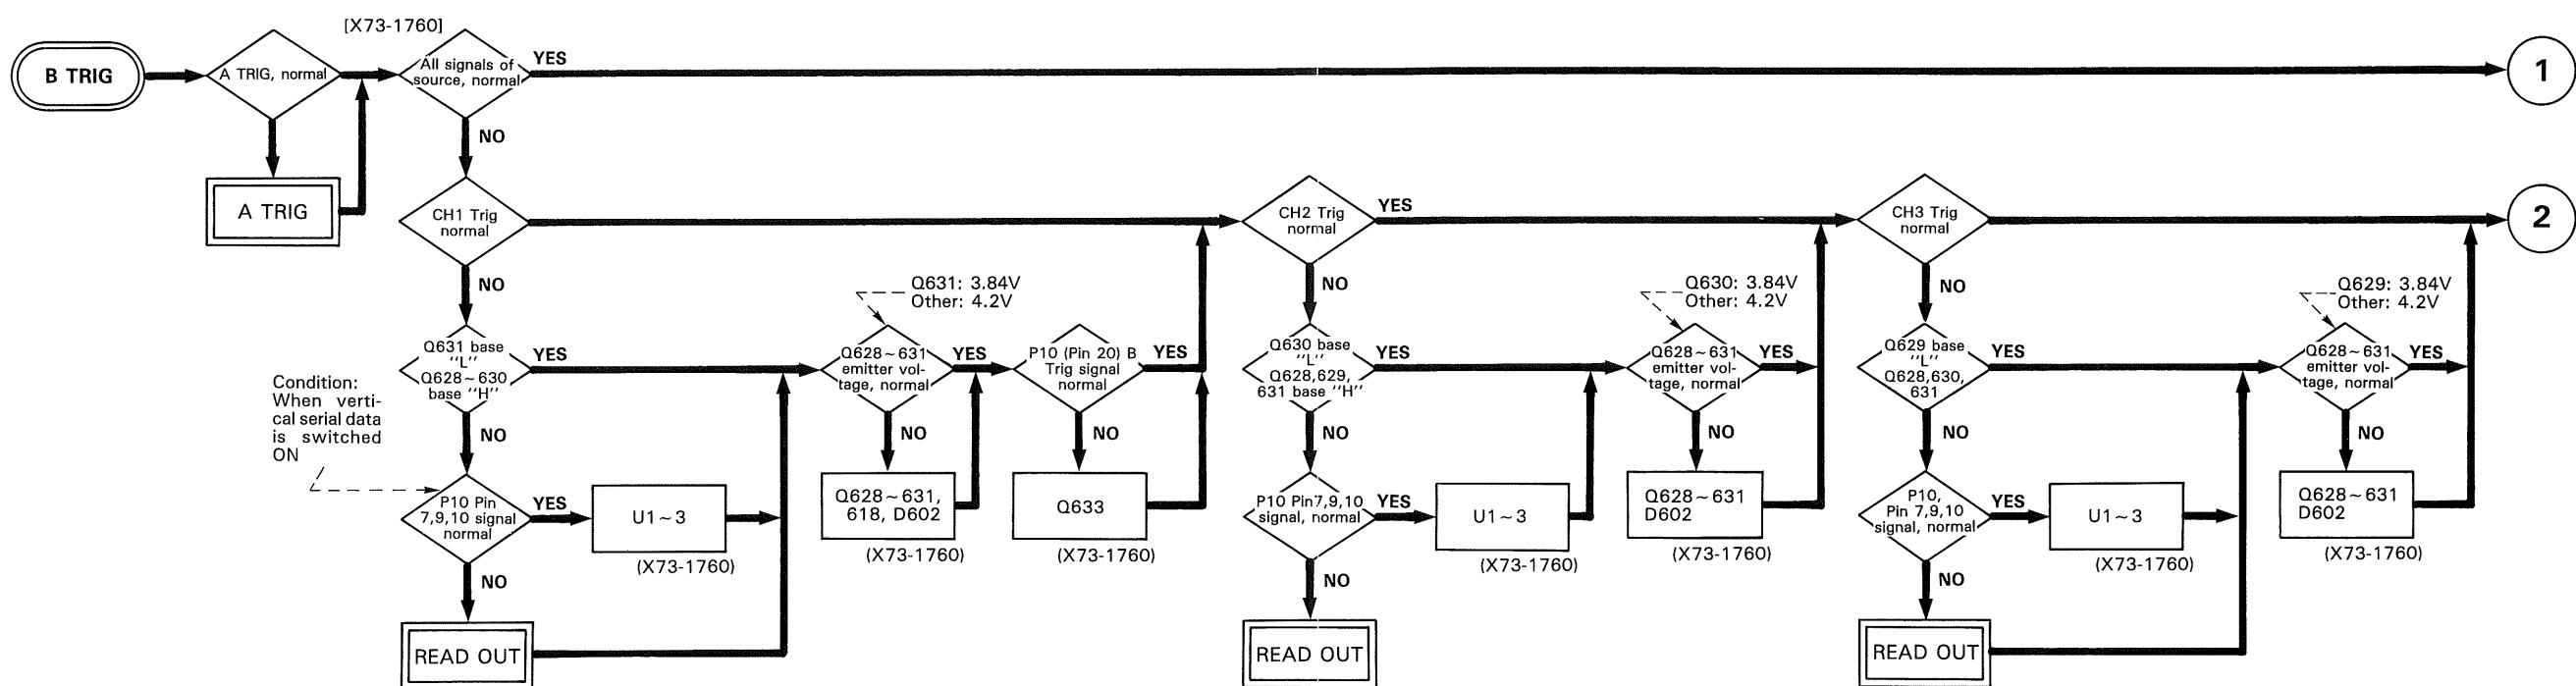

TROUBLESHOOTING

ATT Unit Serial Data Active Level

ATT Code (CH1 and CH2)

	1/2* U3 Pin6 (U3 Pin3)	1/4* U3 Pin5 (U3 Pin2)	1/10 U1 Pin6 (U1 Pin2)	1/100 U1 Pin7 (U1 Pin3)	MAG* U3 Pin7 (U3 Pin4)	CH1 (CH2) Display
1 mV	L	L	L	L	L	1 mV
2 mV	H	L	L	L	L	2 mV
5 mV	L	L	L	L	H	5 mV
10 mV	H	L	L	L	H	10 mV
20 mV	L	H	L	L	H	20 mV
50 mV	L	L	H	L	H	50 mV
0.1 V	H	L	H	L	H	0.1 V
0.2 V	L	H	H	L	H	0.2 V
0.5 V	L	L	L	H	H	0.5 V
1 V	H	L	L	H	H	1 V
2 V	L	H	L	H	H	2 V
5 V	L	L	H	H	H	5 V

() CH2

*1/2, 1/4, MAG Signal Vertical Unit IC.

ATT Code (CH3 and CH4)

	CH3 U2 Pin1	CH4 U2 Pin2	Display
0.1V	H	H	0.1
0.5V	L	L	0.5

CH1,CH2 Coupling	Active	Output IC	Display
CH1 AC	L	U1 Pin4	mV or V
CH1 GND	L	U1 Pin5	---
CH2 AC	L	U1 Pin15	mV or V
CH2 GND	L	U1 Pin1	---

CH2 Polarity	U2 Pin3	Display
Normal	H	
Invert	L	space

Vertical Unit Serial Data Active Level

A-Source	Active	Output IC
CH1	L	U2 Pin 4
CH2	L	U2 Pin 3
CH3	L	U2 Pin 2
CH4	L	U2 Pin 1
LINE	L	U2 Pin 15

B-Source	Active	Output IC
CH1	L	U1 Pin 2
CH2	L	U1 Pin 1
CH3	L	U1 Pin 15
CH4	L	U2 Pin 5

V-Mode	Active	Output IC
CH1E	L	U1 Pin 7
CH2E	L	U1 Pin 6
CH3E	L	U1 Pin 5
CH4E	L	U1 Pin 4
ADDE	L	U1 Pin 3

20MHz BWL	Active	Output IC	Display
BW	L	U3 Pin 1	Bw

Horizontal Unit Serial Data Active Level

(A-Coupling)	Active	Output IC	Condition
AC	L	U29 Pin 7	A Coupling "AC" or A-Source "LINE"
NOISE _{REJ}	H	U29 Pin 5	A-Coupling "NOISE _{REJ} "
HF _{REJ}	H	U29 Pin 6	A-Coupling "HF _{REJ} " or "TV-V" or A-Source "LINE"
TV (B-Coupling)	H	U29 Pin 4	A-Coupling "TV-V" or "TV-H"
AC	L	U29 Pin 15	B-Coupling "AC"
NOISE _{REJ}	H	U29 Pin 2	B-Coupling "NOISE _{REJ} "
HF _{REJ}	H	U29 Pin 1	B-Coupling "HF _{REJ} "
FTVS	H	U29 Pin 3	A-Coupling "TV-V" "TV-H" and Slope "--" or "FIX"

ASLOPE	U30 Pin 7
+	H
-	L

B SLOPE	U30 Pin 6
+	H
-	L

SWEEP MODE	U30 Pin 5	Condition
NORMAL	L	Non "AUTO" or "X-Y"

HORIZONTAL MODE	Active	Output IC	Condition	Display
A	L	U32 Pin 6	Horizontal Mode "A"	A Sweep Time
ALT	L	U32 Pin 1	Horizontal Mode "ALT"	A, B Sweep Time
B	L	U32 Pin 3	Horizontal Mode "B"	A, B Sweep Time
X, Y	L	U28 Pin 7	Horizontal Mode "X, Y"	"CH2-X"
X-Y SGL	H	U32 Pin 4	Horizontal Mode "X-Y" and single sweep	

MAG	U32 Pin 2	Condition
normal	H	Horizontal Mode "A INT B" or "X-Y" or MAG normal
X10 MAG	L	

Single Sweep	Active	Output IC
Single	L	U30 Pin 2

CHOP	Active	Output IC
CHOP	L	U30 Pin 15

Trig Count	Active	Output IC	Display
TC-E (Trig count Enable)	L	U32 Pin 7	COUNT
TC-D0	D9	U30 Pin 1	COUNT 1
TC-D1	0000000000	U30 Pin 15	COUNT 2
TC-D2	0000000001	U31 Pin 7	COUNT 3
TC-D3	.	U31 Pin 6	.
TC-D4	.	U31 Pin 5	.
TC-D5	.	U31 Pin 4	.
TC-D6	.	U31 Pin 3	.
TC-D7	.	U31 Pin 2	.
TC-D8	.	U31 Pin 1	.
TC-D9	1111100111	U31 Pin 15	COUNT 1000

B (TV)	A (FTVS)	Y	X
0	0	Y0 (ALVL)	Y0 (BLVL)
0	1	Y1 (FIX)	X1 (BLVL) (X0=X1)
1	0	Y2 (TV+)	X2 (TV+)
1	1	Y3 (TV-)	X3 (TV-)



X74-1480
U16 Analog SW Control signal
TV...TV-V or TV-H "H" other "L"
FTVS...Fix or TV SLOPE ⊖ "H" other "L"

SWEEP TIME CODE




Sweep Time	A Sweep Time Code			B Sweep Time Code		
AS-A	AS-B	AS-C	BS-A	BS-B	BS-C	

<tbl_r cells="6" ix="2" maxcspan="1" maxrspan="1" usedcols="




TROUBLESHOOTING

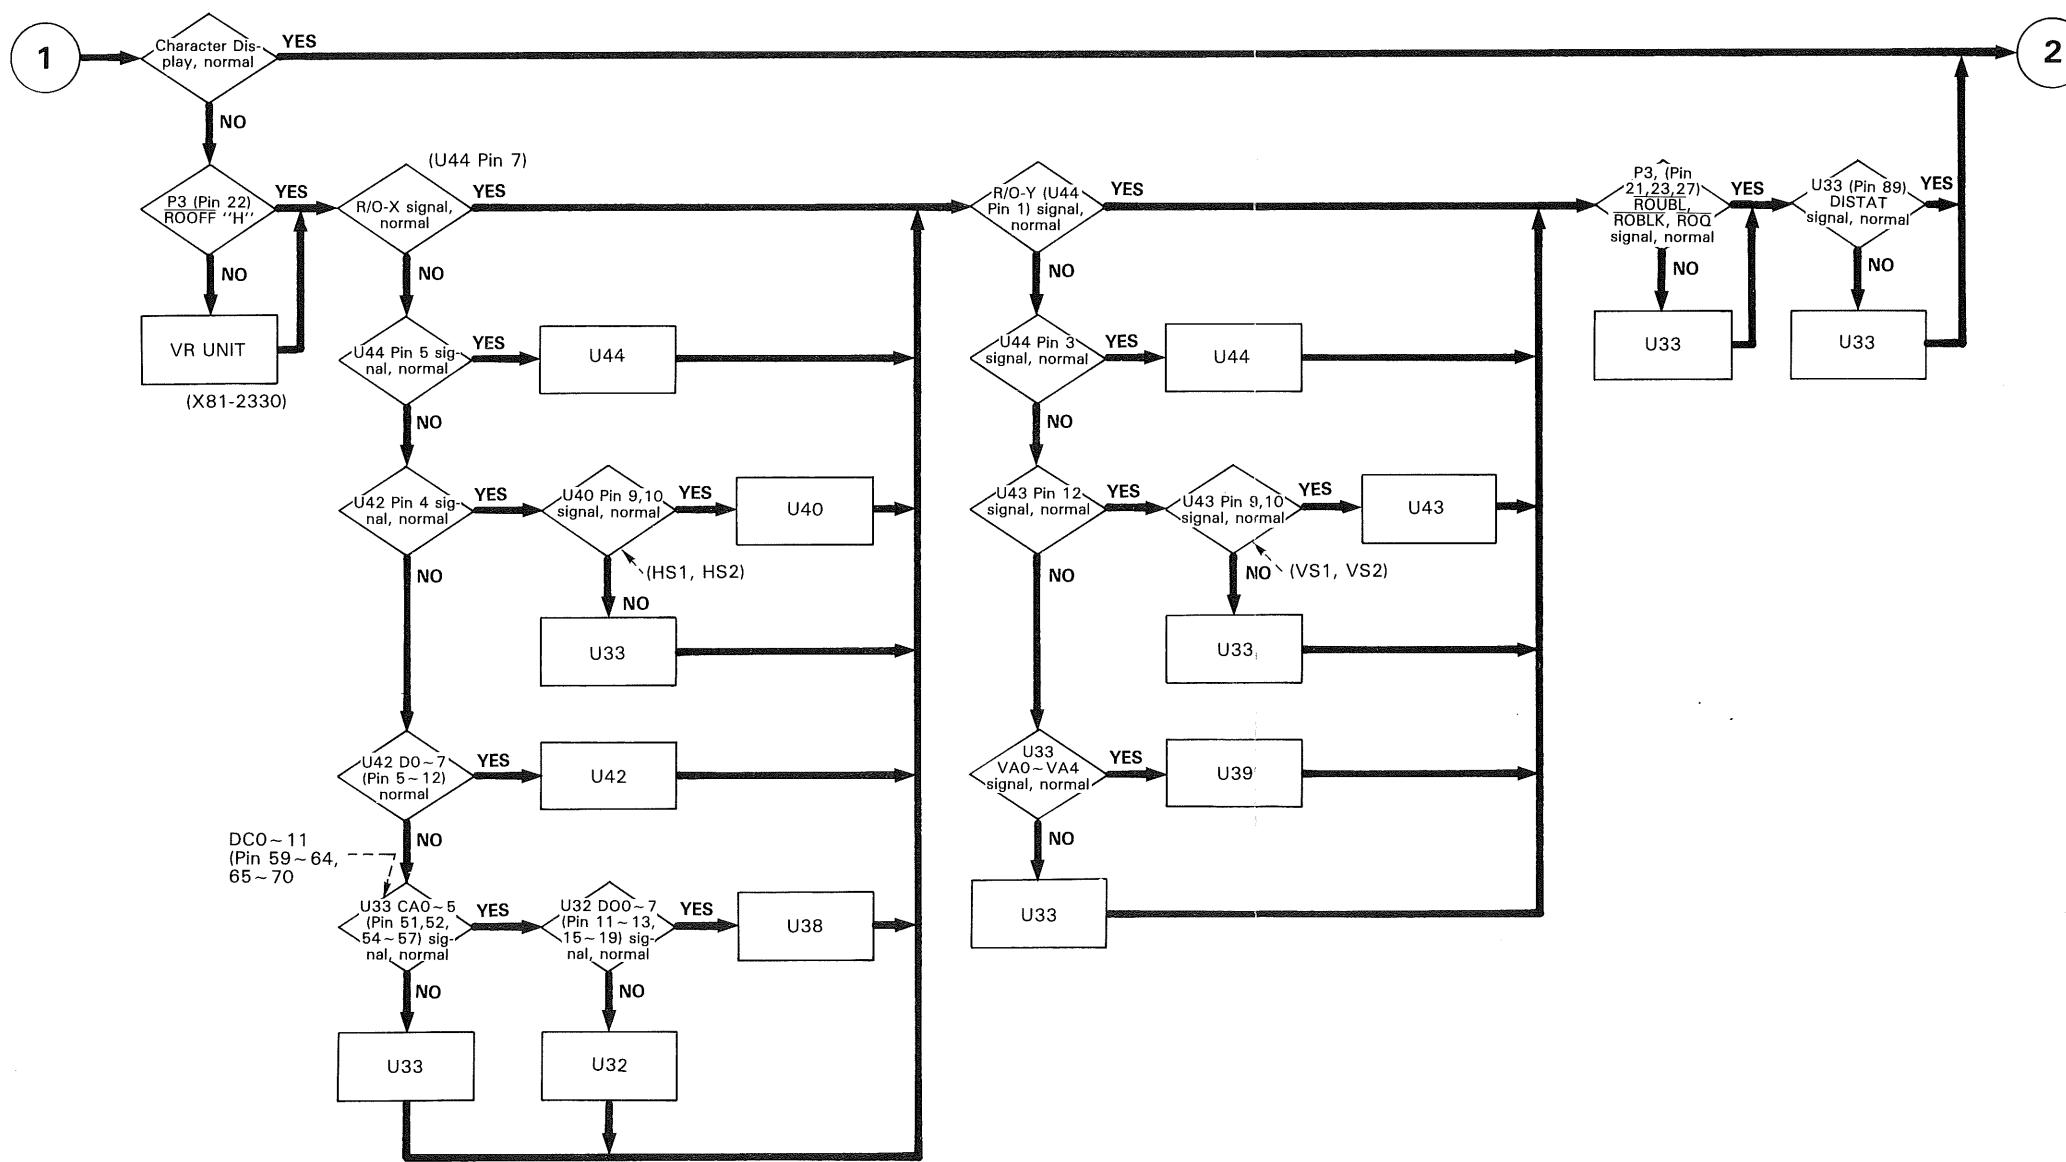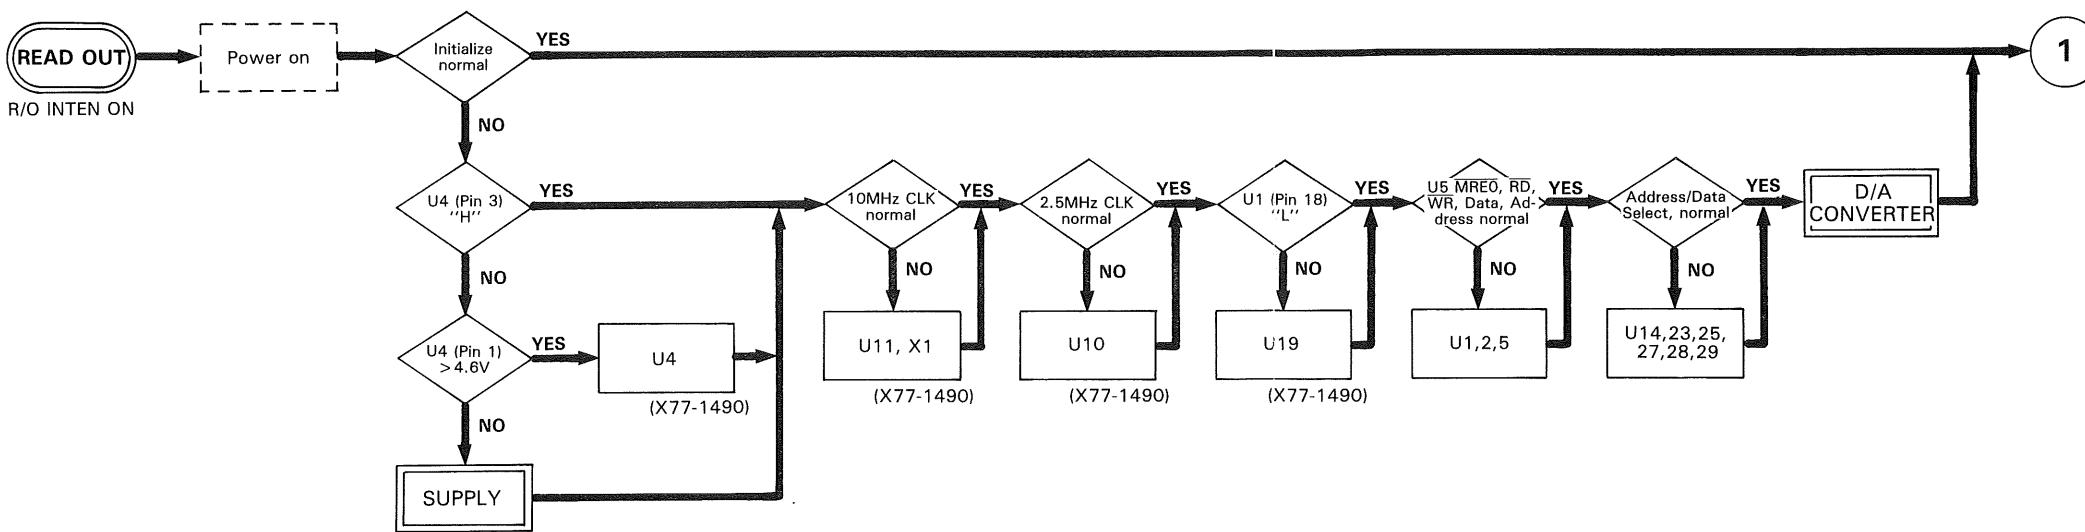

TROUBLESHOOTING

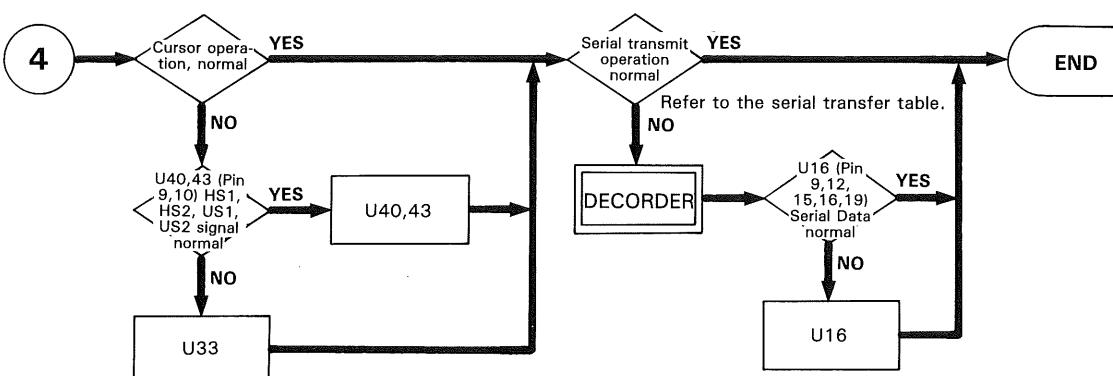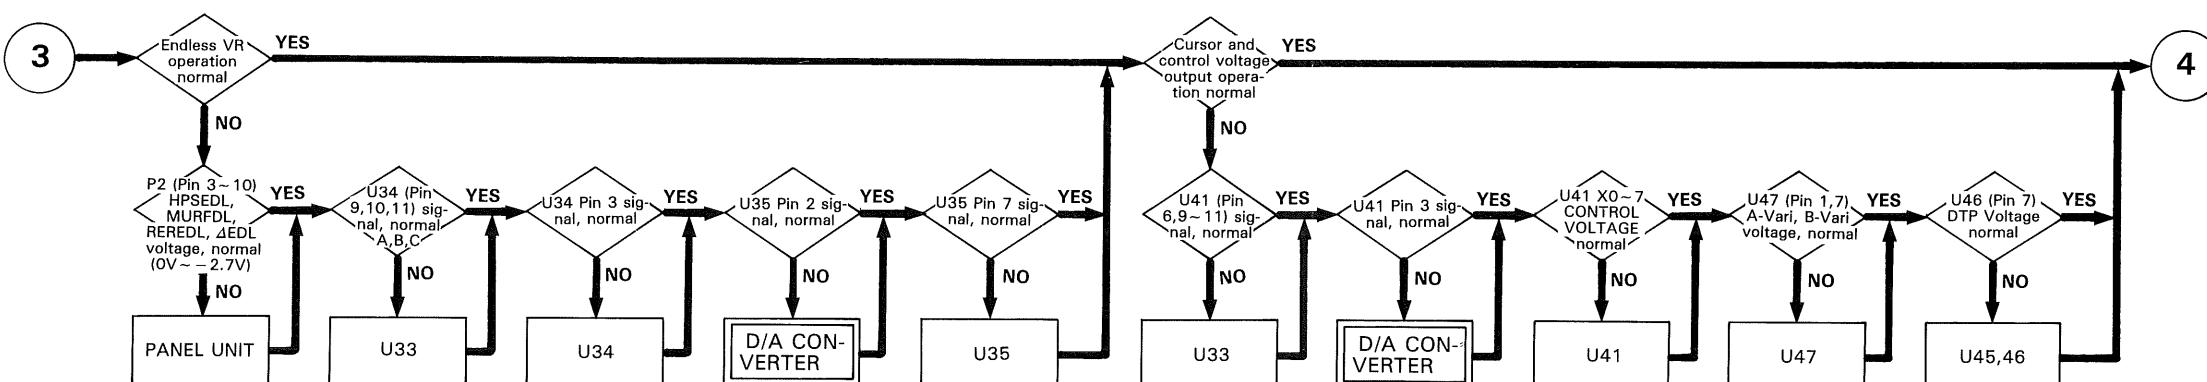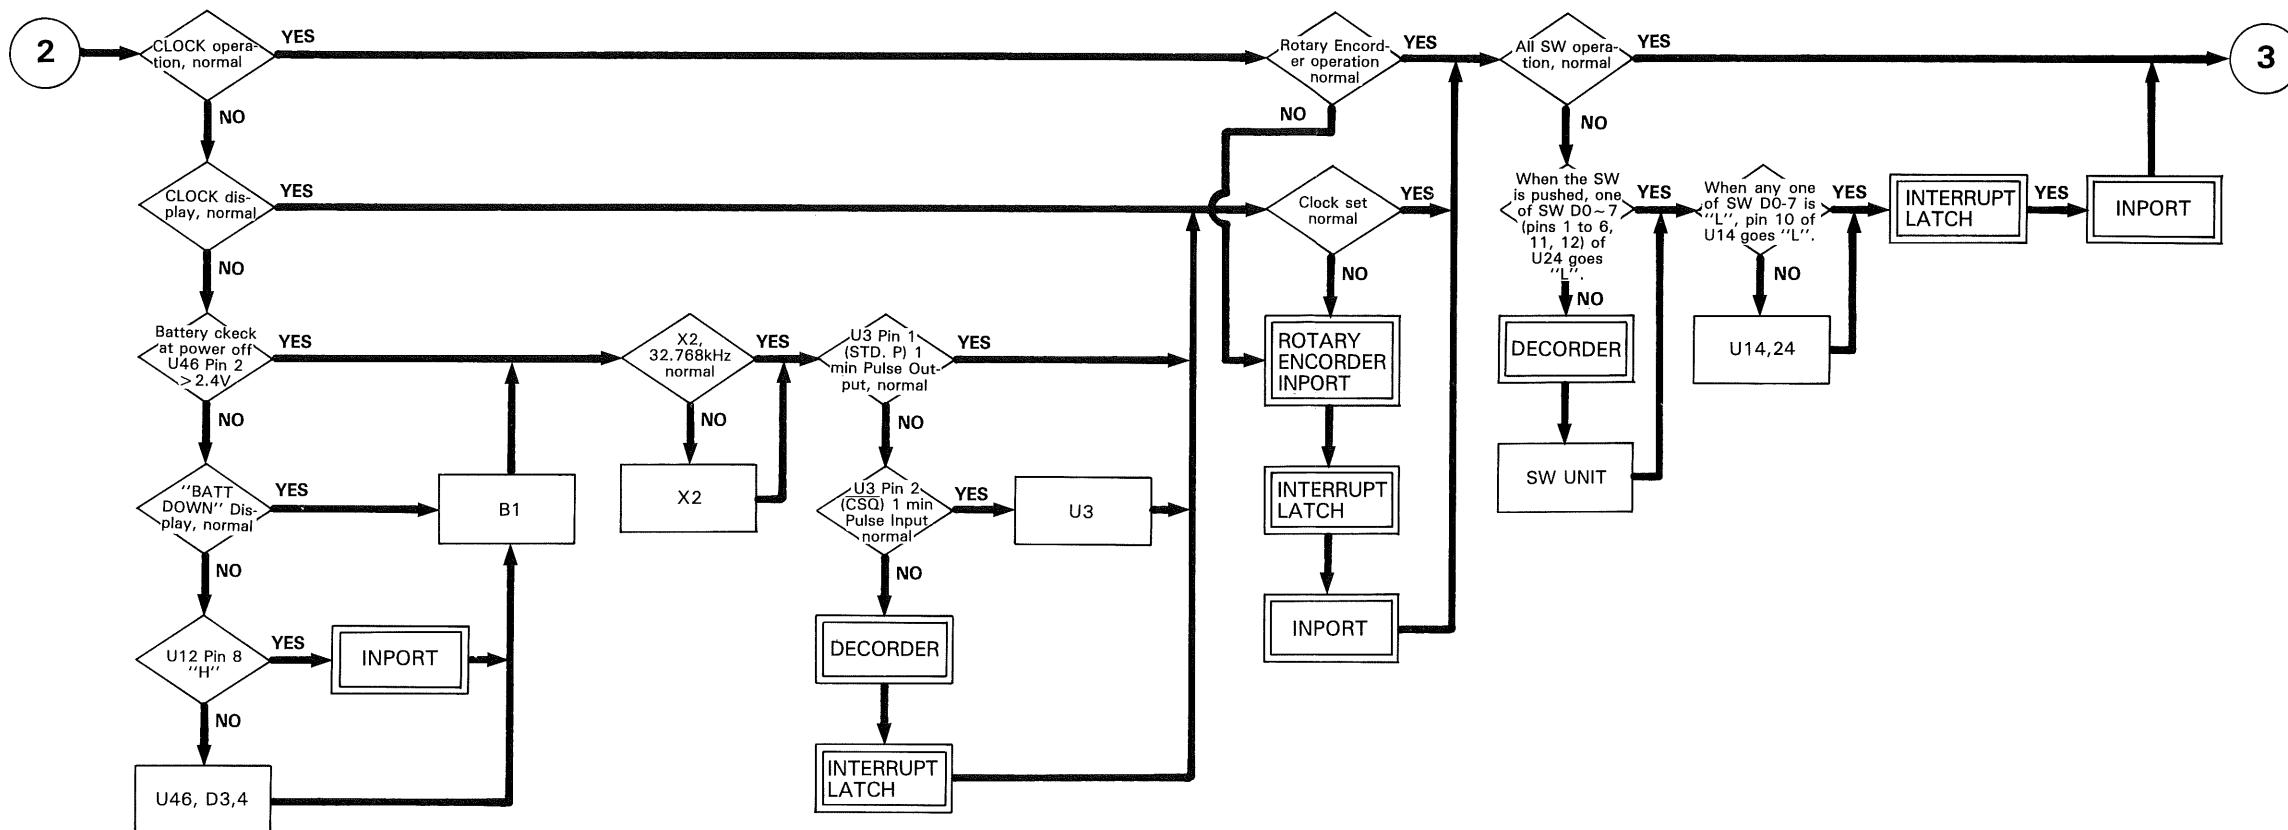




TROUBLESHOOTING

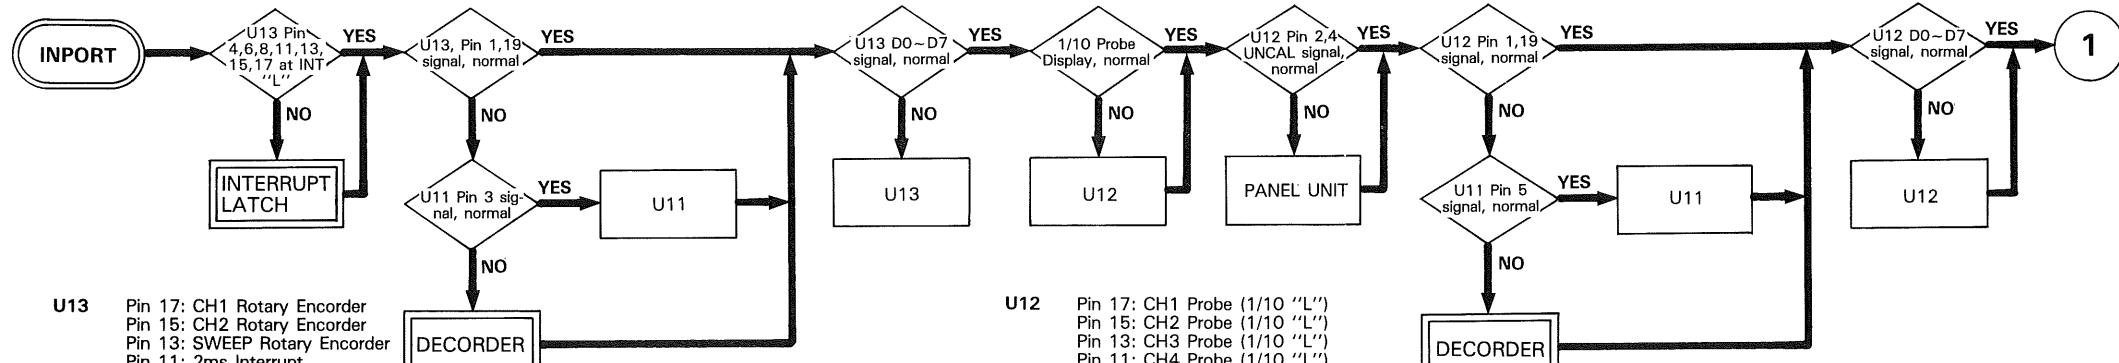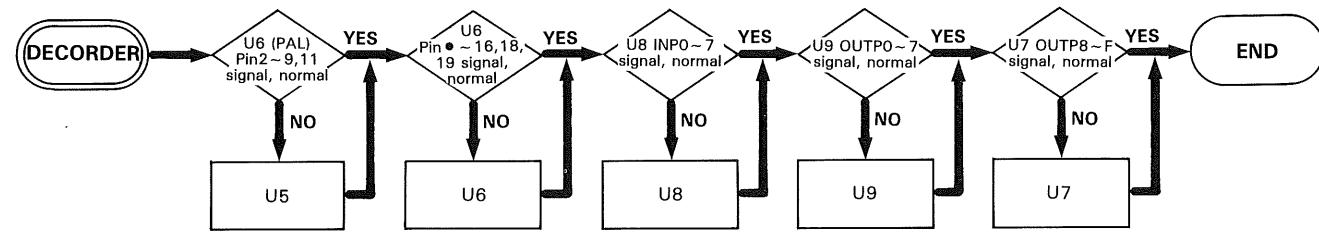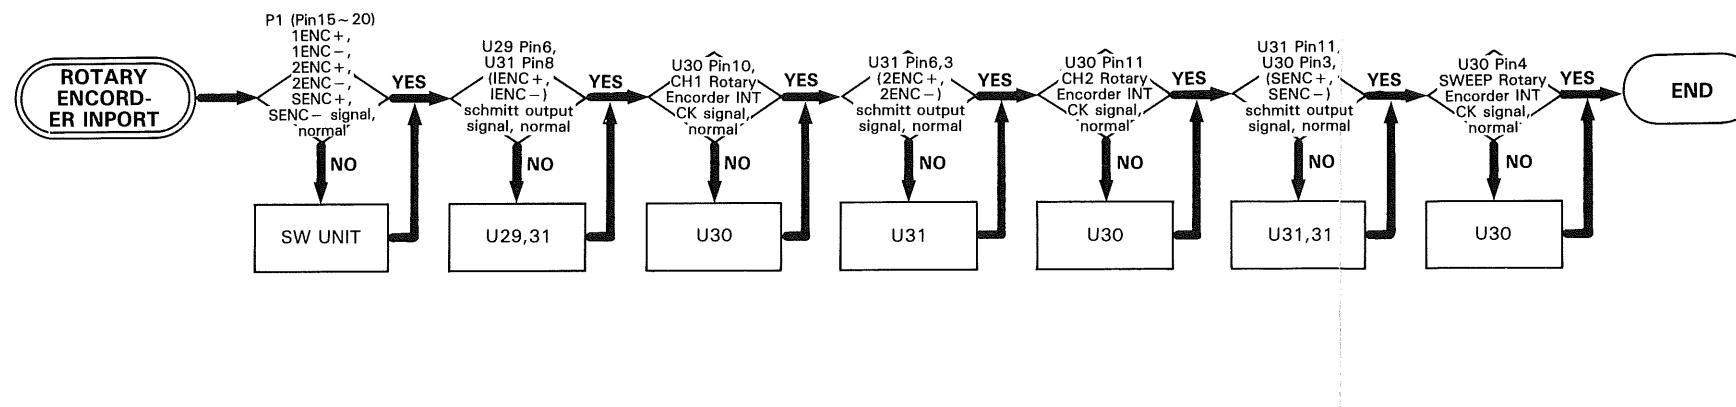


U13 Pin 17: CH1 Rotary Encoder
Pin 15: CH2 Rotary Encoder
Pin 13: SWEET Rotary Encoder
Pin 11: 2ms Interrupt
Pin 8 : Clock Interrupt (STD.P)
Pin 6 : SW Interrupt
Pin 4 : DISTAT
Pin 2 : "L" (always)

U12 Pin 17: CH1 Probe (1/10 "L")
Pin 15: CH2 Probe (1/10 "L")
Pin 13: CH3 Probe (1/10 "L")
Pin 11: CH4 Probe (1/10 "L")
Pin 8 : Batt check (BATT DOWN "H")
Pin 6 :
Pin 4 : CH1 UNCAL (UNCAL "H")
Pin 2 : CH2 UNCAL (UNCAL "H")

TROUBLESHOOTING

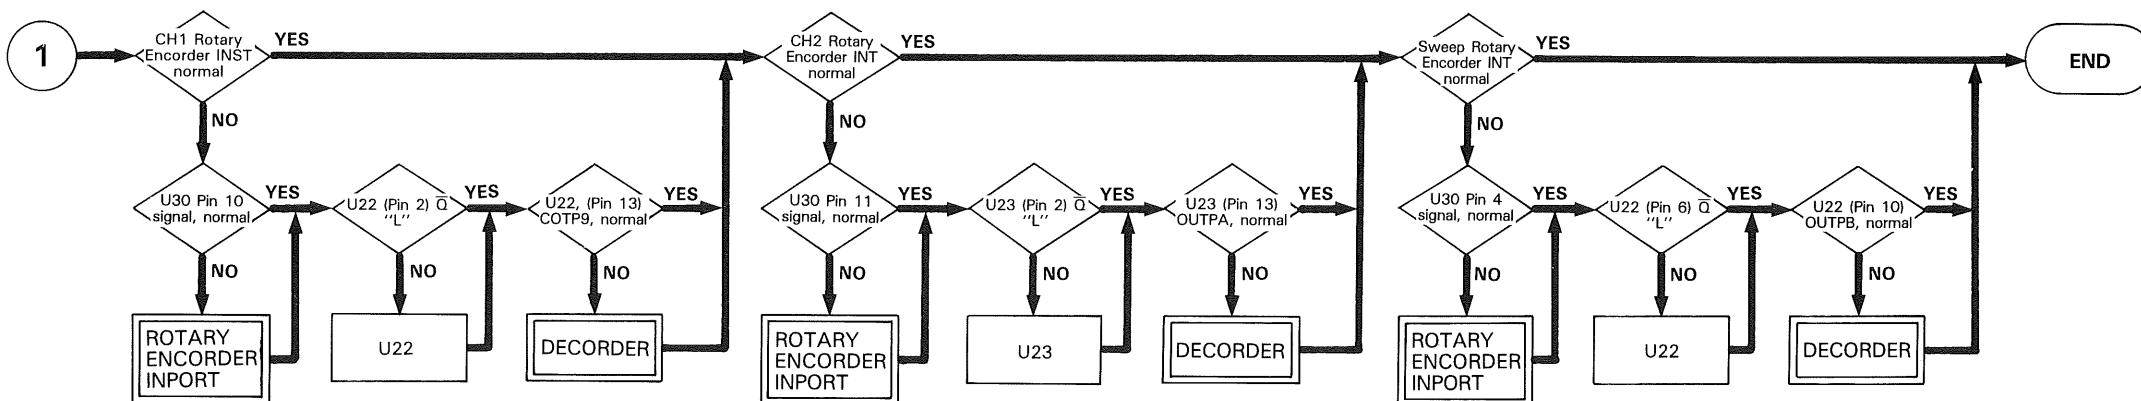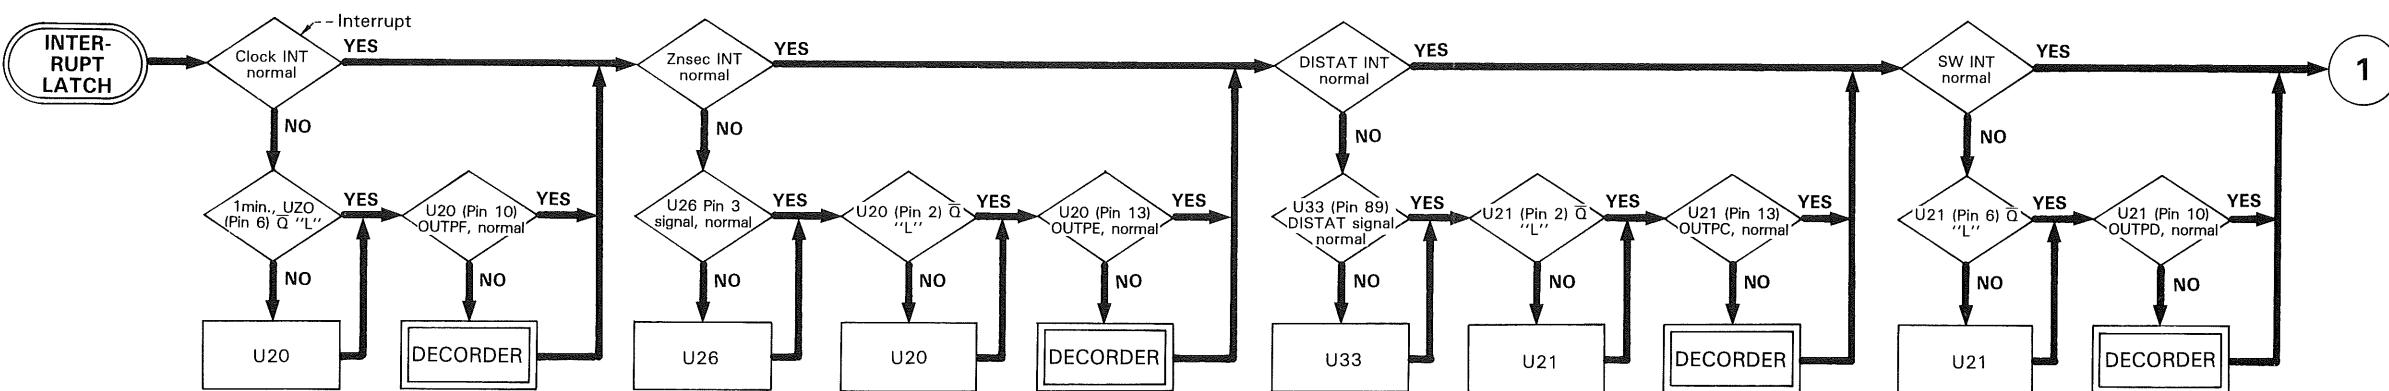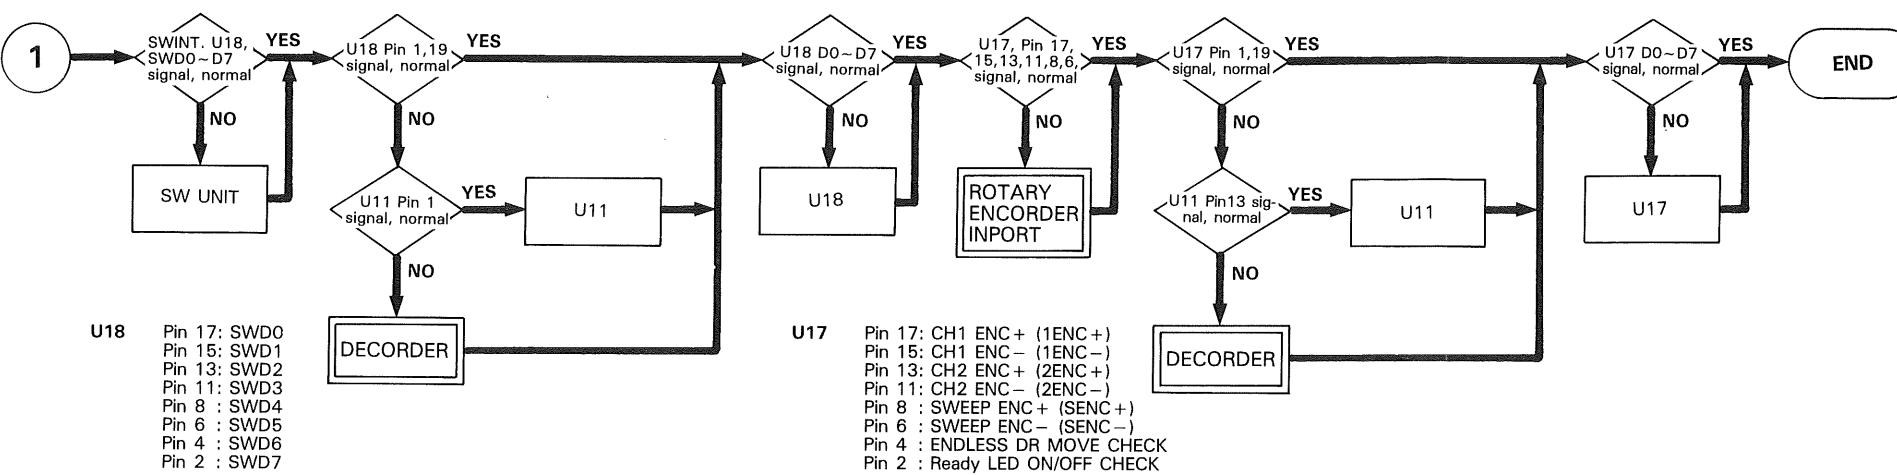


TROUBLESHOOTING

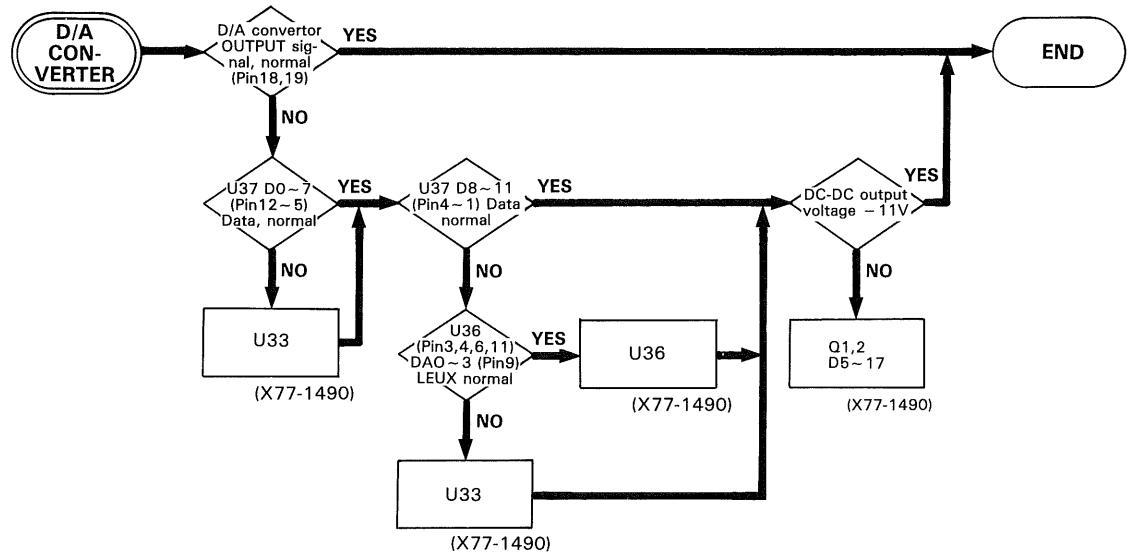

TROUBLESHOOTING

CTM5020 PIN ASSIGNMENT (100-pin FPT) (with RAM)

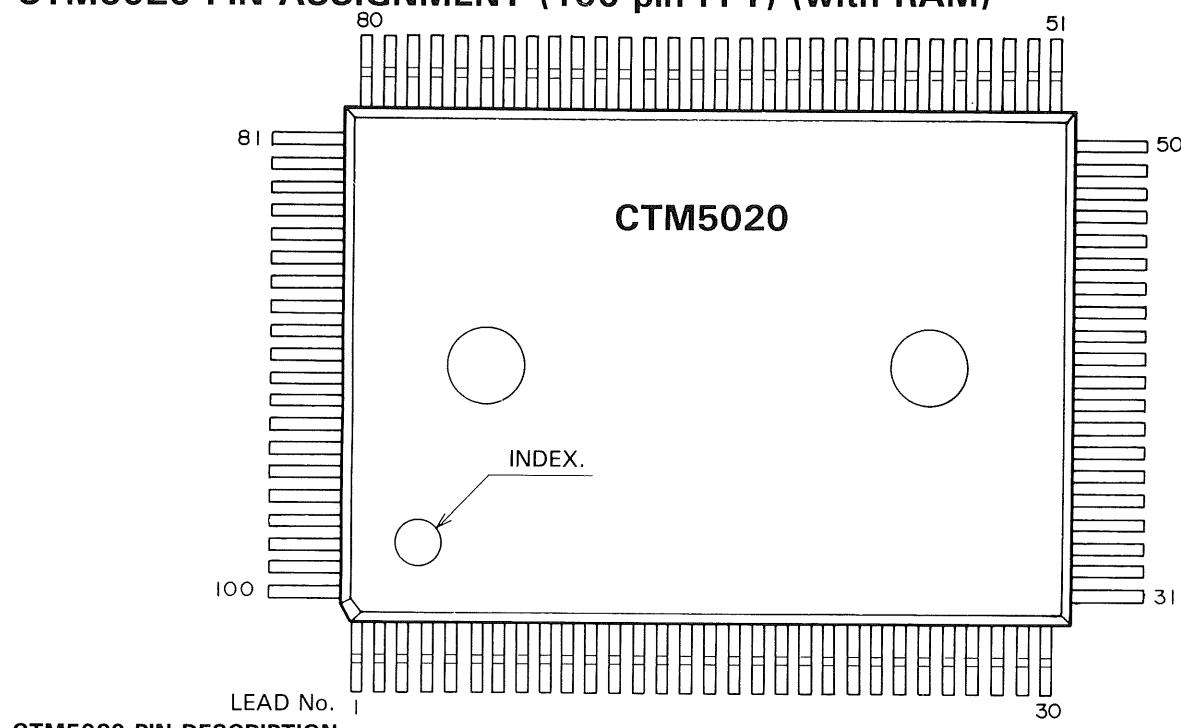

CTM5020 PIN DESCRIPTION

Pin No.	I/O	Pin Name	Function
1	I	CONT	Selection between X-Y mode and normal mode
2	I	A13	Address bus A13
3	-	VDD	+ 5 V power supply
4	I	A14	Address bus A14
5	I	A15	Address bus A15
6	O	INT0	1/2 period of ROSF signal (Open pin)
7	O	VX3	Selection signal of analog switch to input the endless VR voltage
8	O	VX2	Selection signal of analog switch to input the endless VR voltage
9	O	VX1	Selection signal of analog switch to input the endless VR voltage
10	O	VX0	Selection signal of analog switch to input the endless VR voltage
11	O	DAO	Outport (8004H) D0 D/A data (LSB or D8)
12	O	DA1	Outport (8004H) D1 D/A data (D1 or D9)
13	O	DA2	Outport (8004H) D2 D/A data (D2 or D10)
14	O	DA3	Outport (8004H) D3 D/A data (D3 or MSB)
15	-	VSS	GND
16	O	DA4	Outport (8004H) D4 D/A data (D4)
17	O	DA5	Outport (8004H) D5 D/A data (D5)
18	O	DA6	Outport (8004H) D6 D/A data (D6)
19	O	DA7	Outport (8004H) D7 D/A data (D7)
20	O	DA8	Outport (8005H) D0 (Open pin)
21	O	DA9	Outport (8005H) D1 (Serial blanking control signal)
22	O	ROR	Readout monitor terminal


Pin No.	I/O	Pin Name	Function
23	I	ROA	Readout monitor terminal
24	O	LEVX	Outport (8005H) D7 D/A Data D8~MSB Latch signal
25	I	TCL	Test pin (UDD)
26	I	TSD0	Test pin (GND)
27	I	TSD1	Test pin (GND)
28	-	VDD	+ 5 V power supply
29	I	TSD2	Test pin (GND)
30	O	AX2	Selection signal of analog switch to output the cursor, H Variable, Delay Position, H Position voltage
31	O	AX1	Selection signal of analog switch to output the cursor H variable, Delay Position, H Position voltage
32	O	AX0	Selection signal of analog switch to output the cursor H variable, Delay Position, H position voltage
33	O	AX3	Selection signal of analog switch to output the cursor H variable, Delay Position, H Position voltage
34	O	HS2	Selection signal of analog switch for the readout X-axis signal
35	O	HS1	Selection signal of analog switch for the readout X-axis signal
36	O	TDIO	Test pin (VDD)
37	I	TWE	Test pin (VDD)
38	I	TCK1	Test pin (VDD)
39	I	TST1	Test pin (VDD)

Pin No.	I/O	Pin Name	Function
40	-	VSS	GND
41	I	TST2	Test pin (VDD)
42	I	TADD	Test pin (VDD)
43	I	TCK2	Test pin (VDD)
44	O	VS2	Selection signal of analog switch for the readout Y-axis signal
45	O	VS1	Selection signal of analog switch for the readout Y-axis signal
46	O	VA0	Character Y-axis DAC data
47	O	VA4	Character Y-axis DAC data
48	O	VA3	Character Y-axis DAC data
49	O	VA2	Character Y-axis DAC data
50	O	VA1	Character Y-axis DAC data
51	O	GETD	Character X-axis data latch clock
52	O	CA0	Character counter data
53	-	VDD	+ 5 V power supply
54	O	CA4	Character counter data
55	O	CA3	Character counter data
56	O	CA2	Character counter data
57	O	CA1	Character counter data
58	O	CD3	Character ROM address
59	O	CD2	Character ROM address
60	O	CD4	Character ROM address
61	O	CD1	Character ROM address
62	O	CD5	Character ROM address
63	O	DC4	Dot counter data
64	O	CD7	Character ROM address
65	-	VSS	GND
66	O	DC3	Dot counter data
67	O	DC2	Dot counter data
68	O	CD6	Character ROM address
69	O	DC1	Dot counter data

Pin No.	I/O	Pin Name	Function
70	O	DC0	Dot counter data
71	O	CDO	Character ROM address (Open pin)
72	I	D07	Character ROM Y-axis DAC data
73	I	D06	Character ROM Y-axis DAC data
74	I	D05	Character ROM Y-axis DAC data
75	I	D04	Character ROM Y-axis DAC data
76	I	D03	Character ROM Y-axis DAC data
77	I	SING	Terminal for SINGLE signal
78	-	VDD	+ 5 V power supply
79	I	R10M	10 MHz clock
80	I	10M	10 MHz clock
81	I	HLDF	Holdoff input
82	I	SGA	Sweep gate
83	I	ROSP	Readout off
84	I	ROD	Character counter reset
85	O	HLDL	Holdoff output
86	O	ROUB	Readout unblanking
87	O	ROB	Readout blanking
88	O	ROQ	Readout request
89	O	ROED	Readout end
90	-	VSS	GND
91	I	D7	Data bus D7
92	I	D5	Data bus D5
93	I	D3	Data bus D3
94	I	D1	Data bus D1
95	I	ALE	Address/Data latch
96	I	D6	Data bus D6
97	I	D4	Data bus D4
98	I	D2	Data bus D2
99	I	D0	Data bus D0
100	I	WR	Write timing signal


TROUBLESHOOTING

Rotary Encoder Timing chart (X77-1490-00)

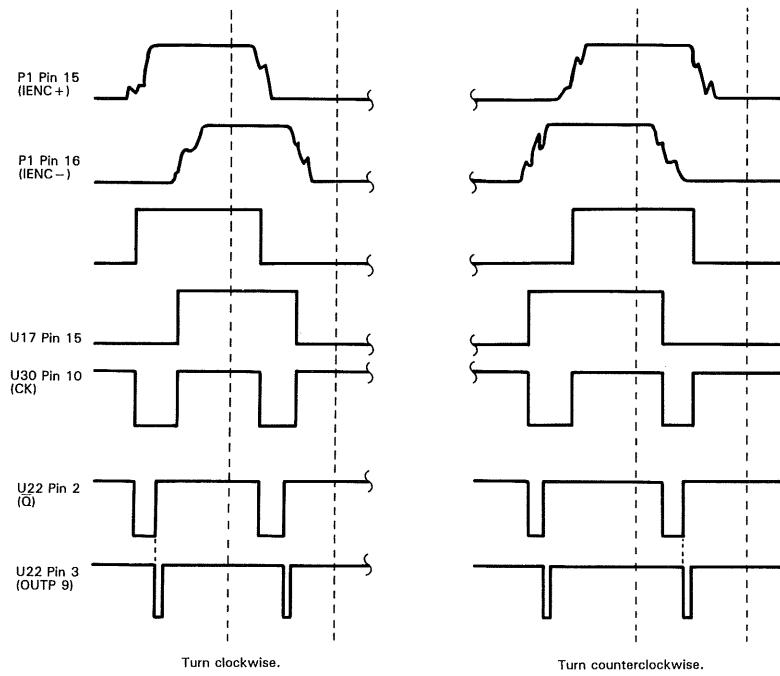


The timing charts of the CH2 rotary encoder and sweep rotary encoder are also the same.


Address/Data Select Timing Chart (X77-1490-00)

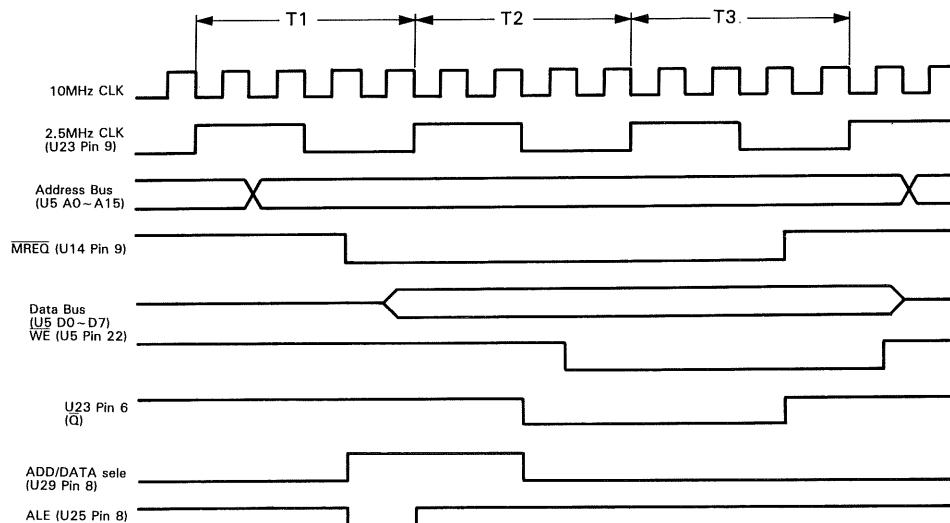

Interrupt Timing Chart

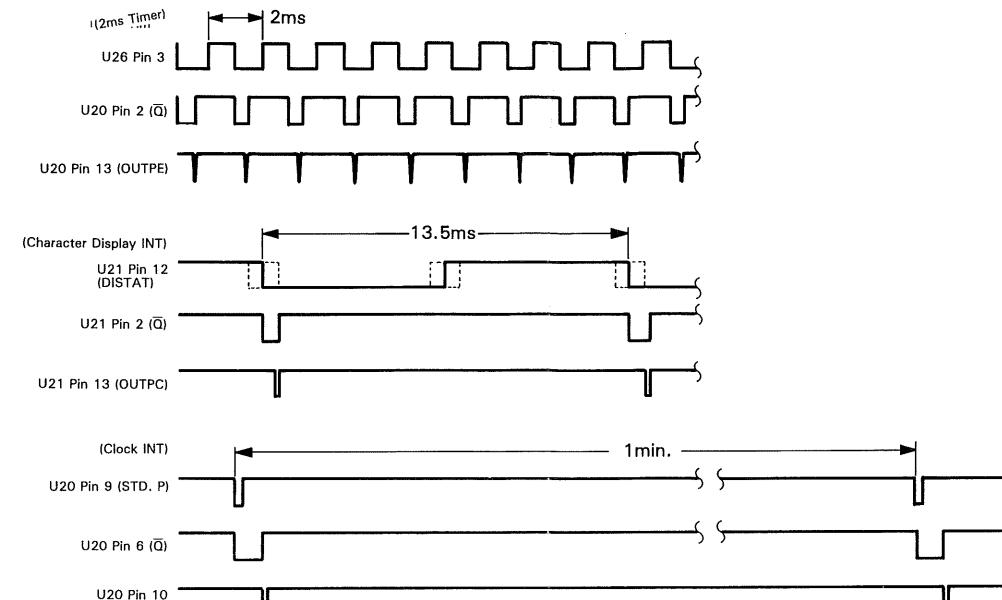

Serial Transmit Timing Chart

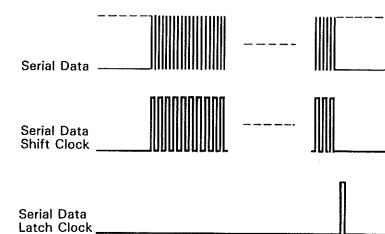

	Panel SW SCAN	Panel LED Control	ATT UNIT Control	V UNIT Control	H UNIT Control
Serial Data	P1 Pin 4 (SD)	P1 Pin 1 (LD)	P4 Pin 9 (AD)	U16 Pin 16 (VD)	U16 Pin 19 (HD)
Serial Data shift Clock	P1 Pin 5 (SSC)	P1 Pin 2 (LSC)	P4 Pin 8 (ASC)	U9 Pin 14 (VSC)	U9 Pin 10 (HSC)
Serial Data Latch clock	P1 Pin 6 (SLC)	P1 Pin 3 (LLC)	P4 Pin 7 (ALC)	U8 Pin 11 (VLC)	U8 Pin 7 (HLC)


CH1 (CH2) Vertical Gain VARIABLE

V. Variable	U12 Pin 4 (2)	Display
CAL	L	Space
UNCAL	H	>

CH1 ~ CH4 Probe

Probe	U12 Pin 17,15,13,11	Display
1/1	H	Volts/div × 1 display
1/10	L	Volts/div × 10 display

Endless VR Select and Control Timing Chart

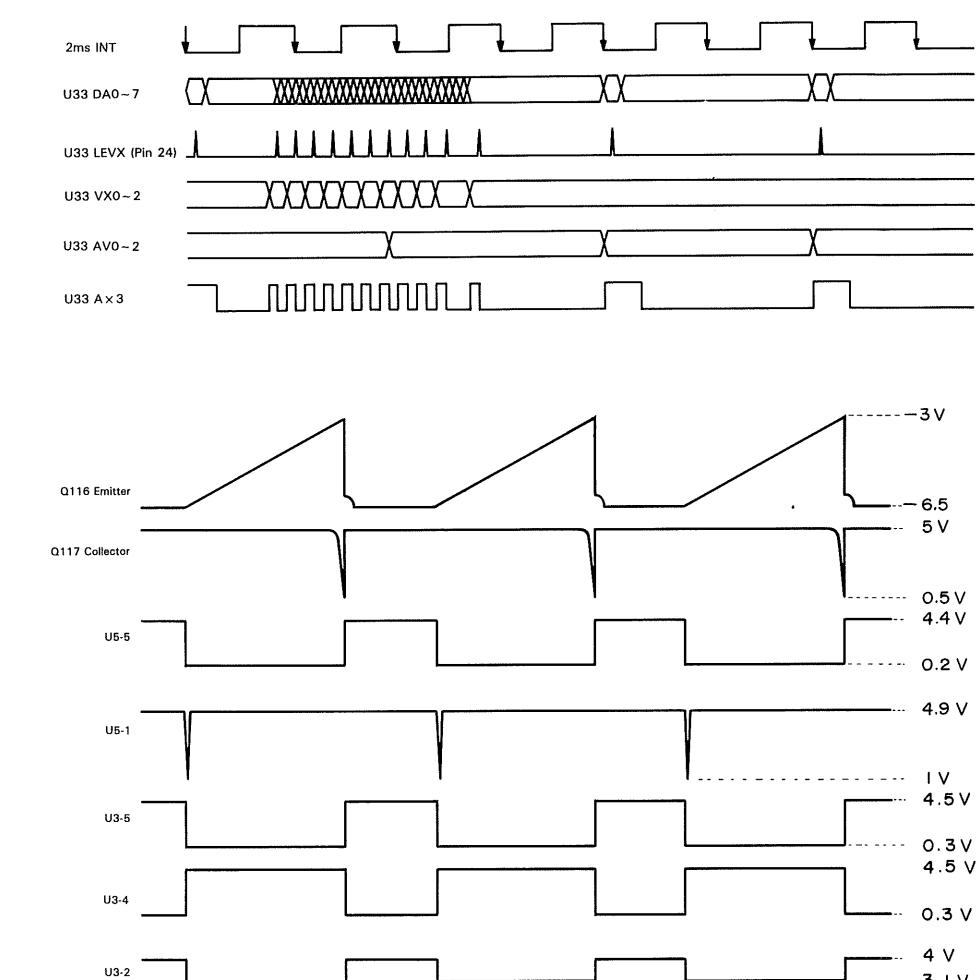

Endless VR Select

V×2	V×1	V×0	Select CH	Endless VR
L	L	L	U34 Pin 13	Δ Endless VR
L	L	H	U34 Pin 14	
L	H	L	U34 Pin 15	REF Endless VR
L	H	H	U34 Pin 12	
H	L	L	U34 Pin 1	H-Posi Endless VR
H	L	H	U34 Pin 5	
H	H	L	U34 Pin 2	H-Vari Endless VR
H	H	H	U34 Pin 4	

CONTROL Voltage Select

A×3	A×2	A×1	A×0	Select CH	Control Voltage
L	L	L	L	U41 Pin 13	REF Cursor
L	L	L	H	U41 Pin 14	A Cursor
L	L	H	L	U41 Pin 15	A-Variable
L	L	H	H	U41 Pin 12	B-Variable
L	H	L	L	U41 Pin 1	V-Delay } (DTP)
L	H	L	H	U41 Pin 5	C-Delay }
L	H	H	L	U41 Pin 2	H-Posi
L	H	H	H	U41 Pin 4*	Inhibit
H	X	X	X	All off	

* Items marked * are not selected.
X Items marked X can be either L or H.

PARTS LIST


CS-6020 UNIT

Y70-1630-00

REF. NO	PARTS NO	NAME & DESCRIPTION
	B07-0703-04	ESCUCHEON FOR ASTIG
	B30-0925-05	LAMP.
	B50-7670-10	INSTRUCTION MANUAL, JAPANESE
	B50-7671-10	INSTRUCTION MANUAL, ENGLISH
	E30-1644-15	BS POWER CORD
	E30-1818-05	JIS POWER CORD
	E30-1819-05	CEE POWER CORD
	E30-1820-05	UL/CSA POWER CORD
	E30-1821-05	SAA POWER CORD
	E31-0717-06	WIRE ASS'Y(INLET TO GND)
	E31-5557-05	WIRE ASS'Y(NO.14)
	E31-5558-05	WIRE ASS'Y(NO.15)
	E31-5559-05	WIRE ASS'Y(NO.24)
	E31-5560-05	WIRE ASS'Y(NO.23)
	E31-5561-05	WIRE ASS'Y(NO.22)
	E31-5562-05	WIRE ASS'Y(NO.30)
	E31-5563-05	WIRE ASS'Y(NO.7,8,9)
	E31-5564-05	WIRE ASS'Y(NO.25)
	E31-5565-05	WIRE ASS'Y(NO.26)
	E31-5566-05	WIRE ASS'Y(CAL.)
	E31-5567-05	WIRE ASS'Y(NO.4)
	F05-1224-05	FUSE 1.2A(6X30MM) FOR 100/120V
	F05-8013-05	FUSE 0.8A(5X20MM) FOR 220/240V
	F05-8015-05	FUSE 0.8A(6X30MM) FOR 220/240V
	F20-0674-04	INSULATED SHEET, HIGH VOLTAGE
	H01-5889-04	CARTON BOX
	H10-2901-02	FOAMED STYRENE PAD, FRONT
	H10-2902-02	FOAMED STYRENE PAD, REAR
	H20-1727-04	VINYL COVER
	W03-2301-15	R/O PROBE, PC-31
1	A01-1194-12	CASE, TOP
2	A01-1195-22	CASE, BOTTOM
3	A13-0924-02	FRAME, RIGHT
4	A13-0925-12	FRAME, CENTER
5	A13-0926-02	FRAME, LEFT
6	A13-0927-03	FRAME, P.C.B SUPPORT
7	A13-0928-03	FRAME
8	A13-0929-03	FRAME
9	A20-2826-01	MOLDED PANEL
10	A20-2827-02	MOLDED PANEL
11	A21-1135-03	DECORATIVE PANEL
12	A21-1136-03	DECORATIVE PANEL
13	A23-1683-12	REAR PANEL
14	B11-0504-14	FILTER
15	B30-0963-05	LAMP ASS'Y, SCALE ILLUMINATION
16	B40-2909-03	NAME PLATE, MODEL
17	B41-0802-04	CAUTION LABEL, REAR PANEL
18	D19-0505-05	FLEXIBLE WIRE, FOR POWER SWITCH
19	E01-1404-05	CRT SOCKET
20	E04-0259-05	BNC RECEPTACLE
21A	E18-0365-05	AC SELECTOR WITH 6X30MM FUSE
21B	E18-0366-05	AC SELECTOR FOR 5X20MM FUSE
22	E21-0660-04	TERMINAL, CAL
23	E21-0667-05	METAL TERMINAL
24	E23-0513-05	EARTH LUG, BNC
25	E31-5568-05	FLAT CABLE
26	E31-5569-05	FLAT CABLE
27	F07-0936-04	COVER, HANDLE LATCH
28	F10-1604-04	SHIELD, R/O UNIT
29	F10-1605-03	SHIELD, R/O UNIT
30	F10-1606-03	SHIELD, HIGH VOLTAGE UNIT
31	F11-1209-02	SHIELD, CRT:FRONT
32	F11-1210-03	SHIELD, CRT:REAR
33	F20-0673-04	INSULATED SHEET
34	G02-0606-14	SPRING, FOR HANDLE
35	J02-0089-05	RUBBER FOOT
36	J11-0508-05	CABLE CLAMP
37	J19-1656-03	HOLDER, COIL
38	J19-1657-04	WEDGE
39	J21-2906-05	GEAR, FOR HANDLE
40	J21-2907-05	RING, FOR HANDLE
41	J21-4642-04	BRACKET
42	J21-4613-04	BRACKET
43	J32-0836-04	BOSS, FOR POWER SWITCH
44	J61-0516-05	SUPPORT
45	J61-0521-05	SUPPORT
46	K01-0528-05	HANDLE, CARRYING
47	K21-0898-03	KNOB, VOLT/DIV, SWEEP TIME/DIV
48	K23-0808-03	KNOB (18 USED)
49	K27-0504-04	KNOB, PUSH:POWER
50	K27-0543-04	KNOB, PUSH(34 USED)
51	L01-9766-05	POWER TRANSFORMER
52	L39-0527-05	COIL, TRACE ROTATION
53	L76-0115-05	DELAY LINE
54	S40-1524-05	PUSH SWITCH, POWER
55	W01-0503-04	REAR RUBBER FOOT/CORD WRAP

REF. NO	PARTS NO	NAME & DESCRIPTION
56	X66-1050-00	PANEL UNIT
57	X68-1500-00	POWER SUPPLY UNIT
58	X68-1510-00	HIGH VOLTAGE UNIT
59	X69-1150-00	SWITCH UNIT
60	X73-1760-00	VERTICAL PREAMP UNIT
61	X74-1480-00	HORIZONTAL UNIT
62	X75-1180-00	ATT. UNIT
63	X77-1490-00	R/O UNIT
64	X77-1500-00	CONNECTION UNIT
65	X80-1100-00	FINAL UNIT
66	X81-2330-00	VOLUME UNIT
67	150XTM31	CRT
68	J59-0403-05	NYLON RIVET (ILLUMI)
69	N19-0710-05	WASHER
70	J19-1660-05	SUPPORT, FOR PCB

MODEL PC-31 (LOW CAPACITY PROBE)

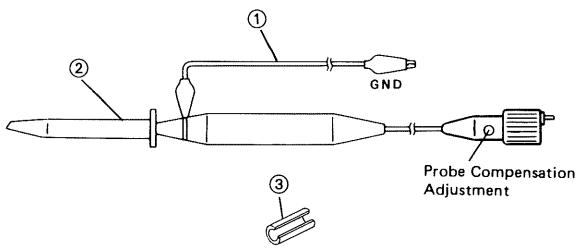

ITEM	DESCRIPTION	PARTS NO.
(1)	Ground Wire Assembly	E30-1883-08
(2)	Retractable Hook Tip	E29-0540-08
(3)	Marker (Orange)	B42-1950-08

PARTS LIST

PANEL UNIT

X66-1050-00

REF. NO	PARTS NO	NAME & DESCRIPTION				
	J25-5197-03	PCB (UNMOUNTED)				
45	J61-0521-05	SUPPORT				
C001	CK45B2H102K	CAP. CERAMIC	1000P	10%	500V	
C002	CK45B2H102K	CAP. CERAMIC	1000P	10%	500V	
C003	CK45B2H102K	CAP. CERAMIC	1000P	10%	500V	
C004	CK45B2H102K	CAP. CERAMIC	1000P	10%	500V	
C005	CK45B2H102K	CAP. CERAMIC	1000P	10%	500V	
C006	CK45B2H102K	CAP. CERAMIC	1000P	10%	500V	
C007	CK45B2H102K	CAP. CERAMIC	1000P	10%	500V	
C008	CK45B2H102K	CAP. CERAMIC	1000P	10%	500V	
D001	MA700	DIODE				
D002	MA700	DIODE				
J031	E31-5555-05	LEAD WIRE WITH CONNECTOR				
J100	R92-0150-05	JUMPING RES.	ZERO OHM(10MM)			
J101	R92-0150-05	JUMPING RES.	ZERO OHM(10MM)			
P002	E40-7038-05	PIN CONNECTOR	26P			
0001	2SC2785(F)	TR. SI, NPN				
0002	2SA1175(F)	TR. SI, PNP				
0003	2SC2785(F)	TR. SI, NPN				
0004	2SA1175(F)	TR. SI, PNP				
R001	RN14BK2C2202F	RES. METAL FILM	22K	1%	1/6W	
R002	RN14BK2C9103F	RES. METAL FILM	910K	1%	1/6W	
R003	RN14BK2C9103F	RES. METAL FILM	910K	1%	1/6W	
R004	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W	
R005	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W	
R006	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W	
R007	RN14BK2C2202F	RES. METAL FILM	22K	1%	1/6W	
R008	RN14BK2C9103F	RES. METAL FILM	910K	1%	1/6W	
R009	RN14BK2C9103F	RES. METAL FILM	910K	1%	1/6W	
R010	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W	
R011	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W	
R012	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W	
R013	RN14BK2C6801F	RES. METAL FILM	6.8K	1%	1/6W	
R014	RN14BK2C1802F	RES. METAL FILM	18K	1%	1/6W	
R015	RD14BB2E220J	RES. CARBON	22	5%	1/4W	
U001	NJM4558D	IC, DUAL OP AMP				
VR001	R05-3514-05	VOLUME	20K	B		
VR002	R05-3514-05	VOLUME	20K	B		
VR003	R05-3514-05	VOLUME	20K	B		
VR004	R05-3514-05	VOLUME	20K	B		
VR005	R05-3514-05	VOLUME	20K	B		
VR006	R05-3514-05	VOLUME	20K	B		
VR007	R05-3514-05	VOLUME	20K	B		
VR008	R05-3514-05	VOLUME	20K	B		
VR009	R05-3514-05	VOLUME	20K	B		
VR010	R05-3514-05	VOLUME	20K	B		
VR011	R10-3504-05	ENDLESS VOLUME	2X10K	B		
VR012	R10-3504-05	ENDLESS VOLUME	2X10K	B		
VR013	R10-3504-05	ENDLESS VOLUME	2X10K	B		
VR014	R10-3504-05	ENDLESS VOLUME	2X10K	B		

POWER SUPPLY UNIT

X68-1500-00

REF. NO	PARTS NO	NAME & DESCRIPTION				
	J25-5227-03	PCB (UNMOUNTED)				
	N14-0626-04	NUT				
	N30-3008-41	SCREW, PAN HD	M3X8			
73	F01-0865-14	HEAT SINK				
C001	CE04WE24R7M	CAP. ELECTRO	4.7	20%	250V	
C002	CE04EW2A220M	CAP. ELECTRO	22	20%	100V	
C003	CE04EW1C331M	CAP. ELECTRO	330	20%	16V	
C004	CE04EW1C331M	CAP. ELECTRO	330	20%	16V	
C005	CE04EW1E101M	CAP. ELECTRO	100	20%	25V	
C006	CE04EW1A102M	CAP. ELECTRO	1000	20%	10V	
C007	CE04WE2470M	CAP. ELECTRO	47	20%	250V	
C008	CE04EW2A471M	CAP. ELECTRO	470	20%	100V	
C009	C90-0973-05	CAP. ELECTRO	6800	20%	25V	
C010	C90-0973-05	CAP. ELECTRO	6800	20%	25V	
C011	C90-0982-05	CAP. ELECTRO	10000	20%	16V	
C012	CE04HW1H010M	CAP. ELECTRO	1	20%	50V	
C013	CE04EW1H331M	CAP. ELECTRO	330	20%	50V	
C014	CE04EW1V471M	CAP. ELECTRO	470	20%	35V	
C015	CE04EW1E101M	CAP. ELECTRO	100	20%	25V	

REF. NO	PARTS NO	NAME & DESCRIPTION				
C016	CK45FF1H103Z	CAP. CERAMIC	0.01			50V
C017	CE04HW1H010M	CAP. ELECTRO	1	20%		50V
C018	CC45FCH1H470J	CAP. CERAMIC	47P	5%		50V
C019	CC45FCH1H470J	CAP. CERAMIC	47P	5%		50V
D001	1SS132	DIODE				
D002	1SS132	DIODE				
D003	MT213JB	DIODE, ZENER	12.88V			
D004	MT213JB	DIODE, ZENER	12.88V			
D005	MT25.1JB	DIODE, ZENER	5.07V			
D006	S1VB60	DIODE				
D007	S1VB60	DIODE				
D008	S4VB40F	DIODE, BRIDGE				
D009	S4VB40F	DIODE, BRIDGE				
D010	1SR35-200A	DIODE				
D011	1SR35-200A	DIODE				
D012	MT224JC	DIODE, ZENER	23.72V			
D013	MT27.5JA	DIODE, ZENER	7.04V			
P017	E40-1173-05	PIN CONNECTOR	11P			
P018	E40-7040-05	PIN CONNECTOR	13P			
0001	2SD1409	TR. SI, NPN				
0002	2SC2271(D)	TR. SI, NPN				
0003	2SD1409	TR. SI, NPN				
0004	2SC2271(D)	TR. SI, NPN				
0005	2SB1133(S)	TR. SI, PNP				
0006	2SD1666(S)	TR. SI, NPN				
0007	2SB1133(S)	TR. SI, PNP				
0008	2SA684(Q)	TR. SI, PNP				
R001	RN14BK2C1302F	RES. METAL FILM	13K	1%	1/6W	
R002	RN14BK2C1803F	RES. METAL FILM	180K	1%	1/6W	
R003	RO14BB2C123J	RES. CARBON	12K	5%	1/6W	
R004	RN14BK2C2002F	RES. METAL FILM	20K	1%	1/6W	
R005	RN14BK2C1203F	RES. METAL FILM	120K	1%	1/6W	
R006	RD14BB2C912J	RES. CARBON	9.1K	5%	1/6W	
R007	RN14BK2C2002F	RES. METAL FILM	20K	1%	1/6W	
R008	RN14BK2C2002F	RES. METAL FILM	20K	1%	1/6W	
R009	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	
R010	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W	
R011	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	
R012	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W	
R013	RD14BB2C512J	RES. CARBON	5.1K	5%	1/6W	
R014	RN14BK2C1002F	RES. METAL FILM	10K	1%	1/6W	
R015	RN14BK2C2002F	RES. METAL FILM	20K	1%	1/6W	
R016	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	
R017	RO14BB2C102J	RES. CARBON	1K	5%	1/6W	
R018	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	
R019	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	
R020	RD14BB2C221J	RES. CARBON	220	5%	1/6W	
R021	RD14BB2C221J	RES. CARBON	220	5%	1/6W	
R022	NO USE					
R023	RD14BB2C362J	RES. CARBON	3.6K	5%	1/6W	
R024	RD14BB2C163J	RES. CARBON	16K	5%	1/6W	
R025	R92-1420-05	RES. SPECIAL POWER	24	5%	2W	
R026	NO USE					
R027	R92-1402-05	RES. SPECIAL POWER	24	5%	2W	
R028	RD14BB2C333J	RES. CARBON	33K	5%	1/6W	
R029	RD14BB2C221J	RES. CARBON	220	5%	1/6W	
R030	RD14BB2C622J	RES. CARBON	6.2K	5%	1/6W	
R031	R92-1421-05	RES. SPECIAL POWER	7.5	5%	3W	
R032	RN14BK2C1502F	RES. METAL FILM	15K	1%	1/6W	
R033	RN14BK2C1002F	RES. METAL FILM	10K	1%	1/6W	
R034	RD14BB2C622J	RES. CARBON	6.2K	5%	1/6W	
R035	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	
R036	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	
U001	NJM4556S	IC, DUAL OP AMP				
U002	NJM4556S	IC, DUAL OP AMP				
U003	NJM4556S	IC, DUAL OP AMP				

VR001 R12-1551-05 RES. SEMI FIXED 1KB

PARTS LIST

HIGH VOLTAGE UNIT

X68-1510-00

REF. NO	PARTS NO	NAME & DESCRIPTION					
F01-0813-05		HEAT SINK (CONVERTER)					
F10-1601-04		SHIELD PLATE					
F15-0727-04		HOLDER (NEON LAMP)					
J25-5226-03		PCB (UNMOUNTED)					
N30-3006-41		SCREW, PAN HD M3X6					
W02-0458-05-		HIGH VOLTAGE UNIT					
C001	CEO4EW1E221M	CAP. ELECTRO 220 20% 25V					
C002	CEO4EW1E221M	CAP. ELECTRO 220 20% 25V					
C003	CK45B1H472K	CAP. CERAMIC 4700P 10% 50V					
C004	CK45FB1H222K	CAP. CERAMIC 2200P 10% 50V					
C005	CC45SL2H101J	CAP. CERAMIC 100P 5% 500V					
C006	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K					
C007	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K					
C008	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K					
C009	CK45B2H102K	CAP. CERAMIC 1000P 10% 500V					
C010	CF92V1H224J	CAP. POLYESTER 0.22 5% 50V					
C011	CF92V1H224J	CAP. POLYESTER 0.22 5% 50V					
C012	CK45E3F102P	CAP. CERAMIC 1000P 3.1K					
C013	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K					
C014	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K					
C015	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K					
C016	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K					
C017	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K					
C018	CK45B2H102K	CAP. CERAMIC 1000P 10% 500V					
C019	CEO4HW1H010M	CAP. ELECTRO 1 20% 50V					
C020	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V					
C021	CC45CH2H010C	CAP. CERAMIC 1P 0.25P 500V					
C022	CC45CH2H010C	CAP. CERAMIC 1P 0.25P 500V					
C023	CK45F1H103Z	CAP. CERAMIC 0.01 50V					
C024	CC45CH2H020C	CAP. CERAMIC 2P 0.25P 500V					
C025	CC45CH2H010C	CAP. CERAMIC 1P 0.25P 500V					
C026	CEO4HW1H010M	CAP. ELECTRO 1 20% 50V					
C027	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V					
C031	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K					
C032	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K					
C033	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K					
C034	C91-1274-05	CAP. CERAMIC 2700P 10% 3.15K					
C035	CE04W2C2R2M	CAP. ELECTRO 2.2 20% 160V					
C036	CE04W2C2R2M	CAP. ELECTRO 2.2 20% 160V					
C037	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V					
C038	CEO4EW1C101M	CAP. ELECTRO 100 20% 16V					
C039	CEO4EW1C101M	CAP. ELECTRO 100 20% 16V					
C040	CEO4EW1C101M	CAP. ELECTRO 100 20% 16V					
C043	CEO4EW0J102M	CAP. ELECTRO 1000 20% 6.3V					

D001	ISS132	DIODE
D002	ISS132	DIODE
D003	ISS132	DIODE
D004	ISR35-200A	DIODE
D005	ISR35-200A	DIODE
D006	ISS83	DIODE
D007	ISS83	DIODE
D008	ISR35-200A	DIODE
D009	ISR35-200A	DIODE
D010	ISS83	DIODE
D011	ISS132	DIODE
D012	ISS132	DIODE
D013	ISS83	DIODE

L001	L40-3925-04	FERRI INDUCTOR 3.9MH
L002	L40-1011-04	FERRI INDUCTOR 100UH
L003	L40-1011-04	FERRI INDUCTOR 100UH
L004	L40-1545-06	FERRI INDUCTOR 150MH

NL001	NE-28	NEON LAMP
NL002	NE-28	NEON LAMP
NL003	NE-28	NEON LAMP
NL004	NE-28	NEON LAMP

P019	E40-1273-05	PIN CONNECTOR 12P
------	-------------	-------------------

P022	E40-0273-05	PIN CONNECTOR 2P
P023	E40-0503-05	PIN CONNECTOR 5P
P024	E40-0373-05	PIN CONNECTOR 3P
P025	E40-0473-05	PIN CONNECTOR 4P
P026	E40-1073-05	PIN CONNECTOR 10P

Q001	ZSD613(E)	TR. SI. NPN
Q002	ZSA1175(F)	TR. SI. PNP
Q003	ZSA1208(S,T)	TR. SI. PNP
Q004	ZSC2910(S,T)	TR. SI. NPN
Q005	ZSA1209(S,T)	TR. SI. PNP
Q006	ZSC2911(S,T)	TR. SI. NPN
Q007	ZSA1175(F)	TR. SI. PNP
Q008	ZSC3315(C)	TR. SI. NPN

REF. NO	PARTS NO	NAME & DESCRIPTION					
R001	RD14BB2C821J	RES. CARBON 820 5% 1/6W					
R002	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W					
R003	RD14BB2C102J	RES. CARBON 1K 5% 1/6W					
R004	RD14BB2C104J	RES. CARBON 100K 5% 1/6W					
R005	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W					
R006	RD14BB2C473J	RES. CARBON 47K 5% 1/6W					
R007	R92-1128-05	RES. FIXED 9.1M 1% 1W					
R008	R92-1128-05	RES. FIXED 9.1M 1% 1W					
R009	RN14BB2C1003F	RES. METAL FILM 100K 1% 1/6W					
R010	R92-1034-05-	RES. METAL FILM 47M 5% 1/2W					
R011	RD14BB2C470J	RES. CARBON 47 5% 1/6W					
R012	RD14BB2C474J	RES. CARBON 470K 5% 1/6W					
R013	R92-1034-05	RES. METAL FILM 47M 5% 1/2W					
R014	RD14BB2C474J	RES. CARBON 470K 5% 1/6W					
R015	RD14BB2C823J	RES. CARBON 82K 5% 1/6W					
R016	RD14BB2C470J	RES. CARBON 47 5% 1/6W					
R017	RD14BB2C683J	RES. CARBON 68K 5% 1/6W					
R018	RD14BB2C114J	RES. CARBON 110K 5% 1/6W					
R019	RD14BB2C822J	RES. CARBON 8.2K 5% 1/6W					
R020	RD14BB2C102J	RES. CARBON 1K 5% 1/6W					
R021	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W					
R022	RD14BB2C134J	RES. CARBON 130K 5% 1/6W					
R023	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W					
R024	RD14BB2C134J	RES. CARBON 130K 5% 1/6W					
R025	RD14BB2C751J	RES. CARBON 750 5% 1/6W					
R026	RD14BB2C913J	RES. CARBON 91K 5% 1/6W					
R027	RD14BB2C103J	RES. CARBON 10K 5% 1/6W					
R034	R92-1050-05	RES. METAL FILM 5.1M 5% 1/2W					
R035	R92-1422-05	RES. FIXED 3.9M 5% 1/2W					
R036	RD14BB2C203J	RES. CARBON 20K 5% 1/6W					
R037	RN14BB2E1804F	RES. METAL FILM 1.8M 1% 1/4W					
R038	NO USE						
R039	RD14BB2C204J	RES. CARBON 200K 5% 1/6W					
R040	RD14BB2C684J	RES. CARBON 680K 5% 1/6W					
R041	RD14BB2C684J	RES. CARBON 680K 5% 1/6W					
R042	RD14BB2C101J	RES. CARBON 100 5% 1/6W					
R043	RD14BB2C6R8J	RES. CARBON 6.8 5% 1/6W					
R044	R92-1126-05	RES. FIXED 4.3M 5% 1/2W					
R047	RD14BB2C103J	RES. CARBON 10K 5% 1/6W					
R048	RD14BB2C101J	RES. CARBON 100 5% 1/6W					
U001	NJM4558D	IC. DUAL OP AMP					
VR001	R12-5524-05	RES. SEMI FIXED 100K B					
VR002	R12-8501-05	RES. SEMI FIXED 2.2M B					

SWITCH UNIT

X69-1150-00

REF. NO	PARTS NO	NAME & DESCRIPTION					
D038	B30-0964-05	LED					
D039	B30-0965-05	LED					
D040	B30-0964-05	LED					
D041	B30-0965-05	LED					
D042	B30-0964-05	LED					
D043	B30-0965-05	LED					
D044	B30-0965-05	LED					
D045	ISS132	DIODE					
D046	ISS132	DIODE					
D047	ISS132	DIODE					
D048	ISS132	DIODE					
D049	ISS132	DIODE					
P001	E40-7036-05	PIN CONNECTOR 20P					
R015	R90-0652-05	RES. NETWORK 6X10K 5%					
R016	R90-0653-05	RES. NETWORK 8X10K 5%					
R017	R90-0614-05	RES. NETWORK 8X390 5%					
R018	R90-0639-05	RES. NETWORK 6X390 5%					
R019	R90-0639-05	RES. NETWORK 6X390 5%					
R020	R90-0639-05	RES. NETWORK 6X390 5%					
R021	RD14BB2C391J	RES. CARBON 390 5% 1/6W					
R022	RD14BB2C391J	RES. CARBON 390 5% 1/6W					
R023	RD14BB2C391J	RES. CARBON 390 5% 1/6W					

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
S001	W02-0810-05	ROTARY ENCODER	C039	CK45F1H1032	CAP. CERAMIC 0.01 50V
S002	W02-0810-05	ROTARY ENCODER	C040	CK45FF1H1032	CAP. CERAMIC 0.01 50V
S003	W02-0810-05	ROTARY ENCODER	C041	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V
S004	S40-2525-05	SWITCH	C042	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V
S005	S40-2525-05	SWITCH	C043	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V
S006	S40-2525-05	SWITCH	C044	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V
S007	S40-2525-05	SWITCH	C045	C092FM1H104K	CAP. MYLAR 0.1 10% 50V
S008	S40-2525-05	SWITCH	C046	CK45FF1H1032	CAP. CERAMIC 0.01 50V
S009	S40-2525-05	SWITCH	C103	CC45FCH1H020C	CAP. CERAMIC 2P 0.25P 50V
S010	S40-2525-05	SWITCH	C104	CC45FCH1H050C	CAP. CERAMIC 5P 0.25P 50V
S011	S40-2525-05	SWITCH	C105	NO USE	
S012	S40-2525-05	SWITCH	C106	CC45FCH1H060D	CAP. CERAMIC 6P 0.5P 50V
S013	S40-2525-05	SWITCH	C107	CK45FF1H1032	CAP. CERAMIC 0.01 50V
S014	S40-2525-05	SWITCH	C108	CC45FCH1H150J	CAP. CERAMIC 15P 5% 50V
S015	S40-2525-05	SWITCH	C109	CK45B1H102K	CAP. CERAMIC 1000P 10% 50V
S016	S40-2525-05	SWITCH	C110	CC45CH1H101C	CAP. CERAMIC 1P 0.25P 50V
S017	S40-2525-05	SWITCH	C111	CC45FCH1H030C	CAP. CERAMIC 3P 0.25P 50V
S018	S40-2525-05	SWITCH	C112	CC45CH1H010C	CAP. CERAMIC 1P 0.25P 50V
S019	S40-2525-05	SWITCH	C113	CC45FCH1H020C	CAP. CERAMIC 2P 0.25P 50V
S020	S40-2525-05	SWITCH	C114	CC45FCH1H020C	CAP. CERAMIC 2P 0.25P 50V
S021	S40-2525-05	SWITCH	C203	CC45FCH1H020C	CAP. CERAMIC 2P 0.25P 50V
S022	S40-2525-05	SWITCH	C204	CC45FCH1H050C	CAP. CERAMIC 5P 0.25P 50V
S023	S40-2525-05	SWITCH	C205	NO USE	
S024	S40-2525-05	SWITCH	C206	CC45FCH1H060D	CAP. CERAMIC 6P 0.5P 50V
S025	S40-2525-05	SWITCH	C207	NO USE	
S026	S40-2525-05	SWITCH	C208	CC45FCH1H150J	CAP. CERAMIC 15P 5% 50V
S027	S40-2525-05	SWITCH	C209	CK45B1H102K	CAP. CERAMIC 1000P 10% 50V
S028	S40-2525-05	SWITCH	C210	CC45CH1H101C	CAP. CERAMIC 1P 0.25P 50V
S029	S40-2525-05	SWITCH	C211	CC45FCH1H030C	CAP. CERAMIC 3P 0.25P 50V
S030	S40-2525-05	SWITCH	C212	CC45CH1H010C	CAP. CERAMIC 1P 0.25P 50V
S031	S40-2525-05	SWITCH	C213	CC45FCH1H020C	CAP. CERAMIC 2P 0.25P 50V
S032	S40-2525-05	SWITCH	C214	CC45FCH1H020C	CAP. CERAMIC 2P 0.25P 50V
S033	S40-2525-05	SWITCH	C301	CK45FF1H1032	CAP. CERAMIC 0.01 50V
S034	S40-2525-05	SWITCH	C401	CK45FF1H1032	CAP. CERAMIC 0.01 50V
S035	S40-2525-05	SWITCH	C402	C092FM1H104K	CAP. MYLAR 0.1 10% 50V
S036	S40-2525-05	SWITCH	C501	CC45FCH1H680J	CAP. CERAMIC 68P 5% 50V
S037	S40-2525-05	SWITCH	C502	CC45FCH1H680J	CAP. CERAMIC 68P 5% 50V
U002	HD74HC595P	IC. 8-BIT SHIFT REGISTER/LATCH	C503	CC45CH1H120J	CAP. CERAMIC 12P 5% 50V
U003	HD74HC595P	IC. 8-BIT SHIFT REGISTER/LATCH	C504	CC45CH1H120J	CAP. CERAMIC 12P 5% 50V
U004	HD74HC595P	IC. 8-BIT SHIFT REGISTER/LATCH	C505	CC45FCH1H020C	CAP. CERAMIC 2P 0.25P 50V
U005	HD74HC595P	IC. 8-BIT SHIFT REGISTER/LATCH	C506	CC45FCH1H020C	CAP. CERAMIC 2P 0.25P 50V
U006	HD74HC595P	IC. 8-BIT SHIFT REGISTER/LATCH	C509	CC45SL1H471J	CAP. CERAMIC 470P 5% 50V
U007	HD74HC595P	IC. 8-BIT SHIFT REGISTER/LATCH	C510	CC45SL1H471J	CAP. CERAMIC 470P 5% 50V
U008	HD74HCS595P	IC. 8-BIT SHIFT REGISTER/LATCH	C511	C092FM1H104K	CAP. MYLAR 0.1 10% 50V
U009	HD74HC595P	IC. 8-BIT SHIFT REGISTER/LATCH	C512	NO USE	

VERTICAL PREAMP UNIT

X73-1760-00

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
E31-5576-05		WIRE ASS'Y(GND TO GND)	C601	CC45FCH1H070D	CAP. CERAMIC 7P 0.5P 50V
E31-5577-05		WIRE ASS'Y(No.A,B,C,D)	C602	CC45FCH1H070D	CAP. CERAMIC 7P 0.5P 50V
J25-S228-02		PCB (UNMOUNTED)	C603	CC45FCH1H120J	CAP. CERAMIC 12P 5% 50V
J61-0408-05		WIRE WRAPPING BAND	C604	CC45FCH1H120J	CAP. CERAMIC 12P 5% 50V
C001	CK45FF1H1032	CAP. CERAMIC 0.01 50V	C605	CE04HW1H010M	CAP. ELECTRO 1 20% 50V
C002	CK45FF1H1032	CAP. CERAMIC 0.01 50V	C606	CC45CH1H010C	CAP. CERAMIC 1P 0.25P 50V
C003	CK45FF1H1032	CAP. CERAMIC 0.01 50V	C607	CE04HW1E220M	CAP. ELECTRO 22 20% 25V
C004	CE04EW1A101M	CAP. ELECTRO 100 20% 10V	C608	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C005	CK45FF1H1032	CAP. CERAMIC 0.01 50V	C609	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C006	CK45FF1H1032	CAP. CERAMIC 0.01 50V	C610	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C007	CK45FF1H1032	CAP. CERAMIC 0.01 50V	C611	NO USE	
C008	CK45FF1H1032	CAP. CERAMIC 0.01 50V	C612	CC45FCH1H020C	CAP. CERAMIC 2P 0.25P 50V
C009	CK45FF1H1032	CAP. CERAMIC 0.01 50V	C701	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C019	CK45FF1H1032	CAP. CERAMIC 0.01 50V	C702	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C020	CK45FF1H1032	CAP. CERAMIC 0.01 50V	C703	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C021	CE04EW1C100M	CAP. ELECTRO 10 20% 16V	C704	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C022	CE04EW1C100M	CAP. ELECTRO 10 20% 16V	C705	CC45FCH1H220J	CAP. CERAMIC 22P 5% 50V
C023	NO USE		C706	CC45FCH1H220J	CAP. CERAMIC 22P 5% 50V
C024	CE04EW1C470M	CAP. ELECTRO 47 20% 16V	C707	CQ92M1H104K	CAP. MYLAR 0.1 10% 50V
C025	CQ92FM1H103K	CAP. MYLAR 0.01 10% 50V	C708	NO USE	
C026	CK45FF1H1032	CAP. CERAMIC 0.01 50V	C709	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C027	CE04EW1C470M	CAP. ELECTRO 47 20% 16V	C710	NO USE	
C028	CE04EW1C470M	CAP. ELECTRO 47 20% 16V	C711	CK45FF1H1032	CAP. CERAMIC 0.01 50V
C029	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V	C714	CE04EW1A101M	CAP. ELECTRO 100 20% 10V
C030	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V	C715	CE04EW1A101M	CAP. ELECTRO 100 20% 10V
C031	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V	C716	CE04EW1C330M	CAP. ELECTRO 33 20% 16V
C032	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V	C720	CQ92FM1H104K	CAP. MYLAR 0.1 10% 50V
C033	CE04EW1C470M	CAP. ELECTRO 47 20% 16V	C721	CQ92FM1H104K	CAP. MYLAR 0.1 10% 50V
C034	CK45FF1H1032	CAP. CERAMIC 0.01 50V			
C035	CK45FF1H1032	CAP. CERAMIC 0.01 50V			
C036	CK45FF1H1032	CAP. CERAMIC 0.01 50V			
C037	CE04EW1C470M	CAP. ELECTRO 47 20% 16V			
C038	CK45F1H1032	CAP. CERAMIC 0.01 50V			

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
C800	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V	Q116	2SC2785(F)	TR. SI, NPN
C801	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V	Q117	2SC3779(D)	TR. SI, NPN
C802	CC45CH1H330J	CAP. CERAMIC 33P .5% 50V	Q118	2SC3779(D)	TR. SI, NPN
C803	CC45SL1H470J	CAP. CERAMIC 47P 5% 50V	Q119	2SC3779(D)	TR. SI, NPN
C804	CC45SL1H470J	CAP. CERAMIC 47P 5% 50V	Q120	2SC3779(D)	TR. SI, NPN
C805	C092M1H104K	CAP. MYLAR 0.1 10% 50V	Q201	2SC4072	TR. SI, NPN
C806	C092M1H104K	CAP. MYLAR 0.1 10% 50V	Q202	2SC4072	TR. SI, NPN
C807	CC45CH1H0R5C	CAP. CERAMIC 0.5P 0.25P 50V	Q203	2SC3779(D)	TR. SI, NPN
C808	CC45CH1H0R5C	CAP. CERAMIC 0.5P 0.25P 50V	Q204	2SC3779(D)	TR. SI, NPN
D101	ISS132	DIODE	Q205	2SC3315(C)	TR. SI, NPN
D102	ISS132	DIODE	Q206	2SC3315(C)	TR. SI, NPN
D103	MA700	DIODE	Q207	2SC3315(C)	TR. SI, NPN
D104	MA700	DIODE	Q208	2SA1161	TR. SI, PNP
D150	MA700	DIODE	Q209	2SA1161	TR. SI, PNP
D151	MA700	DIODE	Q210	2SC4049	TR. SI, NPN
D152	MA700	DIODE	Q211	2SC4049	TR. SI, NPN
D153	MA700	DIODE	Q212	2SC3779(D)	TR. SI, NPN
D154	MA700	DIODE	Q213	2SC3779(D)	TR. SI, NPN
D155	MA700	DIODE	Q214	2SC3779(D)	TR. SI, NPN
D156	MA700	DIODE	Q215	2SC3779(D)	TR. SI, NPN
D157	MA700	DIODE	Q216	2SC2785(F)	TR. SI, NPN
D201	ISS132	DIODE	Q217	2SC3779(D)	TR. SI, NPN
D202	ISS132	DIODE	Q218	2SC3779(D)	TR. SI, NPN
D203	MA700	DIODE	Q219	2SC3779(D)	TR. SI, NPN
D204	MA700	DIODE	Q220	2SC3779(D)	TR. SI, NPN
D250	MA700	DIODE	Q301	2SC3779(D)	TR. SI, NPN
D251	MA700	DIODE	Q302	2SC3779(D)	TR. SI, NPN
D252	MA700	DIODE	Q303	2SC3779(D)	TR. SI, NPN
D253	MA700	DIODE	Q304	2SC3779(D)	TR. SI, NPN
D254	MA700	DIODE	Q401	2SC3779(D)	TR. SI, NPN
D255	MA700	DIODE	Q402	2SC3779(D)	TR. SI, NPN
D501	ISS132	DIODE	Q403	2SC3779(D)	TR. SI, NPN
D502	ISS132	DIODE	Q404	2SC3779(D)	TR. SI, NPN
D503	ISS132	DIODE	Q501	2SA1206	TR. SI, PNP
D504	ISS132	DIODE	Q502	2SA1206	TR. SI, PNP
D505	ISS132	DIODE	Q503	2SC3315(C)	TR. SI, NPN
D506	ISS132	DIODE	Q504	2SC3315(C)	TR. SI, NPN
D507	ISS132	DIODE	Q505	2SA1206	TR. SI, PNP
D508	ISS132	DIODE	Q506	2SA1206	TR. SI, PNP
D509	ISS132	DIODE	Q507	2SC3315(C)	TR. SI, NPN
D510	MT210JC	DIODE, ZENER 9.95V	Q508	2SC3315(C)	TR. SI, NPN
D511	ISS132	DIODE	Q509	2SA1206	TR. SI, PNP
D512	MT25.1JB	DIODE, ZENER 5.07V	Q510	2SA1206	TR. SI, PNP
D601	DAP401	DIODE ARRAY	Q511	2SC3315(C)	TR. SI, NPN
D602	DAP401	DIODE ARRAY	Q512	2SC3315(C)	TR. SI, NPN
D603	ISS132	DIODE	Q513	2SA1206	TR. SI, PNP
K101	SS1-2508-05	RELAY	Q514	2SA1206	TR. SI, PNP
K102	SS1-2508-05	RELAY	Q515	2SC3315(C)	TR. SI, NPN
K103	SS1-2508-05	RELAY	Q516	2SC3315(C)	TR. SI, NPN
K104	SS1-2508-05	RELAY	Q517	NO USE	
K201	SS1-2508-05	RELAY	Q518	2SC3732(L)	TR. SI, NPN
K202	SS1-2508-05	RELAY	Q519	2SA1206	TR. SI, PNP
P005	E40-0373-05	PIN CONNECTOR 3P	Q520	2SA1206	TR. SI, PNP
P006	E40-0373-05	PIN CONNECTOR 3P	Q521	2SA1175(F)	TR. SI, PNP
P007	E40-0473-05	PIN CONNECTOR 4P	Q522	2SA1175(F)	TR. SI, PNP
P008	E40-0473-05	PIN CONNECTOR 4P	Q523	2SA1175(F)	TR. SI, PNP
P009	E40-0373-05	PIN CONNECTOR 3P	Q524	2SC3779(D)	TR. SI, NPN
P010	E40-7039-05	PIN CONNECTOR 20P	Q525	2SC3779(D)	TR. SI, NPN
P011	E40-0373-05	PIN CONNECTOR 3P	Q526	2SA1206	TR. SI, PNP
P030	E40-0273-05	PIN CONNECTOR 2P	Q527	2SA1206	TR. SI, PNP
Q001	2SA1005(K)	TR. SI, PNP	Q528	2SA1161	TR. SI, PNP
Q002	2SA1005(K)	TR. SI, PNP	Q529	2SA1161	TR. SI, PNP
Q003	2SA1005(K)	TR. SI, PNP	Q601	2SA1206	TR. SI, PNP
Q004	2SA1005(K)	TR. SI, PNP	Q602	2SA1206	TR. SI, PNP
Q005	2SA1005(K)	TR. SI, PNP	Q603	2SC3779(D)	TR. SI, NPN
Q006	2SA1005(K)	TR. SI, PNP	Q604	2SA1206	TR. SI, PNP
Q007	2SA1005(K)	TR. SI, PNP	Q605	2SA1206	TR. SI, PNP
Q008	2SA1005(K)	TR. SI, PNP	Q606	2SA1206	TR. SI, PNP
Q101	2SC4072	TR. SI, NPN	Q607	2SC3779(D)	TR. SI, NPN
Q102	2SC4072	TR. SI, NPN	Q608	2SA1206	TR. SI, PNP
Q103	2SC3779(D)	TR. SI, NPN	Q609	2SA1206	TR. SI, PNP
Q104	2SC3779(D)	TR. SI, NPN	Q610	2SA1206	TR. SI, PNP
Q105	2SC3315(C)	TR. SI, NPN	Q611	2SC3779(D)	TR. SI, NPN
Q106	2SC3315(C)	TR. SI, NPN	Q612	2SA1206	TR. SI, PNP
Q107	2SC3315(C)	TR. SI, NPN	Q613	2SA1206	TR. SI, PNP
Q108	2SA1161	TR. SI, PNP	Q614	2SA1206	TR. SI, PNP
Q109	2SA1161	TR. SI, PNP	Q615	2SC3779(D)	TR. SI, NPN
Q110	2SC4049	TR. SI, NPN	Q616	2SA1206	TR. SI, PNP
Q111	2SC4049	TR. SI, NPN	Q617	2SA1161	TR. SI, PNP
Q112	2SC3779(D)	TR. SI, NPN	Q618	2SA1161	TR. SI, PNP
Q113	2SC3779(D)	TR. SI, NPN	Q619	2SA1175(F)	TR. SI, PNP
Q114	2SC3779(D)	TR. SI, NPN	Q620	2SA1175(F)	TR. SI, PNP
Q115	2SC3779(D)	TR. SI, NPN	Q621	2SC3779(D)	TR. SI, NPN
			Q622	2SC3779(D)	TR. SI, NPN
			Q623	2SC2785(F)	TR. SI, NPN
			Q624	2SC3315(C)	TR. SI, NPN

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION			REF. NO	PARTS NO	NAME & DESCRIPTION				
Q625	2SC3315(C)	TR. SI. NPN	R170	RN14BK2C91R0F	RES. METAL FILM	91.0	1%	1/6W			
Q626	2SC3315(C)	TR. SI. NPN	R171	RD14BB2C103J	RES. CARBON	10K	5%	1/6W			
Q627	2SC3315(C)	TR. SI. NPN	R172	RD14BB2C470J	RES. CARBON	47	5%	1/6W			
Q628	2SC3315(C)	TR. SI. NPN	R173	RD14BB2C470J	RES. CARBON	47	5%	1/6W			
Q629	2SC3315(C)	TR. SI. NPN	R174	RN14BK2C4702F	RES. METAL FILM	47K	1%	1/6W			
Q630	2SC3315(C)	TR. SI. NPN	R175	RN14BK2C4702F	RES. METAL FILM	47K	1%	1/6W			
Q631	2SC3315(C)	TR. SI. NPN	R176	RN14BK2C1301F	RES. METAL FILM	1.3K	1%	1/6W			
Q632	2SC3779(D)	TR. SI. NPN	R177	RN14BK2C6800F	RES. METAL FILM	680	1%	1/6W			
Q633	2SC3779(D)	TR. SI. NPN	R178	RN14BK2C6800F	RES. METAL FILM	680	1%	1/6W			
R001	RD14BB2C101J	RES. CARBON	100	5%	1/6W	R179	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R002	RD14BB2C101J	RES. CARBON	100	5%	1/6W	R180	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R003	RD14BB2C101J	RES. CARBON	100	5%	1/6W	R181	RN14BK2C5101F	RES. METAL FILM	5.1K	1%	1/6W
R004	RD14BB2C101J	RES. CARBON	100	5%	1/6W	R182	RN14BK2C4701F	RES. METAL FILM	4.7K	1%	1/6W
R005	RD14BB2C101J	RES. CARBON	100	5%	1/6W	R183	RD14BB2C100J	RES. CARBON	10	5%	1/6W
R006	RD14BB2C101J	RES. CARBON	100	5%	1/6W	R184	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R007	RD14BB2C101J	RES. CARBON	100	5%	1/6W	R185	RD14BB2C202J	RES. CARBON	2K	5%	1/6W
R008	RD14BB2C101J	RES. CARBON	100	5%	1/6W	R186	RD14BB2C202J	RES. CARBON	2K	5%	1/6W
R009	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	R187	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W
R010	RD14BB2C102J	RES. CARBON	100	5%	1/6W	R190	RD14BB2C270J	RES. CARBON	27	5%	1/6W
R011	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	R201	RD14BB2C751J	RES. CARBON	750	5%	1/6W
R012	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	R202	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R013	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	R203	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R014	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	R204	NO USE				
R101	RD14BB2C751J	RES. CARBON	750	5%	1/6W	R205	RD14BB2C221J	RES. CARBON	220	5%	1/6W
R102	RD14BB2C470J	RES. CARBON	47	5%	1/6W	R206	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W
R103	RD14BB2C470J	RES. CARBON	47	5%	1/6W	R207	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W
R104	RD14BB2C221J	RES. CARBON	220	5%	1/6W	R208	RD14BB2C331J	RES. CARBON	330	5%	1/6W
R105	NO USE					R209	RD14BB2C331J	RES. CARBON	330	5%	1/6W
R106	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W	R210	RN14BK2C2700F	RES. METAL FILM	270	1%	1/6W
R107	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W	R211	RN14BK2C2700F	RES. METAL FILM	270	1%	1/6W
R108	RD14BB2C331J	RES. CARBON	330	5%	1/6W	R212	RD14BB2C820J	RES. CARBON	82	5%	1/6W
R109	RD14BB2C331J	RES. CARBON	330	5%	1/6W	R217	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R110	RN14BK2C2700F	RES. METAL FILM	270	1%	1/6W	R218	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R111	RN14BK2C2700F	RES. METAL FILM	270	1%	1/6W	R219	RN14BK2C2700F	RES. METAL FILM	270	1%	1/6W
R112	RD14BB2C820J	RES. CARBON	82	5%	1/6W	R220	RN14BK2C2700F	RES. METAL FILM	270	1%	1/6W
R117	RD14BB2C220J	RES. CARBON	22	5%	1/6W	R221	RD14BB2C223J	RES. CARBON	22K	5%	1/6W
R118	RD14BB2C220J	RES. CARBON	22	5%	1/6W	R222	RD14BB2C750J	RES. CARBON	75	5%	1/6W
R119	RN14BK2C2700F	RES. METAL FILM	270	1%	1/6W	R223	RD14BB2C301J	RES. CARBON	300	5%	1/6W
R120	RN14BK2C2700F	RES. METAL FILM	270	1%	1/6W	R224	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W
R121	RD14BB2C223J	RES. CARBON	22K	5%	1/6W	R225	RD14BB2C471J	RES. CARBON	470	5%	1/6W
R122	RD14BB2C750J	RES. CARBON	75	5%	1/6W	R226	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R123	RD14BB2C301J	RES. CARBON	300	5%	1/6W	R227	RN14BK2C3601F	RES. METAL FILM	3.6K	1%	1/6W
R124	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W	R228	RN14BK2C4301F	RES. METAL FILM	4.3K	1%	1/6W
R125	RD14BB2C471J	RES. CARBON	470	5%	1/6W	R229	RN14BK2C4300F	RES. METAL FILM	430	1%	1/6W
R126	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	R230	NO USE				
R127	RN14BK2C3601F	RES. METAL FILM	3.6K	1%	1/6W	R231	RN14BK2C3000F	RES. METAL FILM	300	1%	1/6W
R128	RN14BK2C4301F	RES. METAL FILM	4.3K	1%	1/6W	R232	RN14BK2C3000F	RES. METAL FILM	300	1%	1/6W
R129	RN14BK2C4300F	RES. METAL FILM	430	1%	1/6W	R233	RD14BB2C151J	RES. CARBON	150	5%	1/6W
R130	NO USE					R234	RD14BB2C151J	RES. CARBON	150	5%	1/6W
R131	RN14BK2C3000F	RES. METAL FILM	300	1%	1/6W	R235	RN14BK2C2401F	RES. METAL FILM	2.4K	1%	1/6W
R132	RN14BK2C3000F	RES. METAL FILM	300	1%	1/6W	R236	RN14BK2C3601F	RES. METAL FILM	3.6K	1%	1/6W
R133	RD14BB2C161J	RES. CARBON	150	5%	1/6W	R237	RN14BK2C1002F	RES. METAL FILM	10K	1%	1/6W
R134	RD14BB2C151J	RES. CARBON	150	5%	1/6W	R238	RD14BB2C242J	RES. CARBON	2.4K	5%	1/6W
R135	RN14BK2C2401F	RES. METAL FILM	2.4K	1%	1/6W	R239	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R136	RN14BK2C3601F	RES. METAL FILM	3.6K	1%	1/6W	R240	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R137	RN14BK2C1002F	RES. METAL FILM	10K	1%	1/6W	R241	RN14BK2C1601F	RES. METAL FILM	1.6K	1%	1/6W
R138	RD14BB2C242J	RES. CARBON	2.4K	5%	1/6W	R242	RN14BK2C1601F	RES. METAL FILM	1.6K	1%	1/6W
R139	RD14BB2C101J	RES. CARBON	100	5%	1/6W	R243	RN14BK2C3000D	RES. METAL FILM	300	0.5%	1/6W
R140	RD14BB2C101J	RES. CARBON	100	5%	1/6W	R244	RN14BK2C3000D	RES. METAL FILM	300	0.5%	1/6W
R141	RN14BK2C1601F	RES. METAL FILM	1.6K	1%	1/6W	R245	RN14BK2C1500D	RES. METAL FILM	150	0.5%	1/6W
R142	RN14BK2C1601F	RES. METAL FILM	1.6K	1%	1/6W	R246	RN14BK2C1500D	RES. METAL FILM	150	0.5%	1/6W
R143	RN14BK2C3000D	RES. METAL FILM	300	0.5%	1/6W	R247	RN14BK2C3000D	RES. METAL FILM	300	0.5%	1/6W
R144	RN14BK2C3000D	RES. METAL FILM	300	0.5%	1/6W	R248	RD14BB2C331J	RES. CARBON	330	5%	1/6W
R145	RN14BK2C1500D	RES. METAL FILM	150	0.5%	1/6W	R249	NO USE				
R146	RN14BK2C1500D	RES. METAL FILM	150	0.5%	1/6W	R250	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R147	RN14BK2C3000D	RES. METAL FILM	300	0.5%	1/6W	R251	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R148	RD14BB2C331J	RES. CARBON	330	5%	1/6W	R252	RD14BB2C680J	RES. CARBON	68	5%	1/6W
R149	RD14BB2C100J	RES. CARBON	10	5%	1/6W	R253	RD14BB2C680J	RES. CARBON	68	5%	1/6W
R150	RD14BB2C101J	RES. CARBON	100	5%	1/6W	R254	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W
R151	RD14BB2C101J	RES. CARBON	100	5%	1/6W	R255	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W
R152	RD14BB2C680J	RES. CARBON	68	5%	1/6W	R256	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R153	RD14BB2C680J	RES. CARBON	68	5%	1/6W	R257	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R154	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W	R258	RN14BK2C1600F	RES. METAL FILM	160	1%	1/6W
R155	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W	R259	RN14BK2C1600F	RES. METAL FILM	160	1%	1/6W
R156	RD14BB2C220J	RES. CARBON	22	5%	1/6W	R260	RD14BB2C562J	RES. CARBON	5.6K	5%	1/6W
R157	RD14BB2C220J	RES. CARBON	22	5%	1/6W	R261	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R158	RN14BK2C1600F	RES. METAL FILM	160	1%	1/6W	R262	RD14BB2C151J	RES. CARBON	150	5%	1/6W
R159	RN14BK2C1600F	RES. METAL FILM	160	1%	1/6W	R263	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W
R160	RD14BB2C562J	RES. CARBON	5.6K	5%	1/6W	R264	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W
R161	RD14BB2C101J	RES. CARBON	100	5%	1/6W	R265	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R162	RD14BB2E151J	RES. CARBON	150	5%	1/6W	R266	RD14BB2C153J	RES. CARBON	15K	5%	1/6W
R163	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W	R267	RD14BB2C223J	RES. CARBON	22K	5%	1/6W
R164	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W	R268	RD14BB2C752J	RES. CARBON	7.5K	5%	1/6W
R165	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	R269	RN14BK2C91R0F	RES. METAL FILM	91.0	1%	1/6W
R166	RD14BB2C153J	RES. CARBON	15K	5%	1/6W	R270	RN14BK2C91R0F	RES. METAL FILM	91.0	1%	1/6W
R167	RD14BB2C223J	RES. CARBON	22K	5%	1/6W	R271	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R168	RD14BB2C752J	RES. CARBON	7.5K	5%	1/6W	R272	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R169	RN14BK2C91R0F	RES. METAL FILM	91.0	1%	1/6W	R273	RD14BB2C470J	RES. CARBON	47	5%	1/6W

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
R274	RN14BK2C4702F	RES. METAL FILM 47K 1% 1/6W	R543	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R275	RN14BK2C4702F	RES. METAL FILM 47K 1% 1/6W	R544	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R276	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W	R545	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W
R277	RN14BK2C6800F	RES. METAL FILM 680 1% 1/6W	R546	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W
R278	RN14BK2C6800F	RES. METAL FILM 680 1% 1/6W	R547	RD14BB2C391J	RES. CARBON 390 5% 1/6W
R279	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R548	RD14BB2C822J	RES. CARBON 8.2K 5% 1/6W
R280	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R549	RD14BB2C181J	RES. CARBON 180 5% 1/6W
R281	RN14BK2C5101F	RES. METAL FILM 5.1K 1% 1/6W	R550	RD14BK2C2401F	RES. METAL FILM 2.4K 1% 1/6W
R282	RN14BK2C4701F	RES. METAL FILM 4.7K 1% 1/6W	R551	RN14BK2C102J	RES. CARBON 1K 5% 1/6W
R283	RD14BB2C100J	RES. CARBON 10 5% 1/6W	R552	RD14BB2C102J	RES. CARBON 100 5% 1/6W
R284	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R553	RD14BB2C101J	RES. CARBON 1K 5% 1/6W
R285	RD14BB2C202J	RES. CARBON 2K 5% 1/6W	R554	RD14BB2C102J	RES. CARBON 22K 5% 1/6W
R286	RD14BB2C202J	RES. CARBON 2K 5% 1/6W	R555	RD14BB2C223J	RES. CARBON 24K 5% 1/6W
R287	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W	R556	RD14BB2C243J	RES. CARBON 4.7K 5% 1/6W
R290	RD14BB2C270J	RES. CARBON 27 5% 1/6W	R557	RD14BB2C472J	RES. CARBON 470 5% 1/6W
R301	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R558	RD14BB2C471J	RES. CARBON 470 5% 1/6W
R302	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R559	RD14BK2C8200F	RES. METAL FILM 820 1% 1/6W
R303	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R560	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W
R304	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R561	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W
R305	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W	R562	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W
R306	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	R563	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W
R307	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R564	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R308	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R565	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R309	RN14BK2C1801F	RES. METAL FILM 1.8K 1% 1/6W	R566	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R310	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R567	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R311	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R568	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R312	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R569	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R313	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R570	RN14BK2C6200F	RES. METAL FILM 620 1% 1/6W
R314	RD14BB2C202J	RES. CARBON 2K 5% 1/6W	R571	RN14BK2C6200F	RES. METAL FILM 620 1% 1/6W
R315	RD14BB2C202J	RES. CARBON 2K 5% 1/6W	R572	RN14BK2C1801F	RES. METAL FILM 1.8K 1% 1/6W
R401	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R573	RN14BK2C1801F	RES. METAL FILM 1.8K 1% 1/6W
R402	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R574	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
R403	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R575	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W
R404	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R576	RD14BB2C162J	RES. CARBON 1.6K 5% 1/6W
R405	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W	R577	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
R406	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	R578	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W
R407	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R579	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R408	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	R580	RD14BB2C113J	RES. CARBON 11K 5% 1/6W
R409	RN14BK2C1801F	RES. METAL FILM 1.8K 1% 1/6W	R581	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W
R410	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R582	RD14BB2C393J	RES. CARBON 39K 5% 1/6W
R411	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R583	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W
R412	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R584	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W
R413	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R585	RN14BK2C4300F	RES. METAL FILM 430 1% 1/6W
R414	RD14BB2C202J	RES. CARBON 2K 5% 1/6W	R586	RN14BK2C4300F	RES. METAL FILM 430 1% 1/6W
R415	RD14BB2C202J	RES. CARBON 2K 5% 1/6W	R587	RN14BK2C91R0F	RES. METAL FILM 91.0 1% 1/6W
R501	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R588	RN14BK2C91R0F	RES. METAL FILM 91.0 1% 1/6W
R502	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R589	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R503	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W	R590	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R504	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W	R591	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W
R505	RN14BB2C391J	RES. CARBON 390 5% 1/6W	R592	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R506	RD14BB2C433J	RES. CARBON 43K 5% 1/6W	R593	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R507	RD14BB2C181J	RES. CARBON 180 5% 1/6W	R594	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R508	RD14BB2C181J	RES. CARBON 180 5% 1/6W	R595	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R509	RN14BK2C2401F	RES. METAL FILM 2.4K 1% 1/6W	R596	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R510	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R597	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R511	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R598	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R512	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R599	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R513	RD14BB2C223J	RES. CARBON 22K 5% 1/6W	R600	NO USE	
R514	RD14BB2C243J	RES. CARBON 24K 5% 1/6W	R601	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R515	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R602	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R516	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R603	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R517	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W	R604	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R518	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W	R605	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R519	RN14BB2C391J	RES. CARBON 390 5% 1/6W	R606	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R520	RD14BB2C433J	RES. CARBON 43K 5% 1/6W	R607	RN14BK2C1200F	RES. METAL FILM 120 1% 1/6W
R521	RD14BB2C181J	RES. CARBON 180 5% 1/6W	R608	NO USE	
R522	RD14BB2C181J	RES. CARBON 180 5% 1/6W	R609	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R523	RN14BK2C2401F	RES. METAL FILM 2.4K 1% 1/6W	R610	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R524	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R611	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R525	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R612	RN14BK2C5600F	RES. METAL FILM 560 1% 1/6W
R526	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R613	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R527	RD14BB2C223J	RES. CARBON 22K 5% 1/6W	R614	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R528	RD14BB2C243J	RES. CARBON 24K 5% 1/6W	R615	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R529	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R616	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R530	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R617	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R531	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W	R618	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R532	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W	R619	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R533	RD14BB2C391J	RES. CARBON 390 5% 1/6W	R620	RN14BK2C1200F	RES. METAL FILM 120 1% 1/6W
R534	RD14BB2C822J	RES. CARBON 8.2K 5% 1/6W	R621	NO USE	
R535	RD14BB2C181J	RES. CARBON 180 5% 1/6W	R622	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R536	RD14BB2C181J	RES. CARBON 180 5% 1/6W	R623	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R537	RN14BK2C2401F	RES. METAL FILM 2.4K 1% 1/6W	R624	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R538	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R625	RN14BK2C5600F	RES. METAL FILM 560 1% 1/6W
R539	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R626	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R540	RD14BB2C102J	RES. CARBON 1K 5% 1/6W	R627	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R541	RD14BB2C223J	RES. CARBON 22K 5% 1/6W	R628	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R542	RD14BB2C243J	RES. CARBON 24K 5% 1/6W	R629	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
			R630	RD14BB2C101J	RES. CARBON 100 5% 1/6W
			R631	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
			R632	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
			R633	RN14BK2C1300F	RES. METAL FILM 130 1% 1/6W

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
			TH501		THERMISTOR
			SDT100		
R634	NO USE		U001	HD74HC595P	IC. 8-BIT SHIFT REGISTER/LATCH
R635	RD14BB2C302J	RES. CARBON 3K 5% 1/6W	U002	HD74HC595P	IC. 8-BIT SHIFT REGISTER/LATCH
R636	RD14BB2C220J	RES. CARBON 22 5% 1/6W	U003	HD74HC595P	IC. 8-BIT SHIFT REGISTER/LATCH
R637	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	U004	HD74LS42P	IC.BCD TO DECIMAL DECODER
R638	RN14BK2C5600F	RES. METAL FILM 560 1% 1/6W	U005	SN74ALS00AN	IC. QUAD 2 INPUT NAND GATE
R639	RD14BB2C101J	RES. CARBON 100 5% 1/6W	U006	SN74ALS112AN	IC. DUAL J-K F.F.(WITH PR&CLR)
R640	RD14BB2C220J	RES. CARBON 22 5% 1/6W	U007	SN74ALS00AN	IC. QUAD 2 INPUT NAND GATE
R641	RD14BB2C220J	RES. CARBON 22 5% 1/6W	U008	SN74ALS112AN	IC. DUAL J-K F.F.(WITH PR&CLR)
R642	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	U009	SN74ALSQ0AN	IC. QUAD 2 INPUT NAND GATE
R643	RD14BB2C101J	RES. CARBON 100 5% 1/6W	U101	NJM4558D	IC. DUAL OP AMP
R644	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	U201	NJM4558D	IC. DUAL OP AMP
R645	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	VR101	R12-0569-05	RES. SEMI FIXED 100B
R646	RN14BK2C1300F	RES. METAL FILM 130 1% 1/6W	VR102	R12-0569-05	RES. SEMI FIXED 100B
R647	NO USE		VR103	R12-2520-05	RES. SEMI FIXED 5KB
R648	RD14BB2C302J	RES. CARBON 3K 5% 1/6W	VR104	R12-3543-05	RES. SEMI FIXED 20KB
R649	RD14BB2C220J	RES. CARBON 22 5% 1/6W	VR201	R12-0569-05	RES. SEMI FIXED 100B
R650	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W	VR202	R12-0569-05	RES. SEMI FIXED 100B
R651	RN14BK2C5600F	RES. METAL FILM 560 1% 1/6W	VR203	R12-2520-05	RES. SEMI FIXED 5KB
R652	RD14BB2C101J	RES. CARBON 100 5% 1/6W	VR204	R12-3543-05	RES. SEMI FIXED 20KB
R653	RD14BB2C822J	RES. CARBON 8.2K 5% 1/6W	VR501	R12-0570-05	RES. SEMI FIXED 200B
R654	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	VR502	R12-1538-05	RES. SEMI FIXED 1KB
R655	R90-0657-05	RES. MULTIPLE 8X330 1%	VR503	R12-3543-05	RES. SEMI FIXED 20KB
R656	RD14BB2C331J	RES. CARBON 330 5% 1/6W	VR504	R12-0570-05	RES. SEMI FIXED 200B
R657	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W	VR505	R12-1538-05	RES. SEMI FIXED 1KB
R658	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W	VR506	R12-3543-05	RES. SEMI FIXED 20KB
R659	RN14BK2C4701F	RES. METAL FILM 4.7K 1% 1/6W	VR507	R12-0570-05	RES. SEMI FIXED 200B
R660	RN14BK2C4701F	RES. METAL FILM 4.7K 1% 1/6W	VR508	R12-1538-05	RES. SEMI FIXED 1KB
R661	RN14BK2C2701F	RES. METAL FILM 2.7K 1% 1/6W	VR509	R12-3543-05	RES. SEMI FIXED 20KB
R662	RD14BK2C2701F	RES. METAL FILM 2.7K 1% 1/6W	VR510	R12-0570-05	RES. SEMI FIXED 200B
R663	RD14BB2C220J	RES. CARBON 22 5% 1/6W	VR511	R12-1538-05	RES. SEMI FIXED 1KB
R664	RD14BB2C220J	RES. CARBON 22 5% 1/6W	VR512	R12-3543-05	RES. SEMI FIXED 20KB
R665	RD14BB2C220J	RES. CARBON 22 5% 1/6W	VR513	R12-3543-05	RES. SEMI FIXED 20KB
R666	RD14BB2C220J	RES. CARBON 22 5% 1/6W	VR601	R12-3543-05	RES. SEMI FIXED 20KB
R667	RD14BB2C220J	RES. CARBON 22 5% 1/6W	VR602	R12-3543-05	RES. SEMI FIXED 20KB
R668	RD14BB2C220J	RES. CARBON 22 5% 1/6W	VR603	R12-3543-05	RES. SEMI FIXED 20KB
R669	RD14BB2C220J	RES. CARBON 22 5% 1/6W	VR604	R12-3543-05	RES. SEMI FIXED 20KB
R670	RD14BB2C220J	RES. CARBON 22 5% 1/6W			
R671	RD14BB2C102J	RES. CARBON 1K 5% 1/6W			
R672	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
R673	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
R674	RN14BK2C2701F	RES. METAL FILM 2.7K 1% 1/6W			
R675	RN14BK2C1002F	RES. METAL FILM 10K 1% 1/6W			
R676	E31-2170-05	JUMPING WIRE			
R677	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
R678	RD14BB2C101J	RES. CARBON 100 5% 1/6W			
R679	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W			
R680	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W			
R681	RN14BK2C8200F	RES. METAL FILM 820 1% 1/6W			
R682	RN14BK2C1601F	RES. METAL FILM 1.6K 1% 1/6W			
R683	RD14BB2C391J	RES. CARBON 390 5% 1/6W			
R684	RD14BB2C300J	RES. CARBON 30 5% 1/6W			
R685	RD14BB2C104J	RES. CARBON 100K 5% 1/6W			
R686	RD14BB2C111J	RES. CARBON 110 5% 1/6W			
R687	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
R688	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
R689	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
R690	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
R691	RN14BK2C6801F	RES. METAL FILM 6.8K 1% 1/6W			
R701	RD14BB2C101J	RES. CARBON 100 5% 1/6W			
R702	RD14BB2C202J	RES. CARBON 2K 5% 1/6W			
R703	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
R704	RN14BK2C5600F	RES. METAL FILM 560 1% 1/6W			
R705	RN14BK2C1601F	RES. METAL FILM 1.6K 1% 1/6W			
R706	RD14BB2C101J	RES. CARBON 100 5% 1/6W			
R707	RD14BB2C202J	RES. CARBON 2K 5% 1/6W			
R708	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
R709	RN14BK2C5600F	RES. METAL FILM 560 1% 1/6W			
R710	RN14BK2C1601F	RES. METAL FILM 1.6K 1% 1/6W			
R711	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
R712	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
R713	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
R714	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
R800	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
R801	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
R802	RD14BB2C561J	RES. CARBON 560 5% 1/6W			
R810	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
R811	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
R812	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
R813	RD14BB2C470J	RES. CARBON 47 5% 1/6W			
TC101	C05-0469-05	CAP. TRIMMER 10P			
TC201	C05-0469-05	CAP. TRIMMER 10P			
TC501	C05-0469-05	CAP. TRIMMER 10P			
TC502	C05-0469-05	CAP. TRIMMER 10P			
TC503	C05-0469-05	CAP. TRIMMER 10P			
TC504	C05-0469-05	CAP. TRIMMER 10P			
HORIZONTAL UNIT					
X74-1480-00					
REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
	E31-5572-05	WIRE ASS'Y(ND.1)	C001	CE04HW1H010M	JUMPING RES. ZERO OHM (5MM)
	J25-5229-02	PCB (UNMOUNTED)	C002	CC45FCH1H050C	CAP. ELECTRO 1 20% 50V
			C003	CC45FCH1H030C	CAP. CERAMIC 3P 0.25P 50V
			C004	CC45FCH1H050C	CAP. CERAMIC 5P 0.25P 50V
			C005	CQ92FM1H104K	CAP. MYLAR 0.1 10% 50V
			C006	CC45FCH1H221J	CAP. CERAMIC 220P 5% 50V
			C007	CC45FCH1H200Q	CAP. CERAMIC 20P 5% 50V
			C008	CF92V1H333J	CAP. PLASTIC FILM 0.033 5% 50V
			C009	CF92V1H684J	CAP. PLASTIC FILM 0.68 5% 50V
			C010	CF92V1H684J	CAP. PLASTIC FILM 0.68 5% 50V
			C011	CE04EW1A470M	CAP. ELECTRO 47 20% 10V
			C012	CC45FCH1H150J	CAP. CERAMIC 15P 5% 50V
			C013	CE04HW1H010M	CAP. ELECTRO 1 20% 50V
			C014	CC45FCH1H030C	CAP. CERAMIC 3P 0.25P 50V
			C015	CC45FCH1H150J	CAP. CERAMIC 15P 5% 50V
			C016	CQ92FM1H104K	CAP. MYLAR 0.1 10% 50V
			C017	CC45FCH1H200J	CAP. CERAMIC 20P 5% 50V
			C018	CF92V1H333J	CAP. PLASTIC FILM 0.033 5% 50V
			C019	CC45FCH1H221J	CAP. CERAMIC 220P 5% 50V
			C020	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
			C021	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
			C022	NO USE	
			C023	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
			C024	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
			C025	NO USE	
			C026	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
			C027	CK45FF1H103Z	CAP. CERAMIC 0.01 50V

PARTS LIST

REF.NO	PARTS NO	NAME & DESCRIPTION				REF.NO	PARTS NO	NAME & DESCRIPTION			
C101	CC45FCH1H050C	CAP. CERAMIC	5P	0.25P	50V	CS30	CK45FF1H1032	CAP. CERAMIC	0.01		50V
C102	CK45FB1H222K	CAP. CERAMIC	2200P	10%	50V	CS31	CK45FF1H1032	CAP. CERAMIC	0.01		50V
C103	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	CS32	CK45FF1H1032	CAP. CERAMIC	0.01		50V
C104	CC45FCH1H050C	CAP. CERAMIC	5P	0.25P	50V	CS33	CE04EW1A101M	CAP. ELECTRO	100	20%	10V
C105	CK45FB1H222K	CAP. CERAMIC	2200P	10%	50V	CS34	CE04EW1A101M	CAP. ELECTRO	100	20%	10V
C106	CK45FB1H222K	CAP. CERAMIC	2200P	10%	50V	CS35	CK45FF1H1032	CAP. CERAMIC	0.01		50V
C107	CE04EW1A470M	CAP. ELECTRO	47	20%	10V						
C108	CK45FF1H1032	CAP. CERAMIC	0.01		50V	CS51	CE04EW1A471M	CAP. ELECTRO	470	20%	10V
C109	CC45FCH1H101J	CAP. CERAMIC	100P	5%	50V	CS52	CE04EW1C331M	CAP. ELECTRO	330	20%	16V
C110	CM93BD2A101J	CAP. MICA	100P	5%	100V	CS53	CE04EW1C331M	CAP. ELECTRO	330	20%	16V
C111	C91-1272-05	CAP. PLASTIC FILM	1.5	5%	100V	CS54	CE04EW1A102M	CAP. ELECTRO	1000	20%	10V
C112	CE04EW1C220M	CAP. ELECTRO	22	20%	16V	CS55	CE04EW1C101M	CAP. ELECTRO	100	20%	16V
C113	CE04EW1A470M	CAP. ELECTRO	47	20%	10V	CS56	CK45FF1H1032	CAP. CERAMIC	0.01		50V
C114	CE04EW1C220M	CAP. ELECTRO	22	20%	16V	CS57	CQ92FM1H103K	CAP. MYLAR	0.01	10%	50V
C115	CC45FSL1H391J	CAP. CERAMIC	390P	5%	50V	CS58	CQ92FM1H103K	CAP. MYLAR	0.01	10%	50V
C116	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V						
C117	CE04HW1H010M	CAP. ELECTRO	1	20%	50V	C600	CC45CH1H270J	CAP. CERAMIC	27P	5%	50V
C118	CC45FCH1H470J	CAP. CERAMIC	47P	5%	50V	C601	CC45CH1H101J	CAP. CERAMIC	100P	5%	50V
C119	NO USE										
C120	CC45FCH1H470J	CAP. CERAMIC	47P	5%	50V	D001	1SS132	DIODE			
C121	CC45FCH1H680J	CAP. CERAMIC	68P	5%	50V	D002	1SS132	DIODE			
C122	CK45FF1H1032	CAP. CERAMIC	0.01		50V	D003	MA700	DIODE			
C123	CC45FCH1H101J	CAP. CERAMIC	100P	5%	50V	D004	MA700	DIODE			
C124	CM93BD2A101J	CAP. MICA	100P	5%	100V	D005	MA700	DIODE			
C125	C91-1272-05	CAP. PLASTIC FILM	1.5	5%	100V	D006	MA700	DIODE			
C126	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	D007	MA700	DIODE			
C127	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	D008	1SS132	DIODE			
C128	CE04EW1A470M	CAP. ELECTRO	47	20%	10V	D009	1SS132	DIODE			
C129	CC45FCH1H470J	CAP. CERAMIC	47P	5%	50V	D010	MA700	DIODE			
C130	CK45FB1H102K	CAP. CERAMIC	1000P	10%	50V						
C131	CK45FB1H102K	CAP. CERAMIC	1000P	10%	50V	D101	MA700	DIODE			
C132	CK45FF1H1032	CAP. CERAMIC	0.01		50V	D102	MA700	DIODE			
C133	CC45FCH1H101J	CAP. CERAMIC	100P	5%	50V	D103	MA700	DIODE			
C134	CE04EW1C330M	CAP. ELECTRO	33	20%	16V	D104	MA700	DIODE			
C135	CE04EW1C330M	CAP. ELECTRO	33	20%	16V	D105	MA700	DIODE			
C136	CE04HW1H010M	CAP. ELECTRO	1	20%	50V	D106	MA700	DIODE			
C137	CE04EW1C220M	CAP. ELECTRO	22	20%	16V	D107	MA700	DIODE			
C138	CC45FCH1H470J	CAP. CERAMIC	47P	5%	50V	D108	MA700	DIODE			
C139	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	D109	MA700	DIODE			
C140	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	D110	MA700	DIODE			
C141	CC45FCH1H200J	CAP. CERAMIC	20P	5%	50V	D111	MA700	DIODE			
C142	NO USE					D112	1SS132	DIODE			
C143	CK45FB1H102K	CAP. CERAMIC	1000P	10%	50V	D113	1SS132	DIODE			
C144	NO USE					D114	NO USE				
C302	CE04EW1A470M	CAP. ELECTRO	47	20%	10V	D115	MA700	DIODE			
C303	NO USE					D116	MA700	DIODE			
C304	CC45FCH1H470J	CAP. CERAMIC	47P	5%	50V	D117	MA700	DIODE			
C305	CC45FCH1H101J	CAP. CERAMIC	100P	5%	50V	D118	1SS132	DIODE			
C306	C90-0987-05	CAP. ELECTRO	1000	20%	6.3V	D119	1SS132	DIODE			
C310	CC45FCH1H070D	CAP. CERAMIC	7P	0.5P	50V	D120	1SS132	DIODE			
C311	CC45FCH1H470J	CAP. CERAMIC	47P	5%	50V	D121	NO USE				
C312	CK45FF1H1032	CAP. CERAMIC	0.01		50V	D122	MA700	DIODE			
C313	CC45FCH1H070D	CAP. CERAMIC	7P	0.5P	50V	D123	MA700	DIODE			
C314	NO USE					D124	1S1587	DIODE			
C315	CE04EW1H2R2M	CAP. ELECTRO	2.2	20%	50V	D126	1S1587	DIODE			
C316	CC45FCH1H680J	CAP. CERAMIC	68P	5%	50V	D127	NO USE				
C317	CC45FCH1H910J	CAP. CERAMIC	91P	5%	50V	D128	1SS132	DIODE			
C318	CC45FCH1H910J	CAP. CERAMIC	91P	5%	50V						
C319	CK45FF1H1032	CAP. CERAMIC	0.01		50V	D301	1SS132	DIODE			
C320	CC45FCH1H1032	CAP. CERAMIC	100P	5%	50V	D302	1SS132	DIODE			
C321	CE04EW1C100M	CAP. ELECTRO	10	20%	16V	D303	1SS132	DIODE			
C322	CC45FCH1H470J	CAP. CERAMIC	47P	5%	50V	D304	MA700	DIODE			
C323	NO USE					D305	1SS132	DIODE			
C324	CK45FF1H1032	CAP. CERAMIC	0.01		50V	D306	MA700	DIODE			
C325	CE04EW1H2R2M	CAP. ELECTRO	2.2	20%	50V	D307	1SS132	DIODE			
C326	CC45FCH1H910J	CAP. CERAMIC	91P	5%	50V	D308	1SS132	DIODE			
C327	CC45FCH1H910J	CAP. CERAMIC	91P	5%	50V	D309	1SS132	DIODE			
C328	CK45FF1H1032	CAP. CERAMIC	0.01		50V	D310	MA700	DIODE			
C329	CK45FF1H1032	CAP. CERAMIC	0.01		50V	D311	MA700	DIODE			
C330	CK45FF1H1032	CAP. CERAMIC	0.01		50V	D312	MA700	DIODE			
C331	CK45FF1H1032	CAP. CERAMIC	0.01		50V	D313	MA700	DIODE			
C332	CK45FF1H1032	CAP. CERAMIC	0.01		50V	D314	MA700	DIODE			
C333	CK45FF1H1032	CAP. CERAMIC	0.01		50V	D315	1SS132	DIODE			
C334	CK45FF1H1032	CAP. CERAMIC	0.01		50V	D316	1SS132	DIODE			
C335	CK45FF1H1032	CAP. CERAMIC	0.01		50V						
C336	CK45FF1H1032	CAP. CERAMIC	0.01		50V	D350	MT23.3JA	DIODE, ZENER	3.27V		
C337	CK45FF1H1032	CAP. CERAMIC	0.01		50V	D351	1SS132	DIODE			
C338	CK45FF1H1032	CAP. CERAMIC	0.01		50V						
C339	CK45FF1H1032	CAP. CERAMIC	0.01		50V						
C340	CK45FF1H1032	CAP. CERAMIC	0.01		50V	D401	1SS132	DIODE			
C341	CK45FF1H1032	CAP. CERAMIC	0.01		50V	D402	MA700	DIODE			
C342	CK45FF1H1032	CAP. CERAMIC	0.01		50V	K001	SS1-1523-05	RELAY			
C343	CK45FF1H1032	CAP. CERAMIC	0.01		50V	K002	SS1-1523-05	RELAY			
C344	CE04EW1A101M	CAP. ELECTRO	100	20%	10V	L001	L40-1011-04	FERRI INDUCTOR	100UH		
C345	CK45FF1H1032	CAP. CERAMIC	0.01		50V	L002	L40-2201-03	FERRI INDUCTOR	22UH		
C346	CK45FF1H1032	CAP. CERAMIC	0.01		50V	L003	L40-2201-03	FERRI INDUCTOR	22UH		
C347	CE04EW1A470M	CAP. ELECTRO	47	20%	10V	P018	E40-7035-05	SOCKET	40P		

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
Q001	2SC3779(D)	TR. SI. NPN	R013	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W
Q002	2SC3779(D)	TR. SI. NPN	R014	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
Q003	2SA1565	TR. SI. PNP	R015	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
Q004	2SC4049	TR. SI. NPN	R016	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q005	2SA1206	TR. SI. PNP	R017	RN14BK2C2200F	RES. METAL FILM 220 1% 1/6W
Q006	2SC3779(D)	TR. SI. NPN	R018	RN14BK2C3301F	RES. METAL FILM 3.3K 1% 1/6W
Q007	2SA1206	TR. SI. PNP	R019	RN14BK2C6800F	RES. METAL FILM 680 1% 1/6W
Q008	2SC2785(F)	TR. SI. NPN	R020	RD14BB2C101J	RES. CARBON 100 5% 1/6W
Q009	2SC4049	TR. SI. NPN	R021	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q010	2SC4049	TR. SI. NPN	R022	RD14BB2C181J	RES. CARBON 180 5% 1/6W
Q014	2SC3779(D)	TR. SI. NPN	R023	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
Q015	2SC3779(D)	TR. SI. NPN	R024	RN14BK2C1003F	RES. METAL FILM 100K 1% 1/6W
Q016	2SA1565	TR. SI. PNP	R025	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
Q017	2SA1206	TR. SI. PNP	R026	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
Q018	2SC3779(D)	TR. SI. NPN	R027	RN14BK2C1003F	RES. METAL FILM 100K 1% 1/6W
Q019	2SA1206	TR. SI. PNP	R028	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
Q020	2SC2785(F)	TR. SI. NPN	R029	RD14BB2C181J	RES. CARBON 180 5% 1/6W
Q101	2SC4049	TR. SI. NPN	R033	RD14BB2C754J	RES. CARBON 750K 5% 1/6W
Q102	NO USE		R034	RD14BB2C754J	RES. CARBON 750K 5% 1/6W
Q103	2SA1206	TR. SI. PNP	R035	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
Q104	2SC2785(F)	TR. SI. NPN	R036	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
Q105	2SC4049	TR. SI. NPN	R037	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
Q106	2SC4049	TR. SI. NPN	R038	RD14BB2C361J	RES. CARBON 360 5% 1/6W
Q107	2SC4049	TR. SI. NPN	R039	RN14BK2C5100F	RES. METAL FILM 510 1% 1/6W
Q108	NO USE		R040	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q109	2SA1005(K)	TR. SI. PNP	R041	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q110	2SA1175(F)	TR. SI. PNP	R042	RN14BK2C5100F	RES. METAL FILM 510 1% 1/6W
Q111	2SC3732(L)	TR. SI. NPN	R043	RN14BK2C6801F	RES. METAL FILM 6.8K 1% 1/6W
Q112	2SC3732(L)	TR. SI. NPN	R044	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
Q113	2SA1175(F)	TR. SI. PNP	R045	NO USE	
Q114	2SC3315(C)	TR. SI. NPN	R046	RN14BK2C6801F	RES. METAL FILM 6.8K 1% 1/6W
Q115	2SA1175(F)	TR. SI. PNP	R051	RD14BB2C361J	RES. CARBON 360 5% 1/6W
Q116	2SC3354(T,S)	TR. SI. NPN	R052	RD14BB2C162J	RES. CARBON 1.6K 5% 1/6W
Q117	2SC3315(C)	TR. SI. NPN	R053	RN14BK2C3901F	RES. METAL FILM 3.9K 1% 1/6W
Q118	2SC2785(F)	TR. SI. NPN	R054	RN14BK2C1600F	RES. METAL FILM 160 1% 1/6W
Q119	2SA1175(F)	TR. SI. PNP	R055	RN14BK2C1501F	RES. METAL FILM 1.5K 1% 1/6W
Q120	2SC2785(F)	TR. SI. NPN	R056	RN14BK2C6201F	RES. METAL FILM 6.2K 1% 1/6W
Q121	2SC3732(L)	TR. SI. NPN	R057	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q122	2SA1206	TR. SI. PNP	R058	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
Q123	2SC3315(C)	TR. SI. NPN	R059	RD14BB2C153J	RES. CARBON 15K 5% 1/6W
Q124	2SA1206	TR. SI. PNP	R060	RN14BK2C1003F	RES. METAL FILM 100K 1% 1/6W
Q125	2SA1565	TR. SI. PNP	R061	RN14BK2C1003F	RES. METAL FILM 100K 1% 1/6W
Q126	2SA1206	TR. SI. PNP	R062	RD14BB2C220J	RES. CARBON 22 5% 1/6W
Q127	2SA1206	TR. SI. PNP	R063	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W
Q128	2SA1005(K)	TR. SI. PNP	R064	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
Q129	2SA1175(F)	TR. SI. PNP	R065	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
Q130	2SC3732(L)	TR. SI. NPN	R066	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q131	2SC3732(L)	TR. SI. NPN	R067	RN14BK2C2200F	RES. METAL FILM 220 1% 1/6W
Q132	2SA1175(F)	TR. SI. PNP	R068	RN14BK2C3301F	RES. METAL FILM 3.3K 1% 1/6W
Q133	2SC3315(C)	TR. SI. NPN	R069	RN14BK2C6800F	RES. METAL FILM 680 1% 1/6W
Q134	2SC3354(T,S)	TR. SI. NPN	R070	RD14BB2C101J	RES. CARBON 100 5% 1/6W
Q135	2SC3315(C)	TR. SI. NPN	R071	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q136	2SC3732(L)	TR. SI. NPN	R072	RD14BB2C181J	RES. CARBON 180 5% 1/6W
Q137	2SC3732(L)	TR. SI. NPN	R073	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
Q138	2SC3354(T,S)	TR. SI. NPN	R074	RN14BK2C1003F	RES. METAL FILM 100K 1% 1/6W
Q301	2SA1175(F)	TR. SI. PNP	R077	RN14BK2C1003F	RES. METAL FILM 100K 1% 1/6W
Q302	2SC2785(F)	TR. SI. NPN	R078	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
Q303	2SC3315(C)	TR. SI. NPN	R079	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
Q304	2SC3315(C)	TR. SI. NPN	R080	RD14BB2C361J	RES. CARBON 360 5% 1/6W
Q305	2SC3315(C)	TR. SI. NPN	R081	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
Q306	2SC3315(C)	TR. SI. NPN	R082	RD14BB2C153J	RES. CARBON 15K 5% 1/6W
Q307	2SC3315(C)	TR. SI. NPN	R083	RD14BB2C153J	RES. CARBON 15K 5% 1/6W
Q308	2SC3315(C)	TR. SI. NPN	R101	RD14BB2C331J	RES. CARBON 330 5% 1/6W
Q309	2SC3315(C)	TR. SI. NPN	R102	RD14BB2C751J	RES. CARBON 750 5% 1/6W
Q310	2SA1565	TR. SI. PNP	R103	RD14BB2C391J	RES. CARBON 390 5% 1/6W
Q311	2SC3354(T,S)	TR. SI. NPN	R104	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
Q314	2SC3354(T,S)	TR. SI. NPN	R105	R90-0659-05	RES. NETWORK 4X510 5% 1/8W
Q401	2SK583	FET, N-CHANNEL	R106	NO USE	
Q402	2SA1175(F)	TR. SI. PNP	R107	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
Q403	2SA1005(K)	TR. SI. PNP	R108	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
Q404	2SA1005(K)	TR. SI. PNP	R109	R90-0660-05	RES. NETWORK 4X1K 5% 1/8W
Q405	2SA1175(F)	TR. SI. PNP	R110	RD14BB2C470J	RES. CARBON 47 5% 1/6W
Q406	2SC2785(F)	TR. SI. NPN	R111	RD14BB2C331J	RES. CARBON 330 5% 1/6W
R001	RD14BB2C361J	RES. CARBON 360 5% 1/6W	R112	RD14BB2C751J	RES. CARBON 750 5% 1/6W
R002	RN14BK2C1801F	RES. METAL FILM 1.8K 1% 1/6W	R113	RD14BB2C391J	RES. CARBON 390 5% 1/6W
R003	RN14BK2C3901F	RES. METAL FILM 3.9K 1% 1/6W	R114	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R004	RN14BK2C1600F	RES. METAL FILM 160 1% 1/6W	R115	R90-0659-05	RES. NETWORK 4X510 5% 1/8W
R005	RN14BK2C1501F	RES. METAL FILM 1.5K 1% 1/6W	R116	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R006	RN14BK2C6201F	RES. METAL FILM 6.2K 1% 1/6W	R117	R90-0660-05	RES. NETWORK 4X1K 5% 1/8W
R007	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R118	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R008	RD14BB2C202J	RES. CARBON 2K 5% 1/6W	R119	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R009	RD14BB2C153J	RES. CARBON 15K 5% 1/6W	R120	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R010	RN14BK2C1003F	RES. METAL FILM 100K 1% 1/6W	R121	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R011	RN14BK2C1003F	RES. METAL FILM 100K 1% 1/6W	R122	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R012	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R123	RD14BB2C470J	RES. CARBON 47 5% 1/6W
			R124	RD14BB2C101J	RES. CARBON 100 5% 1/6W
			R125	RD14BB2C331J	RES. CARBON 330 5% 1/6W

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION			REF. NO	PARTS NO	NAME & DESCRIPTION				
R126	RD14BB2C242J	RES. CARBON	2.4K	5%	1/6W	R217	RN14BK2C4301F	RES. METAL FILM	4.3K	1%	1/6W
R127	R90-0658-05	RES. NETWORK				R218	RN14BK2C1302F	RES. METAL FILM	13K	1%	1/6W
R128	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	R219	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W
R129	RN14BK2C8201F	RES. METAL FILM	8.2K	1%	1/6W	R220	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W
R130	RN14BK2C1601F	RES. METAL FILM	1.6K	1%	1/6W	R221	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R131	RD14BB2C242J	RES. CARBON	2.4K	5%	1/6W	R222	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W
R132	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	R223	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W
R133	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	R224	RD14BB2C272J	RES. CARBON	2.7K	5%	1/6W
R134	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	R225	RD14BB2C272J	RES. CARBON	2.7K	5%	1/6W
R135	RD14BB2C241J	RES. CARBON	240	5%	1/6W	R226	RD14BB2C123J	RES. CARBON	12K	5%	1/6W
R136	RD14BB2C152J	RES. CARBON	1.5K	5%	1/6W	R227	RD14BB2C223J	RES. CARBON	22K	5%	1/6W
R137	RD14BB2C362J	RES. CARBON	3.6K	5%	1/6W	R228	RD14BB2C105J	RES. CARBON	1M	5%	1/6W
R138	RD14BB2C561J	RES. CARBON	560	5%	1/6W	R229	RD14BB2C105J	RES. CARBON	1M	5%	1/6W
R139	RD14BB2C471J	RES. CARBON	470	5%	1/6W						
R140	RD14BB2C162J	RES. CARBON	1.6K	5%	1/6W	R301	RD14BB2C152J	RES. CARBON	1.5K	5%	1/6W
R141	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W	R302	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W
R142	RD14BB2C220J	RES. CARBON	22	5%	1/6W						
R143	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	R305	RD14BB2C562J	RES. CARBON	5.6K	5%	1/6W
R144	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W	R306	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R145	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	R307	RD14BB2C562J	RES. CARBON	5.6K	5%	1/6W
R146	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W	R308	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R147	RD14BB2C242J	RES. CARBON	2.4K	5%	1/6W	R309	RD14BB2C152J	RES. CARBON	1.5K	5%	1/6W
R148	RN14BK2C4701F	RES. METAL FILM	4.7K	1%	1/6W	R310	NO USE				
R149	RN14BK2C6801F	RES. METAL FILM	6.8K	1%	1/6W	R311	RN14BK2C3001F	RES. METAL FILM	3K	1%	1/6W
R150	RD14BB2C70J	RES. CARBON	47	5%	1/6W	R312	RN14BK2C3601F	RES. METAL FILM	3.6K	1%	1/6W
R151	RD14BB2C470J	RES. CARBON	47	5%	1/6W	R313	RN14BK2C3601F	RES. METAL FILM	3.6K	1%	1/6W
R152	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	R314	RD14BB2C203J	RES. CARBON	20K	5%	1/6W
R153	RN14BK2C3401F	RES. METAL FILM	4.3K	1%	1/6W	R315	RD14BB2C273J	RES. CARBON	27K	5%	1/6W
R154	RN14BK2C1302F	RES. METAL FILM	13K	1%	1/6W	R316	RD14BB2C273J	RES. CARBON	27K	5%	1/6W
R155	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W	R317	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W
R156	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W	R318	RN14BK2C2001F	RES. METAL FILM	2K	1%	1/6W
R157	RD14BB2C563J	RES. CARBON	56K	5%	1/6W	R319	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W
R158	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	R320	RN14BK2C7500F	RES. METAL FILM	750	1%	1/6W
R159	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	R321	RN14BK2C4701F	RES. METAL FILM	4.7K	1%	1/6W
R160	RD14BB2C562J	RES. CARBON	5.6K	5%	1/6W	R322	RN14BK2C3301F	RES. METAL FILM	3.3K	1%	1/6W
R161	RD14BB2C123J	RES. CARBON	12K	5%	1/6W	R323	RN14BK2C1001F	RES. METAL FILM	1K	1%	1/6W
R162	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W	R324	RN14BK2C1001F	RES. METAL FILM	1K	1%	1/6W
R163	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	R325	RD14BB2C164J	RES. CARBON	160K	5%	1/6W
R164	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	R326	RN14BK2C1001F	RES. METAL FILM	1K	1%	1/6W
R165	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	R327	RN14BK2C1001F	RES. METAL FILM	1K	1%	1/6W
R166	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W	R328	RD14BB2C131J	RES. CARBON	130	5%	1/6W
R167	RD14BB2C100J	RES. CARBON	10	5%	1/6W	R329	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R168	RD14BB2C681J	RES. CARBON	680	5%	1/6W	R330	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R169	RD14BB2C470J	RES. CARBON	47	5%	1/6W	R331	RD14BB2C272J	RES. CARBON	2.7K	5%	1/6W
R170	RD14BB2C272J	RES. CARBON	2.7K	5%	1/6W	R332	RD14BB2C302J	RES. CARBON	3K	5%	1/6W
R171	RD14BB2C470J	RES. CARBON	47	5%	1/6W	R333	RD14BB2C202J	RES. CARBON	2K	5%	1/6W
R172	RD14BB2C471J	RES. CARBON	470	5%	1/6W	R334	RN14BK2C1002F	RES. METAL FILM	10K	1%	1/6W
R173	RD14BB2C271J	RES. CARBON	270	5%	1/6W	R335	RN14BK2C5602F	RES. METAL FILM	56K	1%	1/6W
R174	RD14BB2C162J	RES. CARBON	1.6K	5%	1/6W	R336	RN14BK2C1502F	RES. METAL FILM	15K	1%	1/6W
R175	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W	R337	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W
R176	RD14BB2C224J	RES. CARBON	220K	5%	1/6W	R338	NO USE				
R177	RD14BB2C821J	RES. CARBON	820	5%	1/6W	R339	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R178	RD14BB2C681J	RES. CARBON	680	5%	1/6W	R340	RD14BB2C471J	RES. CARBON	470	5%	1/6W
R179	RD14BB2C752J	RES. CARBON	7.5K	5%	1/6W	R341	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R180	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W	R342	R90-0660-05	RES. NETWORK	4X1K	5%	1/8W
R181	RN14BK2C1102F	RES. METAL FILM	11K	1%	1/6W	R343	RN14BK2C1001F	RES. METAL FILM	1K	1%	1/6W
R182	RD14BB2C202J	RES. CARBON	2K	5%	1/6W	R344	RN14BK2C2200F	RES. METAL FILM	220	1%	1/6W
R183	RN14BK2C1202F	RES. METAL FILM	12K	1%	1/6W	R345	RN14BK2C5601F	RES. METAL FILM	5.6K	1%	1/6W
R184	RD14BB2C470J	RES. CARBON	47	5%	1/6W	R346	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R185	RD14BB2C101J	RES. CARBON	100	5%	1/6W	R347	RD14BB2C104J	RES. CARBON	100K	5%	1/6W
R186	RD14BB2C622J	RES. CARBON	6.2K	5%	1/6W	R348	RD14BB2C104J	RES. CARBON	100K	5%	1/6W
R187	RD14BB2C471J	RES. CARBON	470	5%	1/6W	R349	RN14BK2C2001F	RES. METAL FILM	2K	1%	1/6W
R188	RD14BB2C221J	RES. CARBON	220	5%	1/6W	R350	RN14BK2C1801F	RES. METAL FILM	1.8K	1%	1/6W
R189	RN14BK2C2401F	RES. METAL FILM	2.4K	1%	1/6W	R351	RN14BK2C2702F	RES. METAL FILM	27K	1%	1/6W
R190	RD14BK2C2701F	RES. METAL FILM	2.7K	1%	1/6W	R352	RD14BB2C243J	RES. CARBON	24K	5%	1/6W
R191	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	R353	RD14BB2C243J	RES. CARBON	24K	5%	1/6W
R192	RD14BB2C101J	RES. CARBON	100	5%	1/6W	R354	RD14BB2C243J	RES. CARBON	24K	5%	1/6W
R193	RD14BB2C101J	RES. CARBON	100	5%	1/6W	R355	RN14BK2C3301F	RES. METAL FILM	3.3K	1%	1/6W
R194	RD14BB2C331J	RES. CARBON	330	5%	1/6W	R356	RN14BK2C4701F	RES. METAL FILM	4.7K	1%	1/6W
R195	R90-0658-05	RES. NETWORK				R357	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W
R196	RD14BB2C123J	RES. CARBON	12K	5%	1/6W	R358	RD14BB2C202J	RES. CARBON	2K	5%	1/6W
R197	RN14BK2C8201F	RES. METAL FILM	8.2K	1%	1/6W	R359	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R198	RN14BK2C1601F	RES. METAL FILM	1.6K	1%	1/6W	R360	RD14BB2C242J	RES. CARBON	2.4K	5%	1/6W
R199	RD14BB2C242J	RES. CARBON	2.4K	5%	1/6W	R361	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W
R200	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	R362	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R201	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	R363	RD14BB2C470J	RES. CARBON	47	5%	1/6W
R202	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	R364	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W
R203	RD14BB2C241J	RES. CARBON	240	5%	1/6W	R365	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R204	RD14BB2C152J	RES. CARBON	1.5K	5%	1/6W	R366	RD14BB2C473J	RES. CARBON	47K	5%	1/6W
R205	RD14BB2C362J	RES. CARBON	3.6K	5%	1/6W	R367	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W
R206	RD14BB2C561J	RES. CARBON	560	5%	1/6W	R368	RN14BK2C1602F	RES. METAL FILM	16K	1%	1/6W
R207	RD14BB2C471J	RES. CARBON	470	5%	1/6W	R369	RN14BK2C6800F	RES. METAL FILM	680	1%	1/6W
R208	RD14BB2C162J	RES. CARBON	1.6K	5%	1/6W	R370	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R209	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W	R371	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R210	RD14BB2C220J	RES. CARBON	22	5%	1/6W	R372	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R211	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	R373	RD14BB2C682J	RES. CARBON	6.8K	5%	1/6W
R212	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W	R374	RD14BB2C912J	RES. CARBON	9.1K	5%	1/6W
R213	RD14BB2C102J	RES. CARBON	1K	5%	1/6W						
R214	RD14BB2C470J	RES. CARBON	47	5%	1/6W						
R215	RD14BB2C470J	RES. CARBON	47	5%	1/6W						
R216	RD14BB2C102J	RES. CARBON	1K	5%	1/6W						
						R401	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
						R402	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
						R403	NO USE.				

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
R404	RD14BB2C512J	RES. CARBON 5.1K 5% 1/6W
R405	RD14BB2C752J	RES. CARBON 7.5K 5% 1/6W
R406	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W
R407	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R408	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R409	RD14BB2C273J	RES. CARBON 27K 5% 1/6W
R410	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R411	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R412	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R413	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R414	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R415	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R416	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R417	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R418	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R419	RD14BB2C331J	RES. CARBON 330 5% 1/6W
R420	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R421	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R422	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R423	RD14BB2C471J	RES. CARBON 470 5% 1/6W
R600	RD14BB2C393J	RES. CARBON 39K 5% 1/6W
TC101	C05-0446-05	CAP. TRIMMER 30P
TC102	C05-0446-05	CAP. TRIMMER 30P
TC302	C05-0458-05	CAP. TRIMMER 7P
TC303	C05-0458-05	CAP. TRIMMER 7P
U001	MC10H102L	IC. QUAD 2-INPUT NOR GATE
U002	MC10H102L	IC. QUAD 2-INPUT NOR GATE
U003	MC10H131L	IC. DUAL D-FLIP FLOP
U004	MC10103L	IC. QUAD 2-INPUT OR GATE
U005	SN74ALS74AN	IC. DUAL D-F.F. (WITH PR & CLR)
U006	SN74ALS74AN	IC. DUAL D-F.F. (WITH PR & CLR)
U007	SN74ALS74AN	IC. DUAL D-F.F. (WITH PR & CLR)
U008	SN74ALS191N	IC. SYNC. U/D 4-BIT BINARY COUN
U009	SN74ALS191N	IC. SYNC. U/D 4-BIT BINARY COUN
U010	SN74ALS191N	IC. SYNC.. U/D 4-BIT BINARY COUN
U011	SN74ALS02N	IC. QUAD 2 INPUT NOR
U012	SN74ALS32N	IC. QUAD 2 INPUT OR
U013	SN74ALS08N	IC. QUAD 2 INPUT AND
U014	SN74ALS32N	IC. QUAD 2 INPUT OR
U015	SN74ALS02N	IC. QUAD 2 INPUT NOR
U016	MC14052BCP	IC. DUAL 4-CH ANALOG MPX/DE-MPX
U017	MC14052BCP	IC. DUAL 4-CH ANALOG MPX/DE-MPX
U018	MC14052BCP	IC. DUAL 4-CH ANALOG MPX/DE-MPX
U019	MC74HC4053N	IC. TRIPLE 2CH ANALOG MPX/DE-MP
U020	ND USE	
U021	NJM072S	IC. J-FET INPUT OP AMP
U022	NJM072S	IC. J-FET INPUT OP AMP
U023	ND USE	
U024	NJM072S	IC. J-FET INPUT OP AMP
U025	NJM072S	IC. J-FET INPUT OP AMP
U026	NJM072S	IC. J-FET INPUT OP AMP
U027	NJM072S	IC. J-FET INPUT OP AMP
U028	HD74HC595P	IC. 8-BIT SHIFT REGISTER/LATCH
U029	HD74HC595P	IC. 8-BIT SHIFT REGISTER/LATCH
U030	HD74HC595P	IC. 8-BIT SHIFT REGISTER/LATCH
U031	HD74HC595P	IC. 8-BIT SHIFT REGISTER/LATCH
U032	HD74HC595P	IC. 8-BIT SHIFT REGISTER/LATCH
U101	2SK332(E)	FET. N-CHANNEL
U102	2SC3066(F)	TR. SI. NPN
U103	2SK332(E)	FET. N-CHANNEL
VR001	R12-3543-05	RES. SEMI FIXED 20KB
VR002	NO USE	
VR003	R12-0571-05	RES. SEMI FIXED 500B
VR004	R12-3543-05	RES. SEMI FIXED 20KB
VR101	R12-1538-05	RES. SEMI FIXED 1KB
VR102	R12-2520-05	RES. SEMI FIXED SKB
VR103	R12-3543-05	RES. SEMI FIXED 20KB
VR104	R12-3543-05	RES. SEMI FIXED 20KB
VR301	R12-1539-05	RES. SEMI FIXED 2KB
VR302	R12-1539-05	RES. SEMI FIXED 2KB
VR303	R12-0571-05	RES. SEMI FIXED 500B
VR304	R12-3453-05	RES. SEMI FIXED 10KB
VR305	R12-3453-05	RES. SEMI FIXED 10KB
VR306	R12-3453-05	RES. SEMI FIXED 10KB
VR307	R12-0569-05	RES. SEMI FIXED 100B

VERTICAL ATTENUATOR UNIT

X75-1180-00

REF. NO	PARTS NO	NAME & DESCRIPTION
	J25-5230-03	PCB (UNMOUNTED)
74	E04-0260-05	BNC RECEPTACLE (READOUT)
75	J21-4612-14	BRACKET FOR BNC
76	J30-0623-04	SPACER
C001	CE04EW1C471M	CAP. ELECTRO 470 20% 16V
C002	CE04EW1G471M	CAP. ELECTRO 470 20% 16V
C003	CE04EW1A221M	CAP. ELECTRO 220 20% 10V
C004	CE04EW1A221M	CAP. ELECTRO 220 20% 10V
C005	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C006	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C007	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C008	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C009	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C010	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C011	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C012	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C013	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C014	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C015	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C016	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C017	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C018	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C019	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C020	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C101	C91-0502-05	CAP. METAL FILM 0.01 20% 630V
C102	NO USE	
C103	CE04EW1C330M	CAP. ELECTRO 33 20% 16V
C104	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V
C105	NO USE	
C106	CC45FCH1H330J	CAP. CERAMIC 33P 5% 50V
C107	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C201	C91-0502-05	CAP. METAL FILM 0.01 20% 630V
C202	NO USE	
C203	CE04EW1C330M	CAP. ELECTRO 33 20% 16V
C204	CC45CH1H101J	CAP. CERAMIC 100P 5% 50V
C205	NO USE	
C206	CC45FCH1H330J	CAP. CERAMIC 33P 5% 50V
C207	CC45FCH1H470J	CAP. CERAMIC 47P 5% 50V
C301	CC45CH2H050C	CAP. CERAMIC 5P 0.25P 500V
C302	C91-0502-05	CAP. METAL FILM 0.01 20% 630V
C303	NO USE	
C304	CC45FCH1H030C	CAP. CERAMIC 3P 0.25P 50V
C305	CC45CH2H080D	CAP. CERAMIC 8P 0.5P 500V
C306	NO USE	
C307	CK45FB1H102K	CAP. CERAMIC 1000P 10% 50V
C350	CC45CH1H180J	CAP. CERAMIC 18P 5% 50V
C351	CC45CH1H220J	CAP. CERAMIC 22P 5% 50V
C401	CC45CH2H050C	CAP. CERAMIC 5P 0.25P 500V
C402	C91-0502-05	CAP. METAL FILM 0.01 20% 630V
C403	NO USE	
C404	CC45FCH1H030C	CAP. CERAMIC 3P 0.25P 50V
C405	CC45CH2H080D	CAP. CERAMIC 8P 0.5P 500V
C406	NO USE	
C407	CK45FB1H102K	CAP. CERAMIC 1000P 10% 50V
C450	CC45CH1H180J	CAP. CERAMIC 18P 5% 50V
C451	CC45CH1H220J	CAP. CERAMIC 22P 5% 50V
D001	1SS132	DIODE
D002	1SS132	DIODE
D101	1SS132	DIODE
D102	1SS132	DIODE
D201	1SS132	DIODE
D202	1SS132	DIODE
D301	1SS132	DIODE
D302	1SS132	DIODE
D303	1SS135	DIODE
D401	1SS132	DIODE
D402	1SS132	DIODE
D403	1SS135	DIODE
JW005	E31-5578-05	LEAD WIRE WITH CONNECTOR
JW006	E31-5579-05	LEAD WIRE WITH CONNECTOR

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION				REF. NO	PARTS NO	NAME & DESCRIPTION			
K301	SS1-2508-05	RELAY				R216	RN14BK2C2401F	RES. METAL FILM	2.4K	1%	1/6W
K401	SS1-2508-05	RELAY				R217	RN14BK2C7501F	RES. METAL FILM	7.5K	1%	1/6W
L001	L40-1011-03	FERRI INDUCTOR	100UH			R218	RN14BK2C2401F	RES. METAL FILM	2.4K	1%	1/6W
P004	E40-0973-05	PIN CONNECTOR	9P			R219	RN14BK2C7501F	RES. METAL FILM	7.5K	1%	1/6W
P007	E40-0473-05	PIN CONNECTOR	4P			R220	RN14BK2C1001F	RES. METAL FILM	1K	1%	1/6W
P008	E40-0473-05	PIN CONNECTOR	4P			R221	RN14BK2C1001F	RES. METAL FILM	1K	1%	1/6W
P009	E40-0373-05	PIN CONNECTOR	3P			R222	RD14BB2C220J	RES. CARBON	22	5%	1/6W
Q001	2SA1565	TR. SI, PNP				R223	RD14BB2C220J	RES. CARBON	22	5%	1/6W
Q002	2SA1565	TR. SI, PNP				R224	RD14BB2C682J	RES. CARBON	6.8K	5%	1/6W
Q101	2SC3354(T,S)	TR. SI, NPN				R225	RD14BB2C220J	RES. CARBON	22	5%	1/6W
Q102	2SC3354(T,S)	TR. SI, NPN				R226	RD14BB2C220J	RES. CARBON	22	5%	1/6W
Q201	2SC3354(T,S)	TR. SI, NPN				R227	RN14BK2C3000F	RES. METAL FILM	300	1%	1/6W
Q202	2SC3354(T,S)	TR. SI, NPN				R228	RN14BK2C3300F	RES. METAL FILM	330	1%	1/6W
Q301	2SK241(GR)	FET, N-CHANNEL				R250	RD14BB2C220J	RES. CARBON	22	5%	1/6W
Q302	2SK241(GR)	FET, N-CHANNEL				R301	RD14BB2E330J	RES. CARBON	33	5%	1/4W
Q303	2SC3354(T,S)	TR. SI, NPN				R302	RD14BB2C560J	RES. CARBON	56	5%	1/6W
Q304	2SC3779(D)	TR. SI, NPN				R303	R92-1433-05	RES. METAL FILM	800K	0.5%	1/2W
Q305	2SC3779(D)	TR. SI, NPN				R304	R92-1432-05	RES. METAL FILM	250K	0.5%	1/2W
Q306	2SC3354(T,S)	TR. SI, NPN				R305	RD14BB2C240J	RES. CARBON	24	5%	1/6W
Q401	2SK241(GR)	FET, N-CHANNEL				R306	RN14BK2E1004D	RES. METAL FILM	1M	0.5%	1/4W
Q402	2SK241(GR)	FET, N-CHANNEL				R307	RD14BB2C684J	RES. CARBON	680K	5%	1/6W
Q403	2SC3354(T,S)	TR. SI, NPN				R308	RD14BB2C101J	RES. CARBON	100	5%	1/6W
Q404	2SC3779(D)	TR. SI, NPN				R309	RD14BB2C201J	RES. CARBON	200	5%	1/6W
Q405	2SC3779(D)	TR. SI, NPN				R310	RN14BK2C3900F	RES. METAL FILM	390	1%	1/6W
Q406	2SC3354(T,S)	TR. SI, NPN				R311	RN14BK2C3900F	RES. METAL FILM	390	1%	1/6W
R001	RD14BB2C100J	RES. CARBON	10	5%	1/6W	R312	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R002	RD14BB2C100J	RES. CARBON	10	5%	1/6W	R313	RD14BB2C510J	RES. CARBON	51	5%	1/6W
R003	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	R314	RN14BK2C3601F	RES. METAL FILM	3.6K	1%	1/6W
R004	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	R315	RN14BK2C3901F	RES. METAL FILM	3.9K	1%	1/6W
R005	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	R316	RN14BK2C3900F	RES. METAL FILM	390	1%	1/6W
R006	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	R317	NO USE				
R007	RD14BB2C101J	RES. CARBON	100	5%	1/6W	R318	RD14BB2C510J	RES. CARBON	51	5%	1/6W
R008	RD14BB2C101J	RES. CARBON	100	5%	1/6W	R319	RD14BB2C820J	RES. CARBON	82	5%	1/6W
R009	RD14BB2C101J	RES. CARBON	100	5%	1/6W	R320	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R101	RN14BK2E1004D	RES. METAL FILM	1M	0.5%	1/6W	R350	RD14BB2C221J	RES. CARBON	220	5%	1/6W
R102	RD14BB2C824J	RES. CARBON	820K	5%	1/6W	R401	RD14BB2E330J	RES. CARBON	33	5%	1/4W
R103	RN14BK2C62R0F	RES. METAL FILM	62.0	1%	1/6W	R402	RD14BB2C560J	RES. CARBON	56	5%	1/6W
R104	RN14BK2C62R0F	RES. METAL FILM	62.0	1%	1/6W	R403	R92-1433-05	RES. METAL FILM	800K	0.5%	1/2W
R105	R92-1431-05	RES. TEMP. COEFF.	330	5%	1/6W	R404	R92-1432-05	RES. METAL FILM	250K	0.5%	1/2W
R106	RN14BK2C5100F	RES. METAL FILM	510	1%	1/6W	R405	RD14BB2C240J	RES. CARBON	24	5%	1/6W
R107	RN14BK2C1003F	RES. METAL FILM	100K	1%	1/6W	R406	RN14BK2E1004D	RES. METAL FILM	1M	0.5%	1/4W
R108	RN14BK2C1000F	RES. METAL FILM	100	1%	1/6W	R407	RD14BB2C684J	RES. CARBON	680K	5%	1/6W
R109	RN14BK2C1000F	RES. METAL FILM	100	1%	1/6W	R408	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R110	RD14BB2C221J	RES. CARBON	220	5%	1/6W	R409	RD14BB2C201J	RES. CARBON	200	5%	1/6W
R111	RD14BB2C181J	RES. CARBON	180	5%	1/6W	R410	RN14BK2C3900F	RES. METAL FILM	390	1%	1/6W
R112	NO USE					R411	RN14BK2C3900F	RES. METAL FILM	390	1%	1/6W
R113	RN14BK2C4300F	RES. METAL FILM	430	1%	1/6W	R412	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R114	RN14BK2C4301F	RES. METAL FILM	4.3K	1%	1/6W	R413	RD14BB2C510J	RES. CARBON	51	5%	1/6W
R115	RN14BK2C3601F	RES. METAL FILM	3.6K	1%	1/6W	R414	RN14BK2C3601F	RES. METAL FILM	3.6K	1%	1/6W
R116	RN14BK2C2401F	RES. METAL FILM	2.4K	1%	1/6W	R415	RN14BK2C3901F	RES. METAL FILM	3.9K	1%	1/6W
R117	RN14BK2C7501F	RES. METAL FILM	7.5K	1%	1/6W	R416	RN14BK2C3900F	RES. METAL FILM	390	1%	1/6W
R118	RN14BK2C1501F	RES. METAL FILM	1.5K	1%	1/6W	R417	NO USE				
R119	RN14BK2C7501F	RES. METAL FILM	7.5K	1%	1/6W	R418	RD14BB2C510J	RES. CARBON	51	5%	1/6W
R120	RN14BK2C1001F	RES. METAL FILM	1K	1%	1/6W	R419	RD14BB2C820J	RES. CARBON	82	5%	1/6W
R121	RN14BK2C1001F	RES. METAL FILM	1K	1%	1/6W	R420	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R122	RD14BB2C220J	RES. CARBON	22	5%	1/6W	R450	RD14BB2C221J	RES. CARBON	220	5%	1/6W
R123	RD14BB2C220J	RES. CARBON	22	5%	1/6W	S101	S02-4511-15	ATTENUATOR UNIT			
R124	NO USE					S201	S02-4511-15	ATTENUATOR UNIT			
R125	RD14BB2C220J	RES. CARBON	22	5%	1/6W	TC101	C05-0459-05	CAP. TRIMMER	10P		
R126	RD14BB2C220J	RES. CARBON	22	5%	1/6W	TC201	C05-0459-05	CAP. TRIMMER	10P		
R127	RN14BK2C3000F	RES. METAL FILM	300	1%	1/6W	TC301	C05-0031-15	CAP. TRIMMER	10P		
R128	RN14BK2C3300F	RES. METAL FILM	330	1%	1/6W	TC302	C05-0031-15	CAP. TRIMMER	10P		
R150	RD14BB2C220J	RES. CARBON	22	5%	1/6W	TC401	C05-0031-15	CAP. TRIMMER	10P		
R201	RN14BK2E1004D	RES. METAL FILM	1M	0.5%	1/4W	TC402	C05-0031-15	CAP. TRIMMER	10P		
R202	RD14BB2C824J	RES. CARBON	820K	5%	1/6W	U001	HD74HC595P	IC, 8-BIT SHIFT REGISTER/LATCH			
R203	RN14BK2C62R0F	RES. METAL FILM	62.0	1%	1/6W	U002	HD74HC595P	IC, 8-BIT SHIFT REGISTER/LATCH			
R204	RN14BK2C62R0F	RES. METAL FILM	62.0	1%	1/6W	U101	DN1901	FET, DUAL, N-CHANNEL			
R205	R92-1431-05	RES. TEMP. COEFF.	330	5%	1/6W	U102	UPA101G	IC, NPN TRANSISTOR ARRAY			
R206	RN14BK2C5100F	RES. METAL FILM	510	1%	1/6W	U201	DN1901	FET, DUAL, N-CHANNEL			
R207	RN14BK2C1003F	RES. METAL FILM	100K	1%	1/6W	U202	UPA101G	IC, NPN TRANSISTOR ARRAY			
R208	RN14BK2C1000F	RES. METAL FILM	100	1%	1/6W	VR101	R12-3543-05	RES. SEMI FIXED 20KB			
R209	RN14BK2C1000F	RES. METAL FILM	100	1%	1/6W	VR201	R12-3543-05	RES. SEMI FIXED 20KB			
R210	RD14BB2C221J	RES. CARBON	220	5%	1/6W						
R211	RD14BB2C181J	RES. CARBON	180	5%	1/6W						
R212	NO USE										
R213	RN14BK2C4300F	RES. METAL FILM	430	1%	1/6W						
R214	RN14BK2C4301F	RES. METAL FILM	4.3K	1%	1/6W						
R215	RN14BK2C3601F	RES. METAL FILM	3.6K	1%	1/6W						

PARTS LIST

R/O UNIT

X77-1490-00

REF. NO	PARTS NO	NAME & DESCRIPTION				
	J25-5231-02	PCB (UNMOUNTED)				
	W09-0408-05	BATTERY, CR2354-1HF				
C001	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C002	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C003	CC45FCH1H101J	CAP. CERAMIC	100P	5%	50V	
C004	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C005	CC45FCH1H101J	CAP. CERAMIC	100P	5%	50V	
C006	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C007	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C008	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C009	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C010	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C011	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C012	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C013	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C014	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C015	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C016	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C017	CC45FCH1H220J	CAP. CERAMIC	22P	5%	50V	
C018	CC45FCH1H220J	CAP. CERAMIC	22P	5%	50V	
C019	CE04EW1C220M	CAP. ELECTRO	22	20%	16V	
C020	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C021	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C022	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C023	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C024	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C025	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C026	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C027	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C028	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C029	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C030	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C031	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C032	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C033	C91-0769-05	CAP. AXIAL	0.01	20%	16V	
C034	CC45FCH1H101J	CAP. CERAMIC	100P	5%	50V	
C035	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C036	CE04EW1C220M	CAP. ELECTRO	22	20%	16V	
C037	CK45F1H103Z	CAP. CERAMIC	0.01		50V	
C038	CC45FCH1H101J	CAP. CERAMIC	100P	5%	50V	
C039	CE04EW1E331M	CAP. ELECTRO	330	20%	16V	
C040	CK45F1H103Z	CAP. CERAMIC	0.01		50V	
C041	CE04EW1E470M	CAP. ELECTRO	47	20%	25V	
C042	CC45FSL1H471J	CAP. CERAMIC	470P	5%	50V	
C043	CE04EW1A471M	CAP. ELECTRO	470	20%	10V	
C044	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C045	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C046	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C047	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C048	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C049	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C050	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C051	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C052	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C053	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C054	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C055	CC45FCH1H101J	CAP. CERAMIC	100P	5%	50V	
C056	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C057	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C058	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C059	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C060	CK45F1H103Z	CAP. CERAMIC	0.01		50V	
C061	CK45F1H103Z	CAP. CERAMIC	0.01		50V	
C062	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C063	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C064	CK45F1H103Z	CAP. CERAMIC	0.01		50V	
C065	CK45F1H103Z	CAP. CERAMIC	0.01		50V	
C066	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C067	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C068	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C069	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C070	CK45F1H103Z	CAP. CERAMIC	0.01		50V	
C071	CC45FCH1H101J	CAP. CERAMIC	100P	5%	50V	
C072	CK45F1H103Z	CAP. CERAMIC	0.01		50V	
C073	CK45F1H103Z	CAP. CERAMIC	0.01		50V	
C074	CK45F1H103Z	CAP. CERAMIC	0.01		50V	
C075	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C076	CE04EW1C470M	CAP. ELECTRO	47	20%	16V	
C077	CE04EW1C471M	CAP. ELECTRO	470	20%	16V	
C078	CE04EW1C471M	CAP. ELECTRO	470	20%	16V	
C079	C91-1273-05	CAP. NETWORK	6X0.01U		50V	
C080	CE04EW1A102M	CAP. ELECTRO	1000	20%	10V	
C081	NO USE					
C082	CK45FB1H102K	CAP. CERAMIC	1000P	10%	50V	
C086	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	
C087	CQ92FM1H104K	CAP. MYLAR	0.1	10%	50V	

REF. NO	PARTS NO	NAME & DESCRIPTION			
D001	ISS132	DIODE			
D002	ISS132	DIODE			
D003	ISS132	DIODE			
D004	ISS132	DIODE			
D005	MTZ12JC	DIODE ZENER	12.05V		
D006	ISS132	DIODE			
D007	ISS132	DIODE			
L001	L40-1011-03	FERRI INDUCTOR	100UH		
L002	L40-1021-03	FERRI INDUCTOR	1MH		
L003	L40-1092-03	FERRI INDUCTOR	1UH		
L004	L40-1011-03	FERRI INDUCTOR	100UH		
P001	E40-7036-05	PIN CONNECTOR	20P		
P002	E40-7037-05	SOCKET	26P		
P003	E40-7035-05	SOCKET	40P		
P004	E40-0973-05	PIN CONNECTOR	9P		
Q001	2SA1175(F)	TR. SI. PNP			
Q002	2SC1384(R,S)	TR. SI. NPN			
R001	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R002	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R003	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W
R004	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W
R005	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R006	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R007	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R008	NO USE				
R009	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R010	RD14BB2C242J	RES. CARBON	2.4K	5%	1/6W
R011	RD14BB2C243J	RES. CARBON	24K	5%	1/6W
R012	RD14BB2C104J	RES. CARBON	100K	5%	1/6W
R013	RD14BB2C104J	RES. CARBON	100K	5%	1/6W
R014	RD14BB2C104J	RES. CARBON	100K	5%	1/6W
R015	RD14BB2C104J	RES. CARBON	100K	5%	1/6W
R016	RD14BB2C104J	RES. CARBON	100K	5%	1/6W
R017	RD14BB2C104J	RES. CARBON	100K	5%	1/6W
R018	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R019	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R020	RN14BK2C5600F	RES. METAL FILM	560	1%	1/6W
R021	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R022	RN14BK2C1002F	RES. METAL FILM	10K	1%	1/6W
R023	RD14BB2C474J	RES. CARBON	470K	5%	1/6W
R024	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W
R025	RN14BK2C9100F	RES. METAL FILM	910	1%	1/6W
R026	RN14BK2C3302F	RES. METAL FILM	33K	1%	1/6W
R027	RN14BK2C5101F	RES. METAL FILM	5.1K	1%	1/6W
R028	RN14BK2C5101F	RES. METAL FILM	5.1K	1%	1/6W
R029	RD14BB2C513J	RES. CARBON	51K	5%	1/6W
R030	RD14BB2C513J	RES. CARBON	51K	5%	1/6W
R031	RD14BB2C513J	RES. CARBON	51K	5%	1/6W
R032	RD14BB2C513J	RES. CARBON	51K	5%	1/6W
R033	RD14BB2C513J	RES. CARBON	51K	5%	1/6W
R034	RD14BB2C513J	RES. CARBON	51K	5%	1/6W
R035	RD14BB2C473J	RES. CARBON	47K	5%	1/6W
R036	RD14BB2C473J	RES. CARBON	47K	5%	1/6W
R037	RN14BK2C2400F	RES. METAL FILM	240	1%	1/6W
R038	RN14BK2C1801F	RES. METAL FILM	1.8K	1%	1/6W
R039	RN14BK2C4701F	RES. METAL FILM	4.7K	1%	1/6W
R040	RN14BK2C1801F	RES. METAL FILM	1.8K	1%	1/6W
R041	RN14BK2C4701F	RES. METAL FILM	4.7K	1%	1/6W
R042	RN14BK2C2400F	RES. METAL FILM	240	1%	1/6W
R043	RD14BB2C473J	RES. CARBON	47K	5%	1/6W
R044	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R045	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R046	RD14BB2C473J	RES. CARBON	47K	5%	1/6W
R047	RD14BB2C473J	RES. CARBON	47K	5%	1/6W
R048	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R049	RD14BB2C473J	RES. CARBON	47K	5%	1/6W
R050	RD14BB2C473J	RES. CARBON	47K	5%	1/6W
R051	RD14BB2C134J	RES. CARBON	130K	5%	1/6W
R052	RD14BB2C152J	RES. CARBON	1.5K	5%	1/6W
R053	RD14BB2C152J	RES. CARBON	1.5K	5%	1/6W
R054	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R055	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R056	E31-2170-05	JUMPING WIRE			
R057	NO USE				
R058	R90-0662-05	RES. NETWORK			
R059	R90-0661-05	RES. NETWORK	4X100K		
R060	RD14BB2C471J	RES. CARBON	470	5%	1/6W
R061	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R062	R90-0663-05	RES. NETWORK	8X1M		
R063	NO USE				
R064	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R065	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R066	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R067	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R068	NO USE				

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
R069	RD14BB2C103J	RES. CARBON- 10K 5% 1/6W
R070	RD14BB2C162J	RES. CARBON 1.6K 5% 1/6W
R071	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R072	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R073	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R074	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R075	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R076	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R077	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R078	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R079	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R080	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W
R081	RN14BK2C2001F	RES. METAL FILM 2K 1% 1/6W
R082	RD14BB2C622J	RES. CARBON .6.2K 5% 1/6W
R083	RN14BK2C5600F	RES. METAL FILM 560 1% 1/6W
R128	E31-2170-05	JUMPING WIRE
U001	LC3517BML-15	IC. 2048X8 STATIC RAM
U001	MB8416-20LPF	IC. 2048X8 STATIC RAM
U002	MBM27C128*8	IC. 16.16384X8 EPROM
U003	MSM6242BGS-VK	IC. REAL TIME CLOCK
U004	PST518B	IC. RESET
U005	LH0080A	IC. CPU
U006	DTM-5010	IC. GATE ARRAY
U007	HD74LS138FP	IC. 3-TO-8 DEMULTIPLEXER
U008	HD74HC238FP	IC. 3-TO-8 LINE DECODER
U009	HD74HC238FP	IC. 3-TO-8 LINE DECODER
U010	HD74HC107FP	IC. DUAL J-K FLIP-FLOP
U011	HD74LS04FP	IC. HEX INVERTERS
U012	HD74LS244FP	IC. OCTAL 3-STATE BUS BUFFER
U013	HD74LS244FP	IC. OCTAL 3-STATE BUS BUFFER
U014	HD74LS04FP	IC. HEX INVERTERS
U015	HD74LS30FP	IC. 8-INPUT NAND
U016	HD74LS374FP	IC. OCTAL 3-STATE D-FF
U017	HD74LS244FP	IC. OCTAL 3-STATE BUS BUFFER
U018	HD74LS244FP	IC. OCTAL 3-STATE BUS BUFFER
U019	HD14066BFP	IC. QUAD BILATERAL SWITCH
U020	HD74LS107Afp	IC. QUAD JK-FF WITH CLEAR
U021	HD74LS107Afp	IC. QUAD JK-FF WITH CLEAR
U022	HD74LS107Afp	IC. QUAD JK-FF WITH CLEAR
U023	HD74LS107Afp	IC. QUAD JK-FF WITH CLEAR
U024	HD74LS30FP	IC. 8-INPUT NAND
U025	HD74LS11FP	IC. TRIPLE 3-INPUT AND
U026	NJMS55M	IC. TIMER
U027	HD74LS157FP	IC. 2 TO 1 DATA SELECTORS
U028	HD74LS157FP	IC. 2 TO 1 DATA SELECTORS
U029	HD74HC08FP	IC. QUAD 2-INPUT AND GATE
U030	HD74HC7266FP	IC. QUAD 2-INPUT NOR GATE
U031	HD74HC08FP	IC. QUAD 2-INPUT AND GATE
U032	MBM27C64*u	IC. 8192X8 EPROM
U033	CTM5020	IC. GATE ARRAY (R/O CONTROLLER)
U034	HD14051BFP	IC. 8-CH ANALOG MPX/DE-MPX
U035	NJM311M	IC. VOLTAGE COMPARATOR
U036	HD74HC174FP	IC. HEX D-TYPE FLIP-FLOP
U037	AM6012DC	IC. 12-BIT D/A CONVERTER
U038	HD74HC564FP	IC. OCTAL D-TYPE FLIP-FLOP
U039	HD74HC244FP	IC. OCTAL BUS BUFFER
U040	HD14052BFP	IC. DUAL 4-CH ANALOG MPX/DE-MPX
U041	HD14051BFP	IC. 8-CH ANALOG MPX/DE-MPX
U042	DAC0808LCN	IC. 8-BIT D/A CONVERTER
U043	HD14052BFP	IC. DUAL 4-CH ANALOG MPX/DE-MPX
U044	NJM072M	IC. DUAL J-FET INPUT OP AMP
U045	NJM072M	IC. DUAL J-FET INPUT OP AMP
U046	NJM072M	IC. DUAL J-FET INPUT OP AMP
U047	NJM072M	IC. DUAL J-FET INPUT OP AMP
X001	L78-0107-05	CERAMIC RESONATOR (10MHZ)
X002	L77-1229-05	CRYSTAL (SUB L77-1025-05)

CONNECTION UNIT

X77-1500-00

REF. NO	PARTS NO	NAME & DESCRIPTION
P003	E40-7034-05	PIN CONNECTOR 40P
P010	E40-7036-05	PIN CONNECTOR 20P
P011	NO USE	
P012	E31-5551-05	LEAD WIRE WITH CONNECTOR 10P
P013	E31-5550-05	LEAD WIRE WITH CONNECTOR 6P
P017	E31-5552-05	LEAD WIRE WITH CONNECTOR 11P
P018	E40-7034-05	PIN CONNECTOR 40P
P019	E31-5553-05	LEAD WIRE WITH CONNECTOR 12P

FINAL AMP UNIT

X80-1100-00

REF. NO	PARTS NO	NAME & DESCRIPTION
J25-5196-03		PCB (UNMOUNTED)
71	F01-0866-04	HEAT SINK
72	F02-0502-04	HEAT SINK
C001	CK45FB1H102K	CAP. CERAMIC 1000P 10% 50V
C002	C91-1275-05	CAP. ELECTRO 0.033F 5.5V
C003	C91-1275-05	CAP. ELECTRO 0.033F 5.5V
C004	CQ92FM1H472K	CAP. MYLAR 4700P 10% 50V
C005	CE04HW1H010M	CAP. ELECTRO 1 20% 50V
C006	CC45FCH1H330J	CAP. CERAMIC 33P 5% 50V
C007	CC45FCH1H080P	CAP. CERAMIC 8P 0.5P 50V
C008	NO USE	
C009	CC45FCH1H150J	CAP. CERAMIC 15P 5% 50V
C010	CC45FCH1H390J	CAP. CERAMIC 39P 5% 50V
C011	CQ92FM1H104K	CAP. MYLAR 0.1 10% 50V
C012	CQ92FM1H104K	CAP. MYLAR 0.1 10% 50V
C013	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C014	CK45FS1L1H561J	CAP. CERAMIC 560P 5% 50V
C015	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C103	CC45FCH1H020C	CAP. CERAMIC 2P 0.25P 50V
C104	CK45FP1H103Z	CAP. CERAMIC 0.01 50V
C105	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V
C108	CC45FCH1H070D	CAP. CERAMIC 7P 0.5P 50V
C109	CC45CH2H010C	CAP. CERAMIC 1P 0.25P 500V
C110	CC45CH2H010C	CAP. CERAMIC 1P 0.25P 500V
C111	CF93AN2E103K	CAP. METAL FILM 0.01 10% 250V
C112	CF93AN2E103K	CAP. METAL FILM 0.01 10% 250V
C113	CF93AN2E104K	CAP. METAL FILM 0.1 10% 250V
C114	CF93AN2E104K	CAP. METAL FILM 0.1 10% 250V
C115	CC45FCH1H040C	CAP. CERAMIC 0.01 50V
C116	CE04HW1E220M	CAP. ELECTRO 22 20% 25V
C301	CE04EW1C331M	CAP. ELECTRO 330 20% 16V
C302	CE04EW1C331M	CAP. ELECTRO 330 20% 16V
C303	CE04EW1E101M	CAP. ELECTRO 100 20% 25V
C304	CE04EW2A220M	CAP. ELECTRO 22 20% 100V
C305	CE04W2E4R7M	CAP. ELECTRO 4.7 20% 250V
C306	CK45FF1H103Z	CAP. CERAMIC 0.01 50V
C307	CK45F1H103Z	CAP. CERAMIC 0.01 50V
C308	CK45F1H103Z	CAP. CERAMIC 0.01 50V
C309	CQ92FM1H104K	CAP. MYLAR 0.1 10% 50V
C310	CK45F1H103Z	CAP. CERAMIC 0.01 50V
C311	CK45F1H103Z	CAP. CERAMIC 0.01 50V
C312	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V
C313	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V
C314	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V
C501	CQ92M1H102K	CAP. MYLAR 1000P 10% 50V
D001	1SS132	DIODE
D002	1SS132	DIODE
D101	TLR112	LED, RED
D102	MA700	DIODE
D105	MA700	DIODE
D106	TLR112	LED, RED
D107	1SS132	DIODE
D108	1SS132	DIODE
D201	1SS132	DIODE
D202	1SS132	DIODE
L001	L33-0806-05	CHOKE COIL <0.52UH>
L002	L33-0806-05	CHOKE COIL <0.52UH>
L003	L40-2282-70	FERRI INDUCTOR 0.22UH
L004	L40-2282-70	FERRI INDUCTOR 0.22UH
L005	L40-2202-70	FERRI INDUCTOR 22UH
P011	E40-0373-05	PIN CONNECTOR 3P
P012	E40-1073-05	PIN CONNECTOR 10P
P013	E40-0673-05	PIN CONNECTOR 6P
P014	E40-0373-05	PIN CONNECTOR 3P
P015	E40-0373-05	PIN CONNECTOR 3P
Q001	ZSC3779(D)	TR. SI, NPN
Q002	ZSC3779(D)	TR. SI, NPN
Q003	ZSC3779(D)	TR. SI, NPN
Q004	ZSC3779(D)	TR. SI, NPN
Q005	ZSA1161	TR. SI, PNP
Q006	ZSA1161	TR. SI, PNP
Q007	ZSC3779(D)	TR. SI, NPN
Q008	ZSC3779(D)	TR. SI, NPN
Q009	ZSC3779(D)	TR. SI, NPN
Q010	ZSC3779(D)	TR. SI, NPN

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	REF. NO	PARTS NO	NAME & DESCRIPTION
Q011	2SC3779(D)	TR. SI. NPN	R101	RD14BB2C220J	RES. CARBON 22 5% 1/6W
Q012	2SC3779(D)	TR. SI. NPN	R102	RD14BB2C220J	RES. CARBON 22 5% 1/6W
Q013	2SC1164(O)*S	TR. SI. NPN	R103	RN14BK2C4300F	RES. METAL FILM 430 1% 1/6W
Q014	2SC1164(O)*S	TR. SI. NPN	R104	RN14BK2C4300F	RES. METAL FILM 430 1% 1/6W
Q101	2SA1005(K)	TR. SI. PNP	R105	RD14BB2C220J	RES. CARBON 22 5% 1/6W
Q102	2SA1005(K)	TR. SI. PNP	R106	RD14BB2C220J	RES. CARBON 22 5% 1/6W
Q103	2SC3315(C)	TR. SI. NPN	R107	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W
Q104	2SC3315(C)	TR. SI. NPN	R108	RN14BK2C5101F	RES. METAL FILM 5.1K 1% 1/6W
Q105	2SA1005(K)	TR. SI. PNP	R109	RN14BK2C1201F	RES. METAL FILM 1.2K 1% 1/6W
Q106	2SA1005(K)	TR. SI. PNP	R110	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W
Q107	2SA1005(K)	TR. SI. PNP	R111	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W
Q108	2SA1005(K)	TR. SI. PNP	R112	RD14BB2C151J	RES. CARBON 150 5% 1/6W
Q109	2SC3354(T,S)	TR. SI. NPN	R113	RD14BB2C431J	RES. CARBON 430 5% 1/6W
Q110	2SC3354(T,S)	TR. SI. NPN	R114	RD14BB2C431J	RES. CARBON 430 5% 1/6W
Q111	2SA1206	TR. SI. PNP	R115	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
Q112	2SC3354(T,S)	TR. SI. NPN	R116	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
Q113	2SC3354(T,S)	TR. SI. NPN	R117	RN14BK2C6800F	RES. METAL FILM 680 1% 1/6W
Q114	2SC3600(E,F)	TR. SI. NPN	R118	RN14BK2C6800F	RES. METAL FILM 680 1% 1/6W
Q115	2SC3600(E,F)	TR. SI. NPN	R119	RN14BK2C4701F	RES. METAL FILM 4.7K 1% 1/6W
Q116	2SA1406(E,F)	TR. SI. PNP	R120	RN14BK2C3901F	RES. METAL FILM 3.9K 1% 1/6W
Q117	2SA1406(E,F)	TR. SI. PNP	R121	RD14BB2C220J	RES. CARBON 22 5% 1/6W
Q201	2SC3315(C)	TR. SI. NPN	R122	RD14BB2C220J	RES. CARBON 22 5% 1/6W
Q202	2SC3315(C)	TR. SI. NPN	R123	RN14BK2C1501F	RES. METAL FILM 1.5K 1% 1/6W
Q203	2SC3354(T,S)	TR. SI. NPN	R124	RN14BK2C1501F	RES. METAL FILM 1.5K 1% 1/6W
Q204	2SC3354(T,S)	TR. SI. NPN	R125	RN14BK2C1501F	RES. METAL FILM 1.5K 1% 1/6W
Q205	2SC2785(F)	TR. SI. NPN	R126	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W
Q206	2SC3315(C)	TR. SI. NPN	R127	RD14BB2C220J	RES. CARBON 22 5% 1/6W
Q207	2SC3315(C)	TR. SI. NPN	R128	RD14BB2C220J	RES. CARBON 22 5% 1/6W
Q208	2SC3354(T,S)	TR. SI. NPN	R129	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W
Q209	2SC3354(T,S)	TR. SI. NPN	R130	RD14BB2C101J	RES. CARBON 100 5% 1/6W
Q210	2SC2785(F)	TR. SI. NPN	R131	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R001	RN14BK2C1000F	RES. METAL FILM 100 1% 1/6W	R132	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W
R002	RN14BK2C1000F	RES. METAL FILM 100 1% 1/6W	R133	RN14BK2C1301F	RES. METAL FILM 1.3K 1% 1/6W
R003	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R134	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R004	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R135	NO USE	
R005	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R136	RD14BB2C514J	RES. CARBON 510K 5% 1/6W
R006	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W	R137	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W
R007	RD14BB2C432J	RES. CARBON 4.3K 5% 1/6W	R138	RD14BB2C242J	RES. CARBON 2.4K 5% 1/6W
R008	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R139	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R009	RD14BB2E470J	RES. CARBON 47 5% 1/6W	R140	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R010	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R141	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R011	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W	R142	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R012	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W	R143	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R013	RD14BB2C303J	RES. CARBON 30K 5% 1/6W	R144	RN14BK2E2002F	RES. METAL FILM 20K 1% 1/4W
R014	RD14BB2C753J	RES. CARBON 75K 5% 1/6W	R145	RN14BK2E2002F	RES. METAL FILM 20K 1% 1/4W
R015	RN14BK2C2700F	RES. METAL FILM 270 1% 1/6W	R146	R92-1434-05	RES. SPECIAL POWER 47K 5% 1/2W
R016	RN14BK2C2700F	RES. METAL FILM 270 1% 1/6W	R147	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W
R017	RN14BK2C2700F	RES. METAL FILM 270 1% 1/6W	R148	RN14BK2C3601F	RES. METAL FILM 3.6K 1% 1/6W
R018	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R149	RN14BK2C4702F	RES. METAL FILM 47K 1% 1/6W
R019	RD14BB2C104J	RES. CARBON 100K 5% 1/6W	R150	RN14BK2C4702F	RES. METAL FILM 47K 1% 1/6W
R020	RN14BK2C3000F	RES. METAL FILM 300 1% 1/6W	R151	RN14BK2C3601F	RES. METAL FILM 3.6K 1% 1/6W
R021	RN14BK2C3000F	RES. METAL FILM 300 1% 1/6W	R152	RN14BK2C7500F	RES. METAL FILM 750 1% 1/6W
R022	RD14BB2C681J	RES. CARBON 680 5% 1/6W	R153	RN14BK2E2002F	RES. METAL FILM 20K 1% 1/4W
R023	RD14BB2C681J	RES. CARBON 680 5% 1/6W	R154	RN14BK2E2002F	RES. METAL FILM 20K 1% 1/4W
R024	RD14BB2C821J	RES. CARBON 820 5% 1/6W	R155	R92-1434-05	RES. SPECIAL POWER 47K 5% 1/2W
R025	RN14BK2C2201F	RES. METAL FILM 2.2K 1% 1/6W	R156	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R026	RN14BK2C2201F	RES. METAL FILM 2.2K 1% 1/6W	R157	RD14BB2C821J	RES. CARBON 820 5% 1/6W
R027	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W	R158	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R028	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W	R159	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R029	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R160	RD14BB2C223J	RES. CARBON 22K 5% 1/6W
R030	RD14BB2C101J	RES. CARBON 100 5% 1/6W	R161	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R031	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R162	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R032	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R163	NO USE	
R033	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R164	RD14BB2C203J	RES. CARBON 20K 5% 1/6W
R034	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R201	RD14BB2C162J	RES. CARBON 1.6K 5% 1/6W
R035	RN14BK2E82R0F	RES. METAL FILM 82.0 1% 1/4W	R202	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R036	RN14BK2E82R0F	RES. METAL FILM 82.0 1% 1/4W	R203	RN14BK2C1200F	RES. METAL FILM 120 1% 1/6W
R037	RN14BK2C3600F	RES. METAL FILM 360 1% 1/6W	R204	RN14BK2C1200F	RES. METAL FILM 120 1% 1/6W
R038	NO USE		R205	RD14BB2C621J	RES. CARBON 620 5% 1/6W
R039	RD14BB2C513J	RES. CARBON 51K 5% 1/6W	R206	RD14BB2C623J	RES. CARBON 62K 5% 1/6W
R040	RD14BB2C100J	RES. CARBON 10 5% 1/6W	R207	RD14BB2C912J	RES. CARBON 9.1K 5% 1/6W
R041	RD14BB2C470J	RES. CARBON 47 5% 1/6W	R208	RD14BB2C301J	RES. CARBON 300 5% 1/6W
R042	RD14BB2C680J	RES. CARBON 68 5% 1/6W	R209	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R043	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W	R210	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R044	RD14BB2C223J	RES. CARBON 22K 5% 1/6W	R211	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W
R045	RD14BB2C220J	RES. CARBON 22 5% 1/4W	R212	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R046	RD14BB2C220J	RES. CARBON 22 5% 1/4W	R213	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R047	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R214	RN14BK2C1800F	RES. METAL FILM 180 1% 1/6W
R048	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R215	RD14BB2C301J	RES. CARBON 300 5% 1/6W
R049	RD14BB2C151J	RES. CARBON 150 5% 1/6W	R216	RD14BB2C821J	RES. CARBON 820 5% 1/6W
R050	R92-1420-05	RES. METAL FILM 510 5% 7W	R217	RN14BK2C3300F	RES. METAL FILM 330 1% 1/6W
R051	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R218	RN14BK2C3300F	RES. METAL FILM 330 1% 1/6W
R052	R92-1420-05	RES. METAL FILM 510 5% 7W	R219	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R053	RD14BB2C220J	RES. CARBON 22 5% 1/6W	R220	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R054	RD14BB2C151J	RES. CARBON 150 5% 1/6W	R221	RD14BB2C912J	RES. CARBON 9.1K 5% 1/6W
R055	RD14BB2C301J	RES. CARBON 300 5% 1/6W	R222	RD14BB2C301J	RES. CARBON 300 5% 1/6W
R056	RD14BB2C301J	RES. CARBON 300 5% 1/6W	R223	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R059	RD14BB2C223J	RES. CARBON 22K 5% 1/6W	R224	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
			R225	RD14BB2C562J	RES. CARBON 5.6K 5% 1/6W

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
R226	RN14BK2C9101F	RES. METAL FILM 9.1K 1% 1/6W
R227	RN14BK2C4701F	RES. METAL FILM 4.7K 1% 1/6W
R228	RN14BK2C5600F	RES. METAL FILM 560 1% 1/6W
R229	RD14BB2C163J	RES. CARBON 16K 5% 1/6W
R400	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R401	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
TC001	C05-0461-05	CAP. TRIMMER 30P
TC002	C05-0460-05	CAP. TRIMMER 20P
TC101	C05-0464-05	CAP. TRIMMER 2P
TC102	NO USE	
TC103	C05-0464-05	CAP. TRIMMER 2P
TH002	SDT100	THERMISTOR
VR001	R12-1538-05	RES. SEMI FIXED 1KB
VR002	NO USE	
VR003	R12-3453-05	RES. SEMI FIXED 10KB
VR004	R12-0058-05	RES. SEMI FIXED 470 B
VR101	R12-1538-05	RES. SEMI FIXED 1KB
VR102	R12-0571-05	RES. SEMI FIXED 500B
VR103	R12-3453-05	RES. SEMI FIXED 10KB
VR201	R12-3543-05	RES. SEMI FIXED 20KB
VR202	R12-3543-05	RES. SEMI FIXED 20KB


REF. NO	PARTS NO	NAME & DESCRIPTION
R017	RD14BB2C271J	RES. CARBON 270 5% 1/6W
R018	RD14BB2C100J	RES. CARBON 10 5% 1/6W
R019	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W
R020	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R021	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R022	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R023	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R024	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R025	RD14BB2C100J	RES. CARBON 10 5% 1/6W
R026	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R101	RD14BY2H225J	RES. CARBON 2.2M 5% 1/2W
S101	SS9-2505-05	SWITCH
U001	NJM4558D	IC, DUAL OP AMP
VR001	R05-3515-05	V.R. WITH SW<READOUT INT> 20KB
VR002	R10-3505-05	V.R.(A/B INT,ROT+ILLUM)20KB X2
VR003	R10-7501-05	V.R.(FOCUS/ASTIG)500KB/500KB
VR004	R10-3505-05	V.R.(A/B INT,ROT+ILLUM)>20KB X2
VR005	R12-3543-05	RES. SEMI FIXED 20KB
VR006	R12-1538-05	RES. SEMI FIXED 1KB

VR UNIT


X81-2330-00

REF. NO	PARTS NO	NAME & DESCRIPTION
F01	0859-14	HEAT SINK
N09	0623-04	SCREW, SEMS M3X8
R92	0150-05	JUMPING RES. ZERO OHM(10MM)
77	J21-4610-04	BRACKET
C006	CE04EW1C01M	CAP. ELECTRO 100 20% 16V
C007	CK45F1H103Z	CAP. CERAMIC 0.01 50V
C008	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V
C009	CQ92M1H103J	CAP. MYLAR 0.01 5% 50V
C010	CE04EW1C470M	CAP. ELECTRO 47 20% 16V
C101	C91-0551-05	CAP. POLYESTER 0.22 10% 630V
C102	C91-0575-05	CAP. CERAMIC 1000P 4KV
C103	C91-0575-05	CAP. CERAMIC 1000P 4KV
D001	1SS132	DIODE
D002	1SS132	DIODE
D003	MTZ24JC	DIODE, ZENER 23.72V
J021	E31-5571-05	LEAD WIRE WITH CONNECTOR
L101	L33-0808-05	CHOKE COIL
P020	E40-0330-05	PIN CONNECTOR 3P
P021	E40-0330-05	PIN CONNECTOR 3P
P025	E40-0474-05	PIN CONNECTOR 4P
P026	E40-1074-05	PIN CONNECTOR 10P
P027	E40-0273-05	PIN CONNECTOR 2P
P028	E40-0274-05	PIN CONNECTOR 2P
P029	E40-0274-05	PIN CONNECTOR 2P
Q001	ZSC2271(D)	TR. SI, NPN
Q002	ZSC1384(Q)	TR. SI, NPN
Q003	2SA684(Q)	TR. SI, PNP
Q004	2SA1175(F)	TR. SI, PNP
Q005	ZSC2785(F)	TR. SI, NPN
Q006	ZSD1666(S)	TR. SI, NPN
R001	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R002	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R003	RD14BB2C183J	RES. CARBON 18K 5% 1/6W
R004	RD14BB2C333J	RES. CARBON 33K 5% 1/6W
R005	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R006	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R007	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R008	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R009	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R010	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R011	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R012	RD14BB2C333J	RES. CARBON 33K 5% 1/6W
R013	RD14BB2C433J	RES. CARBON 43K 5% 1/6W
R014	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R015	RD14BB2C162J	RES. CARBON 1.6K 5% 1/6W
R016	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W

SCHEMATIC DIAGRAM

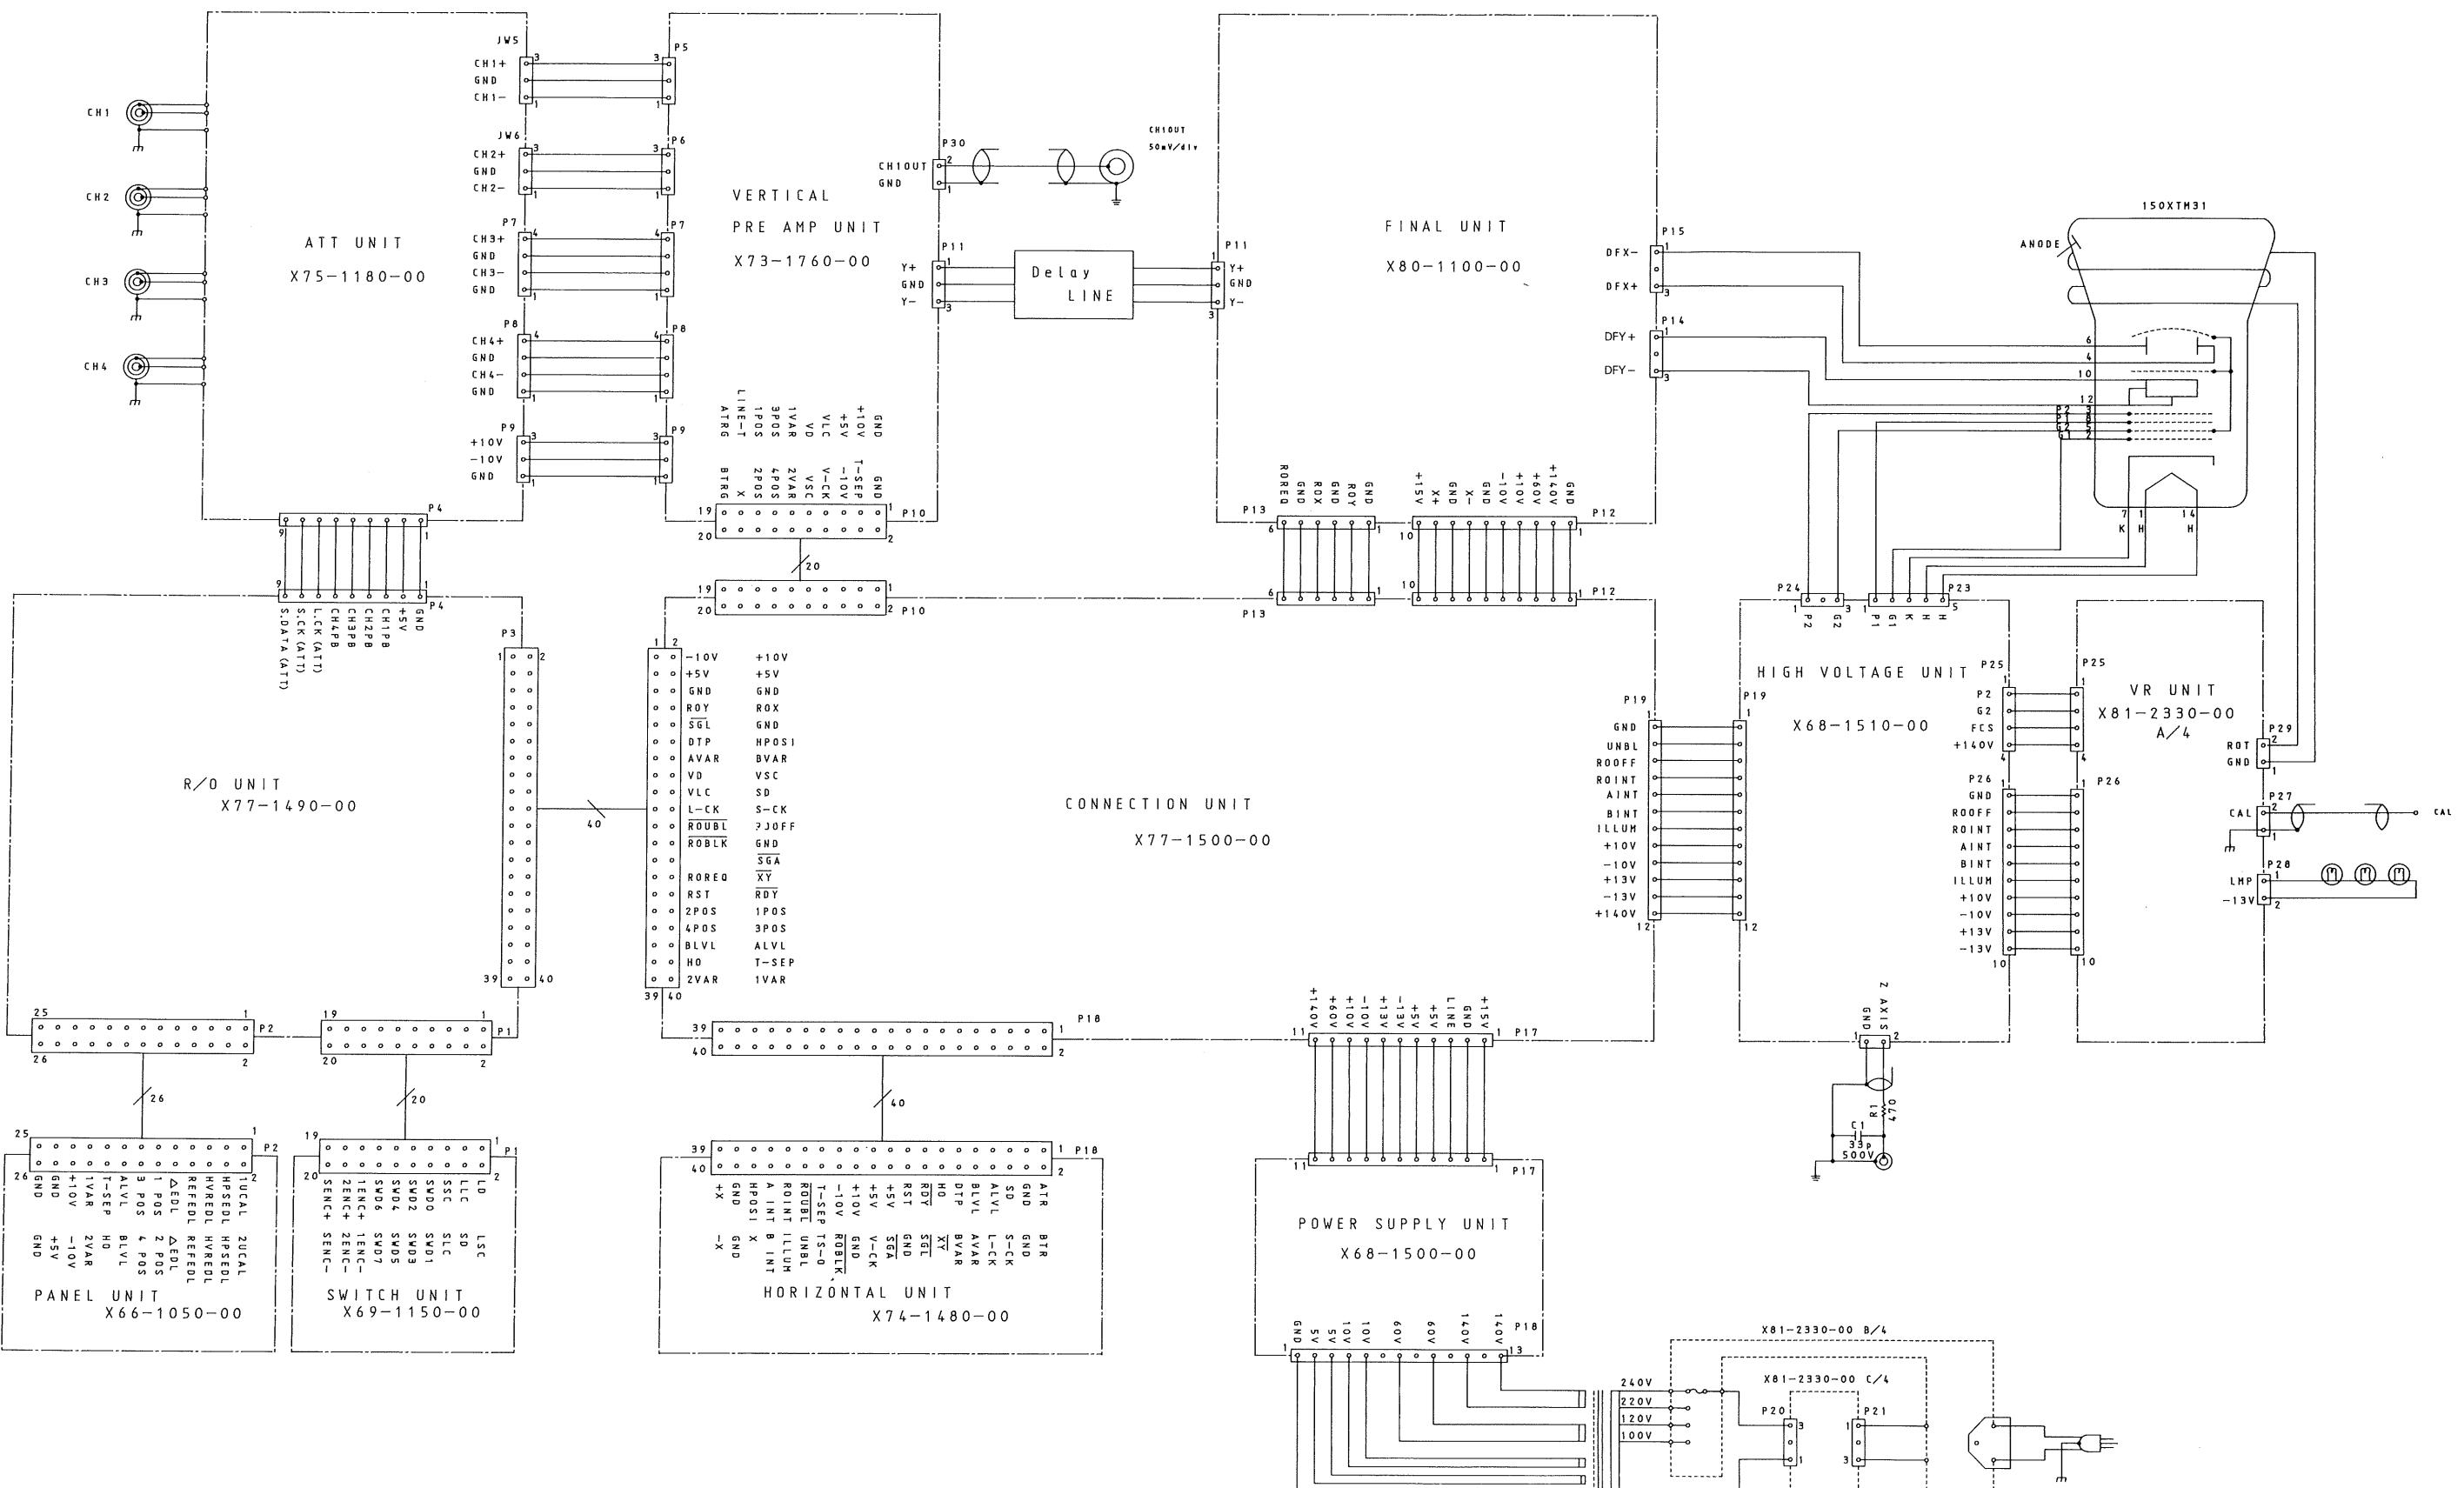


SCHEMATIC DIAGRAM

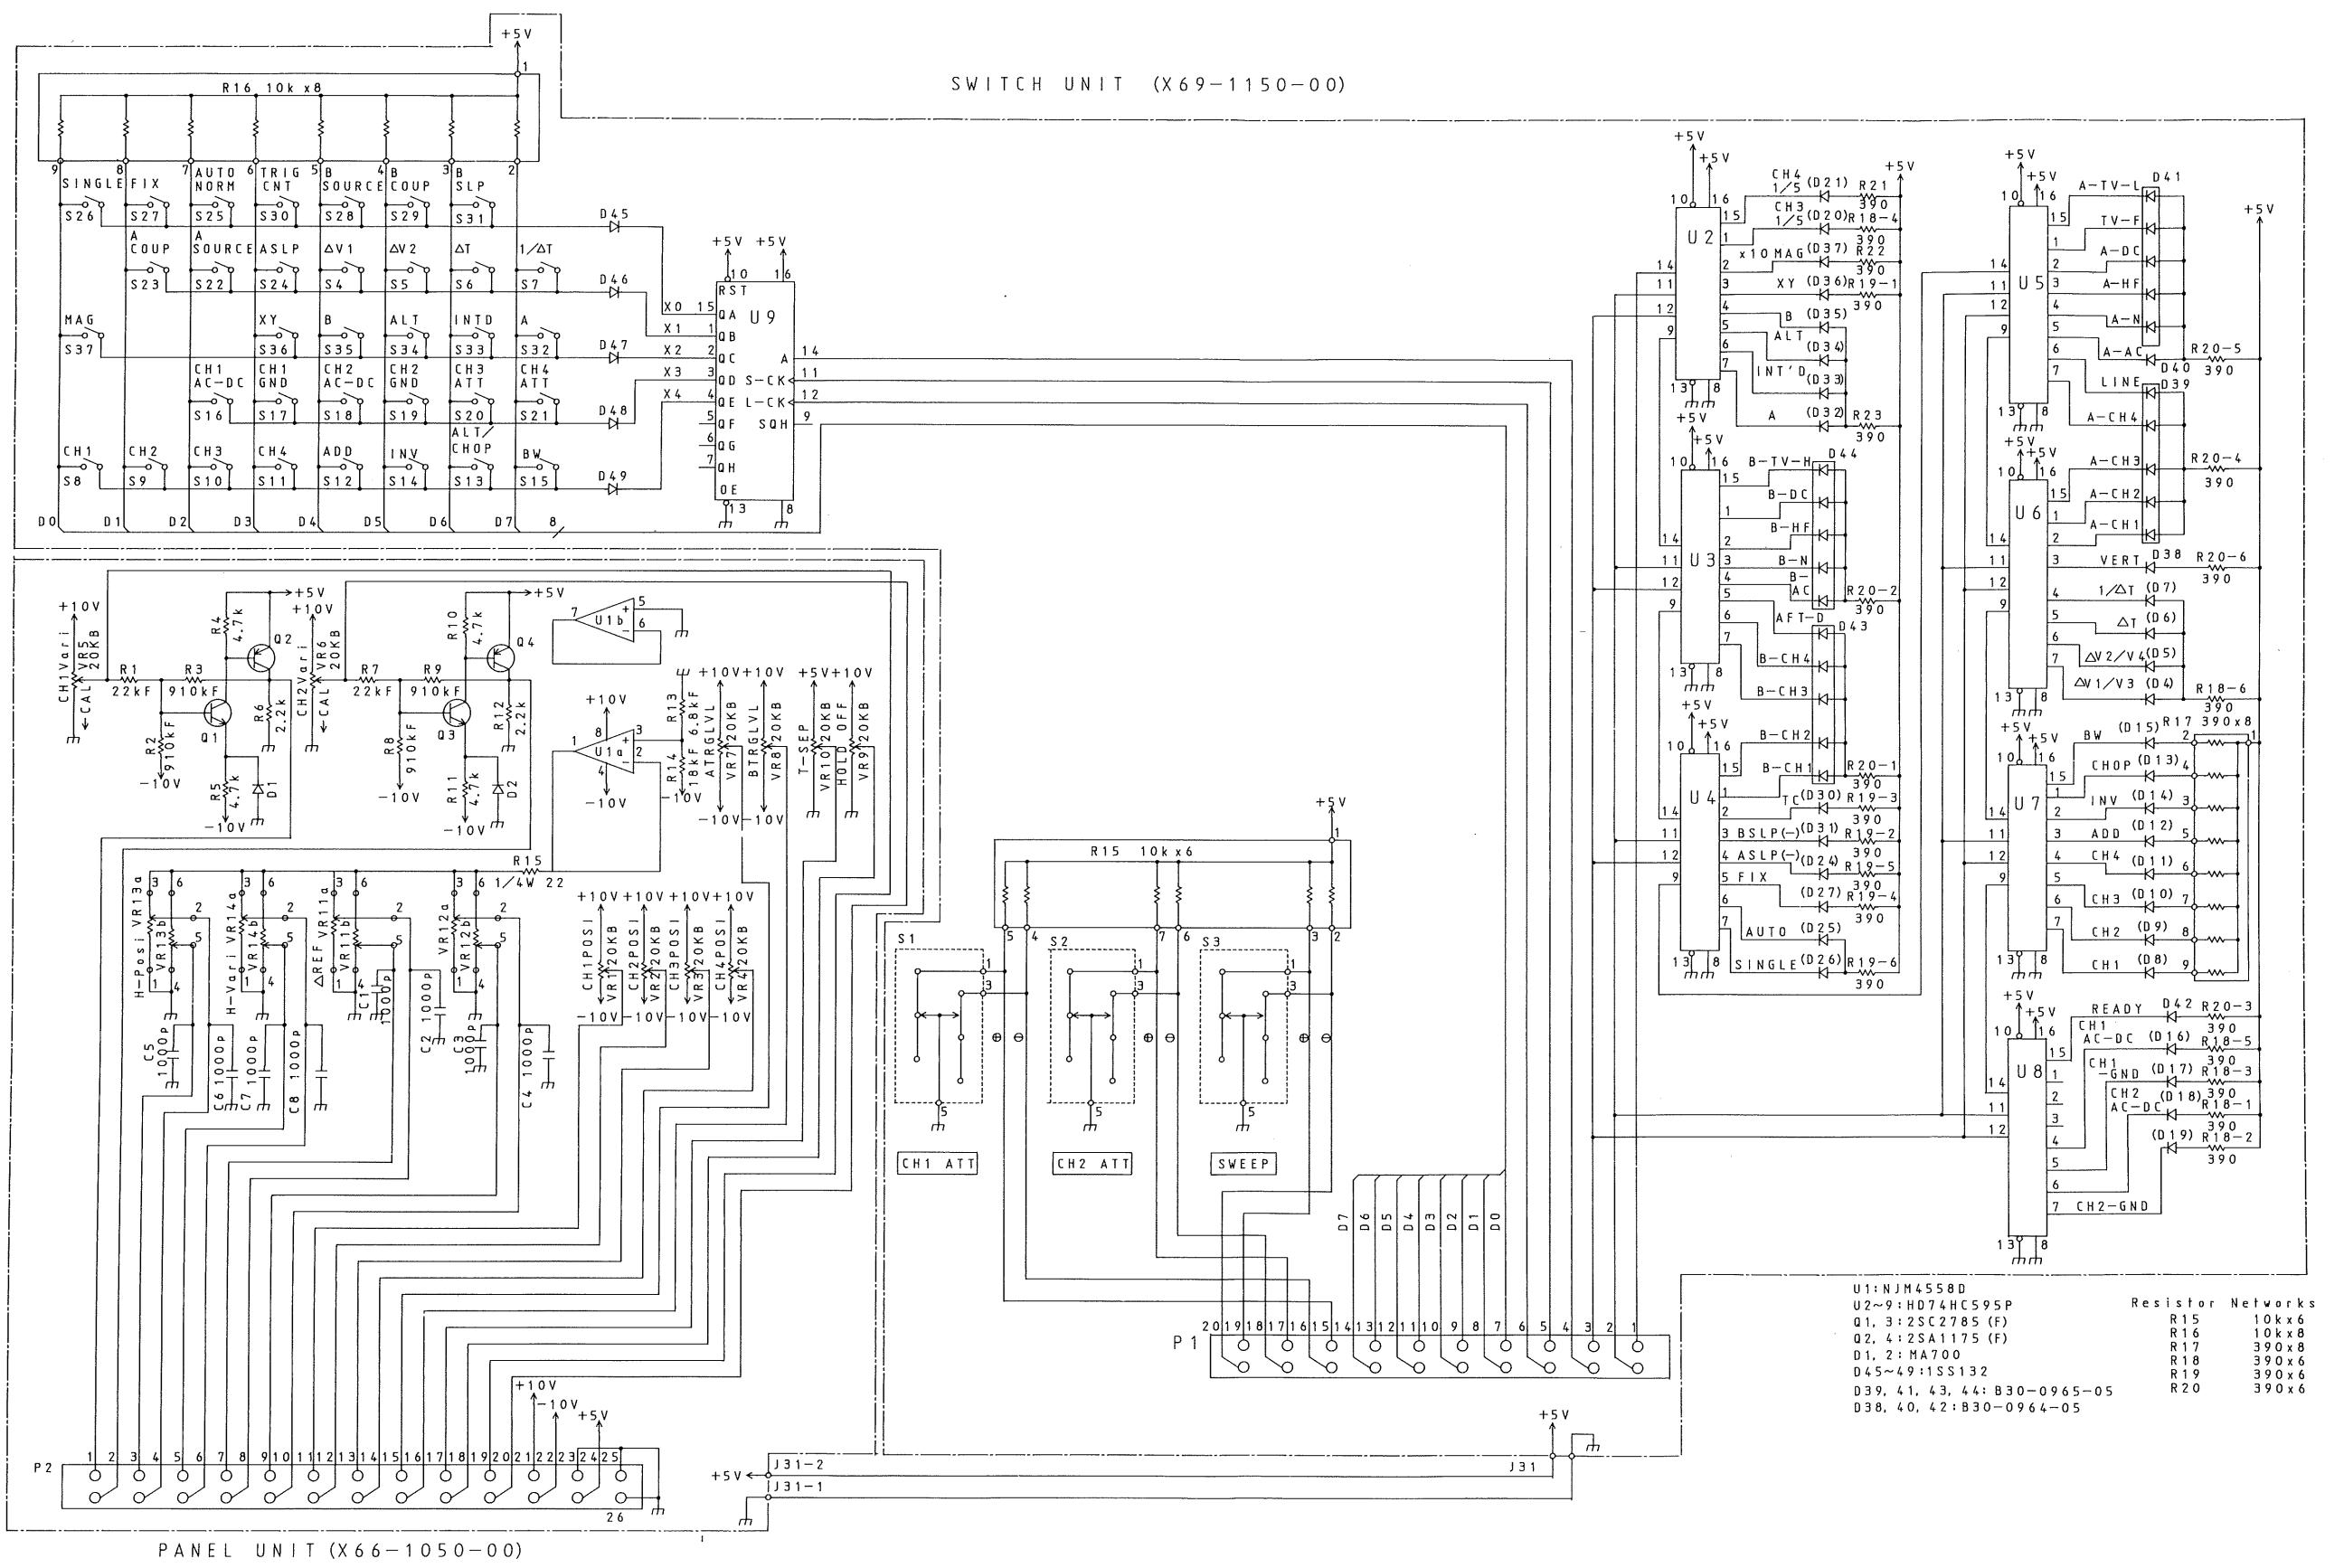


VERTICAL PREAMP UNIT (X73-1760-00)

-1.8V
14mV/div

SCH

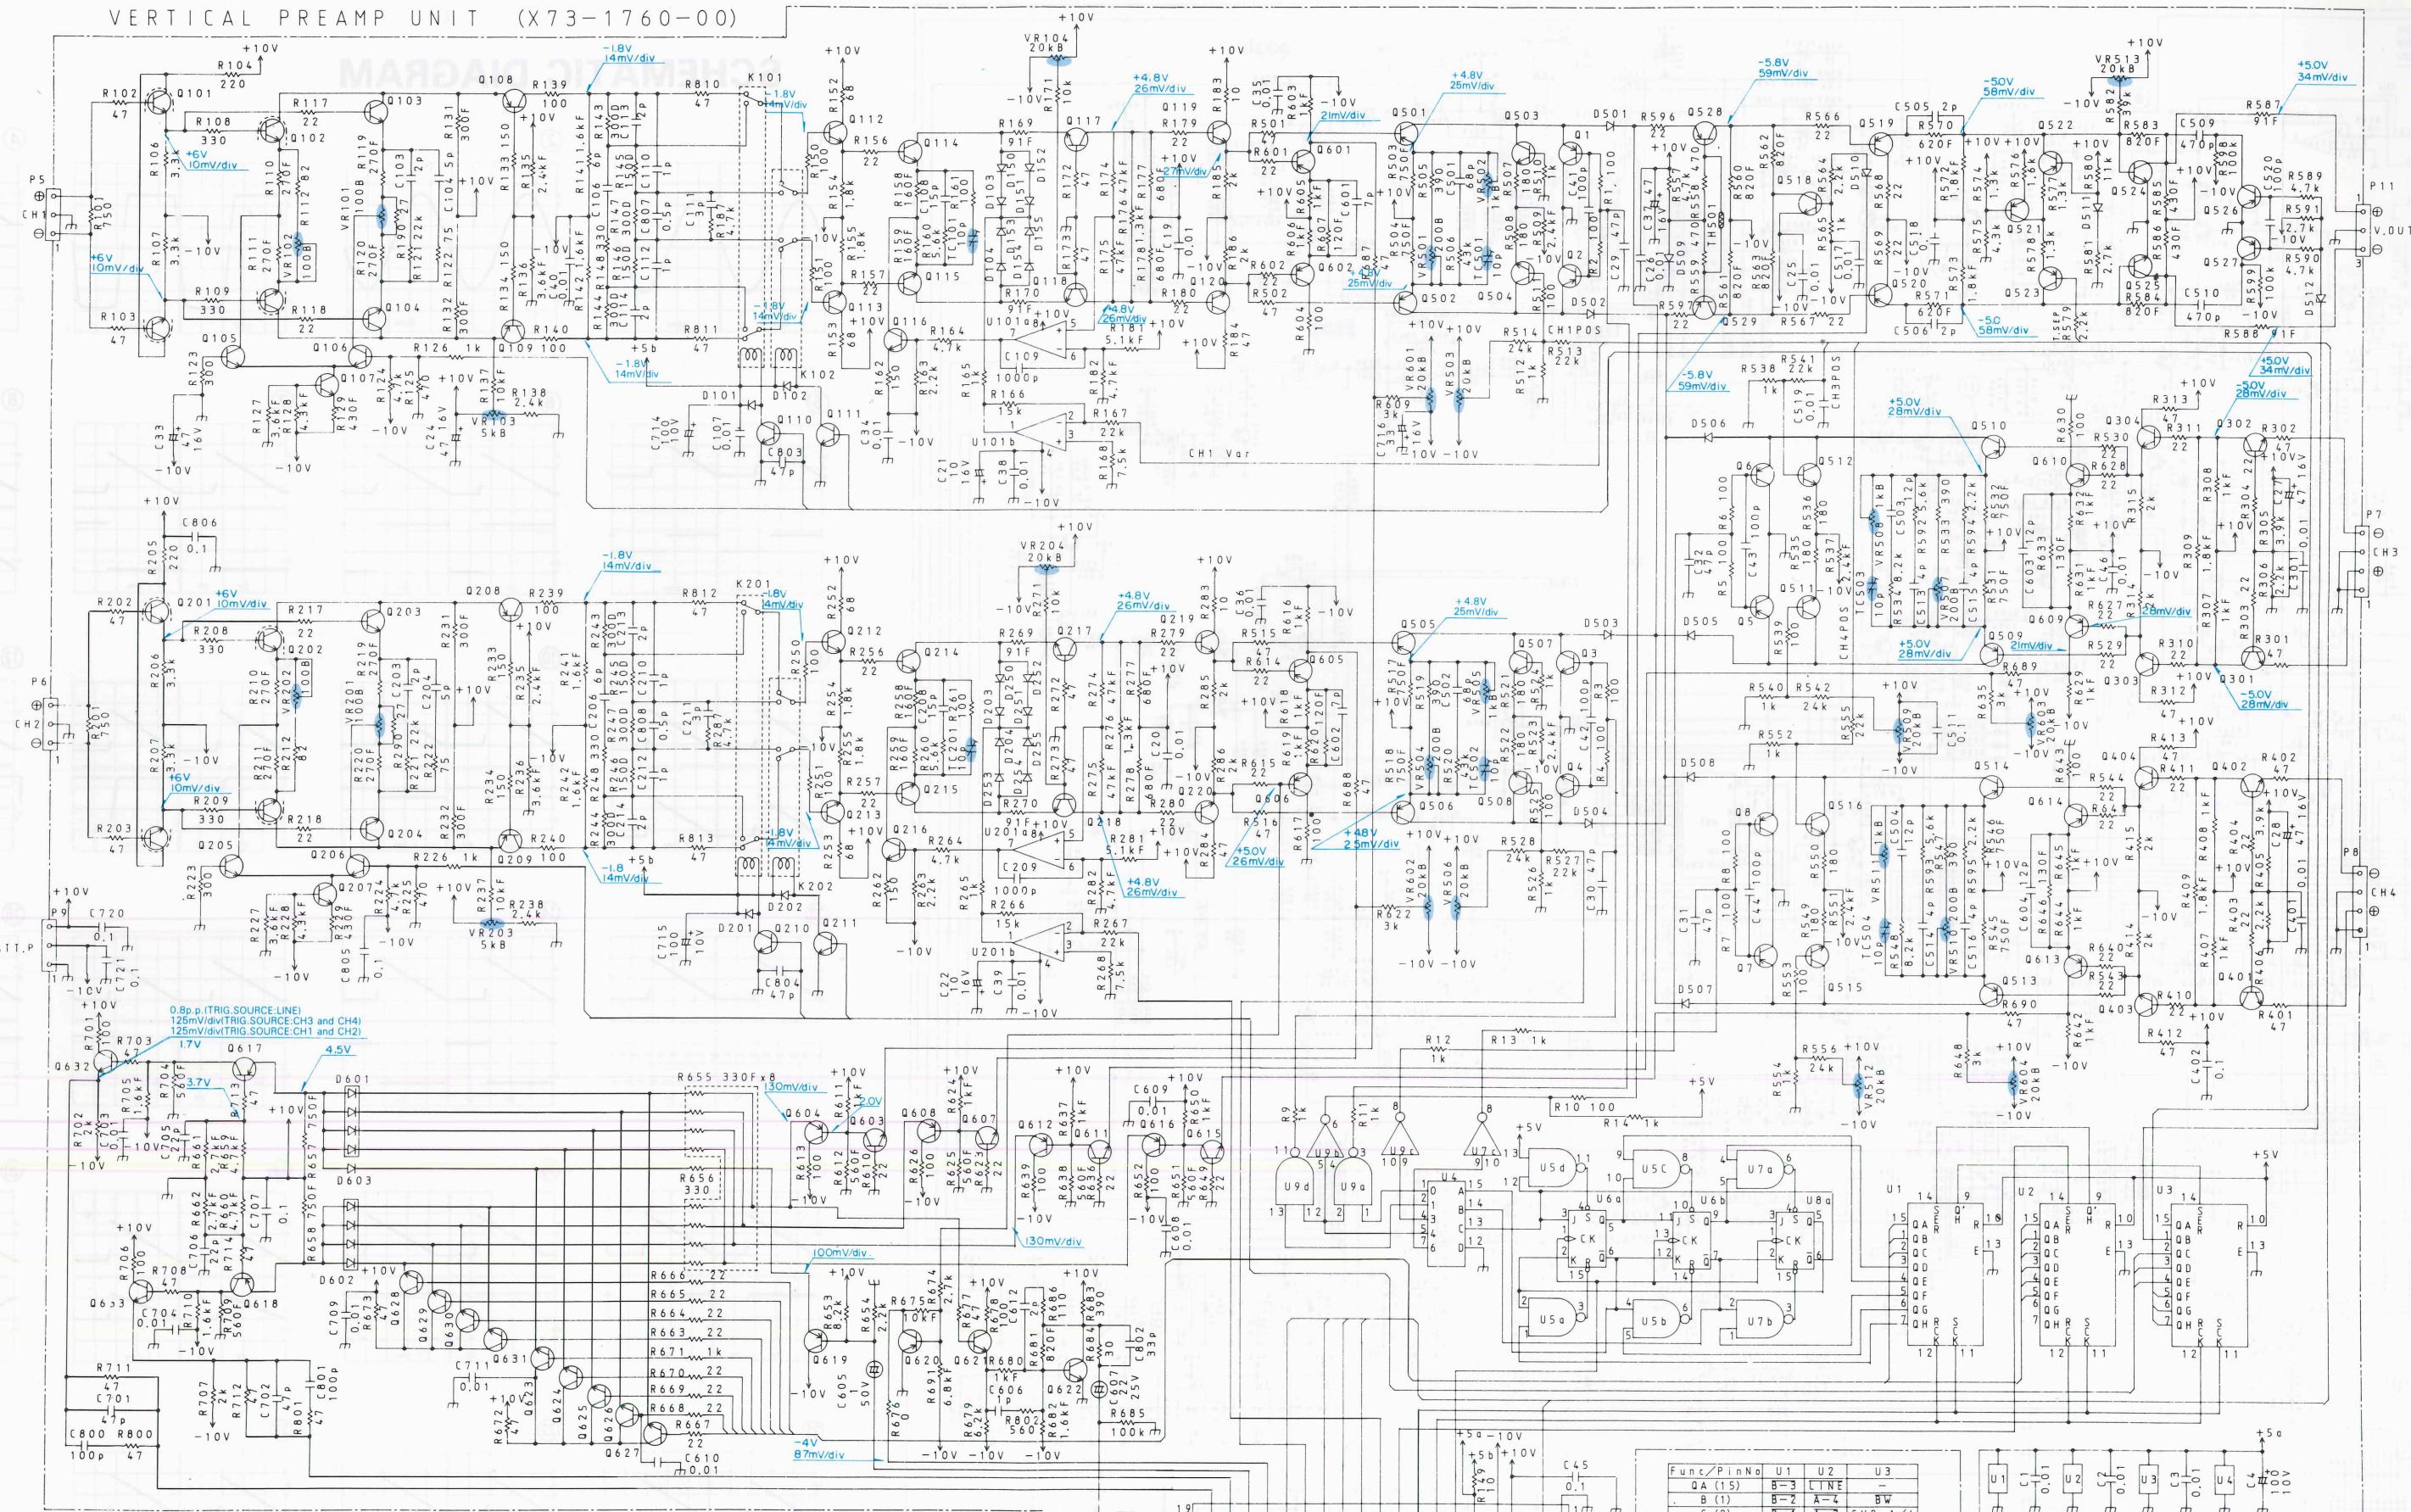

HORIZONTAL UNIT (X 74-1480-0-0)

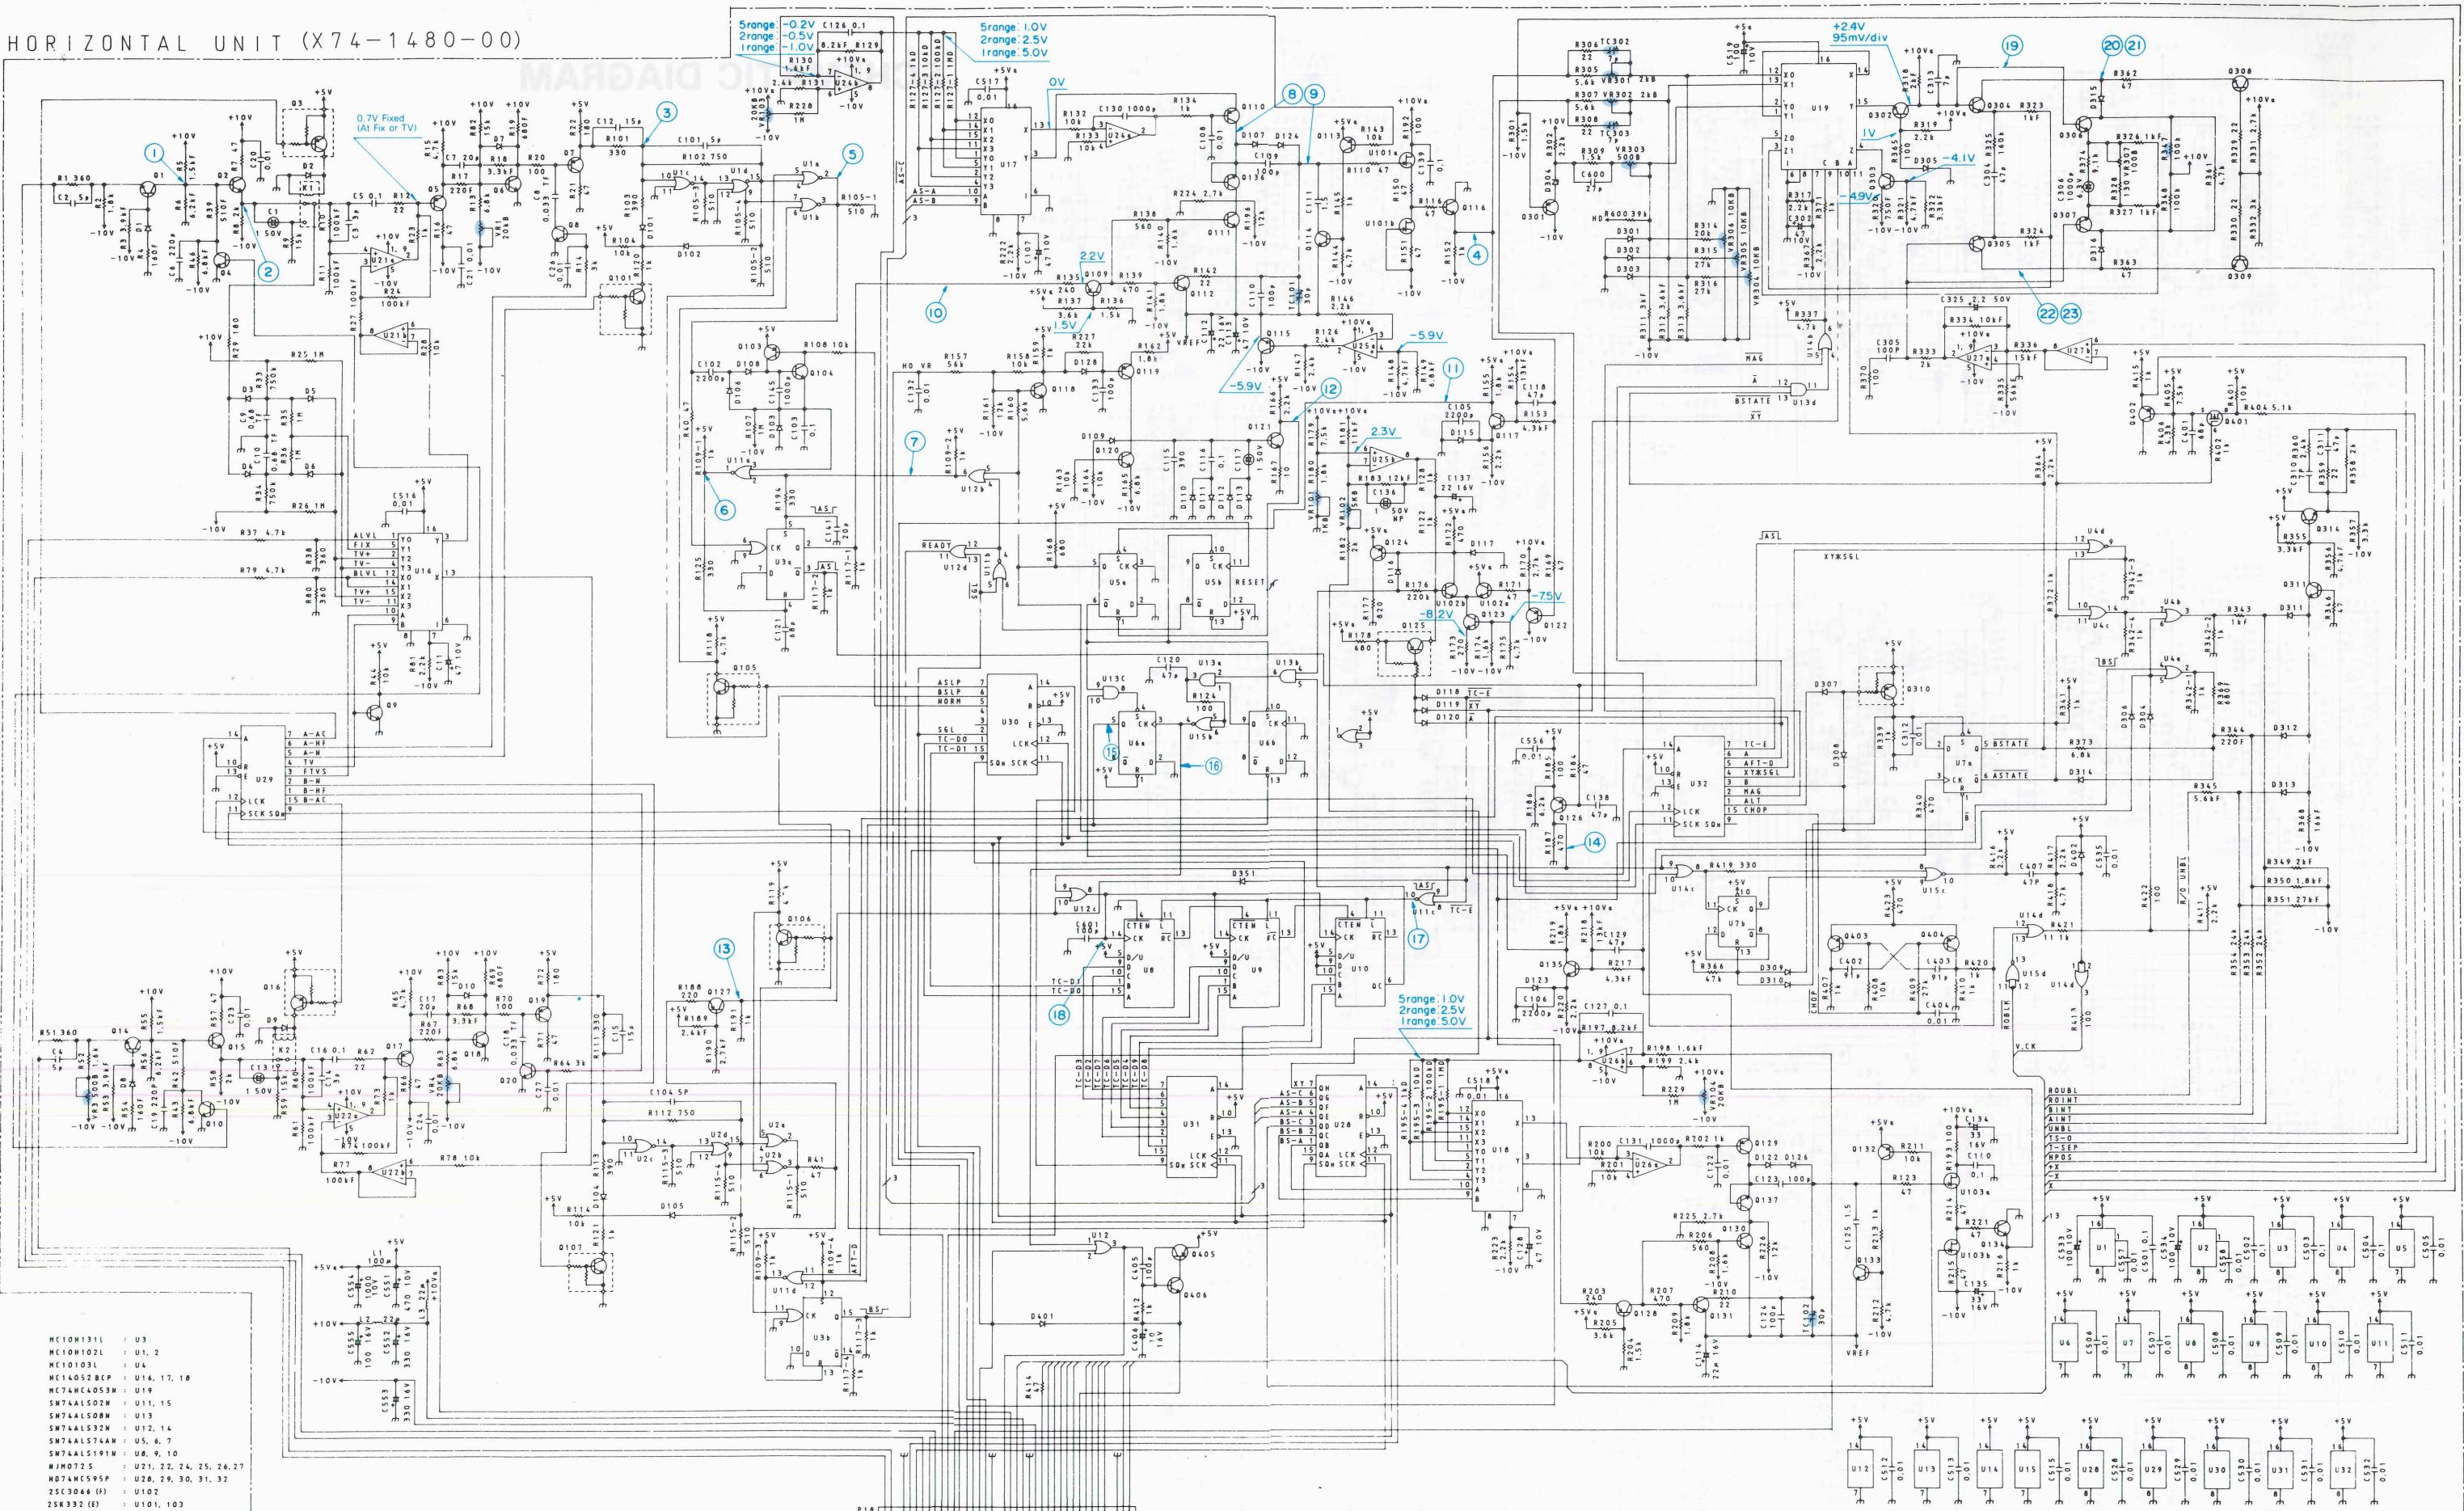

HC10H131L : U3
 HC10H102L : U1, 2
 HC10103L : U4
 HC14052BCP : U16, 17, 18
 MC74H4LS03M : U19
 SH74A4LS02M : U11, 15
 SH74A4LS08M : U13
 SH74A4LS32M : U12, 14
 SH74A4LS74AM : U5, 6, 7
 SH74A4LS191M : U8, 9, 10
 NJM072S : U21, 22, 24, 25, 26, 27
 H074HC595P : U28, 29, 30, 31, 32
 2SC3066 (F) : U102
 2SK332 (E) : U101, 103


ZSA1005 (N) : 0109, 128, 403, 404
 ZSA1175 (F) : 0110, 113, 115, 119,
 0129, 132, 301, 402, 2SC2785 (F) : 08, 20, 104, 118,
 25C3732 (L) : 0111, 112, 121, 130, 131, 136, 137
 25C3732 (D) : 01, 2, 6, 14, 15, 18
 0114, 117, 123, 133, 25C4049 : 04, 9, 10, 101, 105,
 0135, 303-309, 0106, 107
 0405
 2SA1206 : 05, 7, 17, 19, 103, 122
 0124, 126, 237
 03, 14, 125, 310

2SA1565

80


ATR BTR
 GND END
 SL S-CK
 ALV1 L-CK
 BBLV AVAR
 DTP END
 HO XY
 RDY 561
 RST 661
 END
 SL S-CK
 +5V 56A
 +5V V-YK
 END
 -10V END
 T-EEP 550
 END
 RBLK 551
 END
 RBLK 552
 END
 RBLK 553
 END
 C554
 C555
 C556
 C557
 C558
 C559
 C560
 C561
 C562
 C563
 C564
 C565
 C566
 C567
 C568
 C569
 C570
 C571
 C572
 C573
 C574
 C575
 C576
 C577
 C578
 C579
 C580
 C581
 C582
 C583
 C584
 C585
 C586
 C587
 C588
 C589
 C590
 C591
 C592
 C593
 C594
 C595
 C596
 C597
 C598
 C599
 C510
 C511
 C512
 C513
 C514
 C515
 C516
 C517
 C518
 C519
 C520
 C521
 C522
 C523
 C524
 C525
 C526
 C527
 C528
 C529
 C530
 C531
 C532
 C533
 C534
 C535
 C536
 C537
 C538
 C539
 C540
 C541
 C542
 C543
 C544
 C545
 C546
 C547
 C548
 C549
 C550
 C551
 C552
 C553
 C554
 C555
 C556
 C557
 C558
 C559
 C560
 C561
 C562
 C563
 C564
 C565
 C566
 C567
 C568
 C569
 C570
 C571
 C572
 C573
 C574
 C575
 C576
 C577
 C578
 C579
 C580
 C581
 C582
 C583
 C584
 C585
 C586
 C587
 C588
 C589
 C590
 C591
 C592
 C593
 C594
 C595
 C596
 C597
 C598
 C599
 C510
 C511
 C512
 C513
 C514
 C515
 C516
 C517
 C518
 C519
 C520
 C521
 C522
 C523
 C524
 C525
 C526
 C527
 C528
 C529
 C530
 C531
 C532
 C533
 C534
 C535
 C536
 C537
 C538
 C539
 C540
 C541
 C542
 C543
 C544
 C545
 C546
 C547
 C548
 C549
 C550
 C551
 C552
 C553
 C554
 C555
 C556
 C557
 C558
 C559
 C560
 C561
 C562
 C563
 C564
 C565
 C566
 C567
 C568
 C569
 C570
 C571
 C572
 C573
 C574
 C575
 C576
 C577
 C578
 C579
 C580
 C581
 C582
 C583
 C584
 C585
 C586
 C587
 C588
 C589
 C590
 C591
 C592
 C593
 C594
 C595
 C596
 C597
 C598
 C599
 C510
 C511
 C512
 C513
 C514
 C515
 C516
 C517
 C518
 C519
 C520
 C521
 C522
 C523
 C524
 C525
 C526
 C527
 C528
 C529
 C530
 C531
 C532
 C533
 C534
 C535
 C536
 C537
 C538
 C539
 C540
 C541
 C542
 C543
 C544
 C545
 C546
 C547
 C548
 C549
 C550
 C551
 C552
 C553
 C554
 C555
 C556
 C557
 C558
 C559
 C560
 C561
 C562
 C563
 C564
 C565
 C566
 C567
 C568
 C569
 C570
 C571
 C572
 C573
 C574
 C575
 C576
 C577
 C578
 C579
 C580
 C581
 C582
 C583
 C584
 C585
 C586
 C587
 C588
 C589
 C590
 C591
 C592
 C593
 C594
 C595
 C596
 C597
 C598
 C599
 C510
 C511
 C512
 C513
 C514
 C515
 C516
 C517
 C518
 C519
 C520
 C521
 C522
 C523
 C524
 C525
 C526
 C527
 C528
 C529
 C530
 C531
 C532
 C533
 C534
 C535
 C536
 C537
 C538
 C539
 C540
 C541
 C542
 C543
 C544
 C545
 C546
 C547
 C548
 C549
 C550
 C551
 C552
 C553
 C554
 C555
 C556
 C557
 C558
 C559
 C560
 C561
 C562
 C563
 C564
 C565
 C566
 C567
 C568
 C569
 C570
 C571
 C572
 C573
 C574
 C575
 C576
 C577
 C578
 C579
 C580
 C581
 C582
 C583
 C584
 C585
 C586
 C587
 C588
 C589
 C590
 C591
 C592
 C593
 C594
 C595
 C596
 C597
 C598
 C599
 C510
 C511
 C512
 C513
 C514
 C515
 C516
 C517
 C518
 C519
 C520
 C521
 C522
 C523
 C524
 C525
 C526
 C527
 C528
 C529
 C530
 C531
 C532
 C533
 C534
 C535
 C536
 C537
 C538
 C539
 C540
 C541
 C542
 C543
 C544
 C545
 C546
 C547
 C548
 C549
 C550
 C551
 C552
 C553
 C554
 C555
 C556
 C557
 C558
 C559
 C560
 C561
 C562
 C563
 C564
 C565
 C566
 C567
 C568
 C569
 C570
 C571
 C572
 C573
 C574
 C575
 C576
 C577
 C578
 C579
 C580
 C581
 C582
 C583
 C584
 C585
 C586
 C587
 C588
 C589
 C590
 C591
 C592
 C593
 C594
 C595
 C596
 C597
 C598
 C599
 C510
 C511
 C512
 C513
 C514
 C515
 C516
 C517
 C518
 C519
 C520
 C521
 C522
 C523
 C524
 C525
 C526
 C527
 C528
 C529
 C530
 C531
 C532
 C533
 C534
 C535
 C536
 C537
 C538
 C539
 C540
 C541
 C542
 C543
 C544
 C545
 C546
 C547
 C548
 C549
 C550
 C551
 C552
 C553
 C554
 C555
 C556
 C557
 C558
 C559
 C560
 C561
 C562
 C563
 C564
 C565
 C566
 C567
 C568
 C569
 C570
 C571
 C572
 C573
 C574
 C575
 C576
 C577
 C578
 C579
 C580
 C581
 C582
 C583
 C584
 C585
 C586
 C587
 C588
 C589
 C590
 C591
 C592
 C593
 C594
 C595
 C596
 C597
 C598
 C599
 C510
 C511
 C512
 C513
 C514
 C515
 C516
 C517
 C518
 C519
 C520
 C521
 C522
 C523
 C524
 C525
 C526
 C527
 C528
 C529
 C530
 C531
 C532
 C533
 C534
 C535
 C536
 C537
 C538
 C539
 C540
 C541
 C542
 C543
 C544
 C545
 C546
 C547
 C548
 C549
 C550
 C551
 C552
 C553
 C554
 C555
 C556
 C557
 C558
 C559
 C560
 C561
 C562
 C563
 C564
 C565
 C566
 C567
 C568
 C569
 C570
 C571
 C572
 C573
 C574
 C575
 C576
 C577
 C578
 C579
 C580
 C581
 C582
 C583
 C584
 C585
 C586
 C587
 C588
 C589
 C590
 C591
 C592
 C593
 C594
 C595
 C596
 C597
 C598
 C599
 C510
 C511
 C512
 C513
 C514
 C515
 C516
 C517
 C518
 C519
 C520
 C521
 C522
 C523
 C524
 C525
 C526
 C527
 C528
 C529
 C530
 C531
 C532
 C533
 C534
 C535
 C536
 C537
 C538
 C539
 C540
 C541
 C542
 C543
 C544
 C545
 C546
 C547
 C548
 C549
 C550
 C551
 C552
 C553
 C554
 C555
 C556
 C557
 C558
 C559
 C560
 C561
 C562
 C563
 C564
 C565
 C566
 C567
 C568
 C569
 C570
 C571
 C572
 C573
 C574
 C575
 C576
 C577
 C578
 C579
 C580
 C581
 C582
 C583
 C584
 C585
 C586
 C587
 C588
 C589
 C590
 C591
 C592
 C593
 C594
 C595
 C596
 C597
 C598
 C599
 C510
 C511
 C512
 C513
 C514
 C515
 C516
 C517
 C518
 C519
 C520
 C521
 C522
 C523
 C524
 C525
 C526
 C527
 C528
 C529
 C530
 C531
 C532
 C533
 C534
 C535
 C536
 C537
 C538
 C539
 C540
 C541
 C542
 C543
 C544
 C545
 C546
 C547
 C548
 C549
 C550
 C551
 C552
 C553
 C554
 C555
 C556
 C557
 C558
 C559
 C560
 C561
 C562
 C563
 C564
 C565
 C566
 C567
 C568
 C569
 C570
 C571
 C572
 C573
 C574

SCHEMATIC DIAGRAM

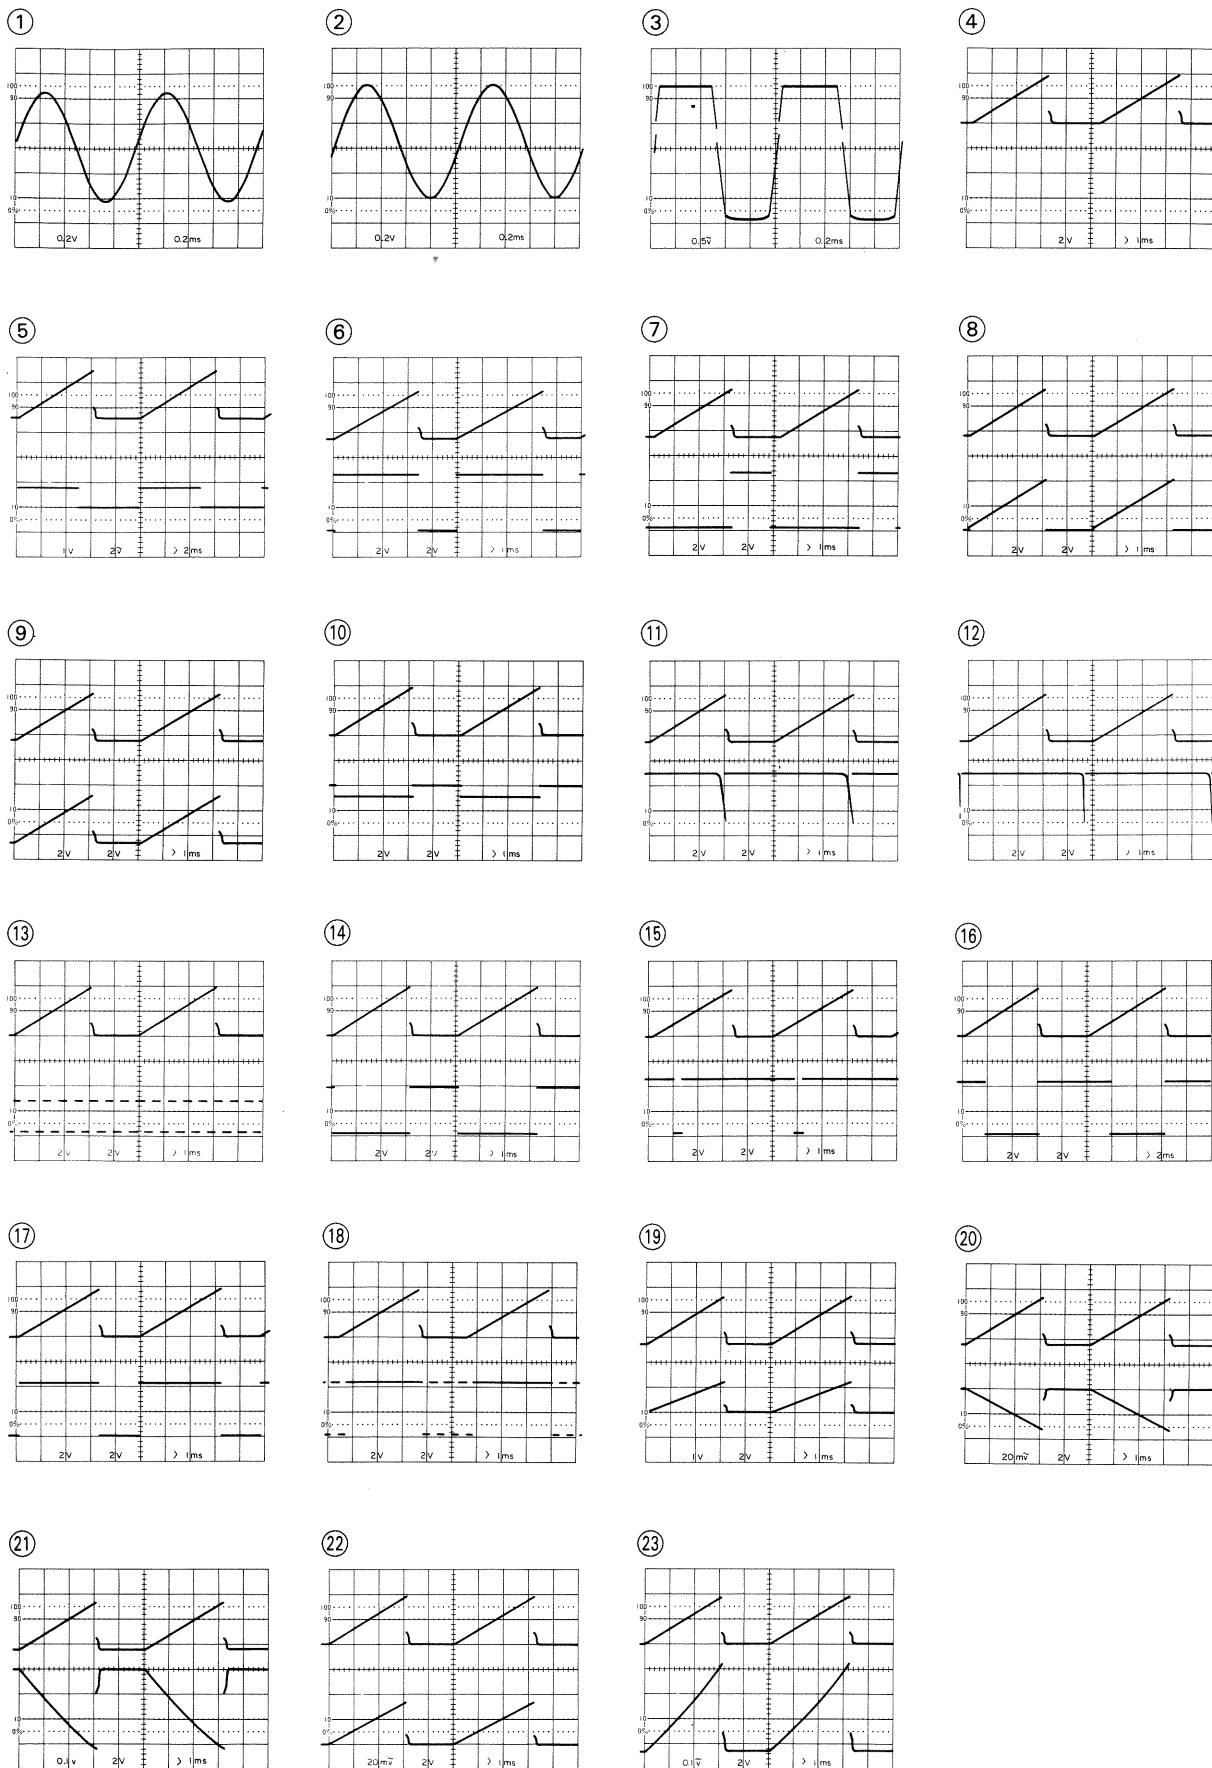


SCHEMATIC DIAGRAM


VERTICAL ATTENUATOR UNIT (X75-1180-00)

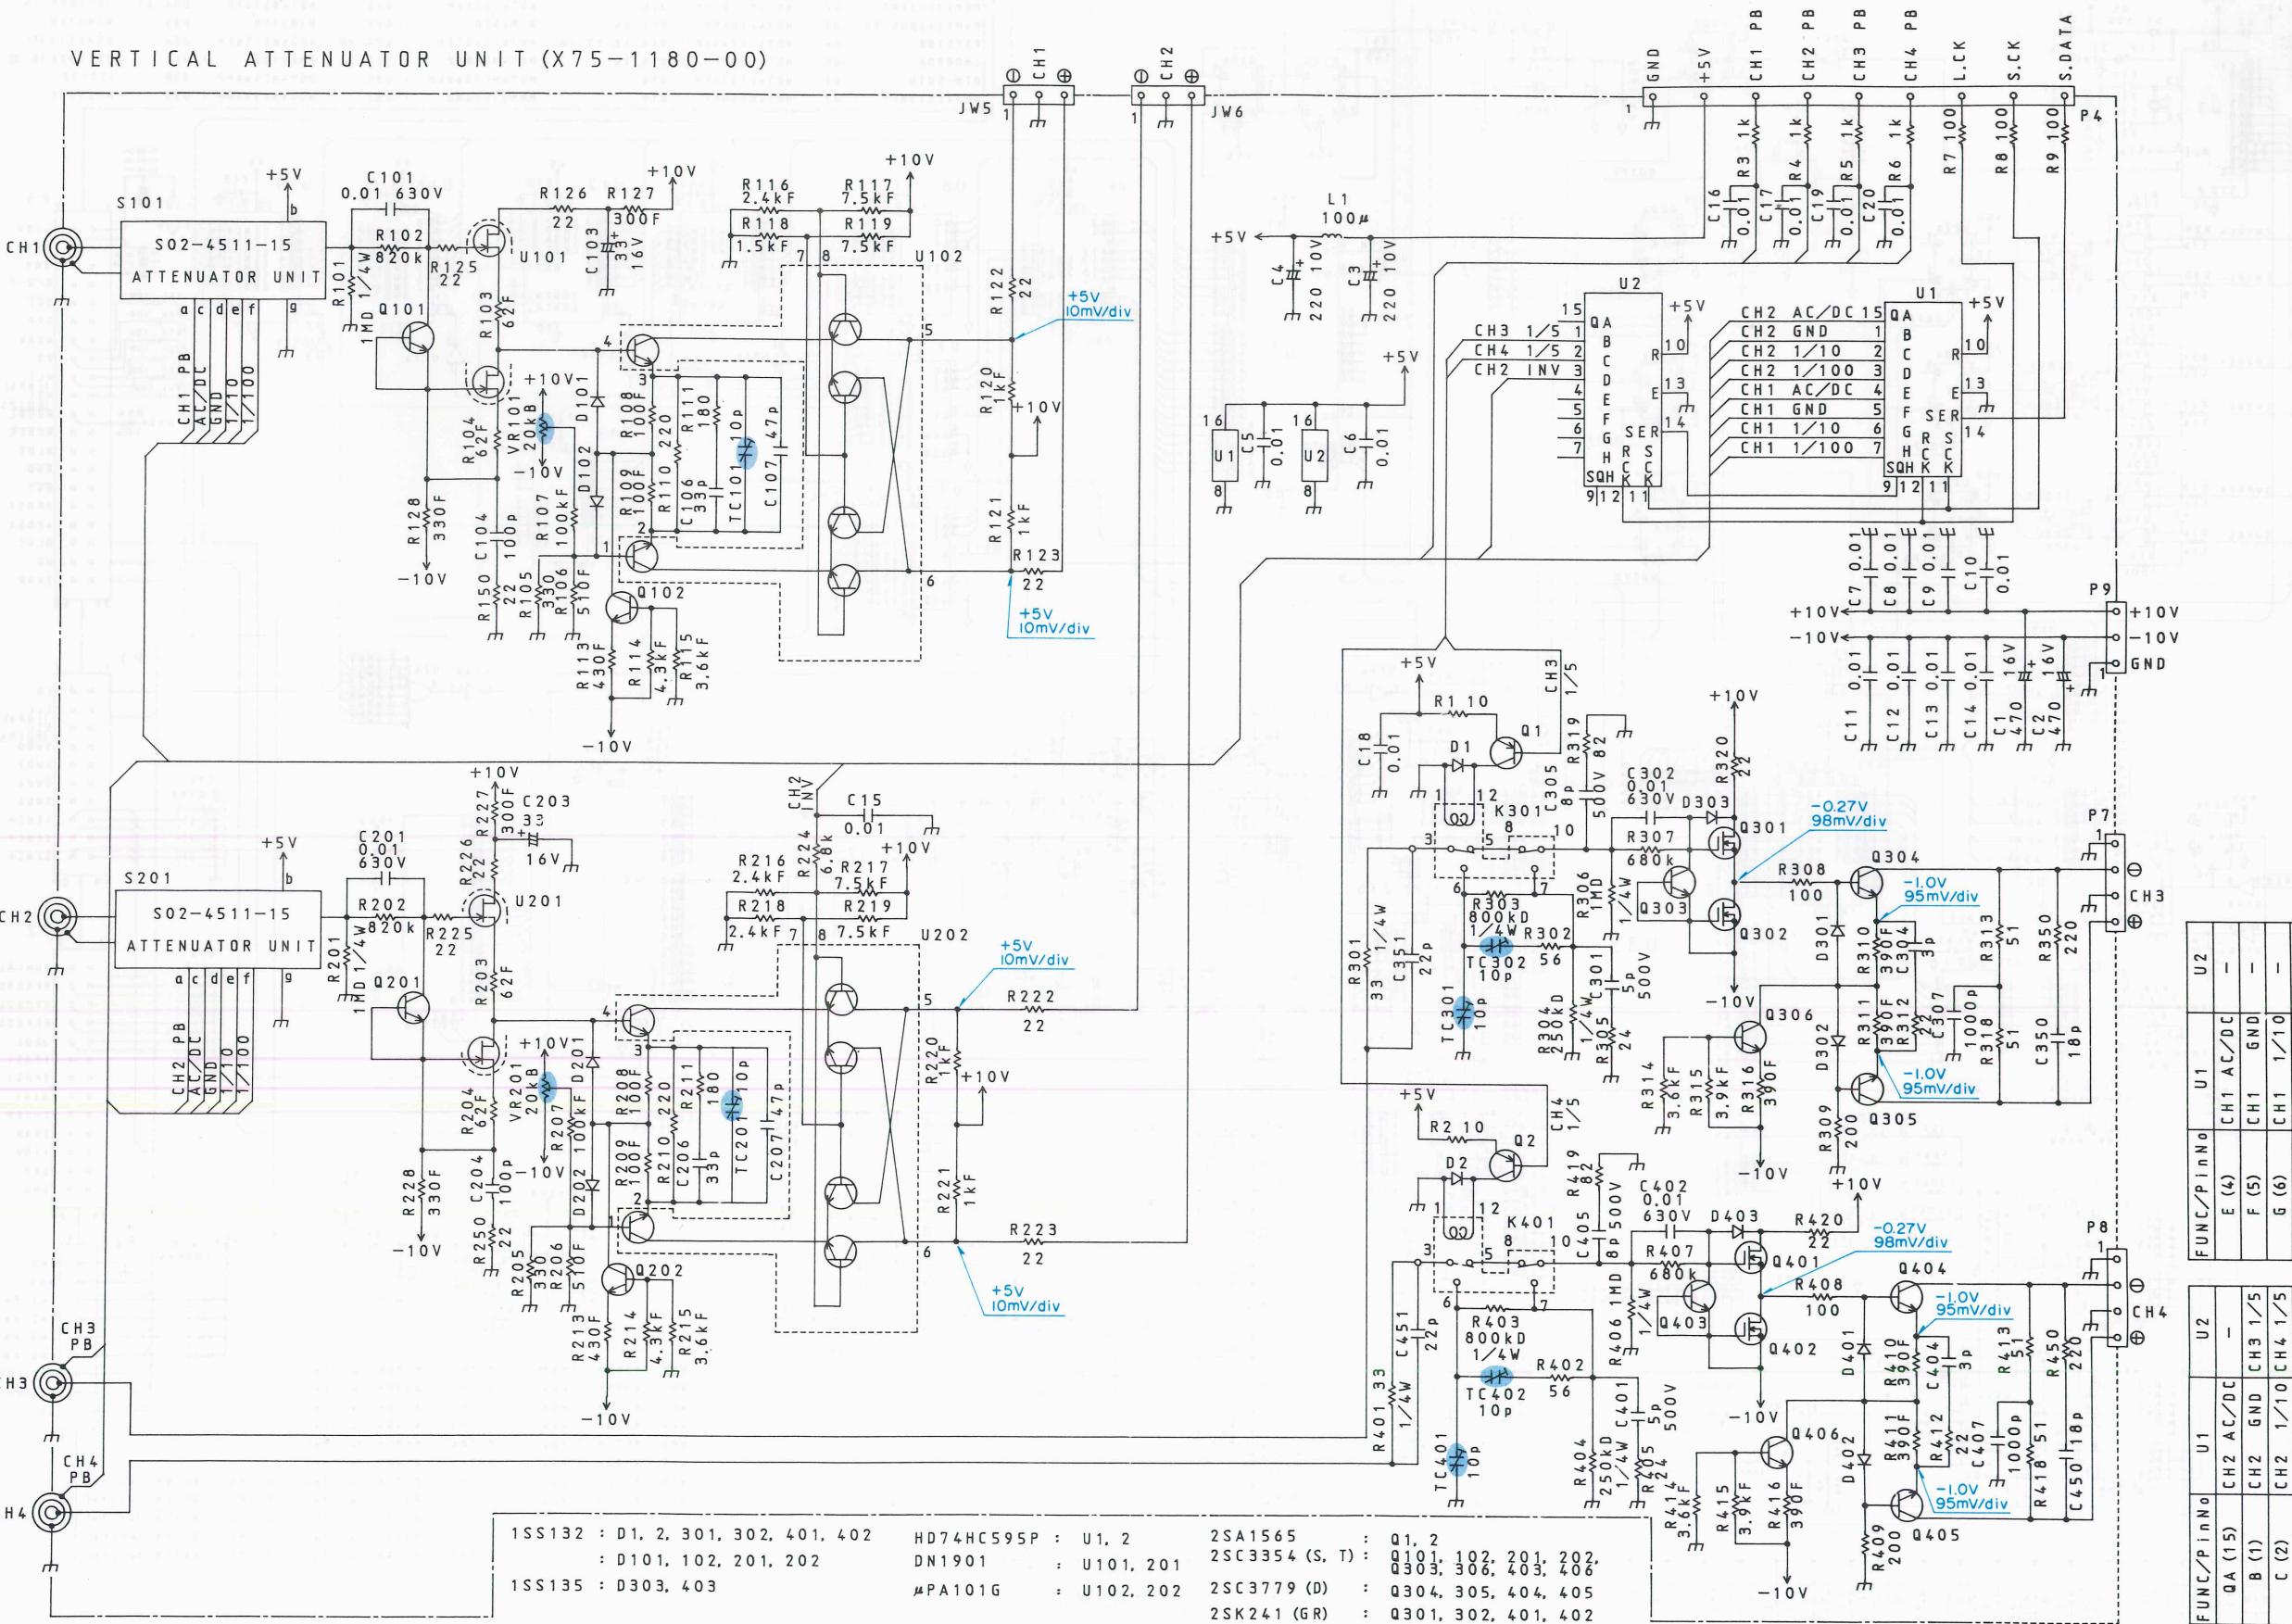

SCHEMATIC DIAGRAM

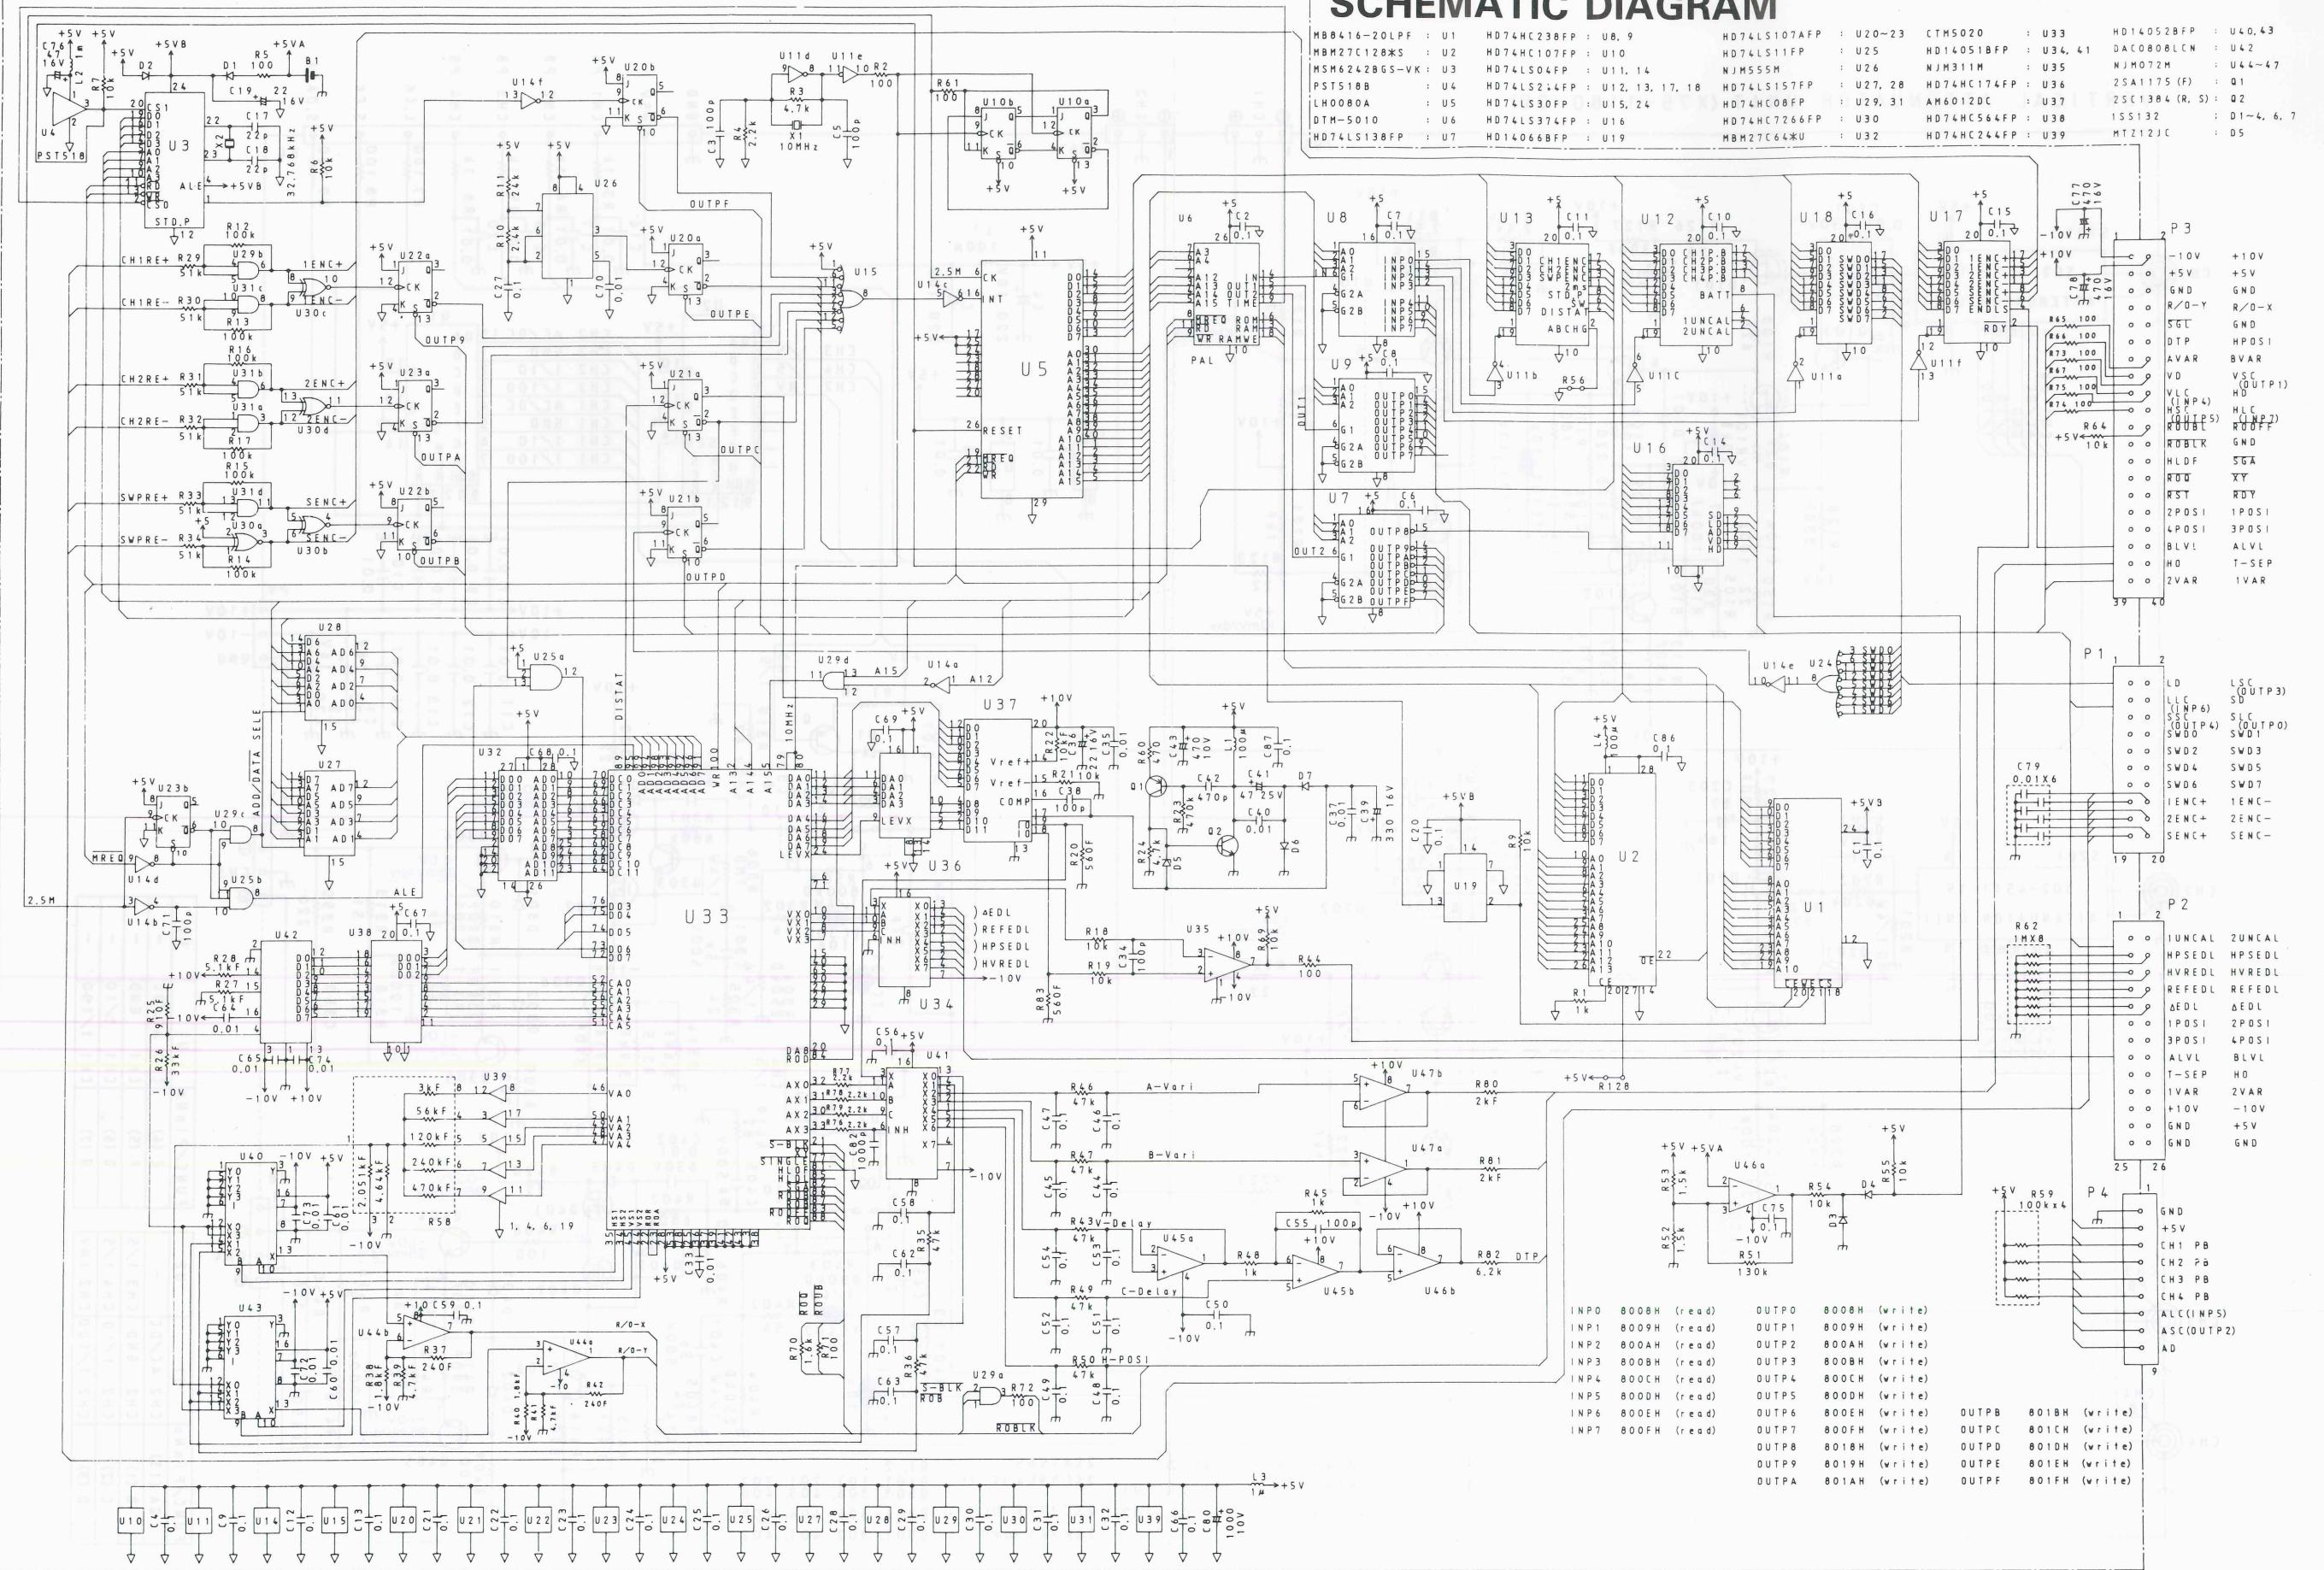


SCHEMATIC DIAGRAM

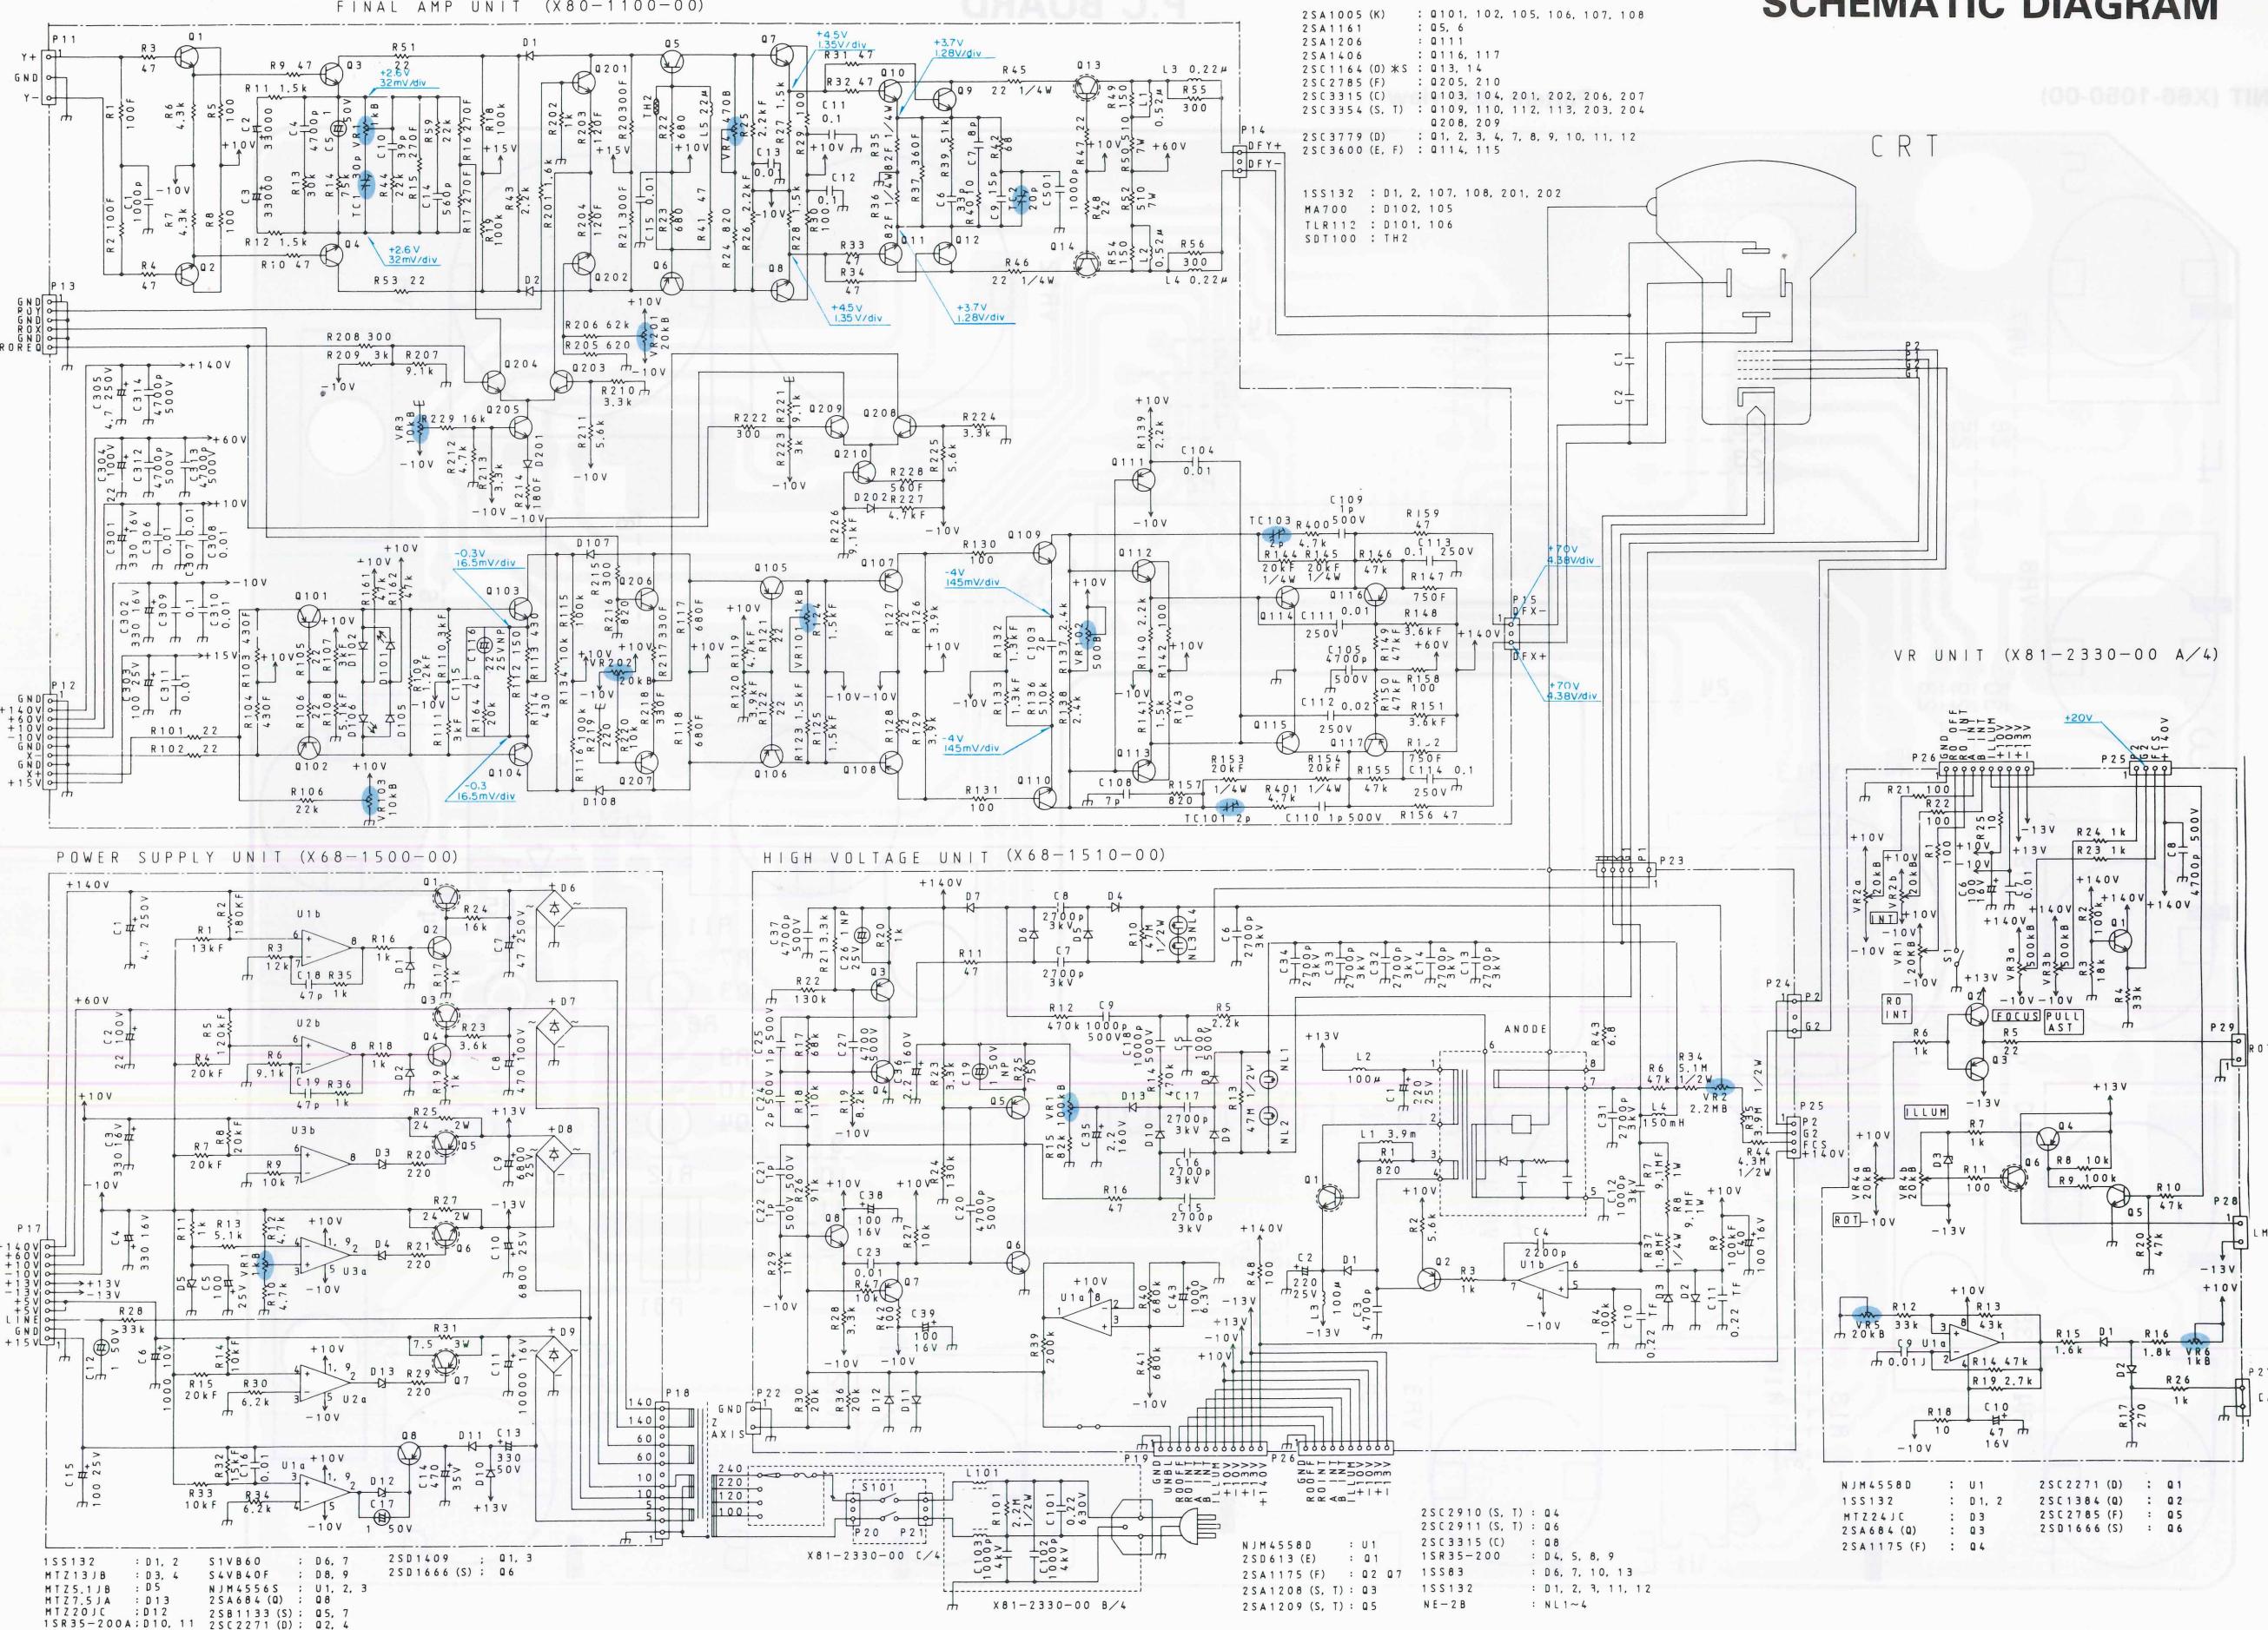

P.C BOARD

PANEL UNIT (X66-1050-00)


Pattern side view

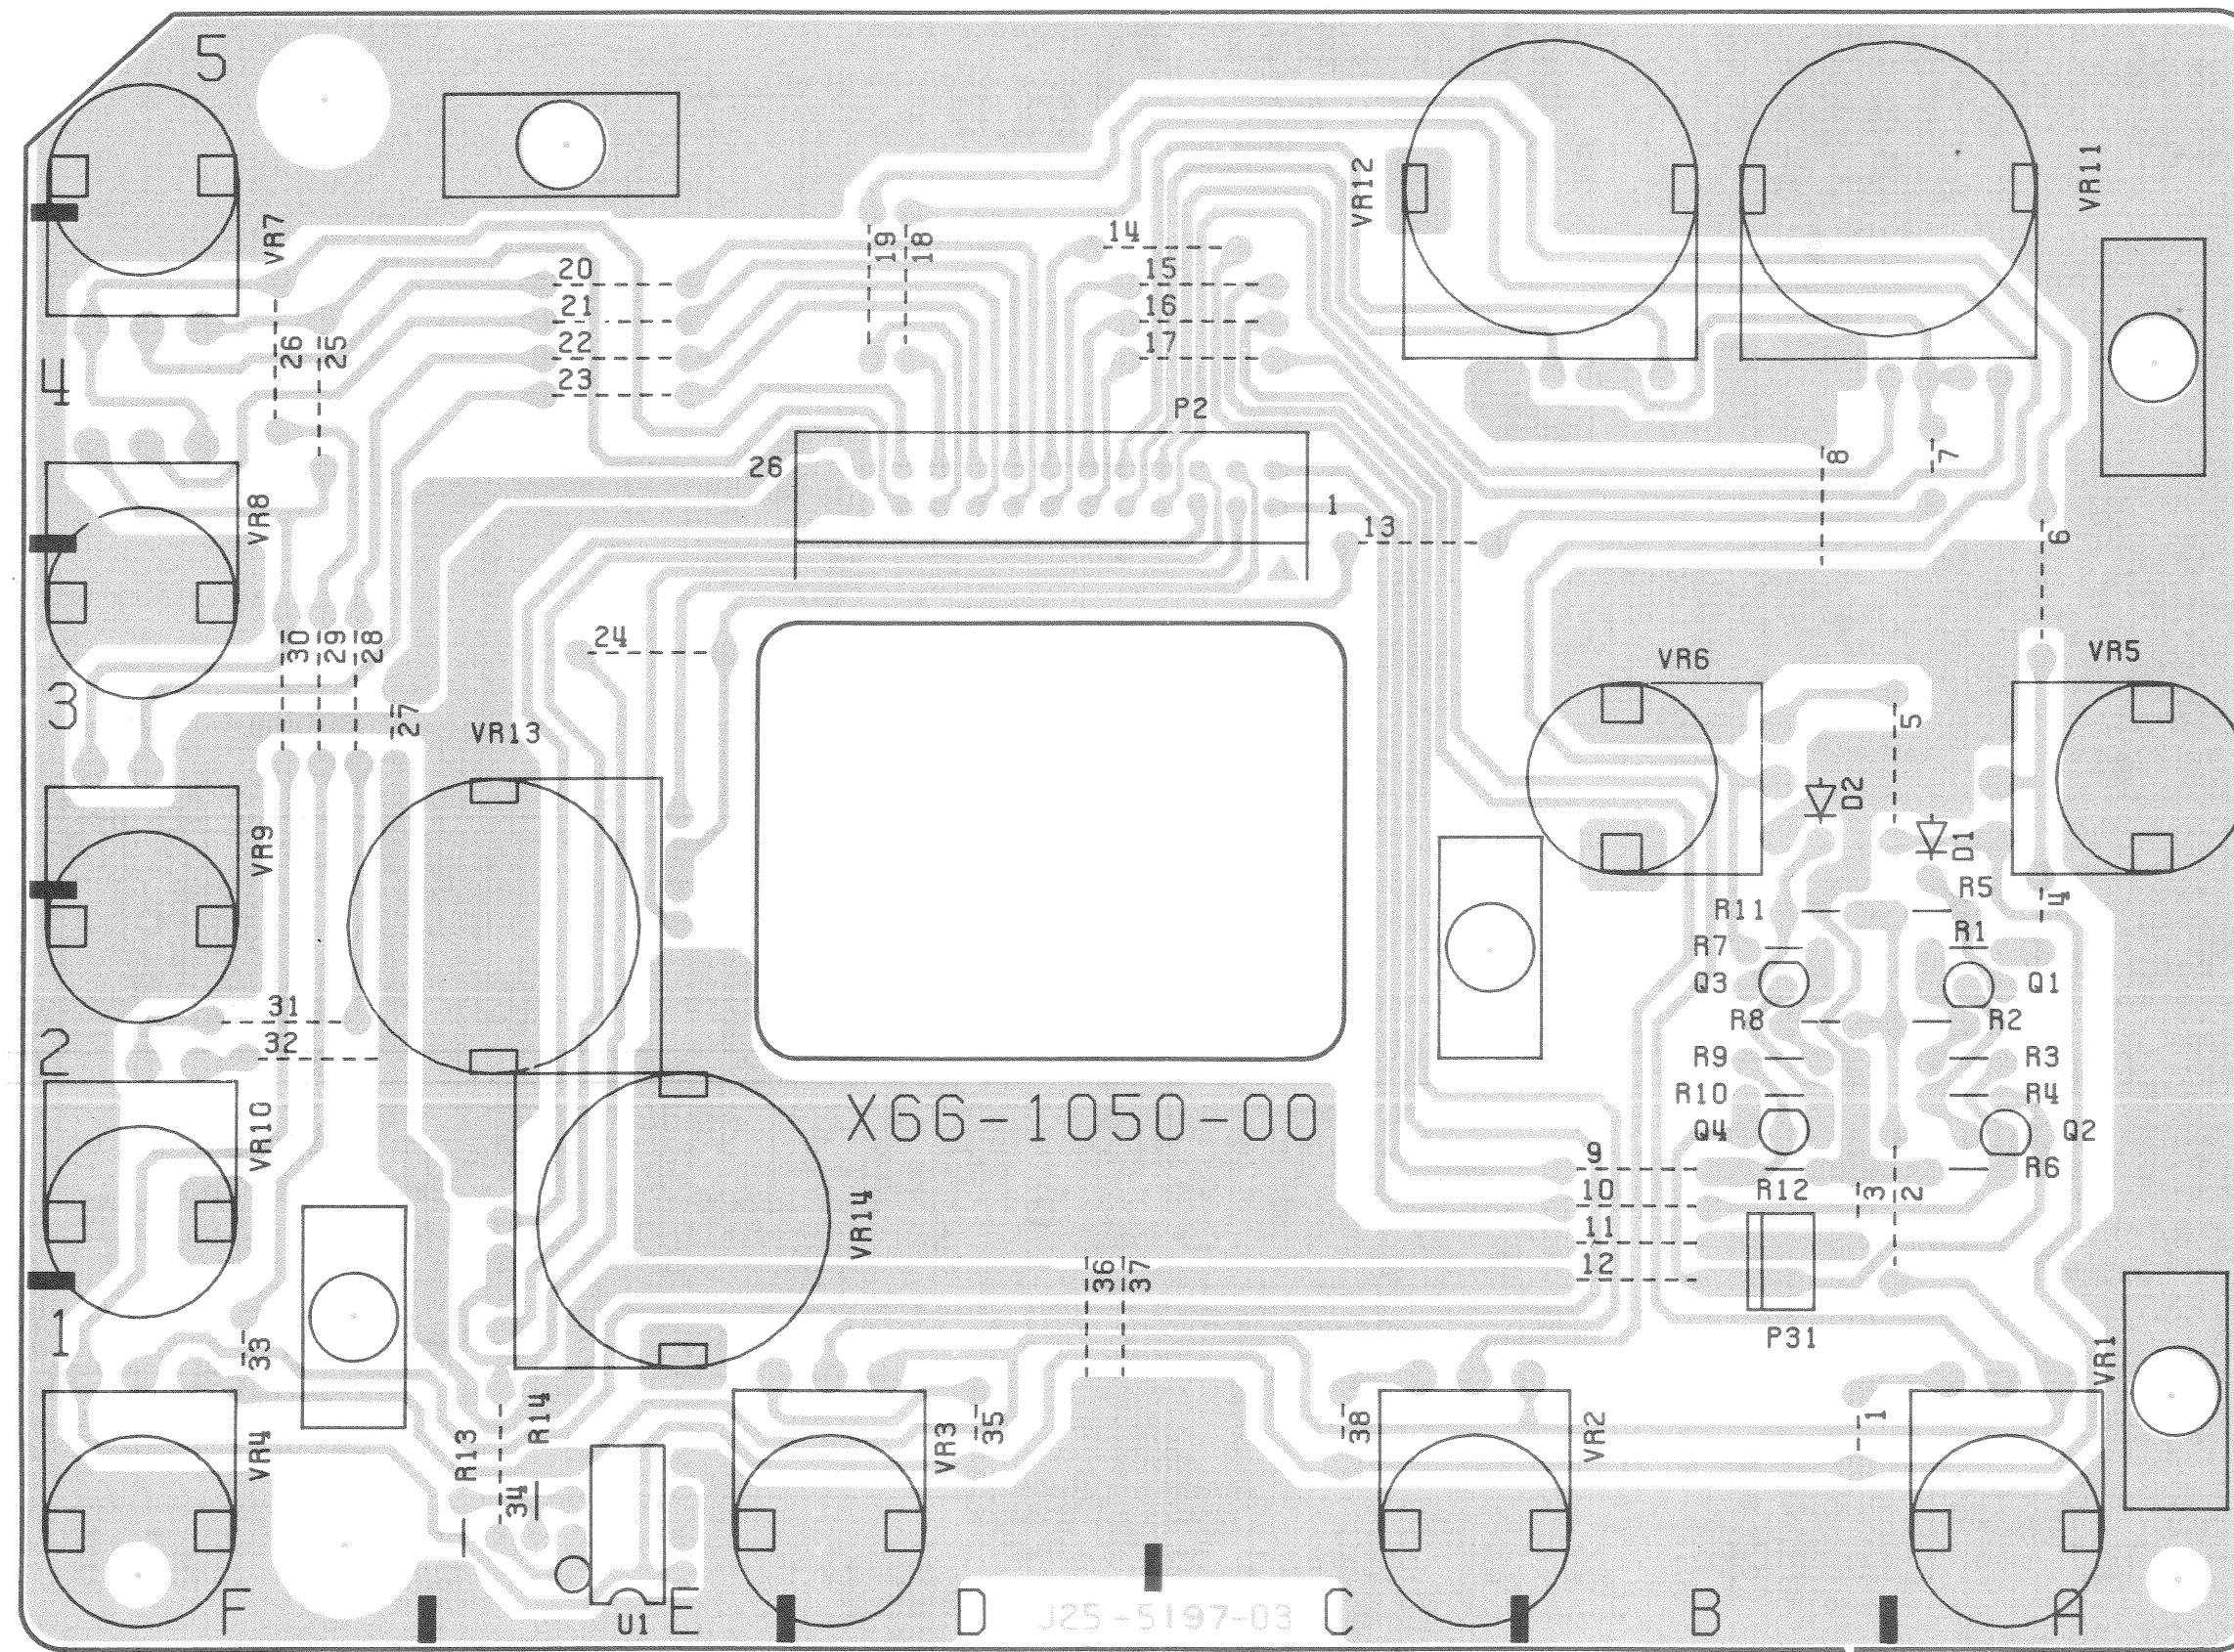

P.C BOARD

POWER SUPPLY UNIT (X68-1500-00)


(00-0101-0000 TIMU 3DATJOV HOIIH

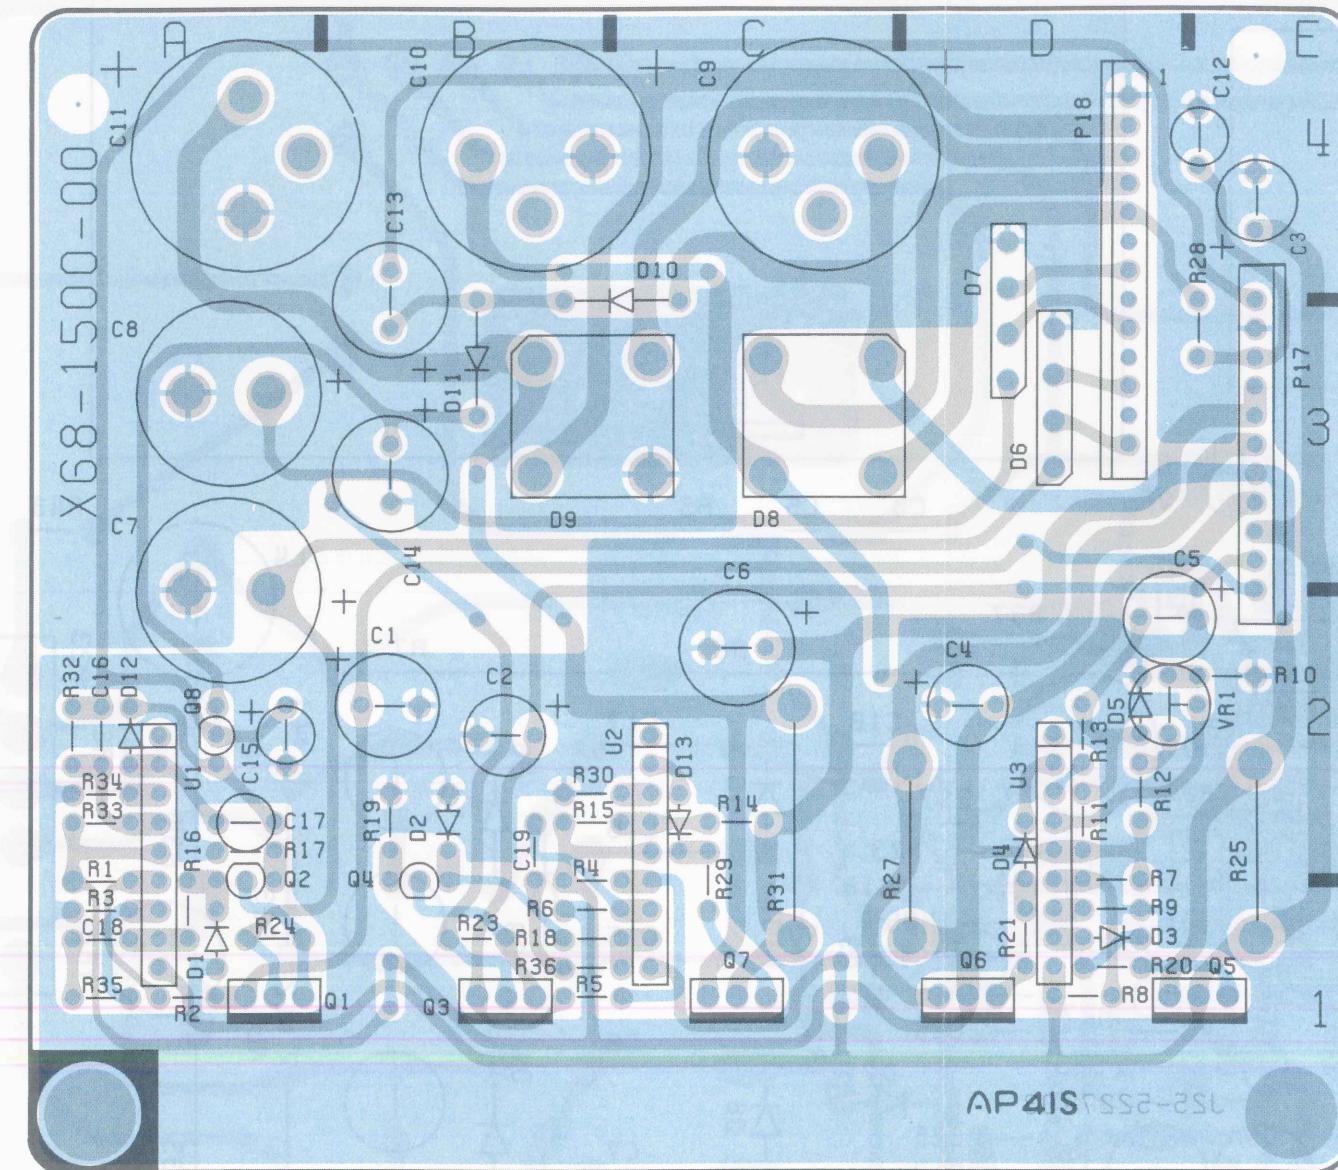

P.C BOARD

HIGH VOLTAGE UNIT (X68-1510-00)


Pattern side view

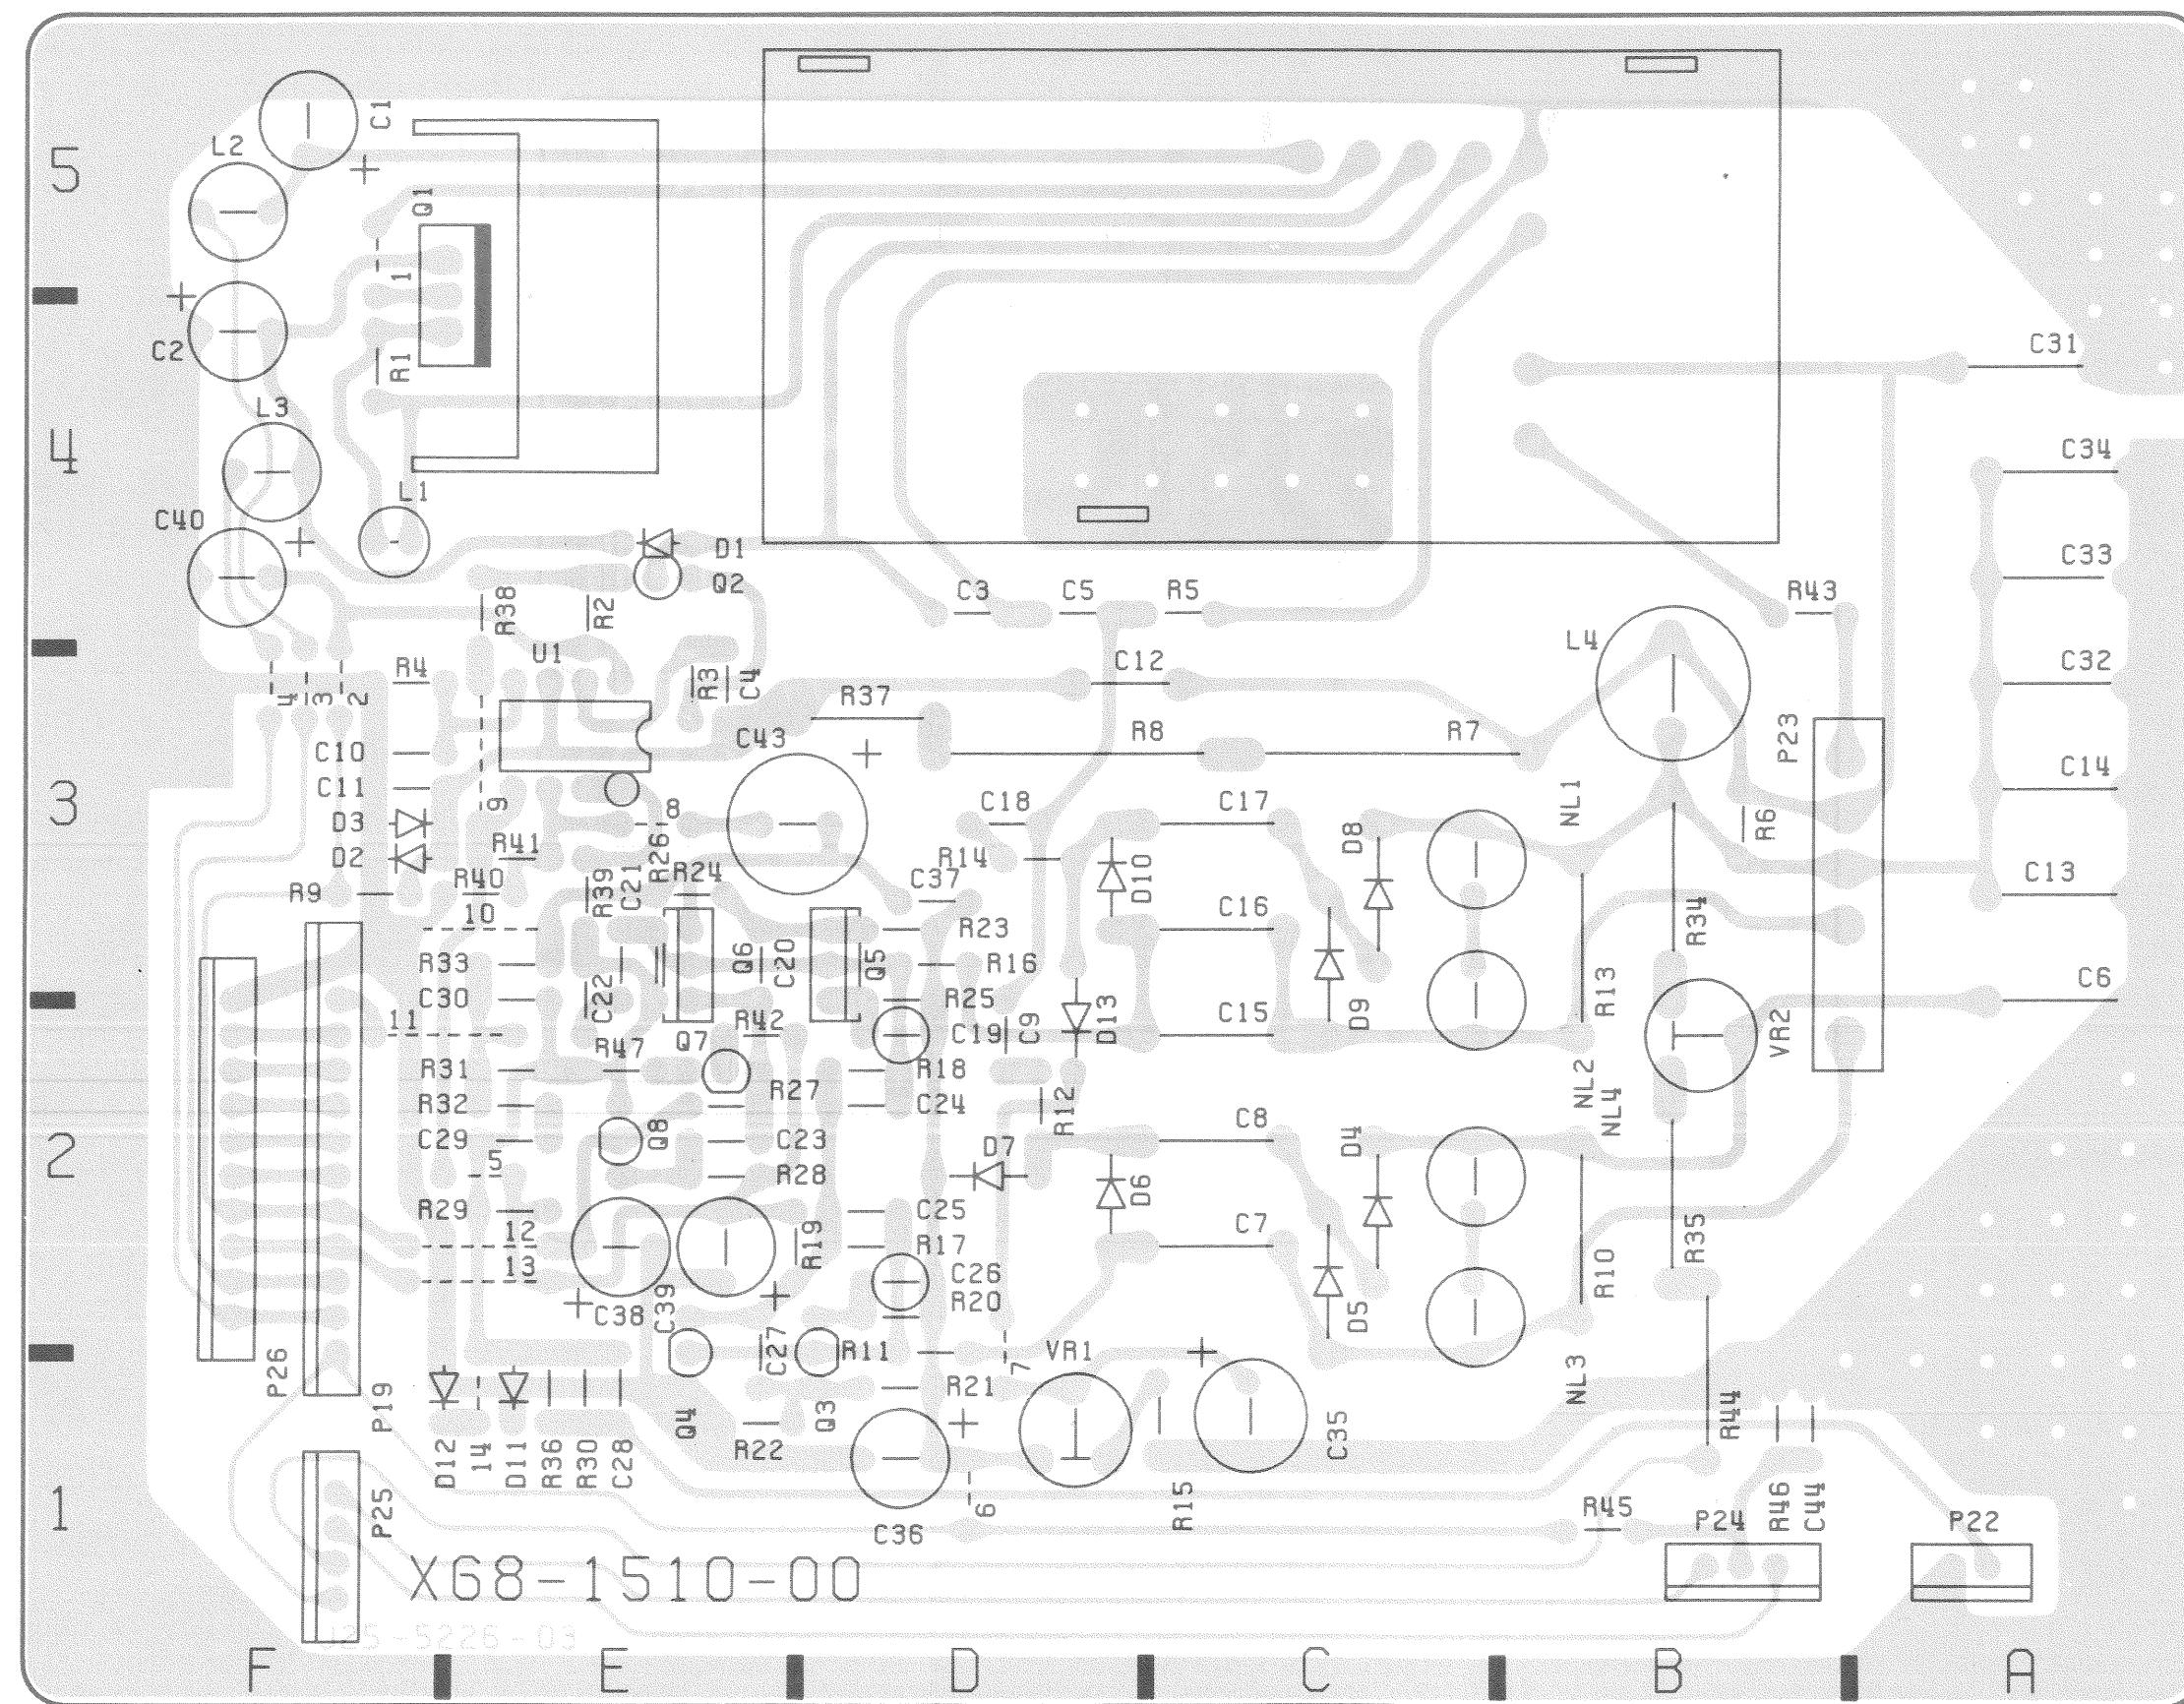

P.C BOARD


SWITCH UNIT (X69-1150-00)

Pattern side view

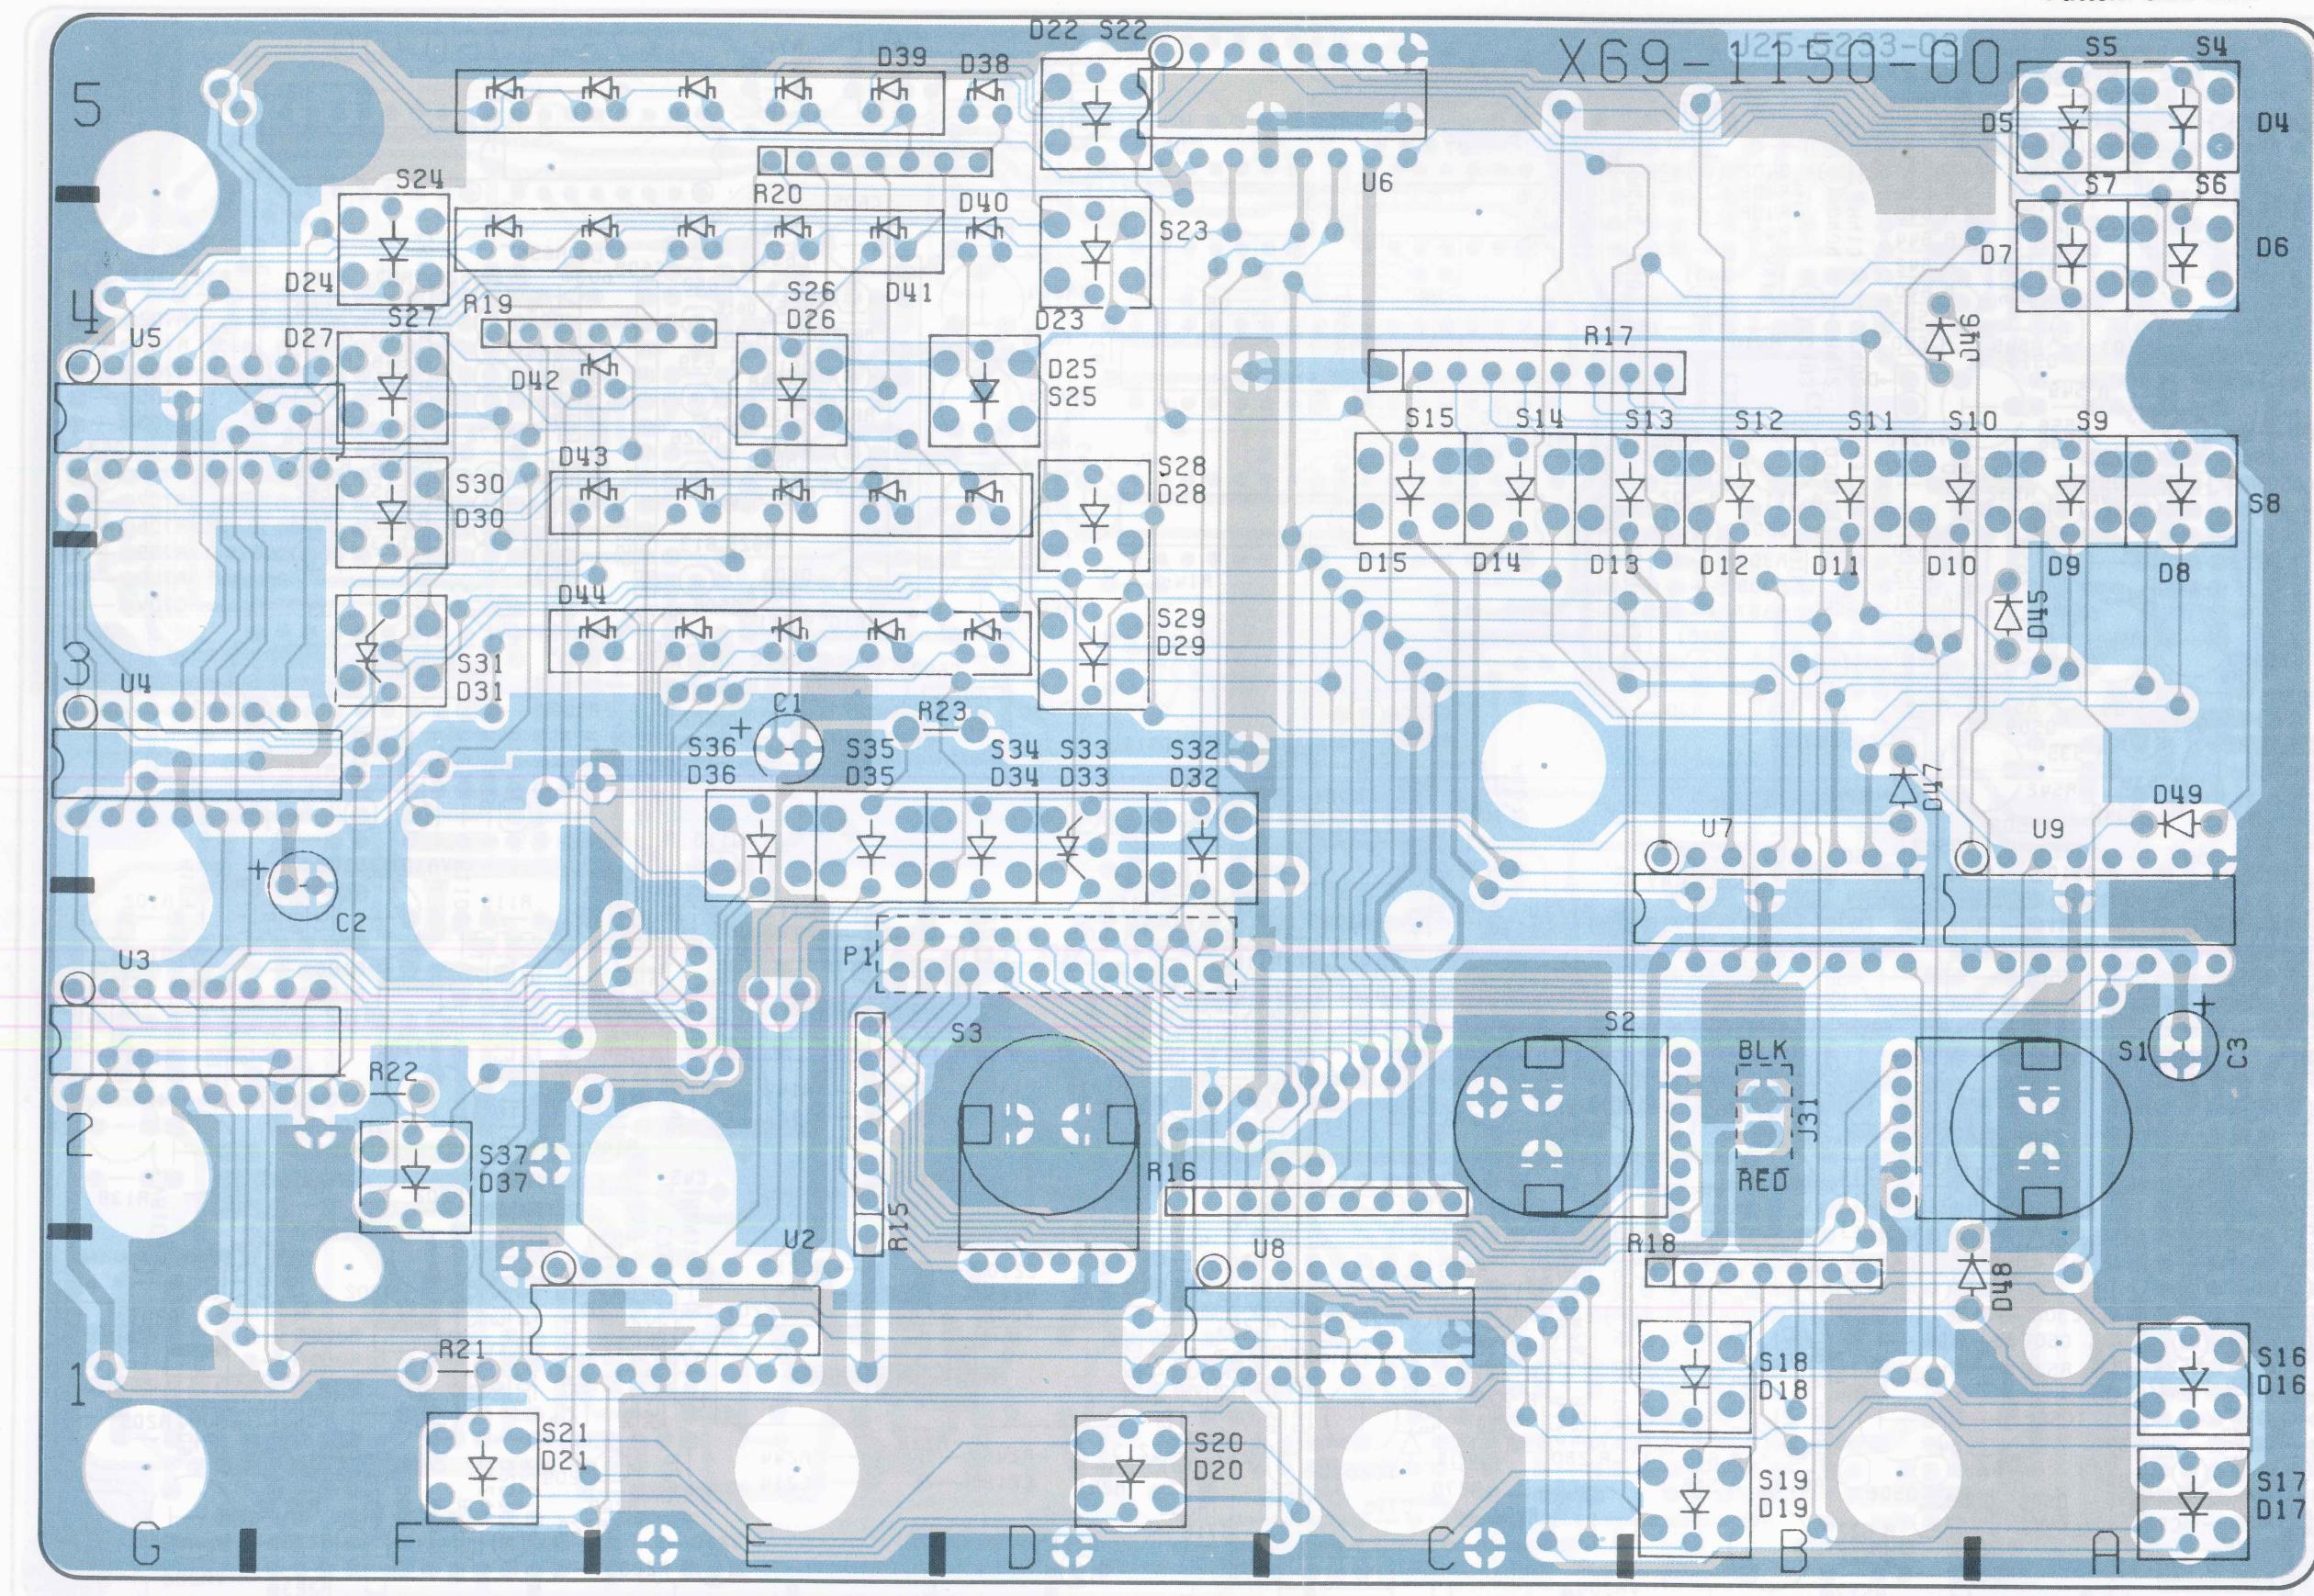


P.C BOAR

VERTICAL PREAMP UNIT (X73-1760-00)

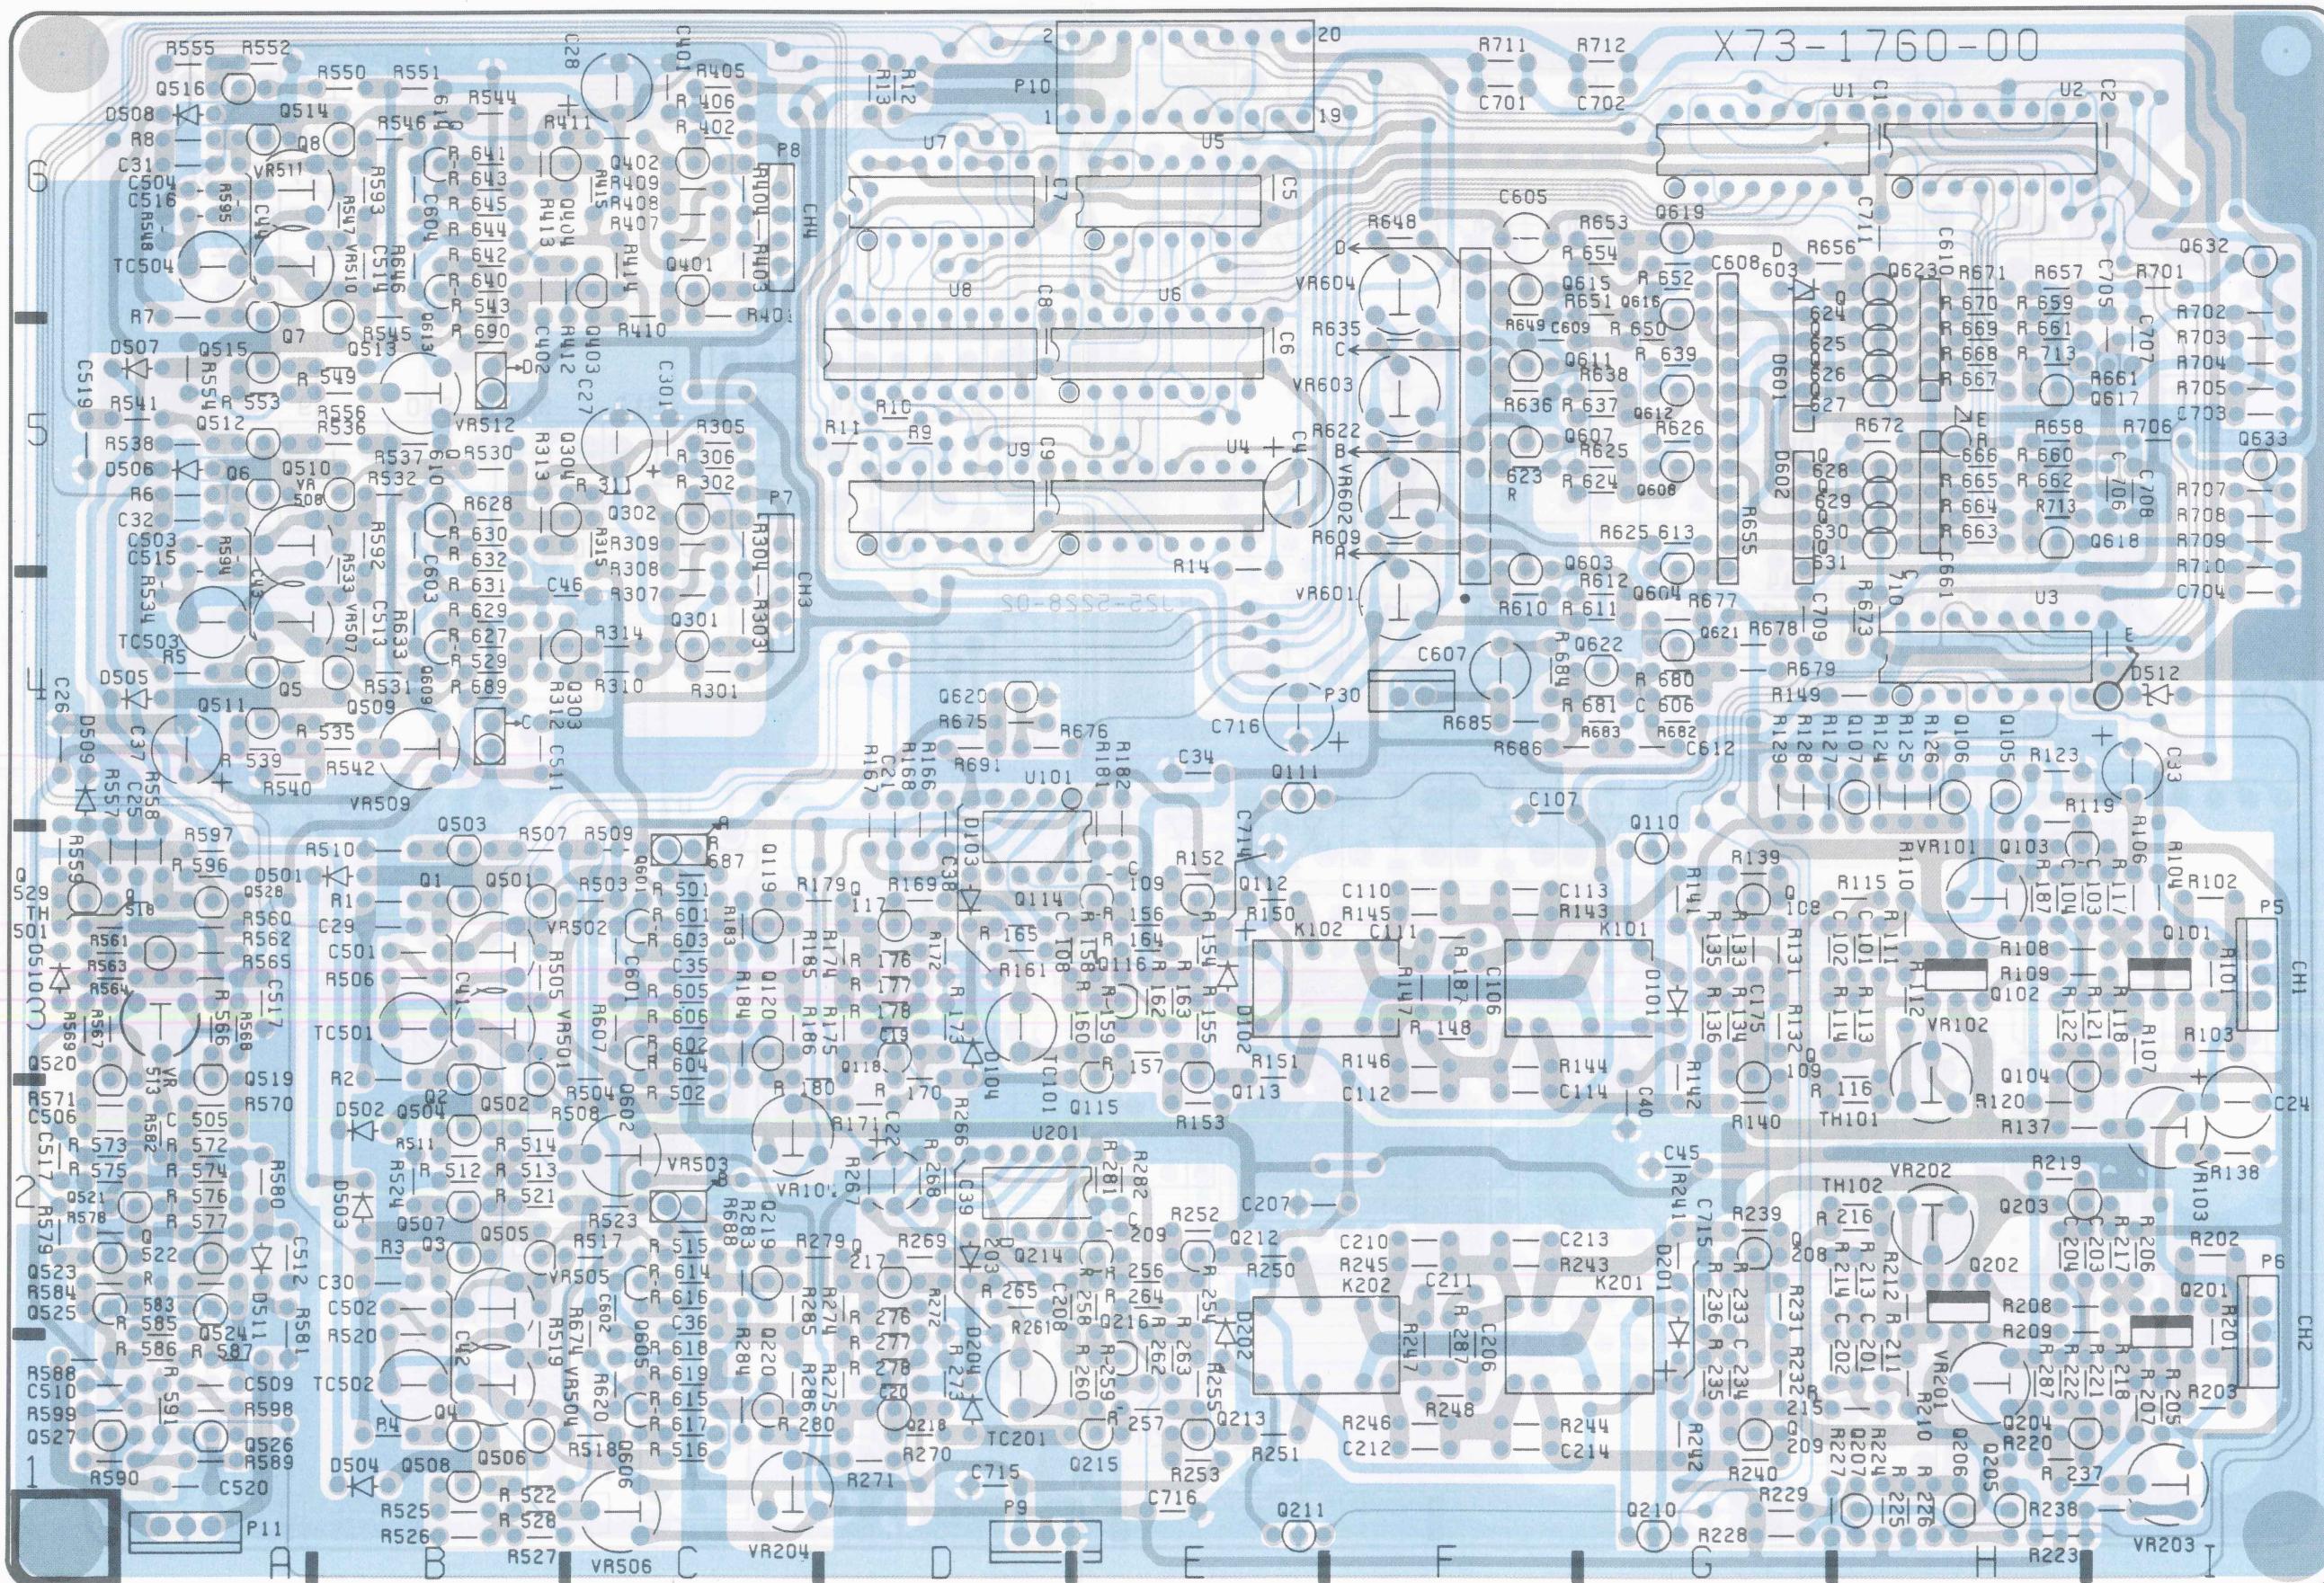


P.C BOARD

HORIZONTAL UNIT (X74-1480-00)

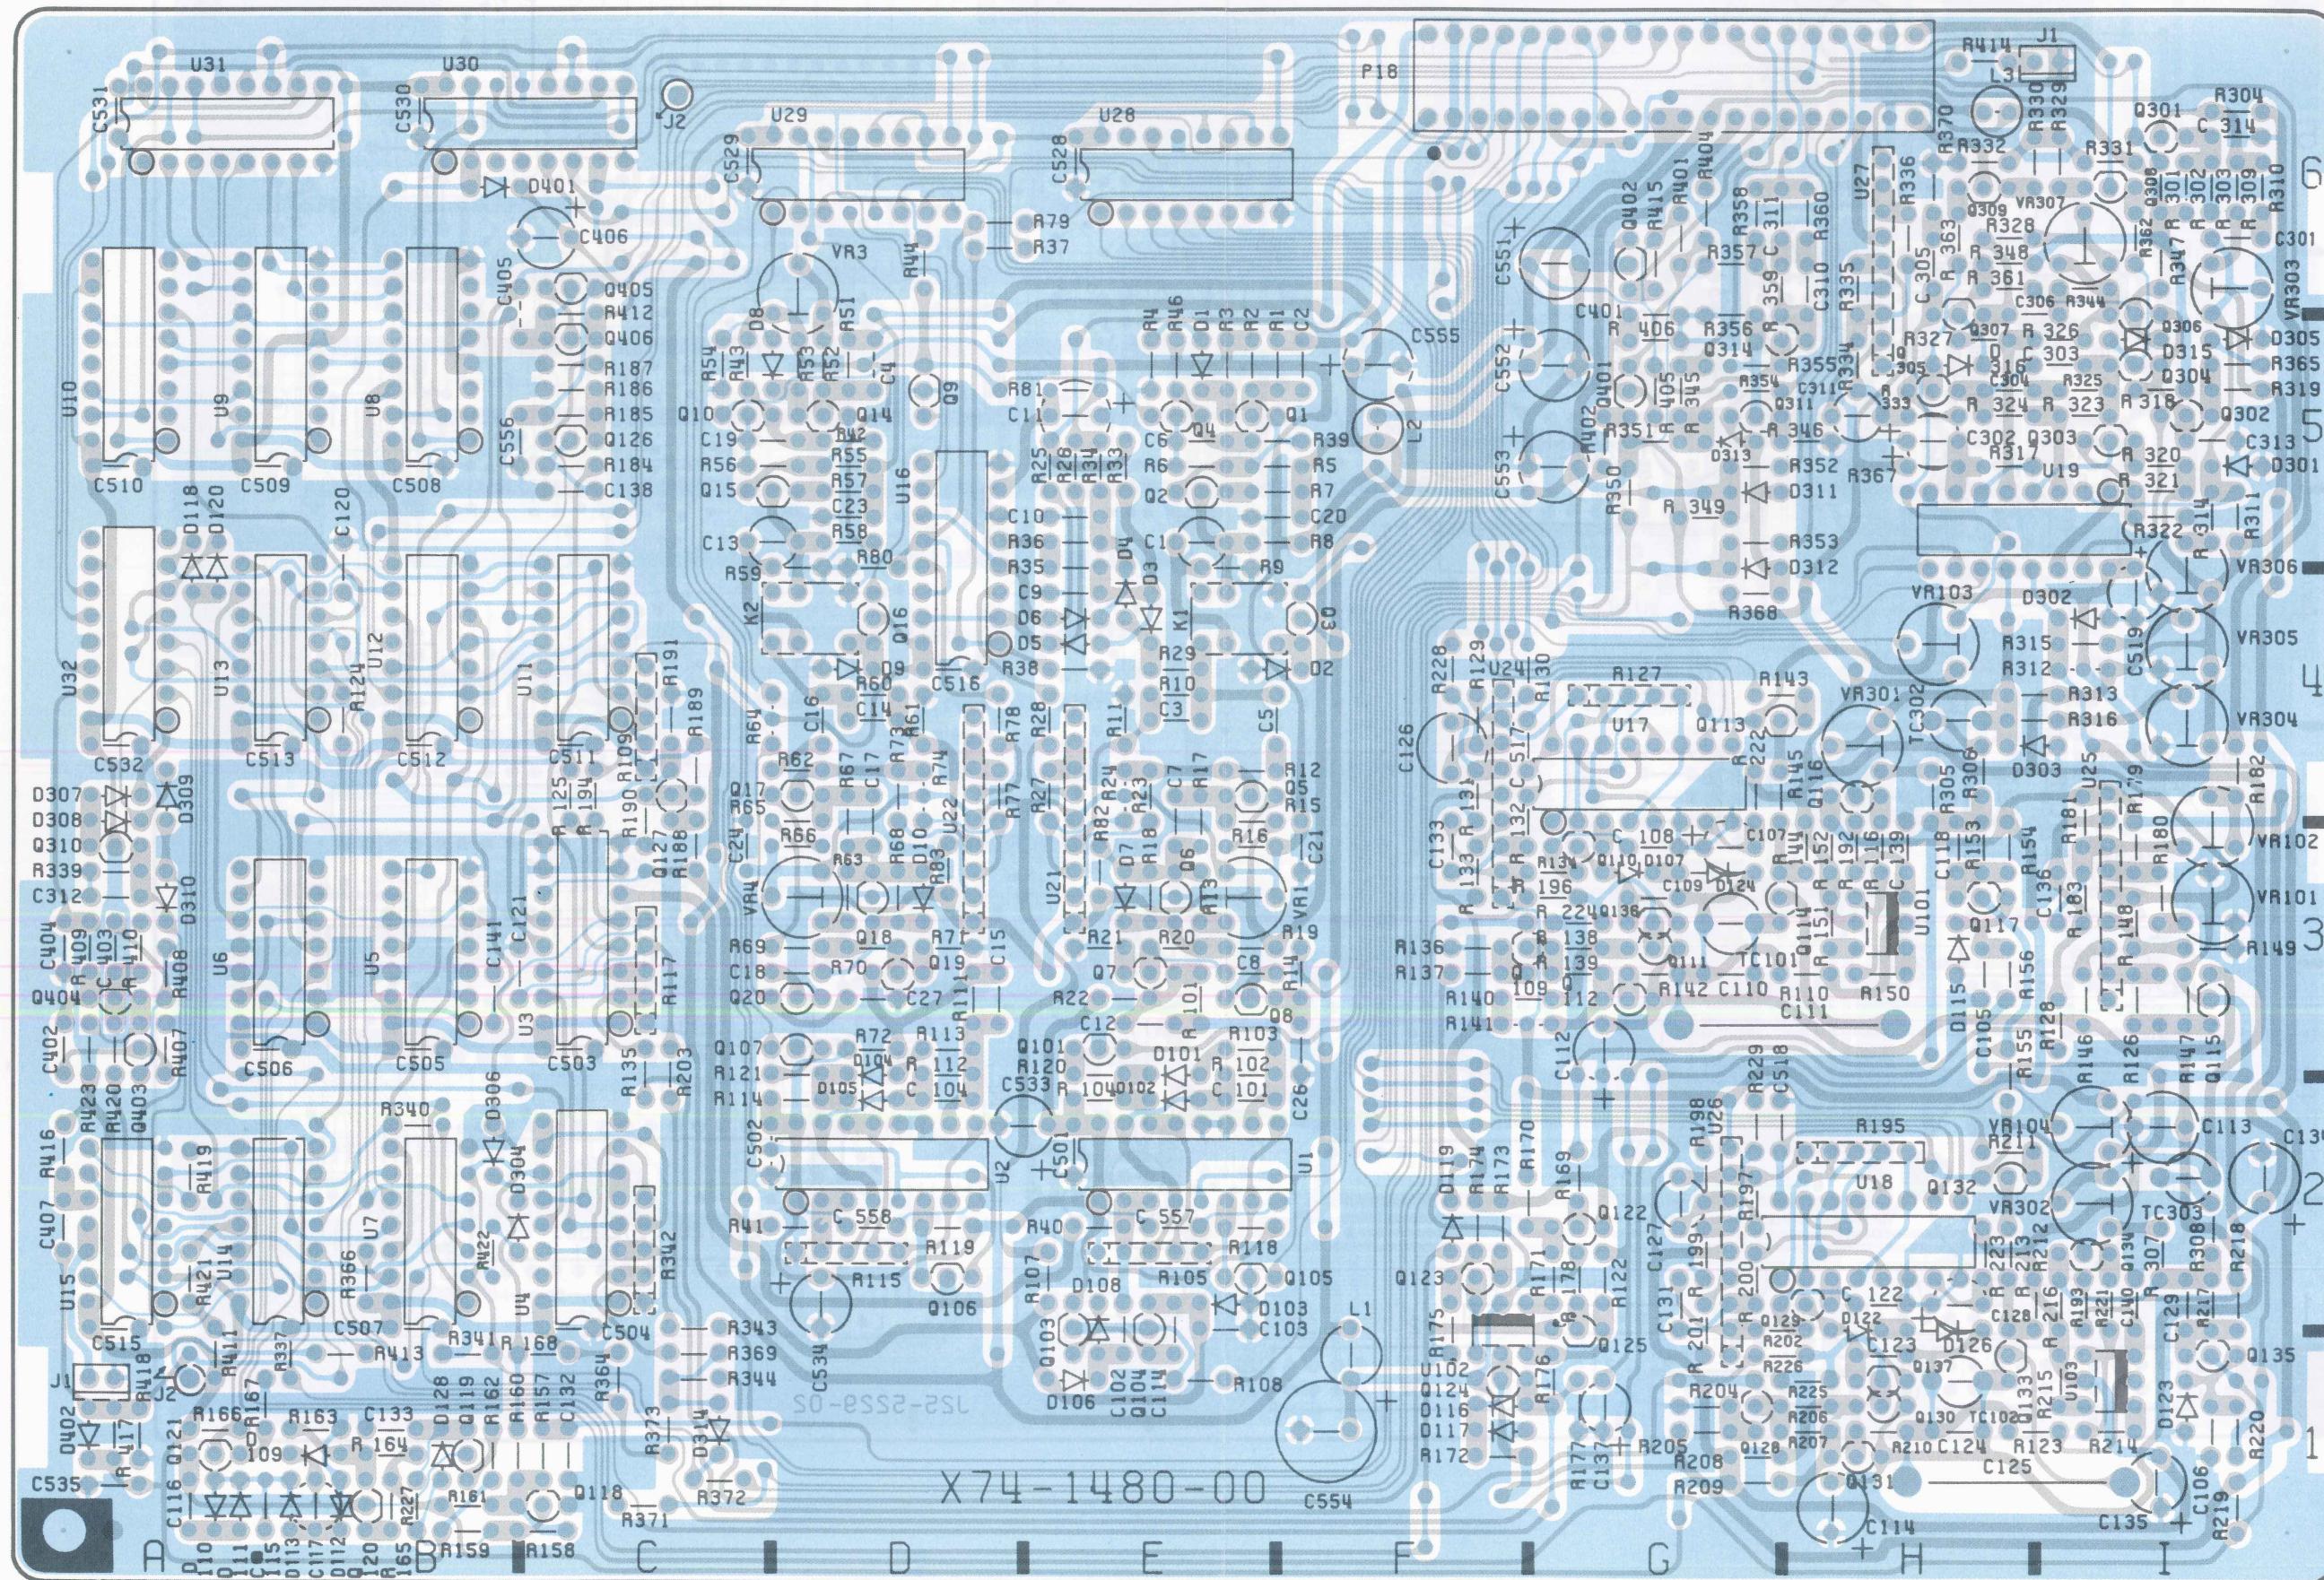


P.C BOARD

R/O UNIT (X77-1490-00)

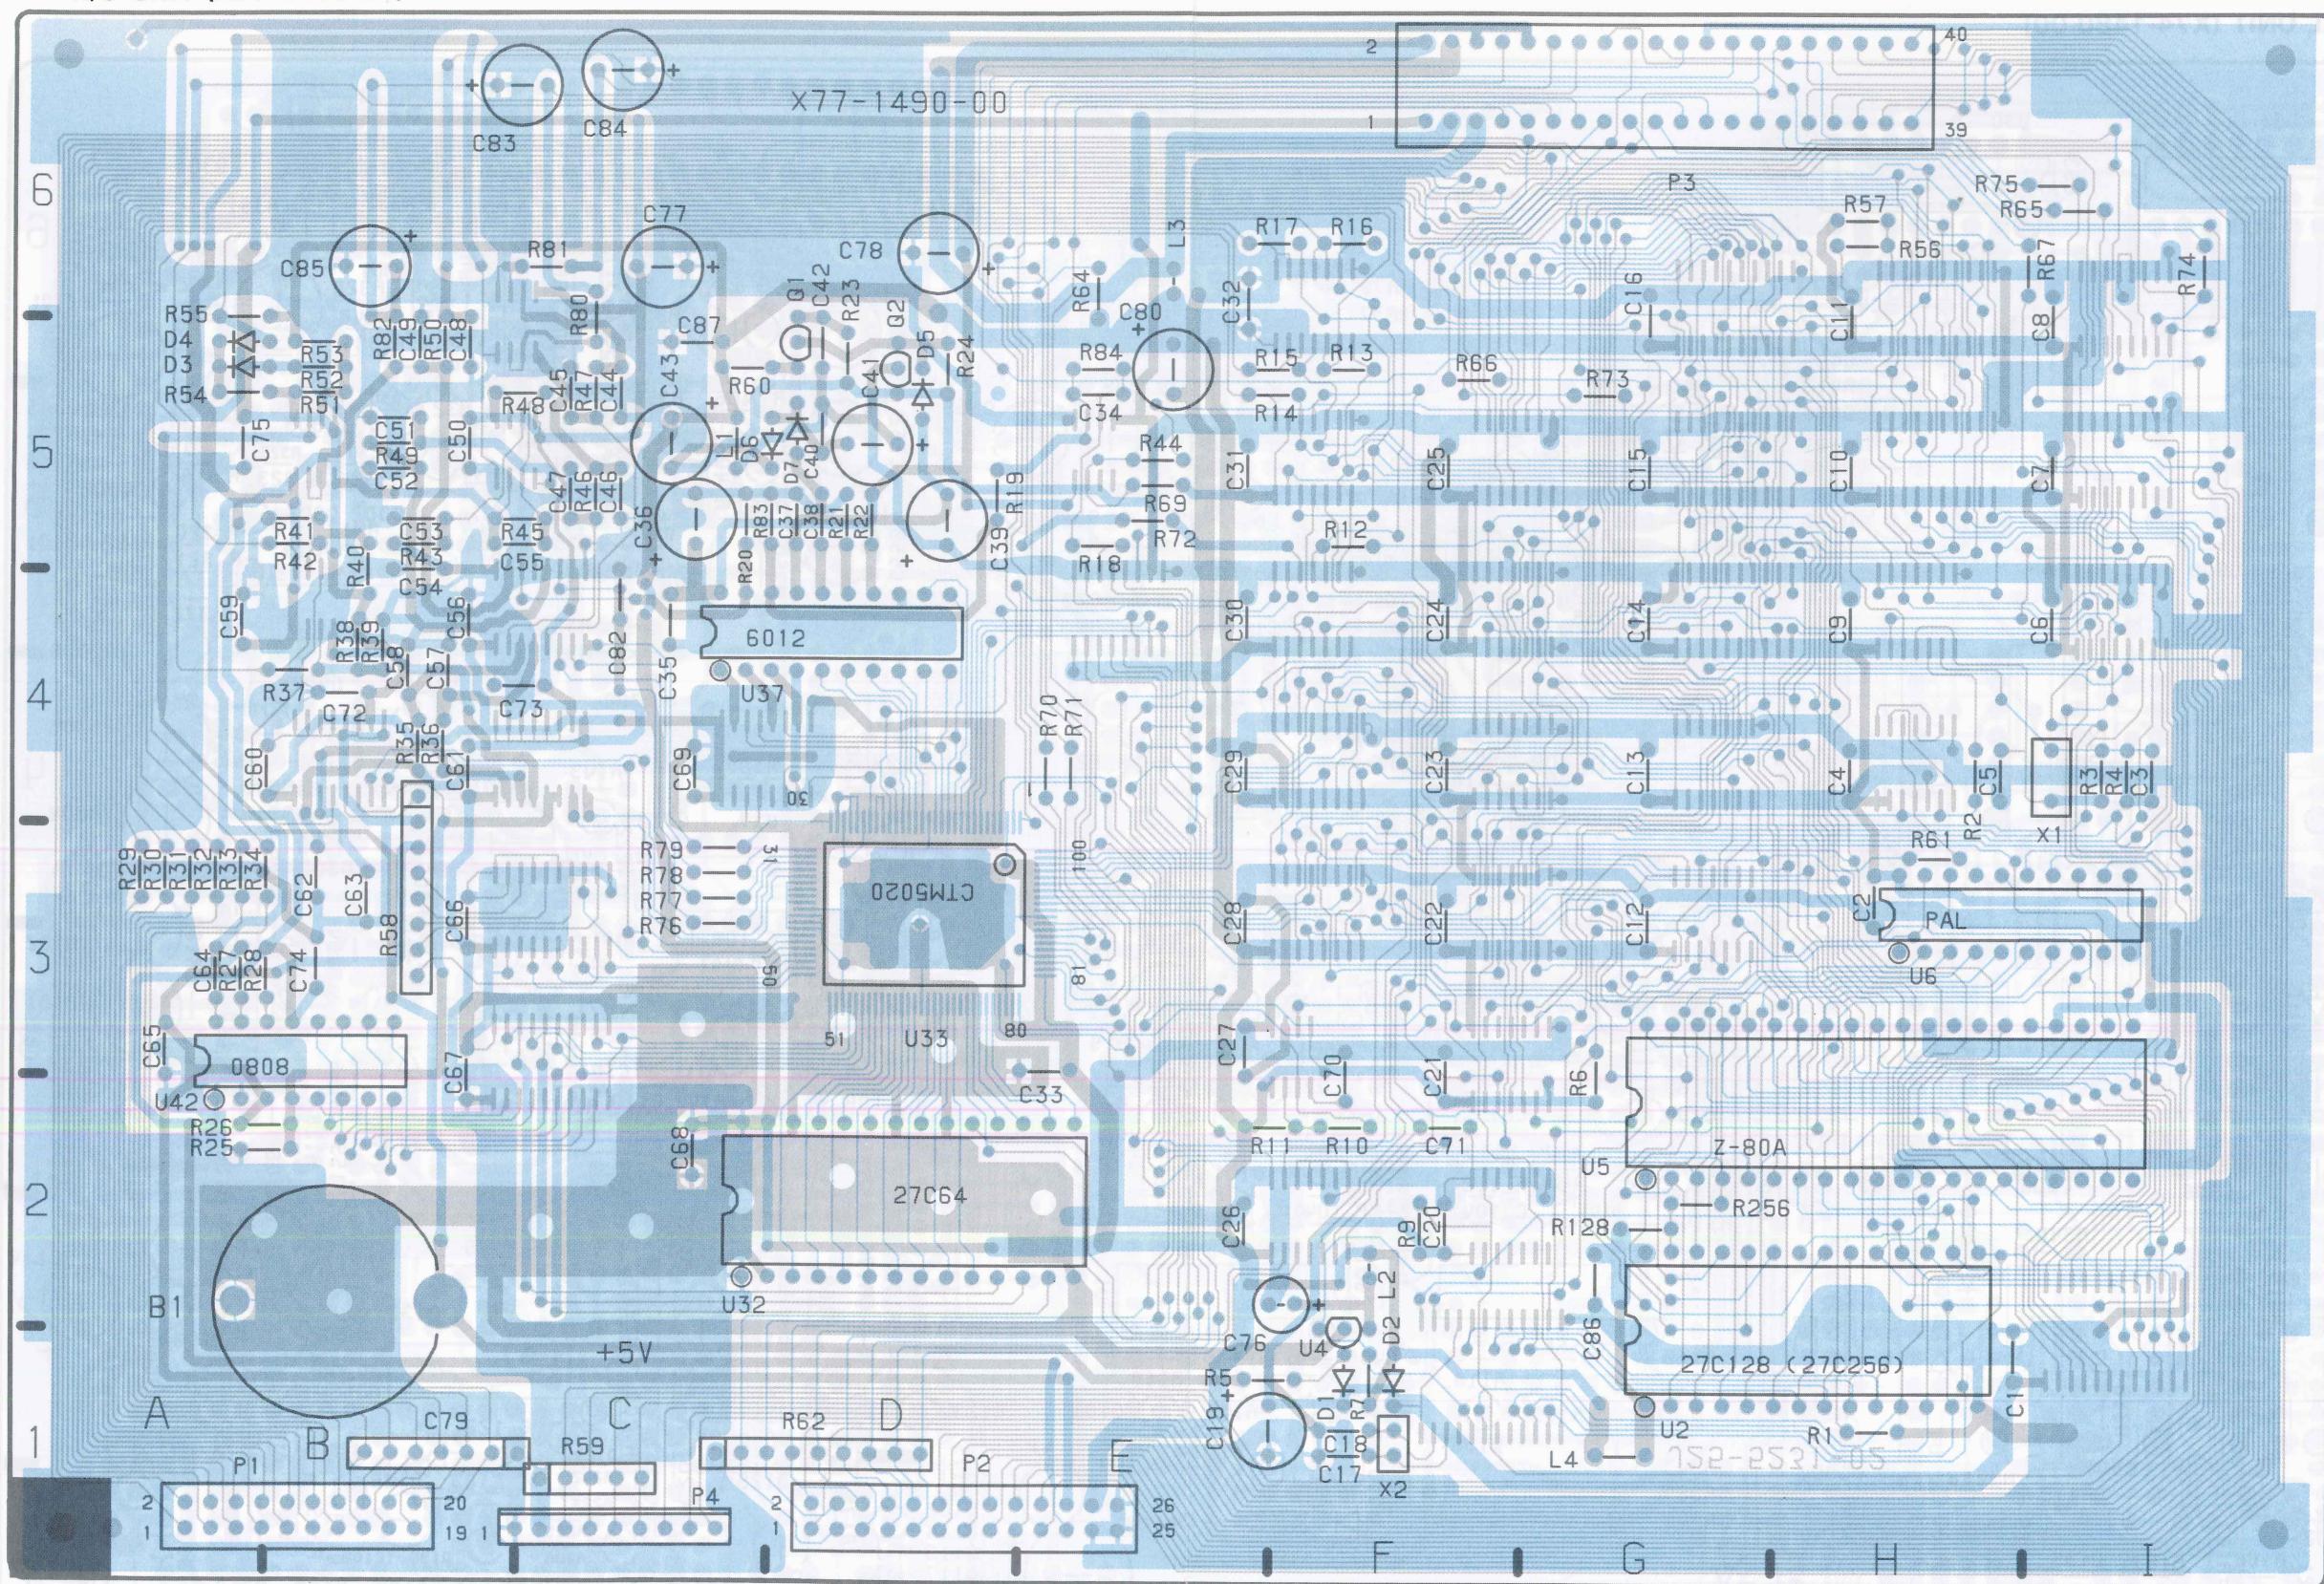

P.C BOARD


R/O UNIT (X77-1490-00)

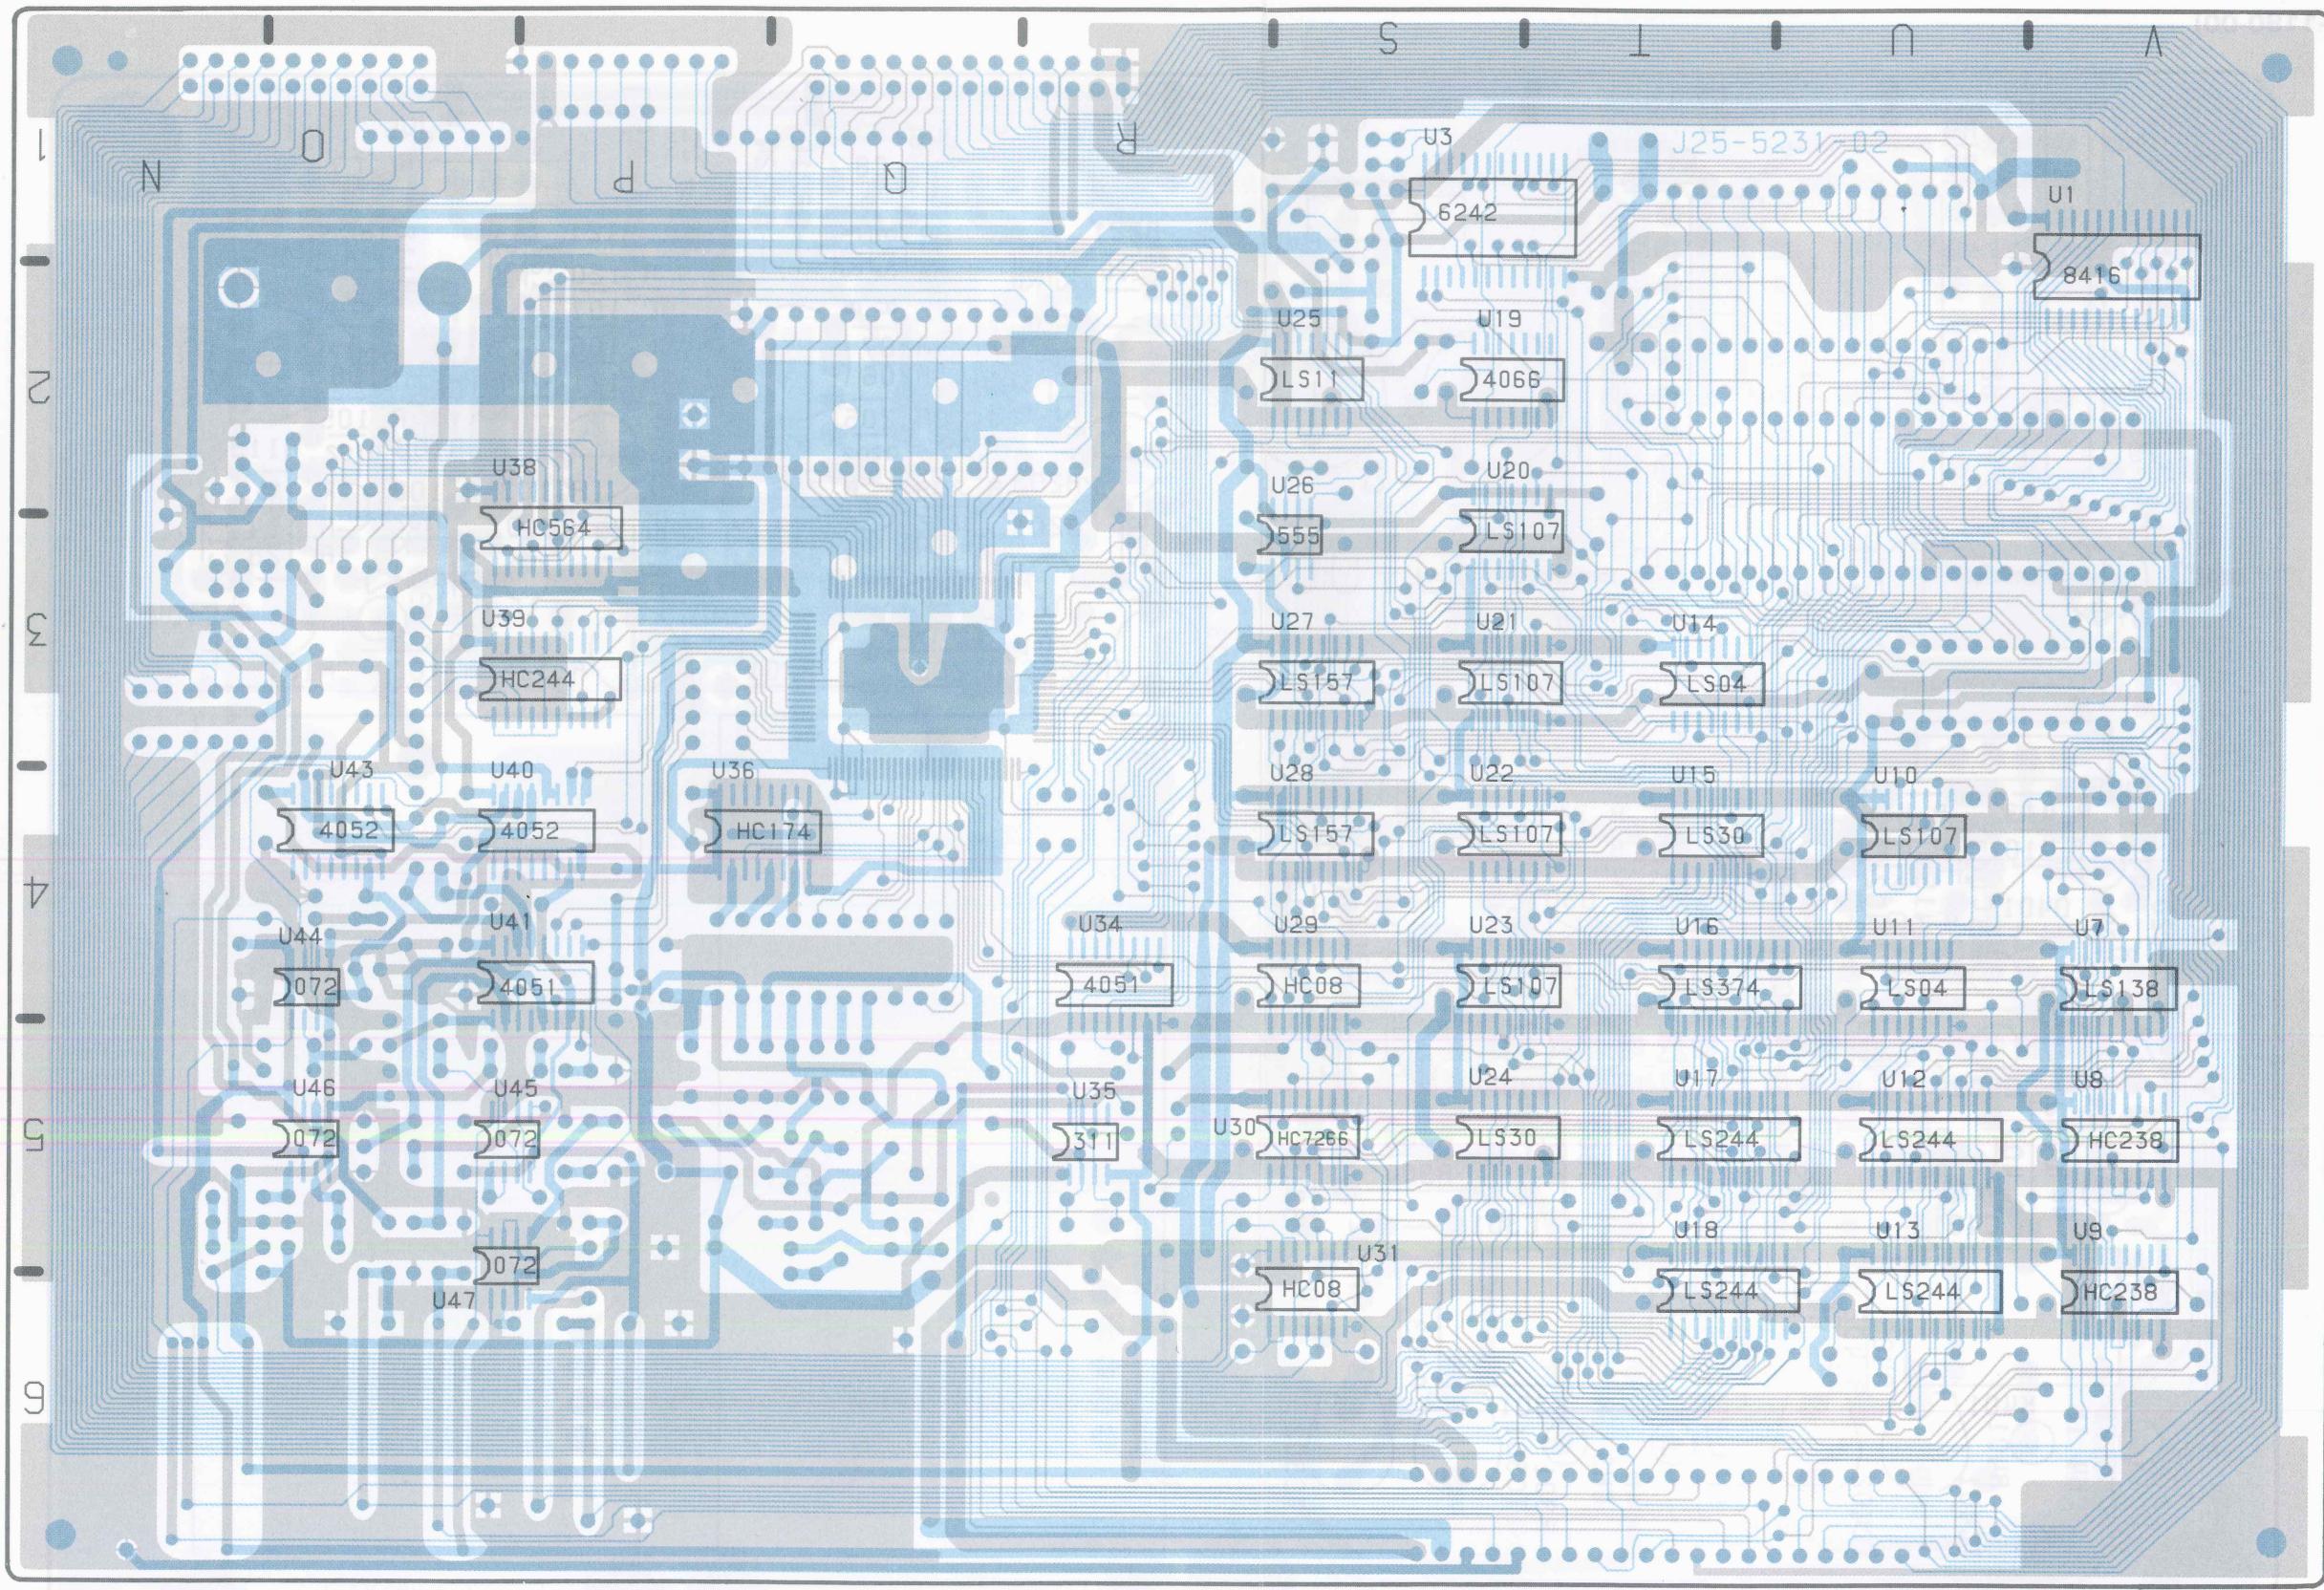

P.C BOARD

ATT UNIT (X75-1180-00)


(00-0041-77X) UNIT NO 014

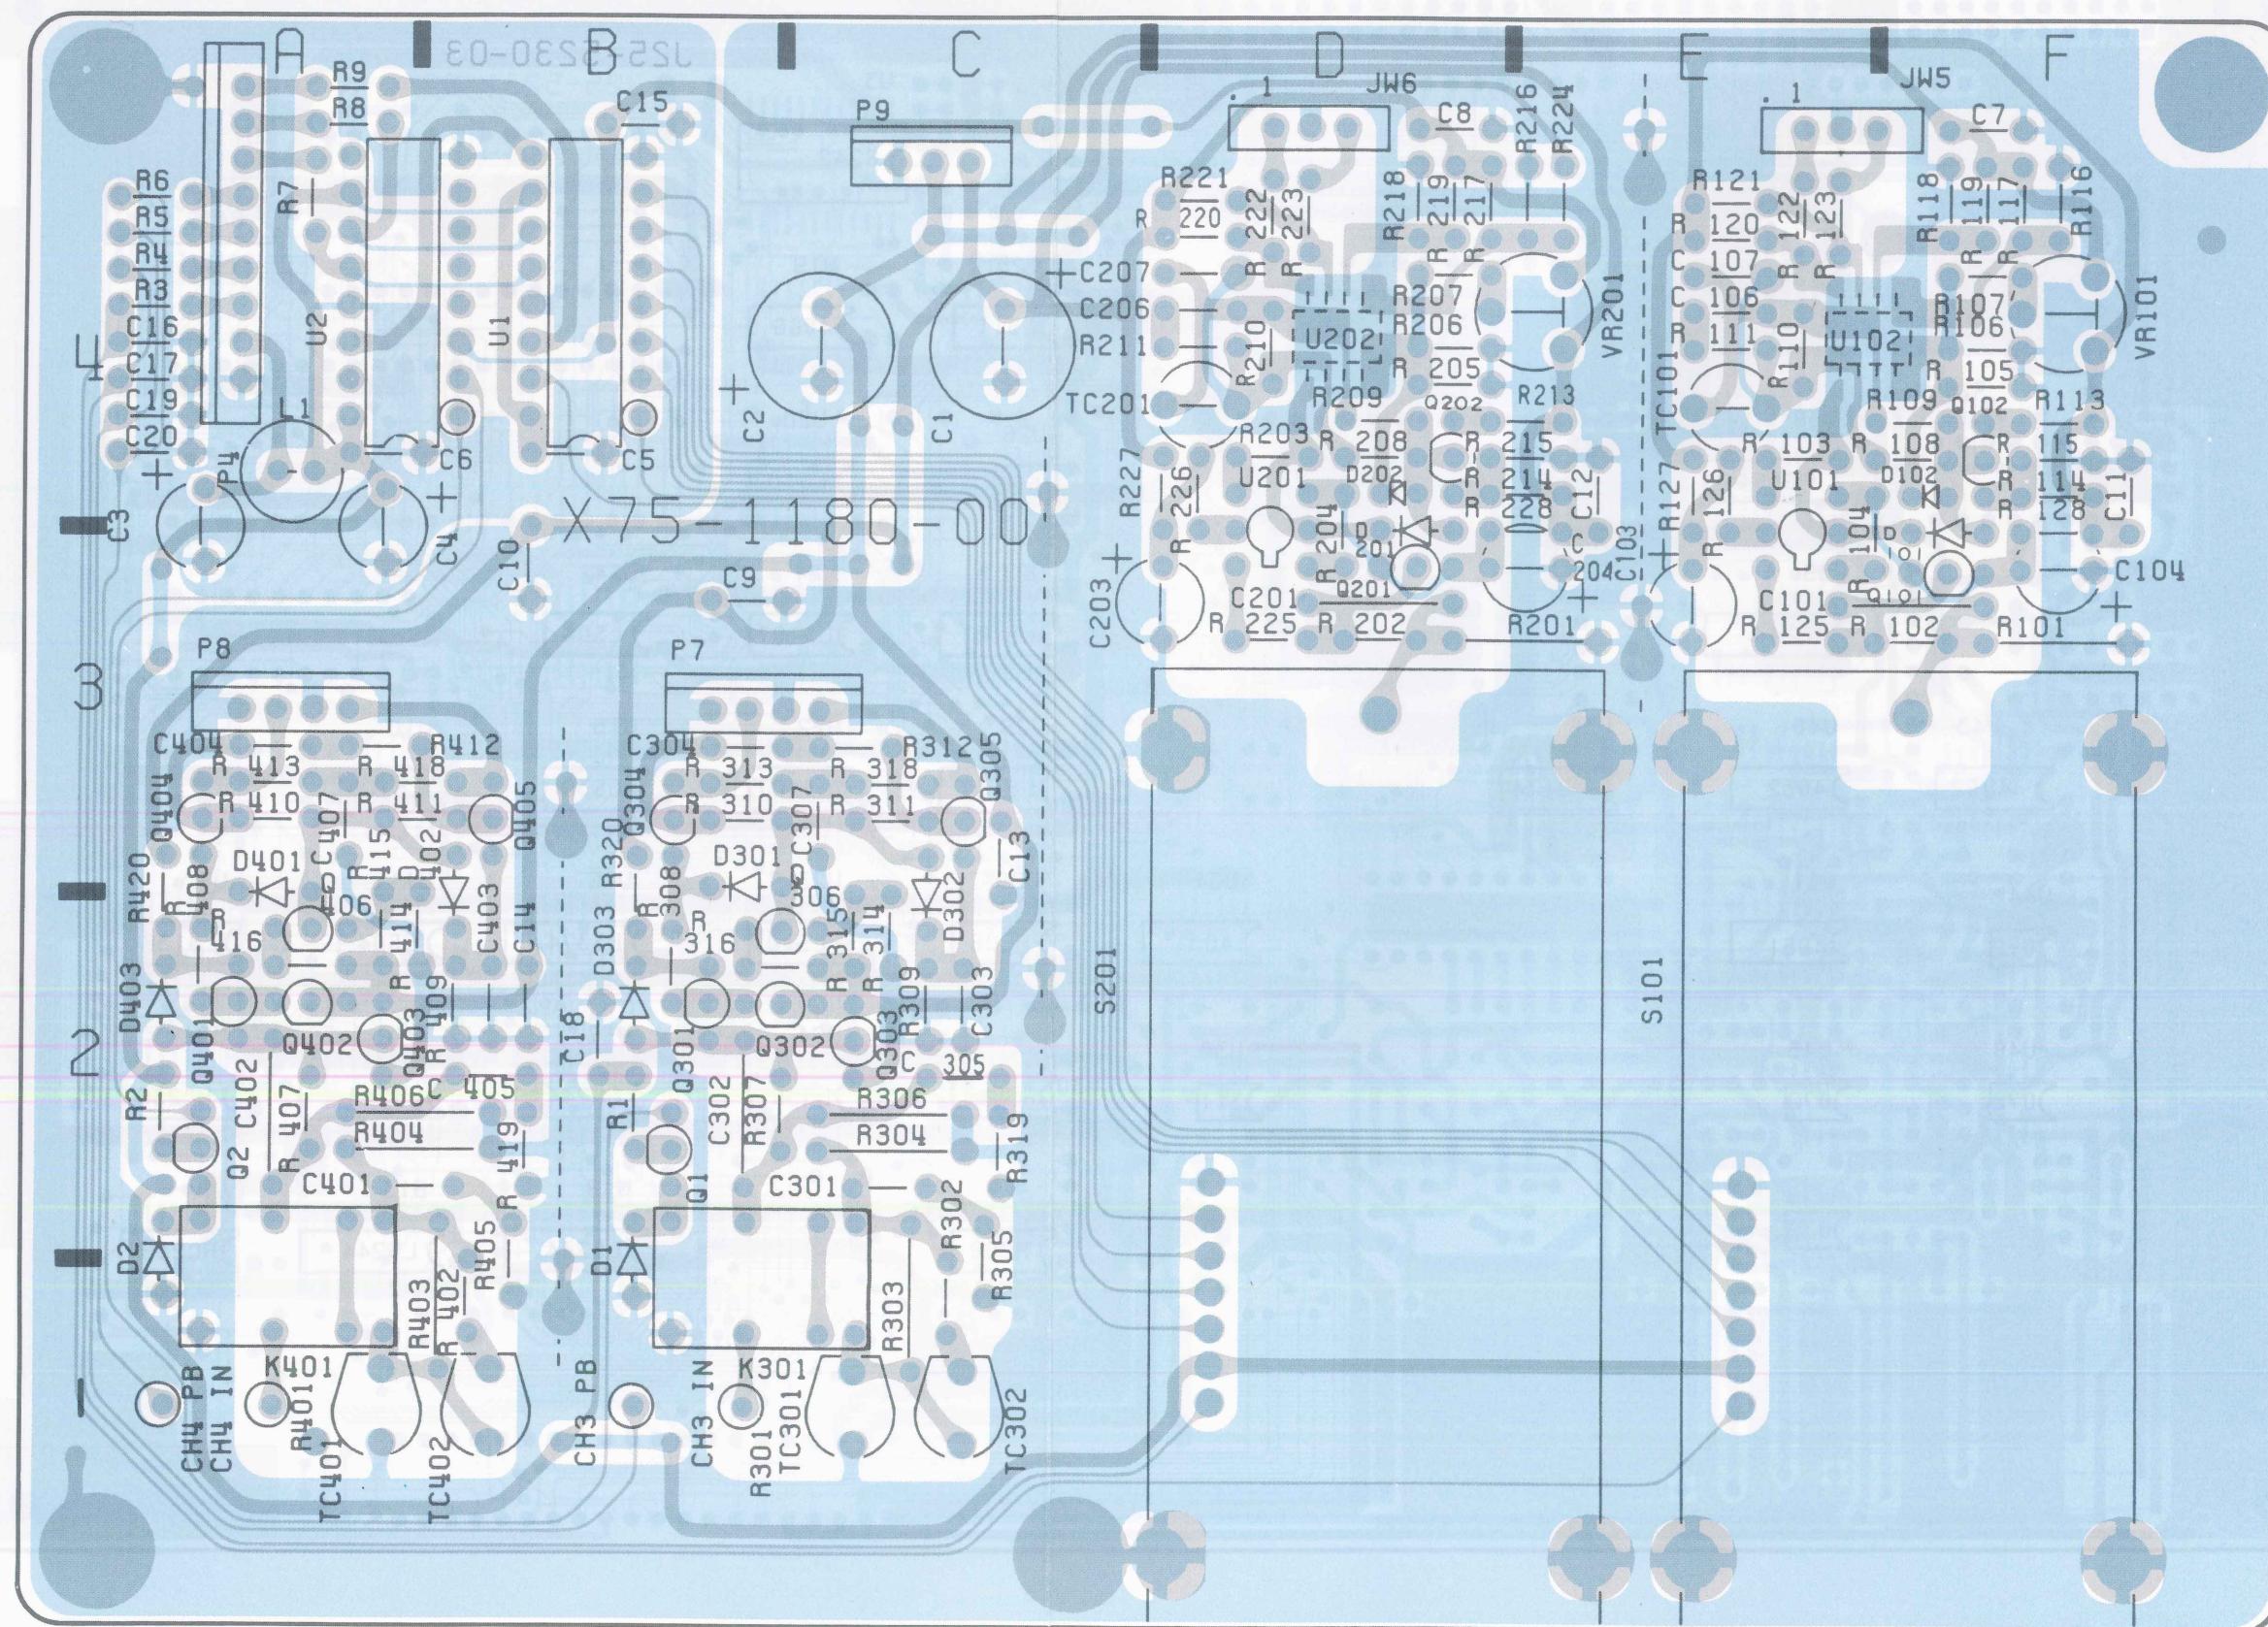

P.C BOARD

CONNECTION UNIT (X77-1500-00)


(00-0011-08X) TINU JAHN

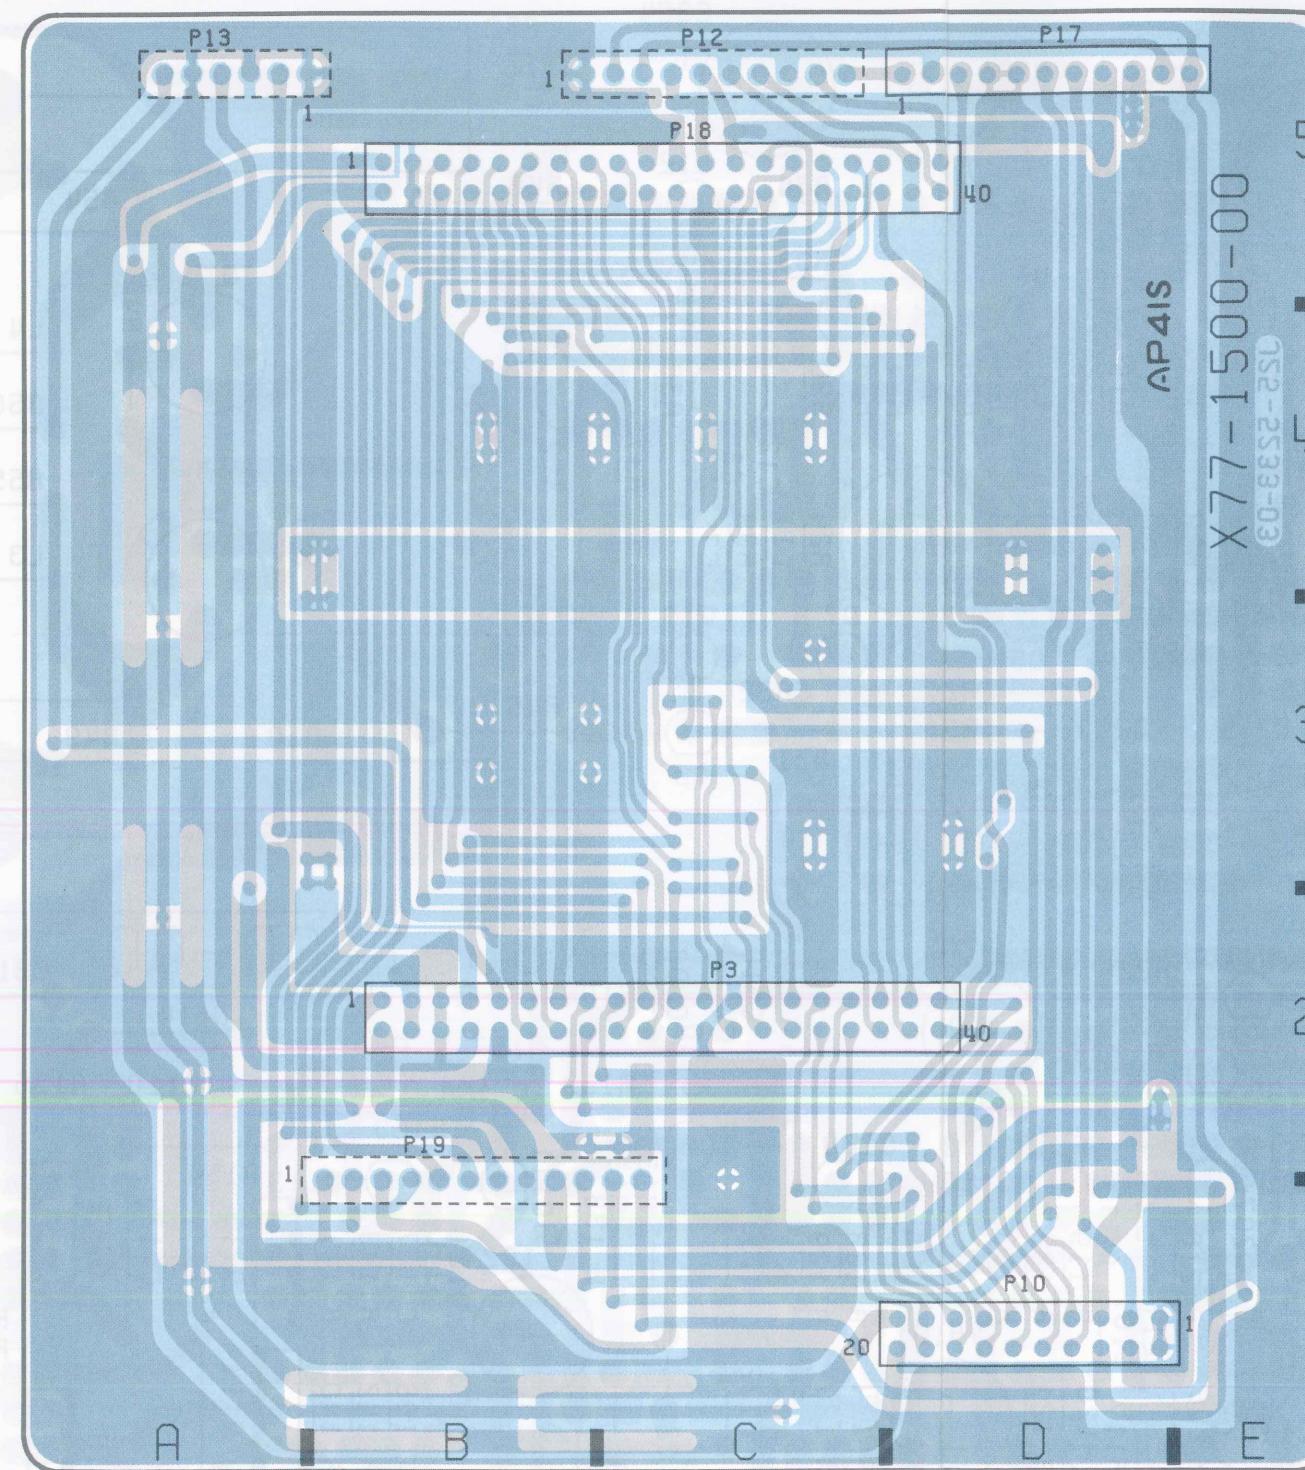

P.C BOARD




FINAL UNIT (X80-1100-00)

CONNECTION UNIT (X32-1800-00)

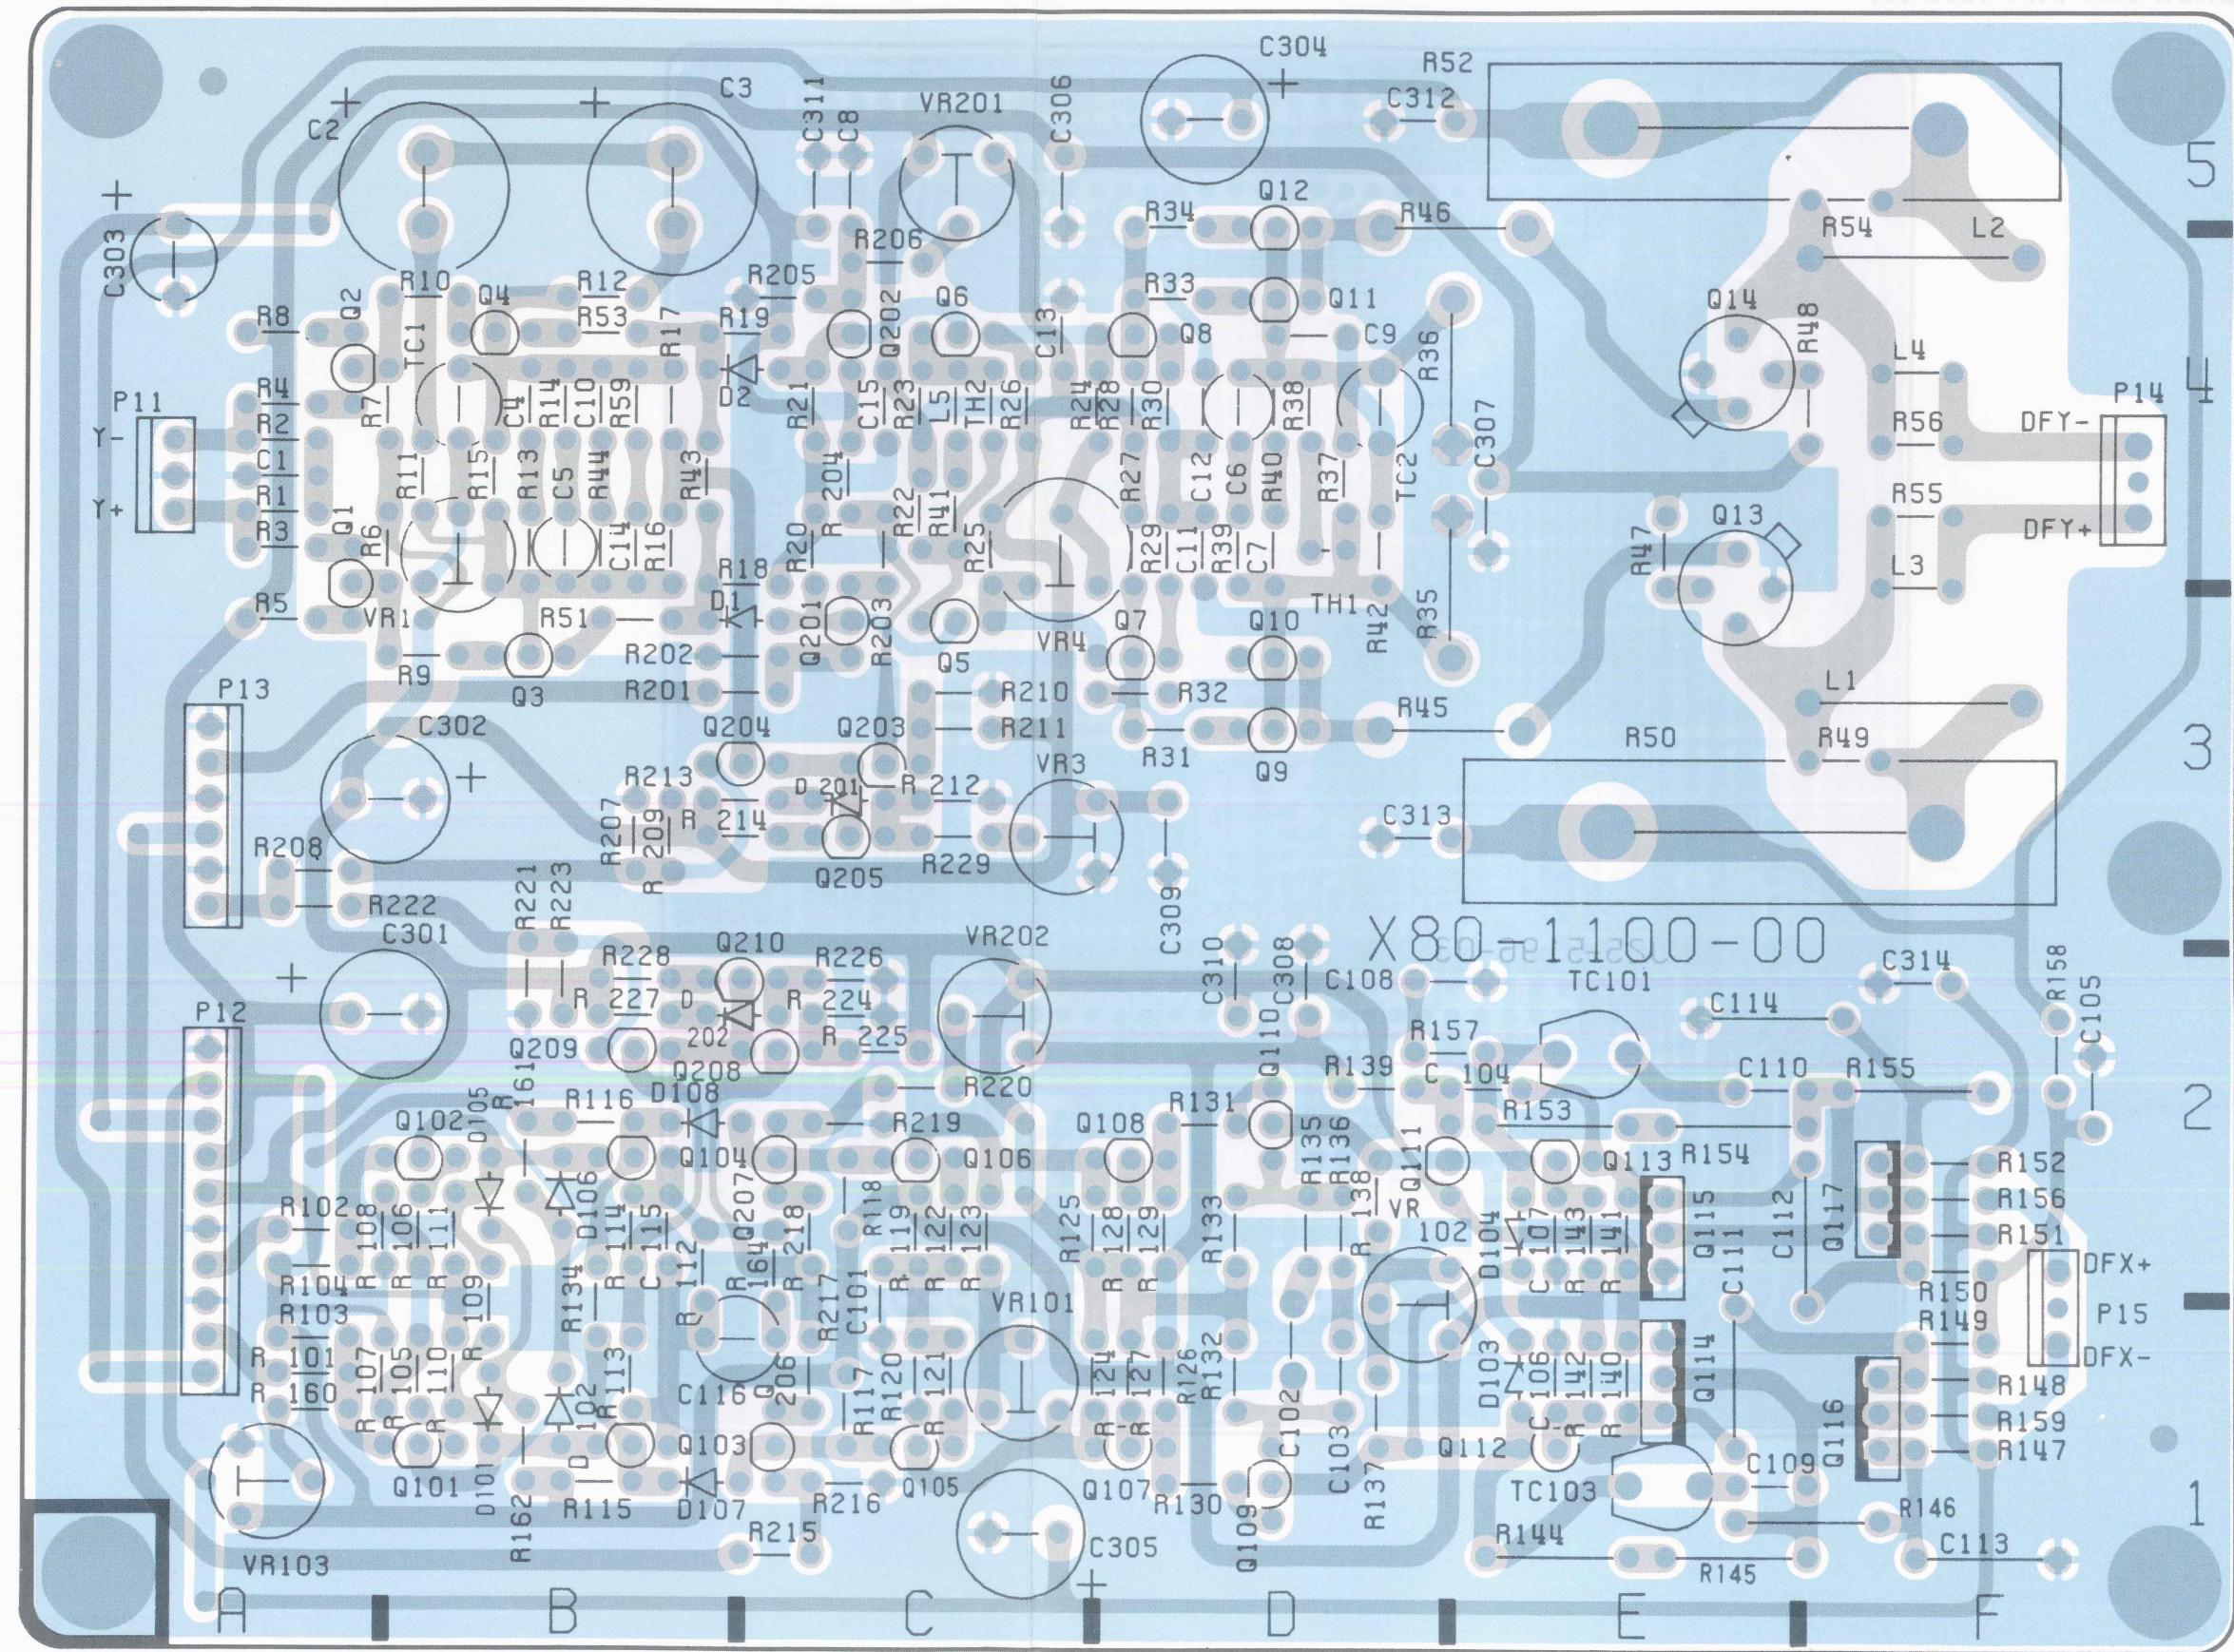

P.C BOARD


VOLUME UNIT (X81-2330-00)

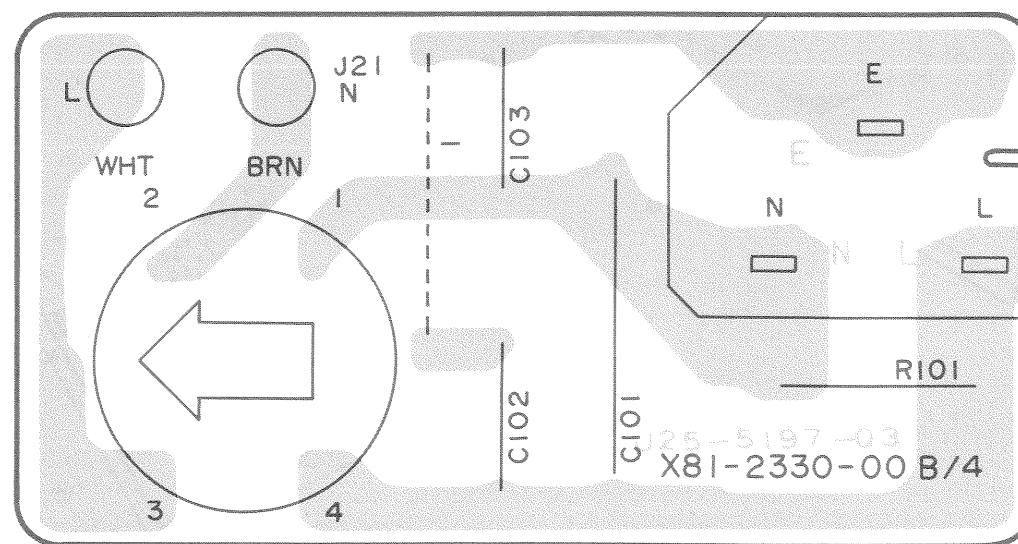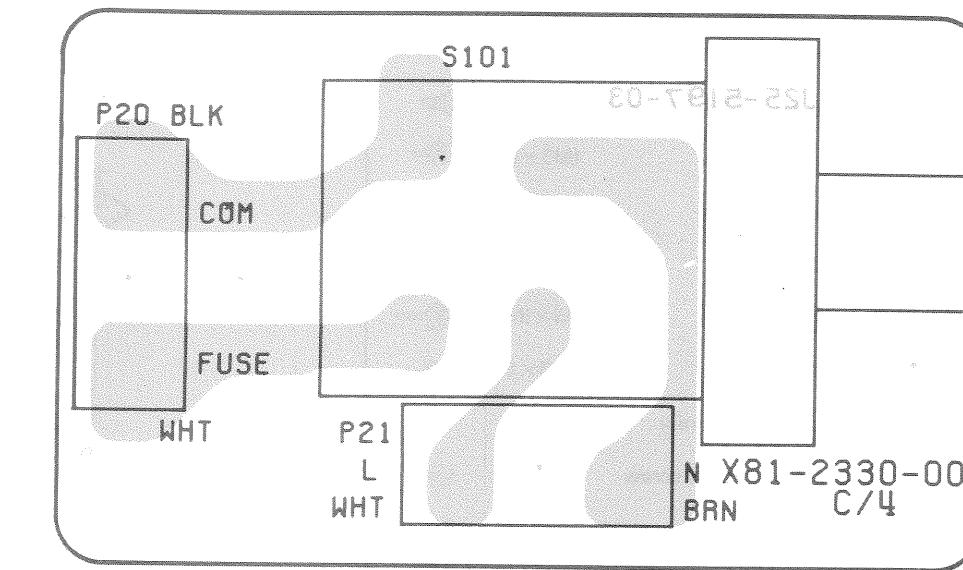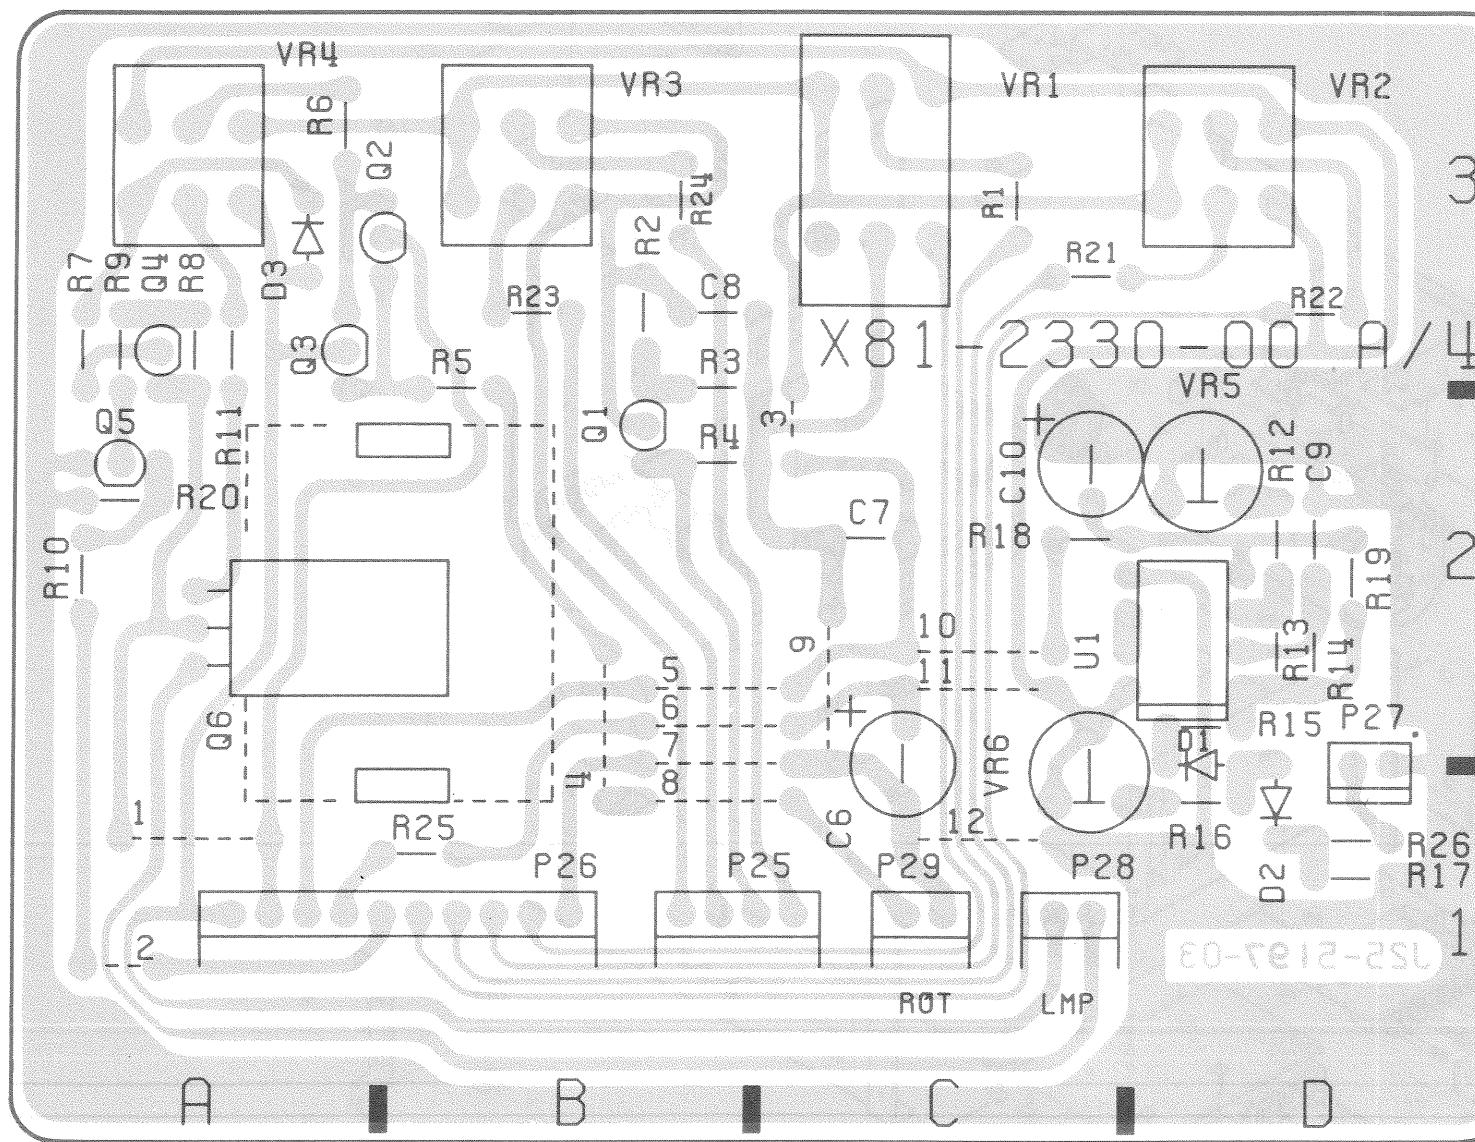









Pattern side view

DISASSEMBLY

Parts No.	Parts Name	Figure
A N08-0611-04	Cord wrapping screw	①
B N09-0705-05	Hexagon socket flat head screw (M4×8)	⑥
C N09-0718-05	Sems screw (M3×6)	⑦
D N09-0739-05	Sems taptite screw (3×8)	⑨
E N09-0720-05	Sems screw (M4×10)	⑩
F N09-0733-15	Sems screw (M3×20)	⑪
G N32-3008-41	Flat head screw (M3×8)	⑫
H N88-3008-41	Flat head taptite screw (3×8)	⑬
I N89-3008-41	Binding head taptite screw (3×8)	⑭
J N35-3006-41	Binding head screw (M3×6)	⑮
K N09-0731-05	Sems screw (M3×12)	⑯

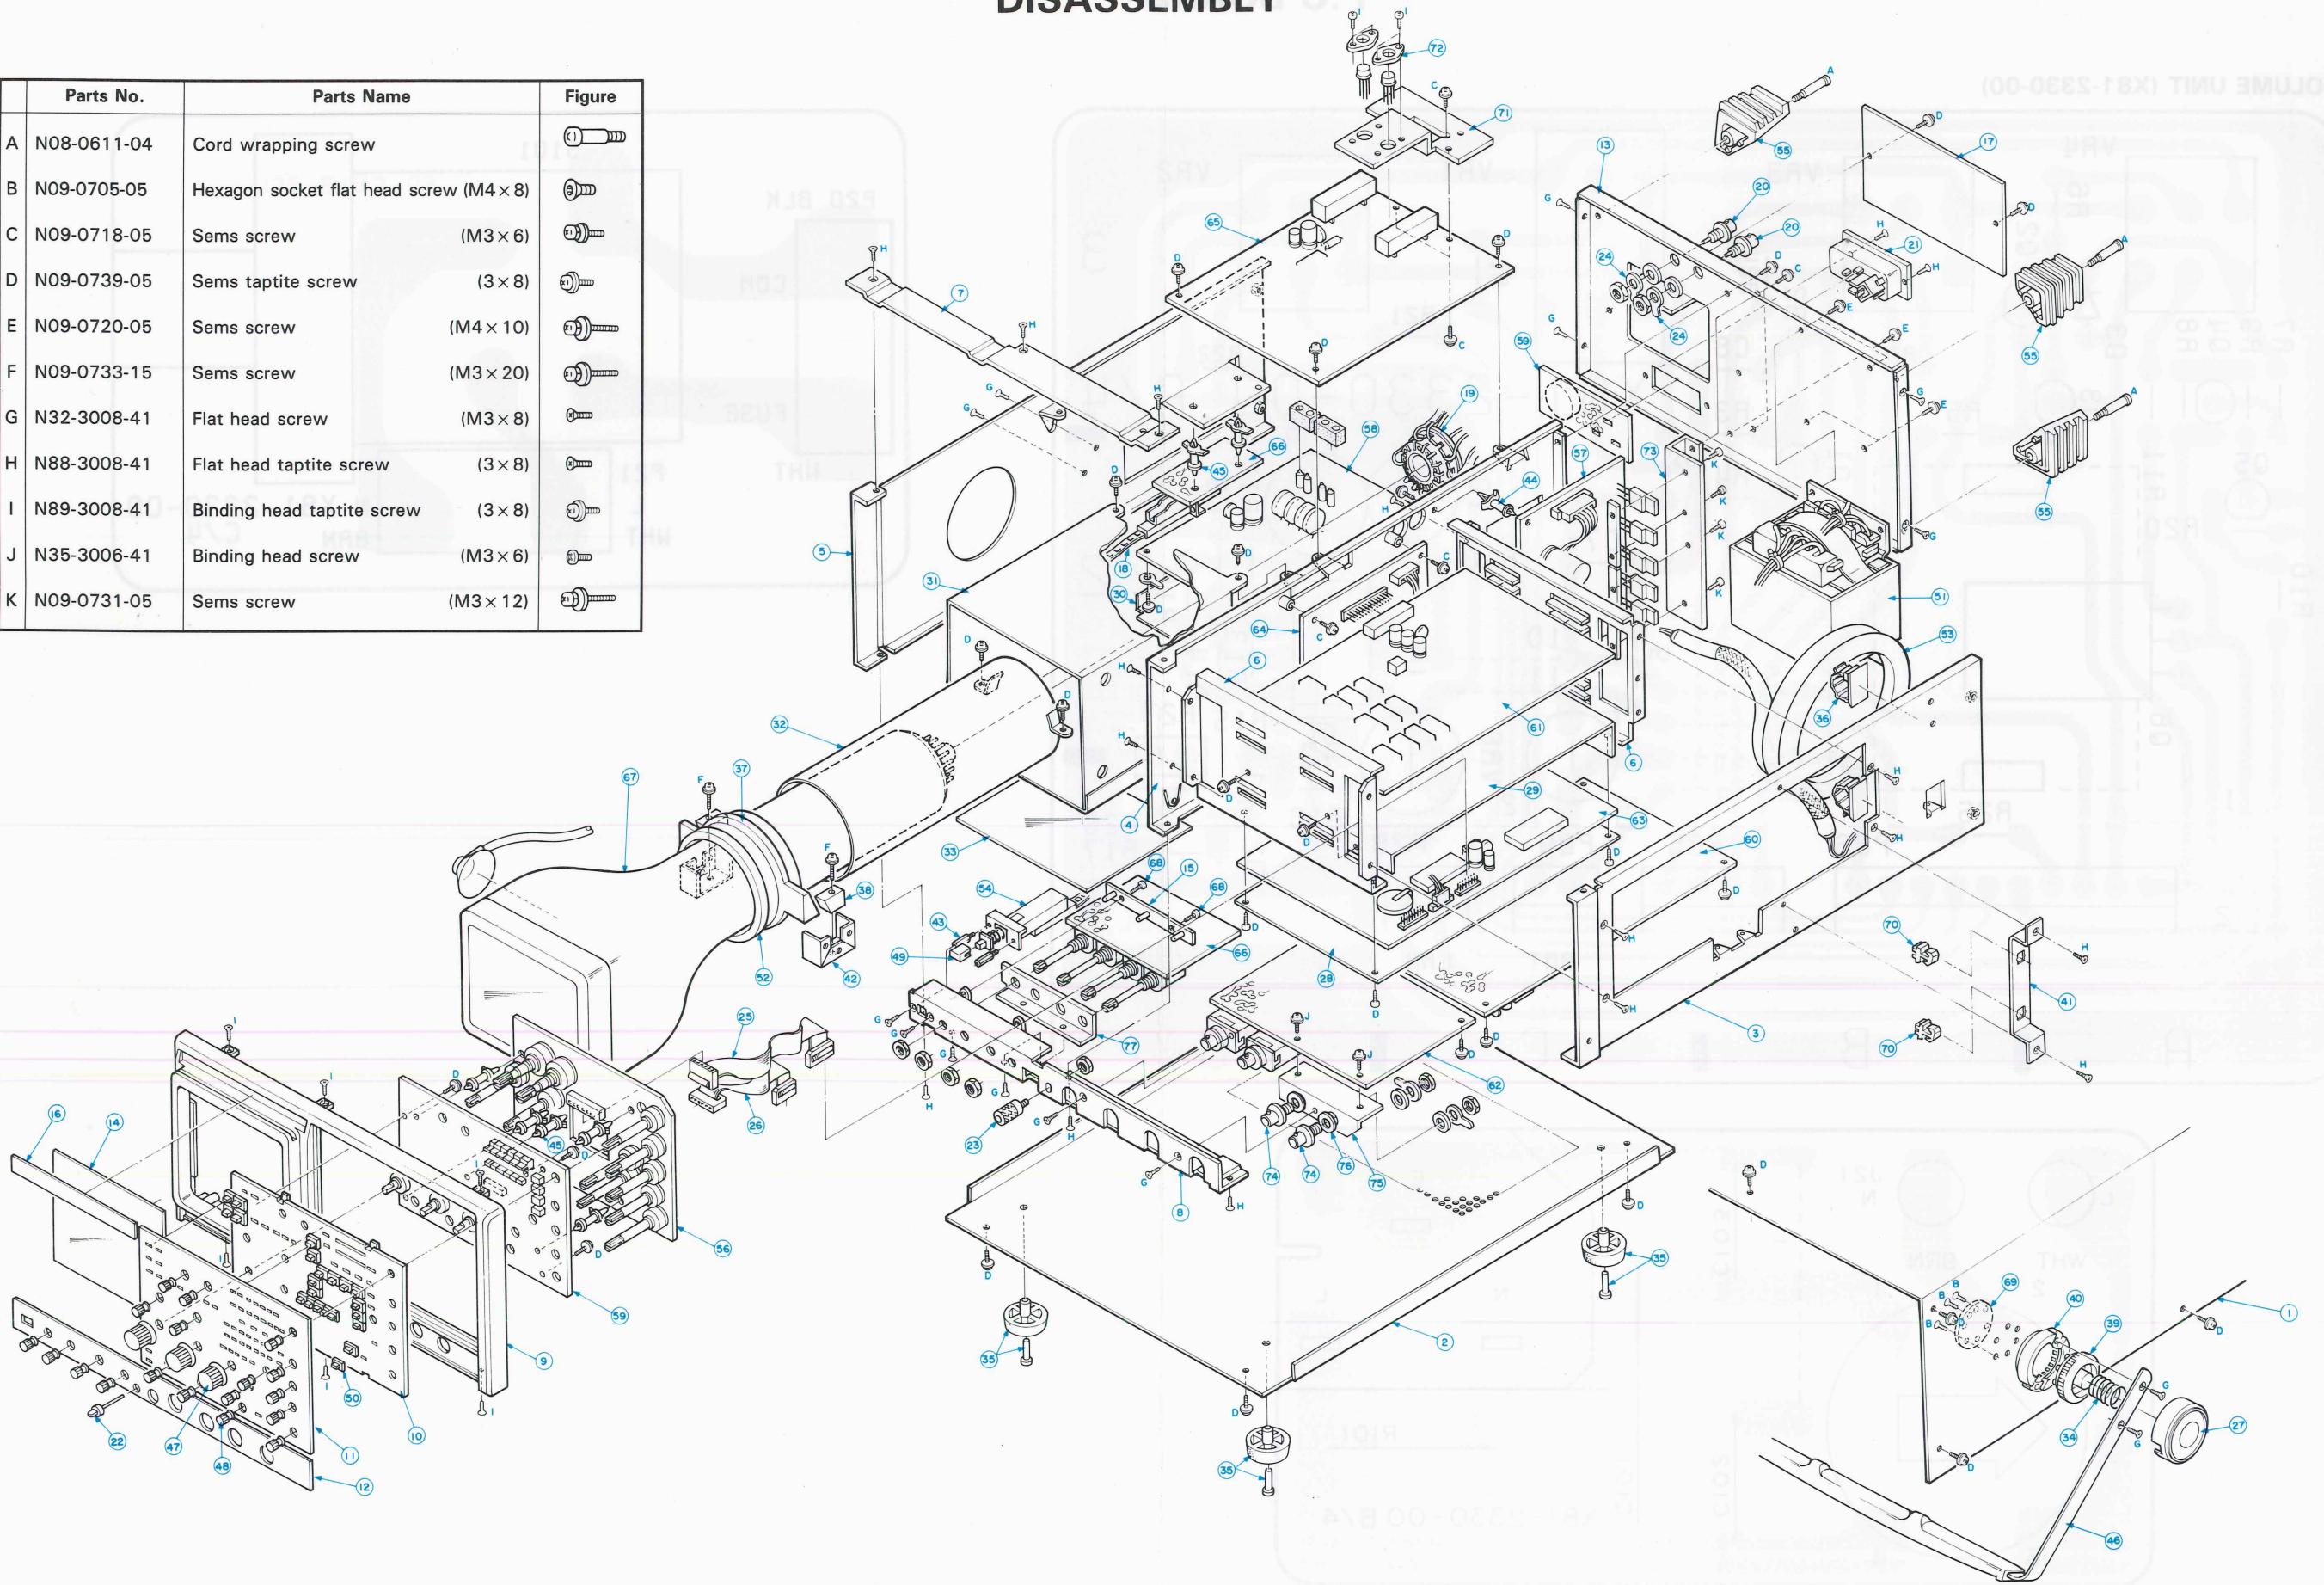

SEMICONDUCTORS

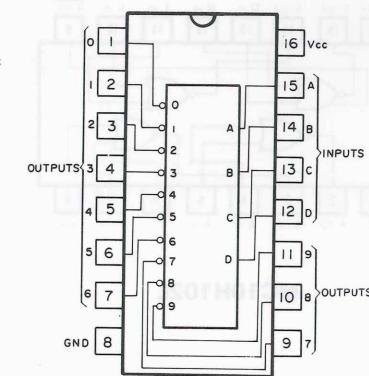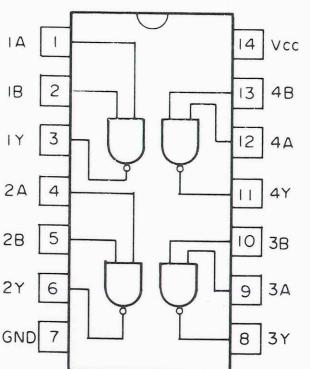

SN74ALS00AN

SN74ALS02N

HD74LS04FP









SN74ALS08N
HD74HC08FP

HD74LS11FP

HD74LS30FP

SN74ALS32N

HD74LS42P

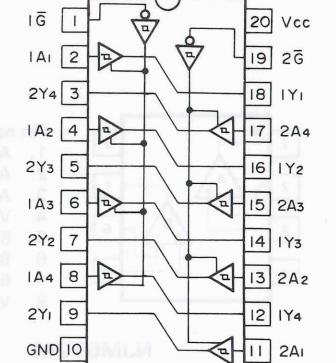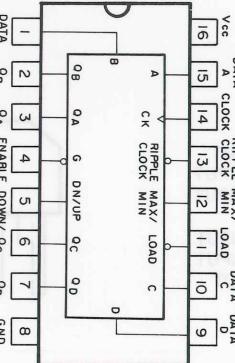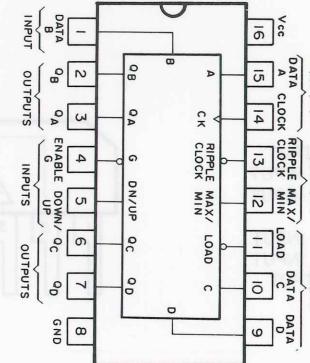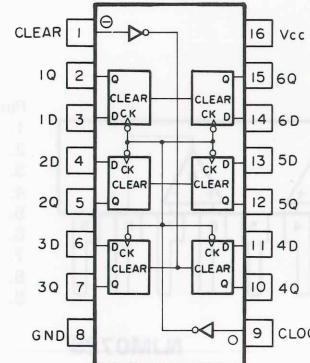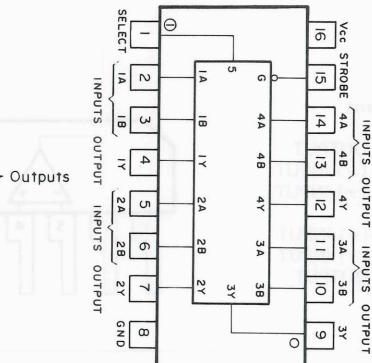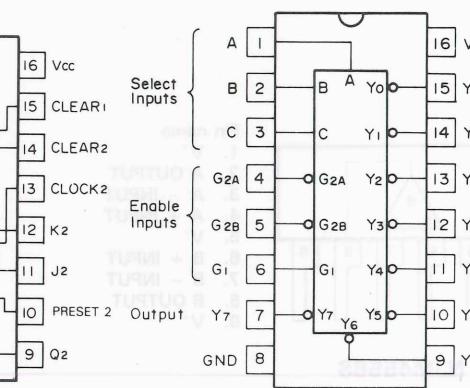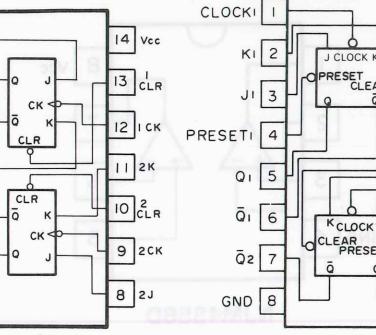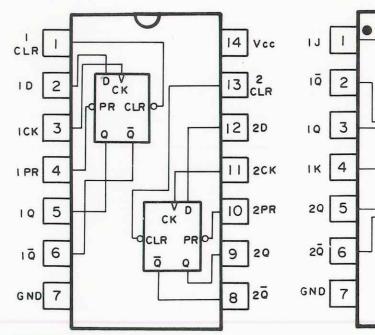

SN74ALS74AN

HD74LS107AFP







SN74ALS112AN

HD74LS138FP

HD74LS157FP

SN74ALS191N

HD74LS244FP

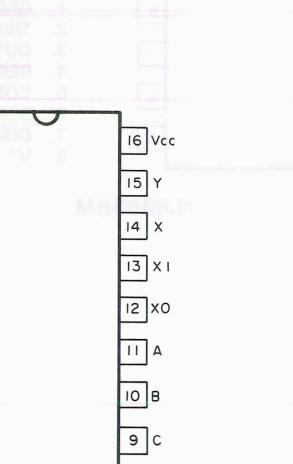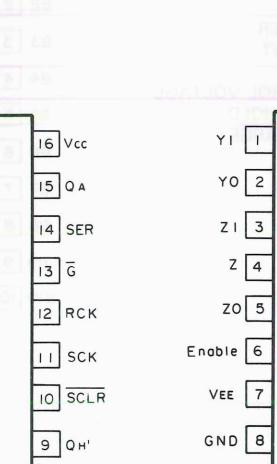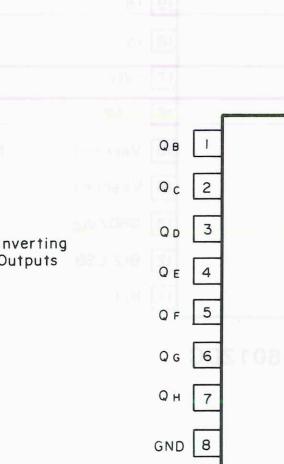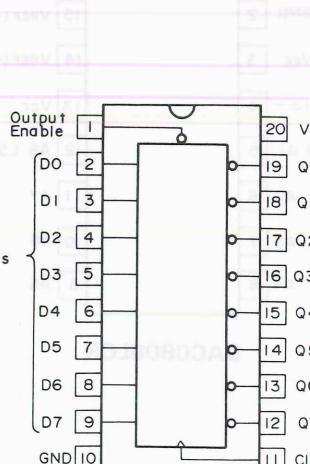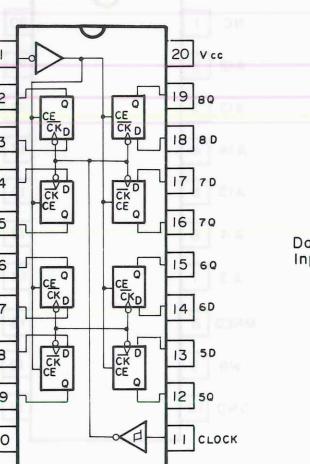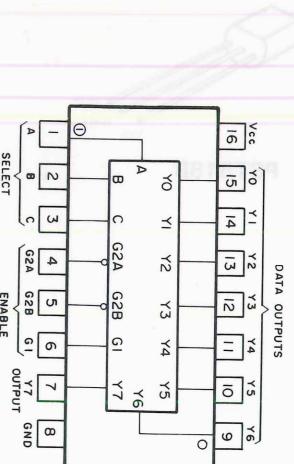

HD74LS374FP

HD74HC238FP









HD74HC564FP

HD74HC595P


MC74HC4053N

HD74HC7266FP









SEMICONDUCTORS

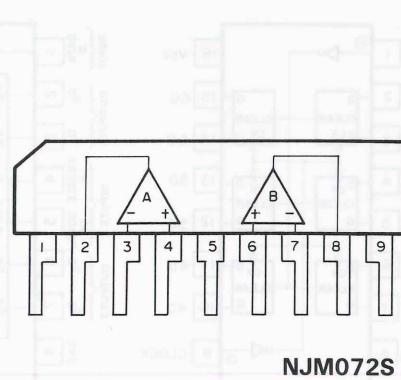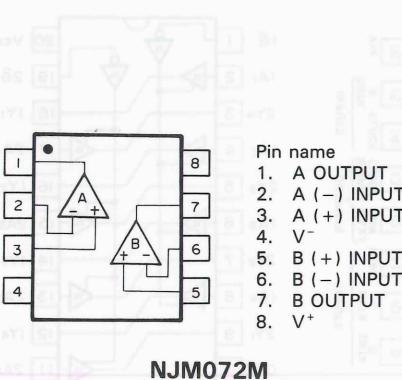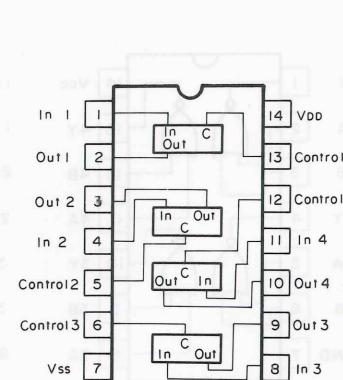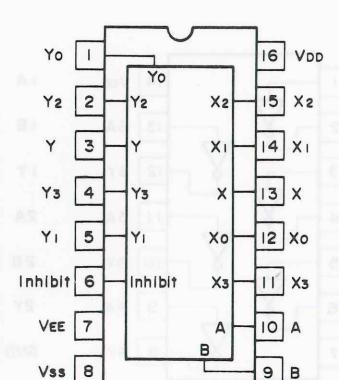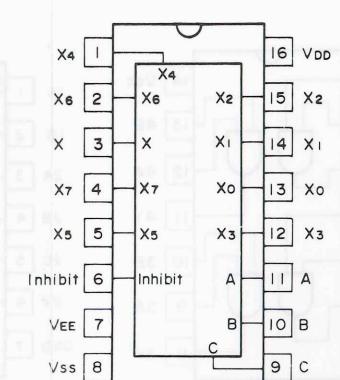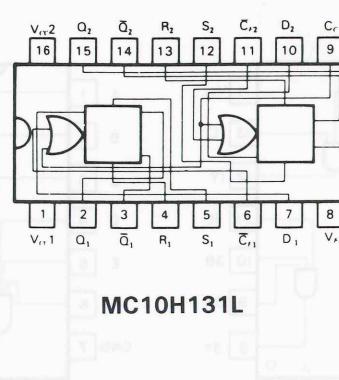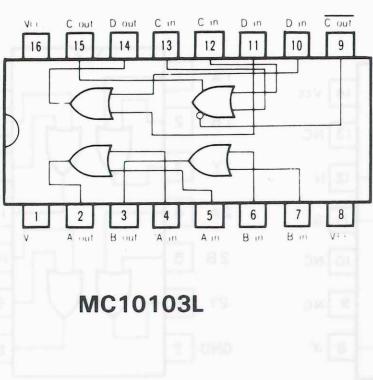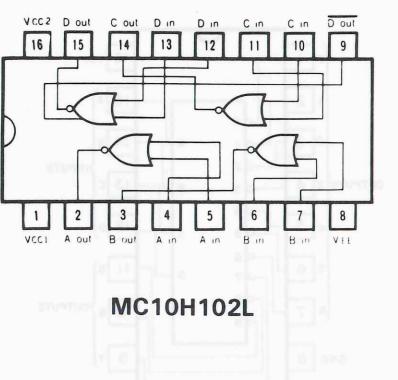


Pin name
1. V+
2. A OUTPUT
3. A (-) INPUT
4. A (+) INPUT
5. V-
6. B (+) INPUT
7. B (-) INPUT
8. B OUTPUT
9. V+

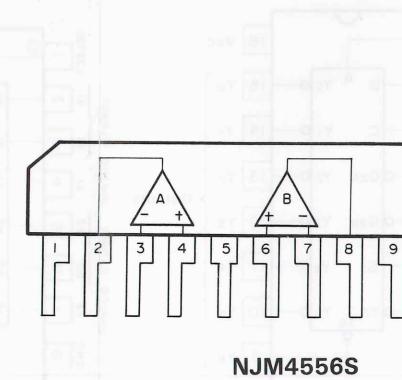


Pin name
1. V+
2. A OUTPUT
3. A - INPUT
4. A + INPUT
5. V-
6. B + INPUT
7. B - INPUT
8. B OUTPUT
9. V+

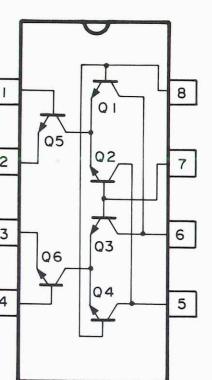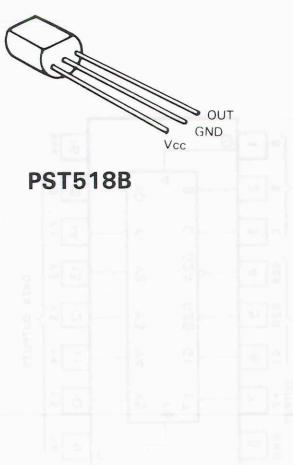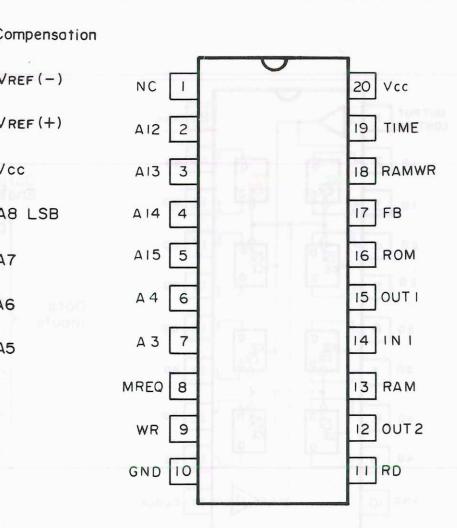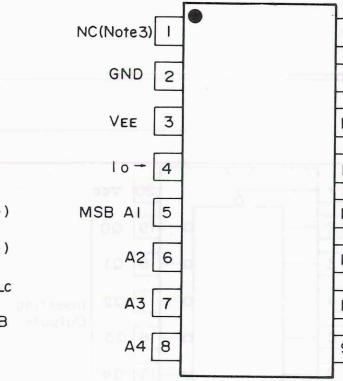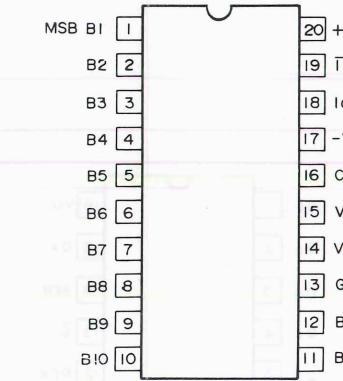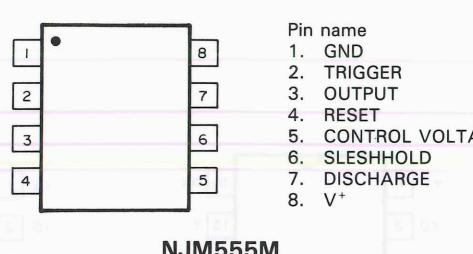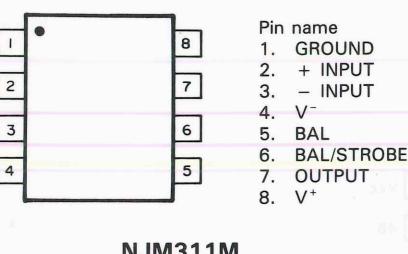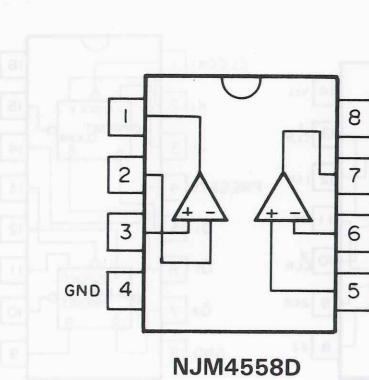


SEMICONDUCTORS

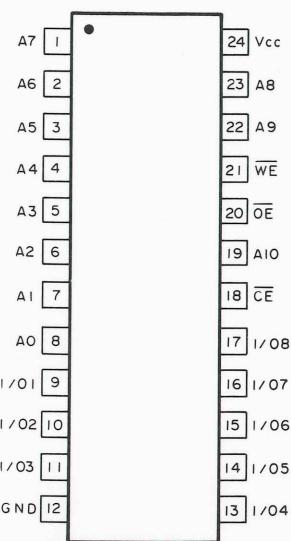


LC3517BML-15

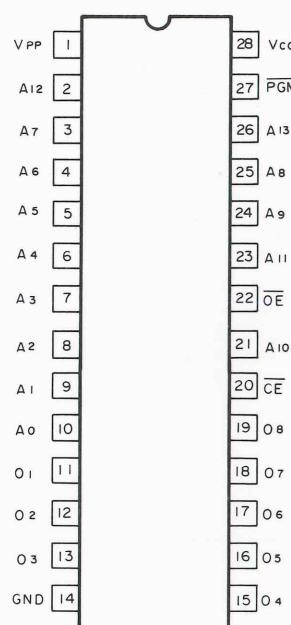


MBM27C128 * S

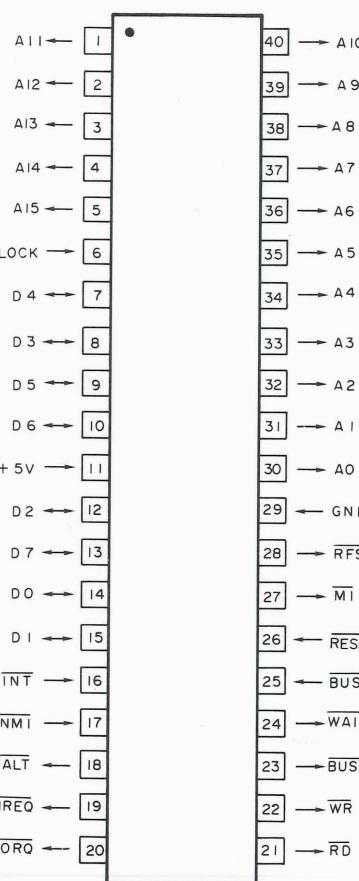

LH0080A

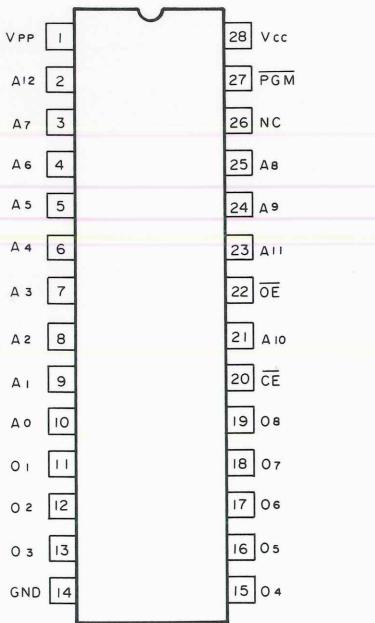


MSM6242BGS-VI

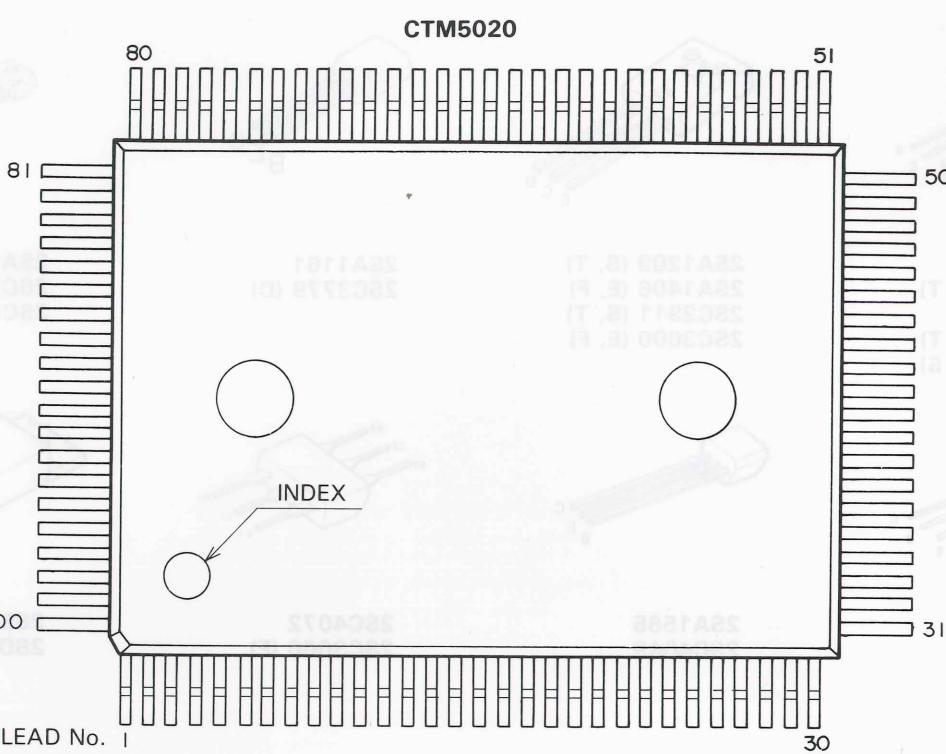


LEAD No

Pin No.	Pin Name						
1	CONT	26	TSD0	51	GETD	76	DD3
2	A13	27	TSD1	52	CA0	77	SING
3	VDD	28	VDD	53	VDD	78	VDD
4	A14	29	TSD2	54	CA4	79	R10M
5	A15	30	AX2	55	CA3	80	10M
6	INT0	31	AX1	56	CA2	81	HLDI
7	VX3	32	AX0	57	CA1	82	SGA
8	VX2	33	AX3	58	CD3	83	ROSP
9	VX1	34	HS2	59	CD2	84	ROD
10	VX0	35	HS1	60	CD4	85	HDL
11	DA0	36	TDIO	61	CD1	86	ROUB
12	DA1	37	TWE	62	CD5	87	ROB
13	DA2	38	TCK1	63	DC4	88	ROQ
14	DA3	39	TST1	64	CD7	89	ROED
15	VSS	40	VSS	65	VSS	90	VSS
16	DA4	41	TST2	66	DC3	91	D7
17	DA5	42	TADD	67	DC2	92	D5
18	DA6	43	TCK2	68	CD6	93	D3
19	DA7	44	VS2	69	DC1	94	D1
20	DA8	45	VS1	70	DC0	95	ALE
21	DA9	46	VA0	71	CD0	96	D6
22	ROR	47	VA4	72	DD7	97	D4
23	ROA	48	VA3	73	DD6	98	D2
24	LEVX	49	VA2	74	DD5	99	DO
25	TCL	50	VA1	75	DD4	100	WR


SEMICONDUCTORS



2SA684 (Q)
2SA1208 (S, T)
2SC2271 (D)
2SC2910 (S, T)
2SC1384 (R, S)




2SA1209 (S, T)
2SA1406 (E, F)
2SC2911 (S, T)
2SC3600 (E, F)




2SA1161
2SC3779 (D)




2SA1175 (E)
2SC2785 (F)
2SC3732 (L)




2SA1206




2SA1565
2SC4049




2SC4072
2SC3066 (F)




2SB1133 (S)
2SD1666 (S)




2SC3354 (T, S)

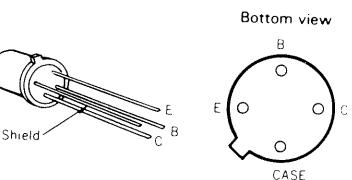


2SC1164 (O)*S




2SD1409




2SD613 (E)




2SK583




2SK241 (GR)




2SK332 (F)

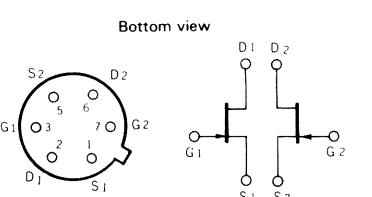

DN1901



S1VB60



S4VB40F

A product of
KENWOOD CORPORATION
17-5, 2-chome, Shibuya, Shibuya-ku, Tokyo 150, Japan