

KENWOOD

20 MHz OSCILLOSCOPE



# CS-4125

40 MHz OSCILLOSCOPE

# CS-4135

## SERVICE MANUAL

KENWOOD CORPORATION

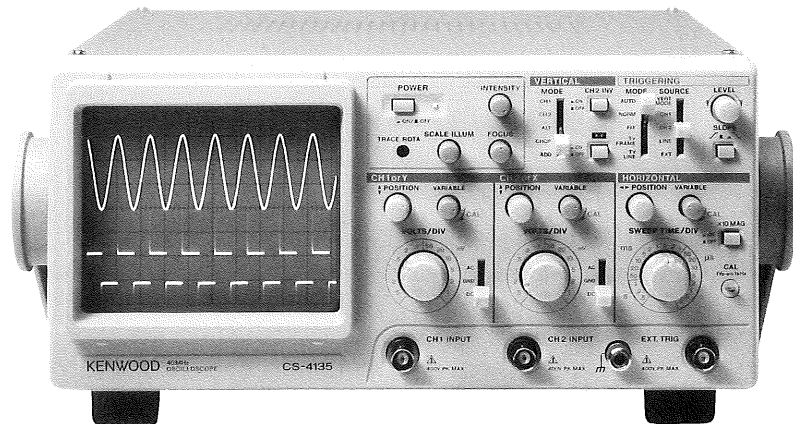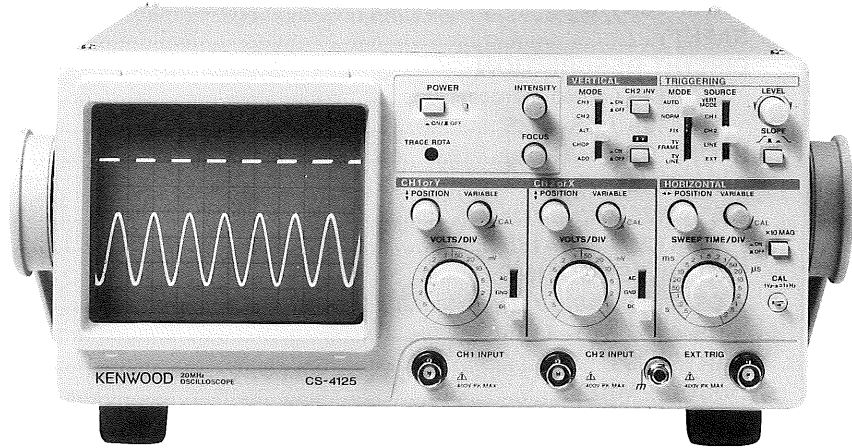

## **WARNING**

The following instructions are for use by qualified personnel only. To avoid electric shock, do not perform any servicing other than contained in the operating instructions unless you are qualified to do so.

## **CONTENTS**

<b>SPECIFICATIONS</b> .....	<b>3</b>
<b>SAFETY</b> .....	<b>7</b>
<b>CIRCUIT DESCRIPTION</b>	
CS-4125 (~S/NO.7120000) .....	<b>9</b>
CS-4125 / CS-4135 .....	<b>11</b>
<b>BLOCK DIAGRAM</b> .....	<b>13</b>
<b>ADJUSTMENT</b>	
CS-4125 (~S/NO.7120000) .....	<b>15</b>
CS-4125 / CS-4135 .....	<b>25</b>
<b>TROUBLESHOOTING</b>	
CS-4125 (~S/NO.7120000) .....	<b>35</b>
CS-4125 / CS-4135 .....	<b>37</b>
<b>PARTS LIST</b> .....	<b>38</b>
<b>DISASSEMBLY</b> .....	<b>39</b>
<b>PARTS LIST (ELECTRICAL)</b> .....	<b>40</b>
<b>SCHEMATIC DIAGRAM</b> .....	<b>51</b>
<b>P.C. BOARD</b>	
CS-4125 (~S/NO.7120000) .....	<b>63</b>
CS-4125 / CS-4135 .....	<b>65</b>
<b>SEMICONDUCTORS</b> .....	<b>69</b>

# SPECIFICATIONS

I T E M	CS-4125	CS-4135	
CRT :			
Type :	Rectangular with internal graticule		
Acceleration Voltage:	Approx. 2 kV	Approx. 12 kV	
Display Area :	8 × 10 div (1 div = 10mm)		
VERTICAL AXIS (CH1 and CH2) :			
Sensitivity :	1mV, 2mV/div ± 5% , 5mV/div to 5 V/div ± 3%		
Attenuator :	1-2-5 step, 12 ranges with fine adjustment		
Input Impedance :	1 MΩ ± 2% , Approx. 22 pF	1 MΩ ± 2% , Approx. 23 pF	
Frequency Response :			
5 mV/div to 5 V/div	DC	DC to 20 MHz, within - 3 dB	DC to 40 MHz, within - 3 dB
	AC	10 Hz to 20 MHz, within - 3 dB	10 Hz to 20 MHz, within - 3 dB
1 mV/div , 2 mV/div	DC	DC to 5 MHz, within - 3dB	
	AC	5 Hz to 5 MHz, within - 3dB	
Rise Time :			
5 mV/div to 5 V/div : 1 mV/div, 2mV/div :	Approx. 17.5 ns (20 MHz)	Approx. 8.75 ns (40 MHz)	
	Approx. 70 ns (5 MHz)		
Crosstalk :	- 40 dB maximum		
Operating Modes :	CH1 : CH1 single trace CH2 : CH2 single trace ALT : Alternating display of two signals CHOP : Chopped display of two signals ADD : Display of combined CH1 + CH2 waveforms		
CHOP Frequency :	Approx. 150 kHz		
Channel Polarity :	Normal or inverted, channel 2 only inverted		
△Maximum Input Voltage:	800Vp-p or 400 V (DC + ACpeak)		
HORIZONTAL AXIS :			
Sensitivity :	Same as vertical axis (CH2)		
Input impedance :	Same as vertical axis (CH2)		
Frequency response :	DC : DC to 500 kHz, within - 3 dB		
	AC : 10Hz to 500kHz, within - 3 dB		
X- Y Phase Difference :	3° or less (at 50 kHz or less)		
Operating Modes :	X- Y operation is selectable with MODE switch CH1 : Y-axis CH2 : X-axis		
△Maximum Input Voltage :	Same as vertical axis (CH2)		

# SPECIFICATIONS

I T E M	CS-4125	CS-4135	
<b>SWEEP SYSTEM :</b>			
Sweep Modes :	NORM : Triggered sweep		
	AUTO : Auto free run with no signal input		
Sweep Time :	0.5 $\mu$ s/div to 0.5 s/div $\pm$ 3% , (0.2 $\mu$ s/div : UNCAL)	0.5 $\mu$ s/div to 0.5 s/div $\pm$ 3% ,	
	1-2-5 step, 20 ranges with fine adjustment		
Sweep Magnification :	10 $\times$ magnification, $\pm$ 5% (20ns/div : UNCAL)	10 $\times$ magnification, $\pm$ 5%	
Linearity	$\pm$ 3% , (0.2 $\mu$ s/div : UNCAL) ( $\pm$ 5% at $\times$ MAG, 20 ns/div : UNCAL)	$\pm$ 3% , ( $\pm$ 5% at $\times$ 10 MAG)	
<b>TRIGGERING :</b>			
Triggering Source :	VERT MODE : Input signal selection with VERTICAL MODE control		
	CH1 : CH1 input signal		
	CH2 : CH2 input signal		
	LINE : Commercial-use power source		
	EXT : Signal input through EXT. TRIG terminal		
External Trigger :			
Input impedance :	1M $\Omega$ , Approx. 22 pF		
$\Delta$ Maximum input voltage:	800 Vp-p or 400 V(DC + ACpeak)		
Trigger Coupling Modes :	AUTO, NORM and FIX are capacitively coupled		
	TV-FRAME : Vertical sync pulses of a composite video signal are selected for triggering.		
	TV-LINE : Horizontal sync pulses of a composite video signal are selected for triggering.		
<b>Trigger Sensitivity :</b>			
CS-4135			
		SOURCE	
MODE	SIGNAL FREQ.	VERT, CH1, CH2	EXT
NORM	10Hz to 20 MHz 20MHz to 40MHz	1.5 div 2 div	0.25 V p-p 0.3 V p-p
AUTO	Same as above specs at 50 Hz or above		
TV-F, TV-L	Composite video Signal	1 div	0.2 Vp-p
FIX	50 Hz to 40 MHz	2 div	0.5 Vp-p



# SPECIFICATIONS

I T E M	CS-4125	CS-4135
Trigger Sensitivity :		
CS-4125		
		SOURCE
MODE	SIGNAL FREQ.	VERT, CH1, CH2      EXT
NORM	10Hz to 5 MHz 5MHz to 20MHz	1 div 1.5 div      0.2 V p-p 0.3 V p-p
AUTO	Same as above specs at 50 Hz or above	
TV-F, TV-L	Composite video Signal	1 div      0.2 Vp-p
FIX	50 Hz to 20 MHz	2 div      0.5 Vp-p
CALIBRATED SIGNALS :		
Waveform :	Positive square wave	
Voltage :	1 Vp-p $\pm$ 3%	
Frequency :	Approx. 1 kHz	
INTENSITY MODULATION :		
Sensitivity :	TTL level, decreases brightness	
Input Impedance :	Approx. 5 k $\Omega$	
Usable Frequency Range:	DC to 3.5 MHz	
$\Delta$ Maximum Input Voltage:	84 Vp-p or 42 V(DC + ACpeak)	
CH1 SIGNAL OUTPUT :		
Output Voltage :	Approx. 50 mV/div (at into 50 $\Omega$ load)	
Output Impedance :	Approx. 50 $\Omega$	
Frequency Response :	100Hz to 10 MHz, $\pm$ 3 dB (into 50 $\Omega$ load)	100Hz to 10 MHz, $\pm$ 3 dB (into 50 $\Omega$ load)
TRACE ROTATION :		
Adjustment :	Adjustable semi-fixed resistor on the front panel	
DIMENSIONS :		
(W $\times$ H $\times$ D)	300(343) $\times$ 140(159) $\times$ 415(431)mm ( ) dimensions include protrusion from basic outline dimensions.	
WEIGHT :		
	Approx. 7 kg	Approx. 7.5 kg
ENVIRONMENTAL :		
Within specifications temp./hum. range :	10 to 35 $^{\circ}$ C / 85% RH or less	
Full operation temp./hum. range :	0 to 40 $^{\circ}$ C / 85% RH or less	

# SPECIFICATIONS

I T E M	CS-4125	CS-4135
<b>ENVIRONMENTAL :</b>		
	Indoor Use Only	
	Altitude up to 2000 m	
	OVERVOLTAGE CATEGORY II	
	POLLUTION DEGREE 2	
<b>LINE VOLTAGE/FREQUENCY :</b>		
	AC 100 V (90V to 110V), AC 120 V (108V to 132V), AC 220 V (198V to 242V), AC 230V (207V to 253V), 50/60Hz	
<b>POWER CONSUMPTION :</b>		
	Max. 35 W	Max. 35 W
<b>ACCESSORIES :</b>		
Probe :	PC-41 × 2	
Instruction manual :	1	
Power cord :	1	
Replacement fuse :	1	
<b>REGULATORY INFORMATION :</b>		
EMI :	EN55011(1991) CLASS B	
Immunity :	IEC801-2(1991) 8kVAD	
	IEC801-3(1984) 3V/m	
	IEC801-4(1988)	

PC-41 probe specifications :

(The table below shows the specifications when an input resistance of  $1\text{M}\Omega \pm 1\%$  is connected to the oscilloscope.)

I T E M S	× 1	× 10
Input resistance	$1\text{M}\Omega \pm 2\%$	$10\text{M}\Omega \pm 2\%$
Input capacitance	200 pF or less (Probe only)	$22\text{ pF} \pm 10\%$
Attenuation ratio	1/1	$1/10 \pm 3\%$
Frequency range	DC to 6 MHz ( ± 3 dB)	DC to 60 MHz ( ± 3 dB)
Applicable capacitance	—	20 to 45 pF
Input withstand voltage	DC 600 V	

■ The above specifications are subject to change without notice.

# CS-4125 SAFETY

## SAFETY

Before connecting the instrument to a power source, carefully read the following information, then verify that the proper power cord is used and the proper line fuse is installed for power source. The specified voltage is shown at the fuse holder of the AC inlet. If the power cord is not applied for specified voltage, there is always a certain amount of danger from electric shock.

### Line voltage

This instrument operates using ac-power input voltages that 100/120/220/230 V at frequencies from 50 Hz to 60 Hz.

### Power cord

The ground wire of the 3-wire ac power plug places the chassis and housing of the oscilloscope at earth ground. Do not attempt to defeat the ground wire connection or float the oscilloscope; to do so may pose a great safety hazard. The appropriate power cord is supplied by an option that is specified when the instrument is ordered.

The optional power cords are shown as follows in Fig. 1.

### Line fuse

The fuse holder is located on the rear panel and contains the line fuse. Verify that the proper fuse is installed by replacing the line fuse.

### Voltage conversion

This oscilloscope may be operated from either a 100 V to 230 V, 50/60 Hz power source. Use the following procedure to change from 100 to 230 volt operation or vice versa.

1. Remove the fuse holder.
2. Replace fuse F 1 with a fuse of appropriate value, 800 m amp for 100 VAC to 120 VAC operation. 500 m amp for 220 VAC to 230 VAC operation.
3. Reinsert it for appropriate voltage range.
4. When performing the reinsertion of fuse holder for the voltage conversion, the appropriate power cord should be used. (See Fig.1.)







Plug configuration	Power cord and plug type	Factory installed instrument fuse	Line cord plug fuse	Parts No. for power cord
	North American 120 volt/60 Hz Rated 15 amp (12 amp max; NEC)	800 mA, 250 V Fast blow 5 × 20 mm	None	E30-1951-05
	Universal Europe 220 volt/50 Hz Rated 16 amp	500 mA, 250 V Fast blow 5 × 20 mm	None	E30-1952-05
	U.K. 240 volt/50 Hz Rated 13 amp	500 mA, 250 V Fast blow 5 × 20 mm	5 A	E30-1963-05
	Australian 240 volt/50 Hz Rated 10 amp	500 mA, 250 V Fast blow 5 × 20 mm	None	E30-1953-15
	North American 240 volt/60 Hz Rated 15 amp (12 amp max; NEC)	500 mA, 250 V Fast blow 5 × 20 mm	None	—
	Switzerland 240 volt/50 Hz Rated 10 amp	500 mA, 250 V Fast blow 5 × 20 mm	None	—

Fig. 1 Power Input Voltage Configuration

# CS-4135 SAFETY

## SAFETY

Before connecting the instrument to a power source, carefully read the following information, then verify that the proper power cord is used and the proper line fuse is installed for power source. The specified voltage is shown at the fuse holder of the AC inlet. If the power cord is not applied for specified voltage, there is always a certain amount of danger from electric shock.

### Line voltage

This instrument operates using ac-power input voltages that 100/120/220/230 V at frequencies from 50 Hz to 60 Hz.

### Power cord

The ground wire of the 3-wire ac power plug places the chassis and housing of the oscilloscope at earth ground. Do not attempt to defeat the ground wire connection or float the oscilloscope; to do so may pose a great safety hazard. The appropriate power cord is supplied by an option that is specified when the instrument is ordered.

The optional power cords are shown as follows in Fig. 1.

### Line fuse

The fuse holder is located on the rear panel and contains the line fuse. Verify that the proper fuse is installed by replacing the line fuse.

### Voltage conversion

This oscilloscope may be operated from either a 100 V to 230 V, 50/60 Hz power source. Use the following procedure to change from 100 to 230 volt operation or vice versa.

1. Remove the fuse holder.
2. Replace fuse F 1 with a fuse of appropriate value, 500 m amp for 100 VAC to 120 VAC operation. 315 m amp for 220 VAC to 230 VAC operation.
3. Reinsert it for appropriate voltage range.
4. When performing the reinsertion of fuse holder for the voltage conversion, the appropriate power cord should be used. (See Fig.1.)







Plug configuration	Power cord and plug type	Factory installed instrument fuse	Line cord plug fuse	Parts No. for power cord
	North American 120 volt/60 Hz Rated 15 amp (12 amp max; NEC)	500 mA, 250 V Slow blow 5 × 20 mm	None	E30-1951-05
	Universal Europe 220 volt/50 Hz Rated 16 amp	315 mA, 250 V Slow blow 5 × 20 mm	None	E30-1952-05
	U.K. 240 volt/50 Hz Rated 13 amp	315 mA, 250 V Slow blow 5 × 20 mm	5 A	E30-1963-05
	Australian 240 volt/50 Hz Rated 10 amp	315 mA, 250 V Slow blow 5 × 20 mm	None	E30-1953-15
	North American 240 volt/60 Hz Rated 15 amp (12 amp max; NEC)	315 mA, 250 V Slow blow 5 × 20 mm	None	—
	Switzerland 240 volt/50 Hz Rated 10 amp	315 mA, 250 V Slow blow 5 × 20 mm	None	—

Fig. 1 Power Input Voltage Configuration

**Vertical attenuator**

The CH1 (CH2) input signal passes through the AC-GND-DC switch and enters the 1st ATT (1/1, 1/10, 1/100).

The 1st ATT is composed of 2 relays and a passive ATT element. The signal output from the 1st ATT enters the head amp composed of Q101 (201) to Q106 (206) and IC101 (201). This head amp is a 1/1 buffer amplifier of the feed-forward type with low temperature drift and an input impedance of 1 megohm. After the impedance of the signal has been converted with the head amp, the signal is sent to the 2nd ATT (1/1, 1/2, 1/4, 1/10).

The 2nd ATT is also composed of 2 relays and a passive ATT element similarly to the 1st ATT. With both the 1st and 2nd ATTs, the sensitivities can be switched with the panel unit's switch which activates a relay through drive transistors (Q151 to 154).

**Vertical preamplifier**

The vertical preamp boosts the signal Input from the 2nd ATT with a gain of about 5x using a differential cascode amp composed of Q107, 111 and 112 (Q207, 211 and 212). Q108 (Q208) is a constant current circuit, and Q109 (Q209) forms the variable gain circuit which varies the resistance between the drain and source according to the voltage applied to the gate. K105 (K205) is switched OFF when the selected range is 1 mV or 2 mV so the gain at the differential cascode amp of Q107, 111 and 112 is boosted further by 5 times (to a total of 25x). Q110 (Q210) is an emitter-follower, the trigger signal is obtained from the output from this stage, supplied through emitter-follower Q113 and sent from Q114 to the TRIG circuit in the form of current signal. With CH2 only, the X output is also extracted, sent through the amp formed with Q224 and 231 and applied to the Horizontal signal selector. With CH1, the CH1 OUT signal is taken from the input to this stage. The signal output from the 2nd amp is sent to the position amp. The position amp is a differential cascode amp composed of Q115 to 118 (Q215 to 218). The position current from the panel unit is applied to the collector of Q115 (Q215) and converted in current for use in varying the vertical position. With CH2 only, a polarity inverter circuit is formed by Q221 to Q223 and inverts the signal polarity by grounding the base of Q223.

At the channel selector, the signal turning the anodes of CH1 D101 and 102 (CH2 - D201 and 202) "H" is selected and sent as the current signal to the vertical final amp in the final unit.

**Vertical final amplifier**

The current signal supplied from the position amp is input to the feedback amp composed of Q102 and 103, converted into a voltage signal and sent to the vertical output amp. Q101 is turned ON in the ADD mode to absorb the excess DC operation current.

The vertical output amp is feedback amp with a constant current load, and Q112 and 113 in the final stage are driven by complementary emitter-followers Q106 to 109. Q110 and

111 form the constant current load. The vertical output amp has a gain of about 65x.

**Trigger circuit**

The trigger source selector switch on the panel unit is used to select the desired trigger signal by operating the trigger switching circuit composed of IC404, Q402 to 407 and D401 to 404. The trigger source switching circuit is connected to the CH1 and CH2 trigger signals from the vertical circuitry, the LINE trigger signal from the power supply circuitry and the external trigger signal supplied through the buffer amp including Q301 to 303.

The selected trigger signal is sent through emitter-follower Q409 and into the trigger level setting circuit composed of Q419 to 421, Q434 and IC402. The trigger level setting circuit is a Schmitt circuit, the threshold level of which is variable with the TRIG LEVEL control on the panel unit.

The signal is also supplied to the TV sync separator circuit composed of Q410 to 412 and Q416 to 418 through C403. Q410, D406 and 407 form the polarity inverter, Q416 is the sync tip clamper and Q418 is the switch for separating the vertical sync signal. IC403a is used to select between the ordinary sync signal or TV sync signal and activate the sweep gate flip-flop IC401b.

**Sweep circuit**

The gate signal from IC401b turns Q427 ON-OFF in the AUTO or NORM mode to control the ramp wave generator circuit composed of IC407 to 410 and Q432 and 433. This is a constant-current charge type ramp circuit and the time constant is determined by combining R469 to 472, R474 to 477, C304 and 305 according to the code entered from the sweep time switch on the panel unit. In case the code indicates a value below 1 ms/div., the time constant adjustment circuit of Q305 is activated so VR301 and R310 are involved in the determination of the time constant.

In the X-Y mode, the ramp wave is not generated because the sweep gate is stopped by IC405d.

Q428 to 430 and IC205c and d determine the upper limit and hold-off time of the ramp wave.

The ramp wave becomes the sweep signal, which is sent through the buffer amp of Q307 and 308, input to the sweep signal-X signal switching circuit formed by Q309 to 312, selected and applied to the horizontal final amp in the final unit.

**Horizontal final amplifier**

The horizontal signal is input to Q215. The voltage corresponding to the horizontal position is input to Q202, then into the feedback amp with constant current load that is composed of Q205 to 212, and amplified to an amplitude large enough to drive the CRT.

Q203 and 204 are turned ON in the MAG mode to increase the gain to 10x the normal gain.

# CS-4125 (~S/NO.7121000) CIRCUIT DESCRIPTION

## CHOP oscillator

The CHOP oscillator circuit is composed of IC406c and d. IC403b selects the CHOP oscillator signal in the CHOP mode or sweep gate signal in the ALT mode, and the selected signal is used as the signal for switching channels.

IC406a and b inputs the signal from the CHOP oscillator and the opposite-phase signal of the sweep gate into the blanking amp in the final unit as the blanking signals.

## High-voltage and blanking circuitry

Q401 oscillates by using the inductance of converter transformer T1. The oscillated voltage appears on the high-voltage coil and -1800 V is obtained from it by means of the voltage multiplying rectifier composed of C404, C405, D402 and D403 and control circuit composed of Q402 to 404. A CRT heater coil is also provided which lights the CRT heater through R401.

From the middle of the high-voltage coil, a voltage of about 300 Vp-p is extracted and modulated with the blanking signal. The blanking signal sent from the ATT unit passes through the blanking amp composed of Q409 to 411 and, together with the modulation signal, enters the DC regenerator circuit composed of D404 to 407, C411 and C412 to supply the intensity control signal to the G1 electrode of the CRT.

Q405 to 408 are used in focusing control, and a high with-standing voltage is obtained by connecting 4 transistors in series.

## Low-voltage circuit

IC301 and 302 are used to control 4 voltage systems of +/-8 V, +5 V and +140 V based on -8 V. The +/-10 V voltages are unstable voltages used as the power supply for the high-voltage circuitry.

## Other

Q351 and 352 in the final unit are used to drive the rotation coil. IC1 in the panel unit is the CAL signal oscillator circuit which generates a square wave of 1 Vp-p and about 1 kHz.

# CS-4125/CS-4135 CIRCUIT DESCRIPTION

## Vertical attenuator

The CH1 (CH2) input signal passes through the AC-GND-DC switch and enters the 1st ATT (1/1, 1/10, 1/100).

The 1st ATT is composed of 2 relays and a passive ATT element. The signal output from the 1st ATT enters the head amp composed of Q101 (201) to Q106 (206) and IC101 (201). This head amp is a 1/1 buffer amplifier of the feed-forward type with low temperature drift and an input impedance of 1 megohm. After the impedance of the signal has been converted with the head amp, the signal is sent to the 2nd ATT (1/1, 1/2, 1/4, 1/10).

The 2nd ATT is also composed of 2 relays and a passive ATT element similarly to the 1st ATT. With both the 1st and 2nd ATTs, the sensitivities can be switched with the panel unit's switch which activates a relay through drive transistors (Q151 to 154).

## Vertical preamplifier

The vertical preamp boosts the signal input from the 2nd ATT with a gain of about 4x using a differential cascode amp composed of Q107, 111 and 112 (Q207, 211 and 212). Q108 (Q208) is a constant current circuit, and Q109 (Q209) forms the variable gain circuit which varies the resistance between the drain and source according to the voltage applied to the gate. K105 (K205) is switched ON when the selected range is 1 mV or 2 mV so the gain at the differential cascode amp of Q107, 111 and 112 is boosted further by 5 times (to a total of 20x). Q110 (Q210) is an emitter-follower. The trigger signal is obtained from the emitter follower Q115, supplied through emitter-follower Q113 and sent from Q114 to the TRIG circuit in the form of current signal. With CH2 only, the X output is also extracted, sent through the amp formed with Q224 and 231 and applied to the Horizontal signal selector. With CH1, the CH1 OUT signal is taken from the input to this stage.

The position amp is a differential cascode amp composed of Q115 to 118 (Q215 to 218). The position current from the panel unit is applied to the collector of Q115 (Q215) and converted in current for use in varying the vertical position. With CH2 only, a polarity inverter circuit is formed by Q221 to Q223 and inverts the signal polarity by grounding the base of Q223.

At the channel selector, the signal turning the anodes of CH1 D101 and 102 (CH2 - D201 and 202) "H" is selected and sent as the current signal to the vertical final amp in the final unit.

## Vertical final amplifier

The current signal supplied from the position amp is input to the feedback amp composed of Q102 and 103, converted into a voltage signal and sent to the vertical output amp. Q101 is turned ON in the ADD mode to absorb the excess DC operation current.

The vertical output amp is feedback amp with a constant current load, and Q112 and 113 in the final stage are driven by complementary emitter-followers Q106 to 109. Q110 and

111 form the constant current load. The vertical output amp has a gain of about 65x. [CS-4135 : about 35x].

## Trigger circuit

The trigger source selector switch on the panel unit is used to select the desired trigger signal by operating the trigger switching circuit composed of IC404, Q402 to 407 and D401 to 404. The trigger source switching circuit is connected to the CH1 and CH2 trigger signals from the vertical circuitry, the LINE trigger signal from the power supply circuitry and the external trigger signal supplied through the buffer amp including Q301 to 303.

The selected trigger signal is sent through emitter-follower Q409 and into the trigger level setting circuit composed of Q419 to 421, Q434 and IC402. The trigger level setting circuit is a Schmitt circuit, the threshold level of which is variable with the TRIG LEVEL control on the panel unit.

The signal is also supplied to the TV sync separator circuit composed of Q410 to 412 and Q416 to 418 through C403. Q410, D406 and 407 form the polarity inverter, Q416 is the sync tip clamper and Q418 is the switch for separating the vertical sync signal. IC403a is used to select between the ordinary sync signal or TV sync signal and activate the sweep gate flip-flop IC401b.

## Sweep circuit

The gate signal from IC401b turns Q427 ON-OFF in the AUTO or NORM mode to control the ramp wave generator circuit composed of IC407 to 410 and Q432 and 433. This is a constant-current charge type ramp circuit and the time constant is determined by combining R469 to 472, R474 to 477, C304 and 305 according to the code entered from the sweep time switch on the panel. In case the code indicates a value below 1 ms/div., the time constant adjustment circuit of Q305 is activated so VR301 and R310 are involved in the determination of the time constant.

In the X-Y mode, the ramp wave is not generated because the sweep gate is stopped by IC405d.

Q428 to 430 and IC205c and d determine the upper limit and hold-off time of the ramp wave.

The ramp wave becomes the sweep signal, which is sent through the buffer amp of Q307 and 308, input to the sweep signal-X signal switching circuit formed by Q309 to 312, selected and applied to the horizontal final amp in the final unit.

## Horizontal final amplifier

The horizontal signal is input to Q215. The voltage corresponding to the horizontal position is input to Q202, then into the feedback amp with constant current load that is composed of Q205 to 212, and amplified to an amplitude large enough to drive the CRT.

Q203 and 204 are turned ON in the MAG mode to increase the gain to 10x the normal gain.

# CS-4125/CS-4135 CIRCUIT DESCRIPTION

## CHOP oscillator

The CHOP oscillator circuit is composed of IC406c and d. IC403b selects the CHOP oscillator signal in the CHOP mode or sweep gate signal in the ALT mode, and the selected signal is used as the signal for switching channels.

IC406a and b inputs the signal from the CHOP oscillator and the opposite-phase signal of the sweep gate into the blanking amp in the final unit as the blanking signals.

## High-voltage and blanking circuitry

Q401 oscillates by using the inductance of converter transformer T1. The oscillated voltage appears on the high-voltage coil and -1800 V [CS-4135 : -1500 V] is obtained from it by means of the voltage multiplying rectifier composed of C404, C405, D402 and D403 [CS-4135 : C405 and D403] and control circuit composed of Q402 to 404. A CRT heater coil is also provided which lights the CRT heater through R401. A401 is the Cockcroft circuit generating the high 10.5 kV voltage for the CRT anode. [A401 is not used with the CS-4125]

From the middle of the high-voltage coil, a voltage of about 300 V<sub>p-p</sub> is extracted and modulated with the blanking signal. The blanking signal sent from the ATT unit passes through the blanking amp composed of Q409 to 411 and, together with the modulation signal, enters the DC regenerator circuit composed of D404 to 407, C411 and C412 to supply the intensity control signal to the G1 electrode of the CRT.

Q405 to 408 are used in focusing control, and a high with-standing voltage is obtained by connecting 4 transistors in series. [CS-4135 : 3 transistors in series]

## Low-voltage circuit


IC301 and 302 are used to control 4 voltage systems of +/-8 V, +5 V [CS-4135 : 80 V] and +140 V based on -8 V. The +5 V is controlled by 3-Terminal regulator IC303 [not used with the CS-4125]. The +/-10 V voltages are unstable voltages used as the power supply for the high-voltage circuitry.

## Other


Q351 and 352 in the final unit are used to drive the rotation coil. IC1 in the panel unit is the CAL signal oscillator circuit which generates a square wave of 1 V<sub>p-p</sub> and about 1 kHz. Q421 and Q422 are illumination lamp driver transistors. The control signal is the pulse-width modulation signal which is set according to VR101 on the panel.



# CS-4125 BLOCK DIAGRAM

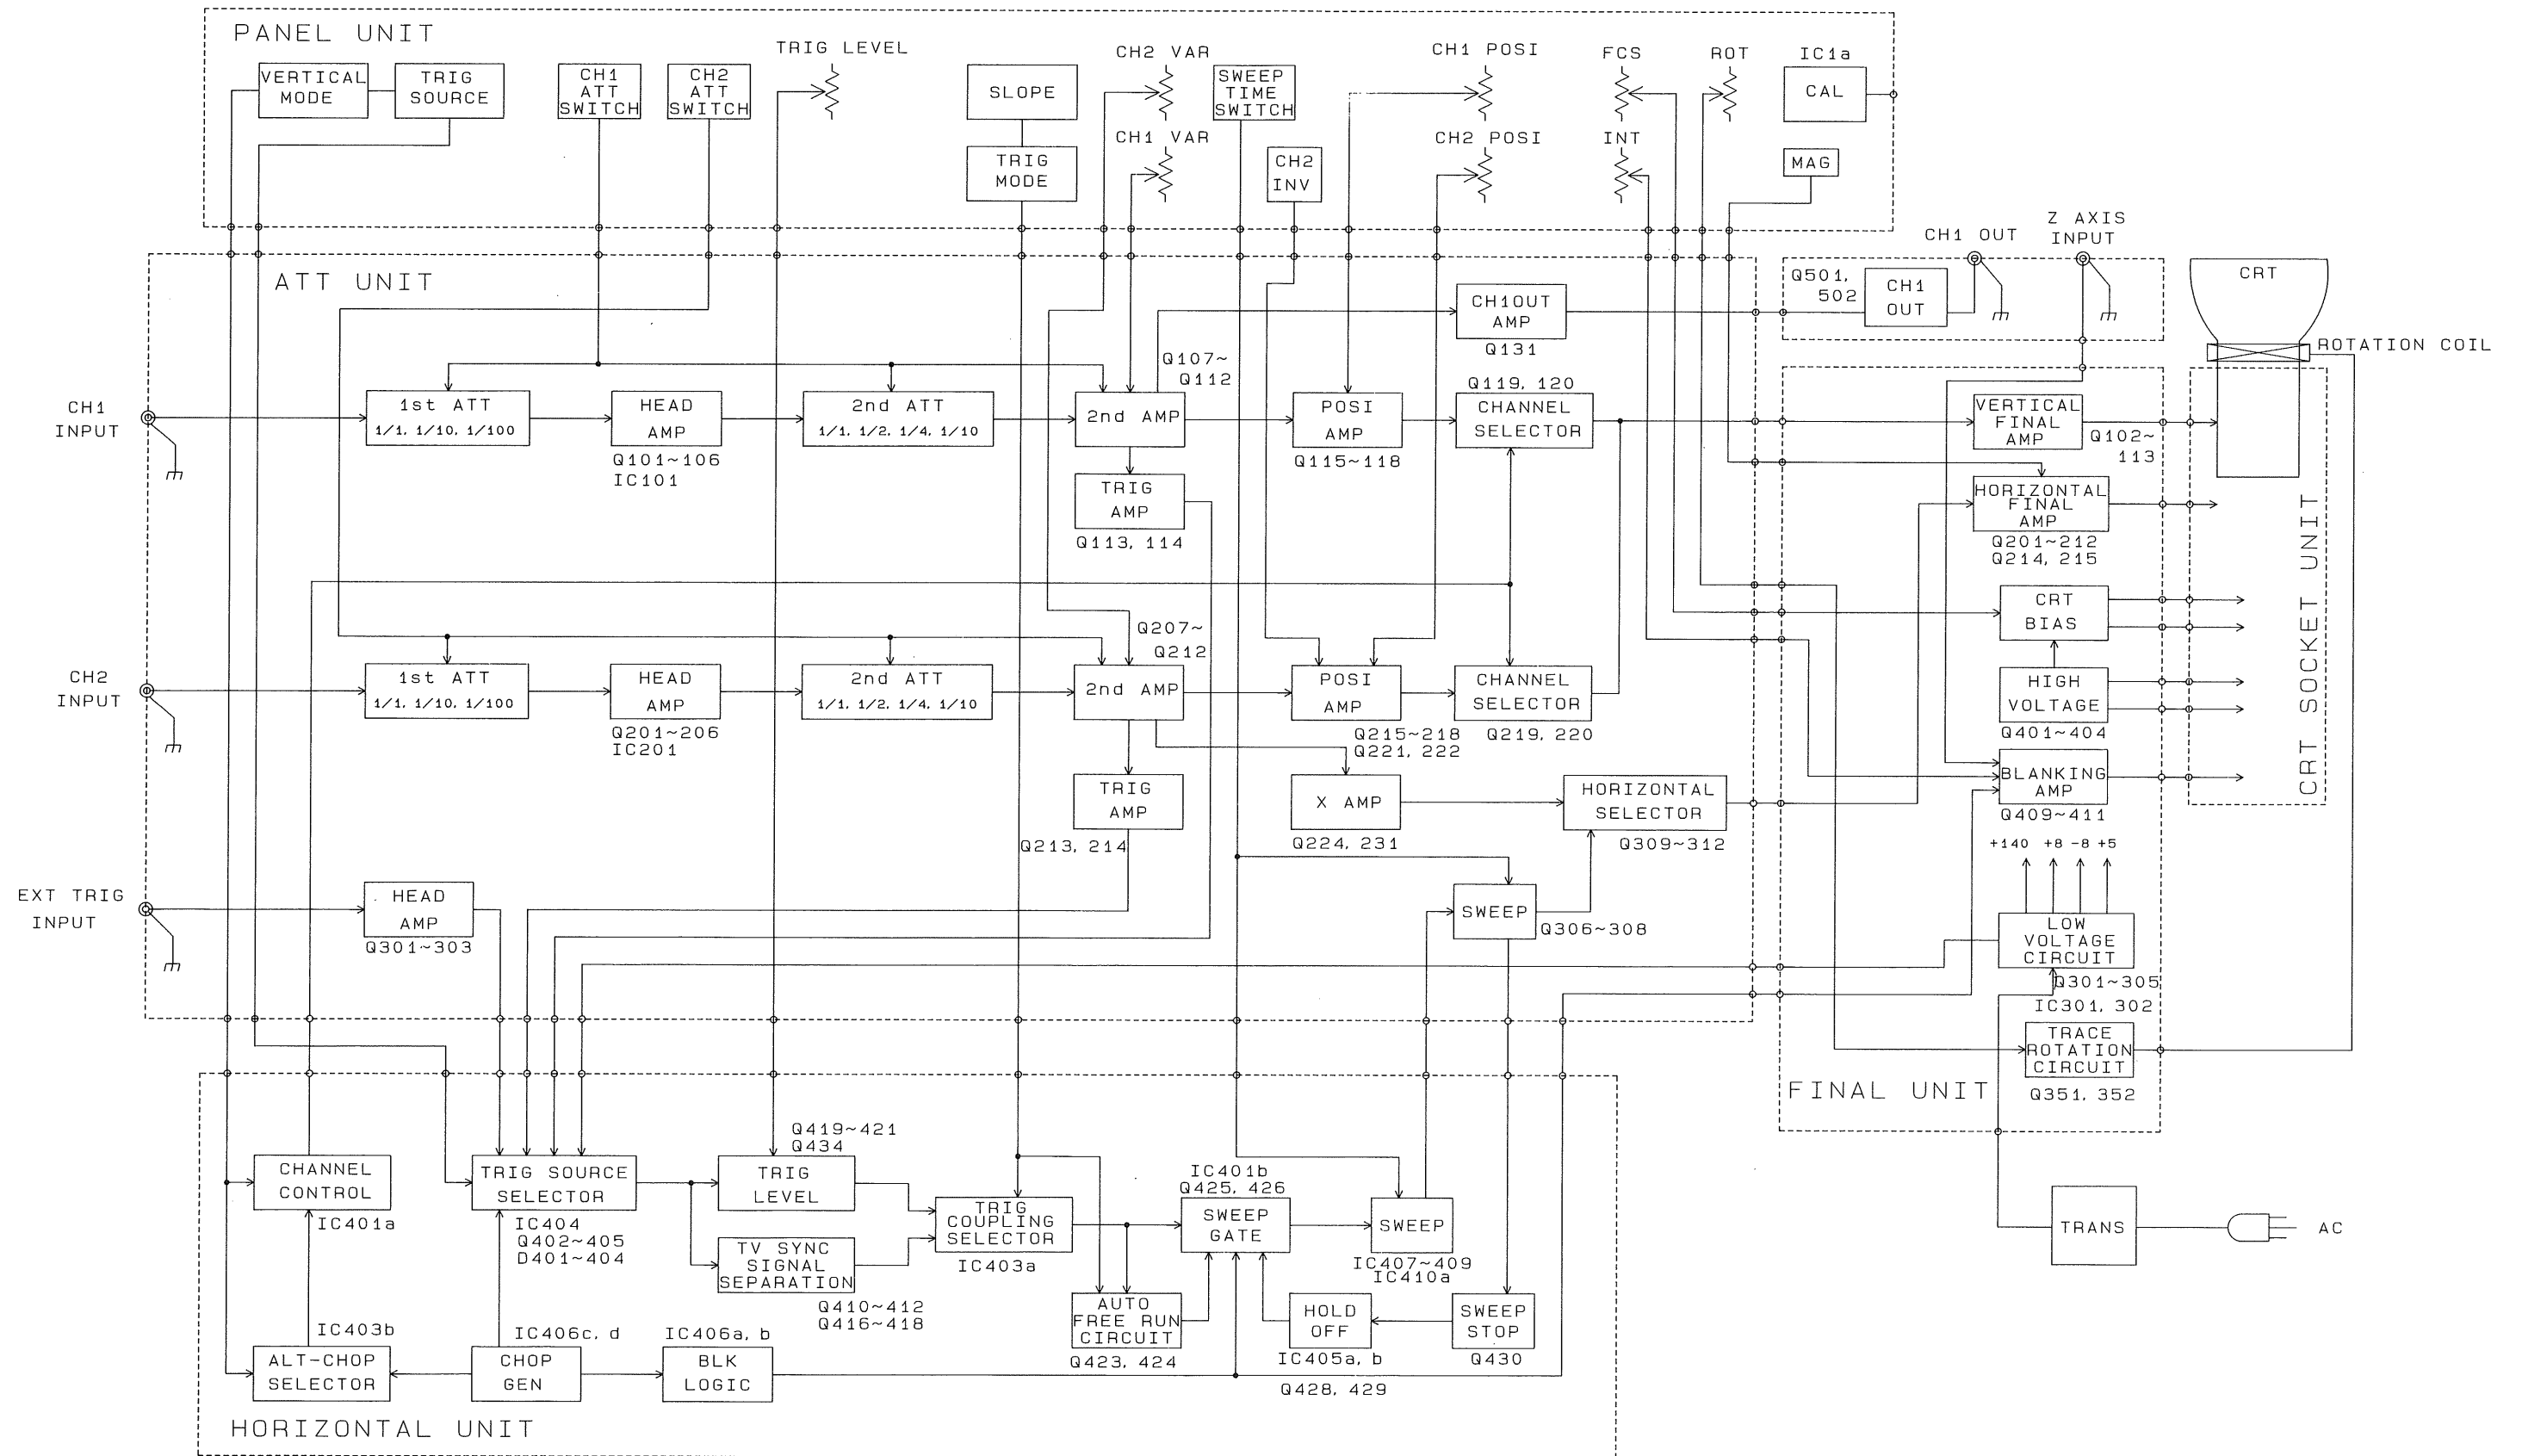

# CS-4135 BLOCK DIAGRAM

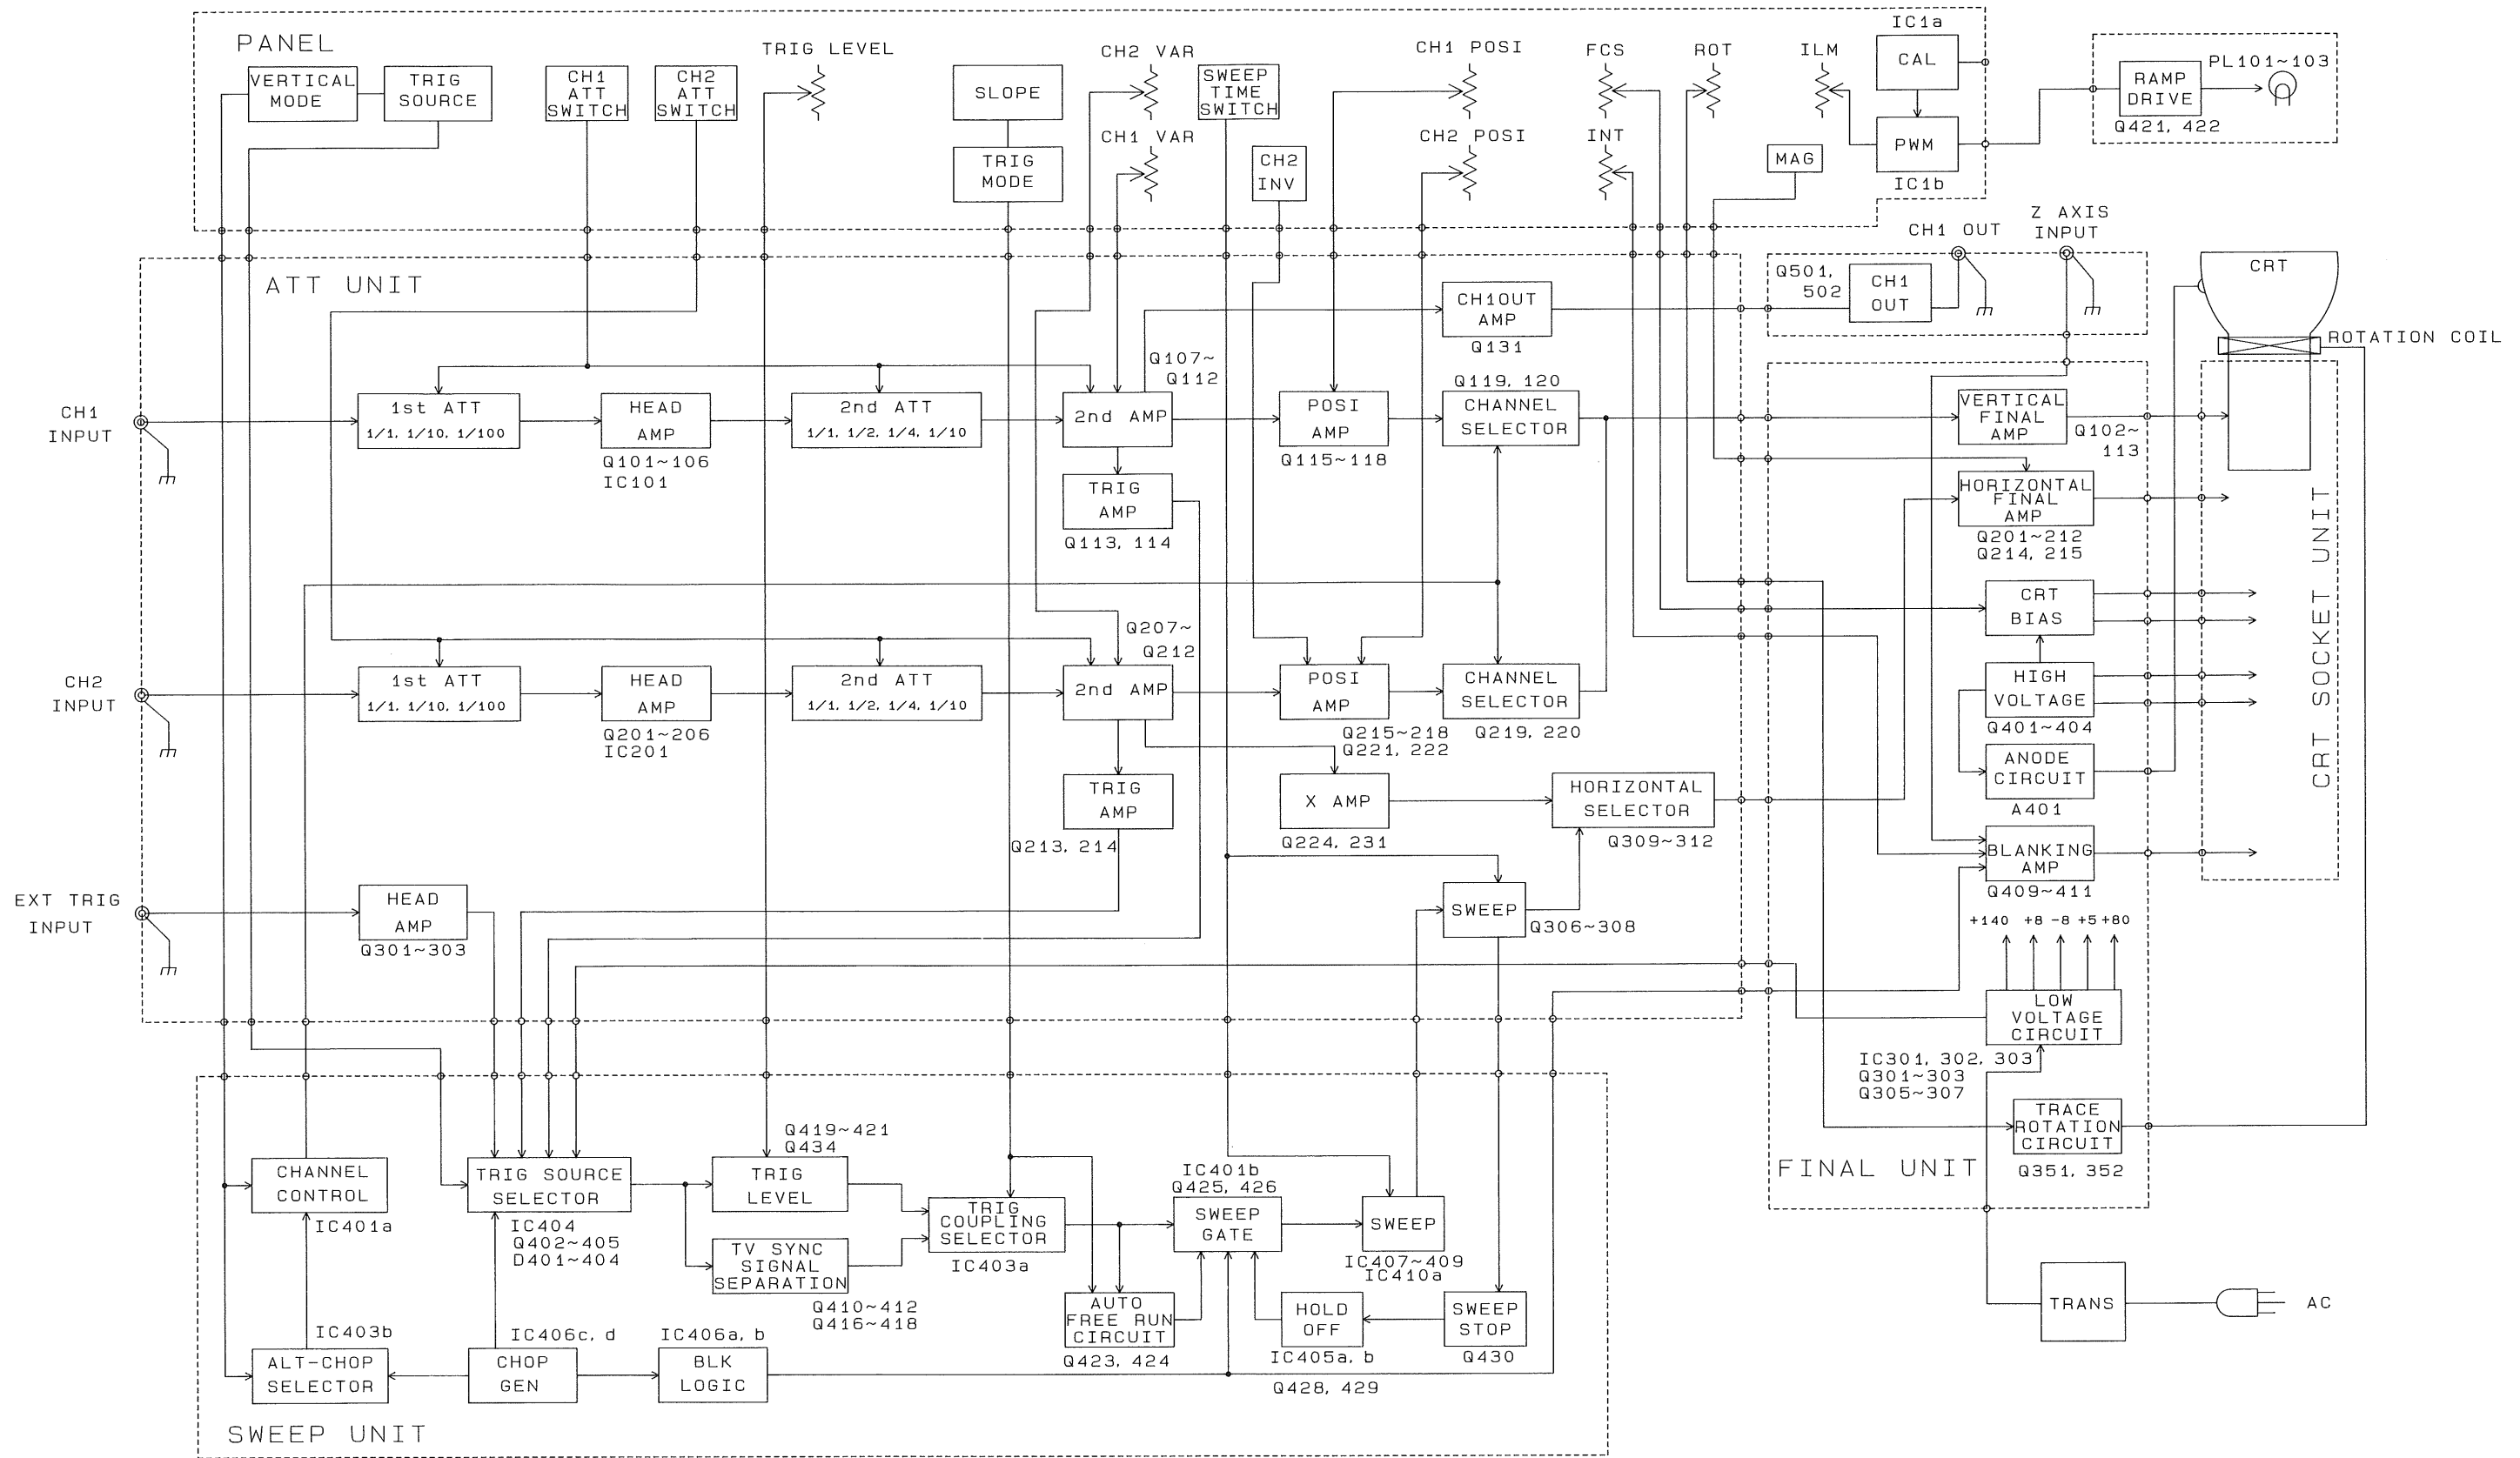

# CS-4125 (~S/NO.7121000) ADJUSTMENT

To obtain the best performance, periodically calibrate the unit. Sometimes, only one mode need be calibrated, while at other times, all modes should be calibrated. When one mode is calibrated, it must be noted that the other modes may be affected. When calibrating all modes, perform the calibration in the specified sequence.

The following calibration required an accurate measuring instrument and an insulated adjusting flat blade screwdriver. If they are not available, contact your dealer. For optimum adjustment, turn the power on and warm up the scope sufficiently (more than 30 minutes) before starting.

Before calibrating the scope, check the power supply voltage.

## TEST EQUIPMENT REQUIRED

The following instrument or their equivalent should be used for making adjustment.

Test Equipment	Model	Minimum Specification
Digital Multi-Meter	DL-712 (KENWOOD)	Impedance: More than 10 M $\Omega$ , Measuring range: 0.2 V to 1000 V
Sine-Wave Generator	651 B (YHP)	Frequency: 10 Hz to 10 MHz, constant voltage over tuning range
Sine-Wave Generator	SG-503 (Tektronix)	Frequency: 50 kHz to 100 MHz, Output impedance: 50 $\Omega$ , constant voltage over tuning range
Square-Wave Generator	PG-506 (Tektronix)	Output signal: 1 kHz, Amplitude: 10 mVp-p to 10 Vp-p, Accuracy: within $\pm 1\%$ , Rise time: 35ns or less 100 kHz, Rise time: 1 ns or less
Q Meter	4343B (YHP)	—
Color Pattern Generator	CG-921 (KENWOOD)	—
Oscilloscope	CS-6040 (KENWOOD)	Sensitivity: more than 1 mV Frequency response: More than 150 MHz
Time-Marker Generator	TG-501 (Tektronix)	Time mark: 0.5 s to 0.1 $\mu$ s repetitive waveform
High-Voltage Probe	—	Input Impedance: 1000 M $\Omega$
Termination	—	Impedance: 50 $\Omega$ Accuracy: within 3%
Termination	—	3 watts type impedance: 50 $\Omega$
Attenuator	—	- 20 dB attenuation (50 $\Omega$ )

Table 1

## PREPARATION FOR ADJUSTMENT

### Control Settings

The control settings listed below must be used for each adjustment procedure.

Exceptions to these settings will be noted as they occur. After completing a adjustment, return the controls to the following settings.

NEME OF KNOBS	POSITION
INTEN	12 o'clock
FOCUS	12 o'clock
◀ ▶ POSITION	12 o'clock
× 10 MAG	OFF
VARIABLE	CAL
VERTICAL MODE	CH 1
INV	OFF
X - Y	OFF
TRIGGERING SOURCE	VERT MODE
TRIGGERING MODE	AUTO
TRIGGERING LEVEL	12 o'clock
VOLTS / DIV (CH1 and CH2)	5 V / DIV
SWEEP TIME / DIV	0.5 s / 50 ms
VOLTS / DIV LEVER	AC
SLOPE	■ +

Table 2

# CS-4125 (~S/NO.7121000) ADJUSTMENT

Item	Adjustment	P.C.B.	Procedure								
Supply voltage	VR301	X73-2090	<p>-8.0 V Adjustment range: -7.96 to -8.04 V (<math>\pm 0.5\%</math>)</p> <p>Apply the digital multimeter probe to VR301 and adjust to the adjustment range.</p>								
Vertical operating voltage	VR102	X73-2090	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">V.MODE: CH1</td> <td style="width: 50%;">VOLTS: 10 mV (both CH)</td> </tr> <tr> <td>AC-DC: GND (both CH)</td> <td>H.MODE: AUTO</td> </tr> <tr> <td colspan="2">VARIABLE: CAL (both CH)</td> </tr> </table> <p>1) Move the luminescent line to the CRT center by operating the POSI controls.                  2) Plug the dedicated connector into CN503.                  3) Adjust so that the multimeter is 60.0 V. (Adjustment range: 59.9 to 60.1 V)                  4) After adjustment, unplug the connector.                  * In case the dedicated connector is not available, adjust so that the center value of the + and - electrodes is 60.0 V.                  (Example)                  When the + electrode (adjustment) is 60.0 V and the - electrode (check) is 62.0 V; the + electrode (adjustment) should be 59.0 V and the - electrode (check) should be 61.0 V.</p>	V.MODE: CH1	VOLTS: 10 mV (both CH)	AC-DC: GND (both CH)	H.MODE: AUTO	VARIABLE: CAL (both CH)			
V.MODE: CH1	VOLTS: 10 mV (both CH)										
AC-DC: GND (both CH)	H.MODE: AUTO										
VARIABLE: CAL (both CH)											
Horizontal operating voltage	VR203	X73-2090	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">V.MODE: CH1</td> <td style="width: 50%;">VOLTS: 10 mV (both CH)</td> </tr> <tr> <td>AC-DC: GND (both CH)</td> <td>X-Y: ON</td> </tr> <tr> <td colspan="2">VARIABLE: CAL (both CH)</td> </tr> </table> <p>1) Move the luminescent line to the CRT center by operating the POSI controls.                  2) Plug the dedicated connector into CN503.                  3) Adjust so that the multimeter is 70.0 V. (Adjustment range: 69.5 to 70.5 V)                  4) After adjustment, unplug the connector.                  * In case the dedicated connector is not available, adjust so that the center value of the + and - electrodes is 70.0 V.                  (Example)                  When the + electrode (adjustment) is 70.0 V and the - electrode (check) is 73.0 V; the + electrode (adjustment) should be 68.5 V and the - electrode (check) should be 71.5 V.</p>	V.MODE: CH1	VOLTS: 10 mV (both CH)	AC-DC: GND (both CH)	X-Y: ON	VARIABLE: CAL (both CH)			
V.MODE: CH1	VOLTS: 10 mV (both CH)										
AC-DC: GND (both CH)	X-Y: ON										
VARIABLE: CAL (both CH)											
Focus center and ASTIG	VR401 (Focus) VR403 (ASTIG)	X73-2090	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">V.MODE: CH1</td> <td style="width: 50%;">H.MODE: X-Y</td> </tr> <tr> <td>AC-DC: GND (both CH)</td> <td>FOCUS: 12 o'clock</td> </tr> <tr> <td>VARIABLE: CAL (both CH)</td> <td>INTEN: Arbitrary</td> </tr> <tr> <td colspan="2">VOLTS: 10 mV (both CH)</td> </tr> </table> <p>1) Set FOCUS on the panel to the 12 o'clock position. Adjust VR401 and VR403 to move the spot to the best point.</p> <div style="text-align: center; margin-top: 10px;"> </div>	V.MODE: CH1	H.MODE: X-Y	AC-DC: GND (both CH)	FOCUS: 12 o'clock	VARIABLE: CAL (both CH)	INTEN: Arbitrary	VOLTS: 10 mV (both CH)	
V.MODE: CH1	H.MODE: X-Y										
AC-DC: GND (both CH)	FOCUS: 12 o'clock										
VARIABLE: CAL (both CH)	INTEN: Arbitrary										
VOLTS: 10 mV (both CH)											






# CS-4125 (~S/NO.7121000) ADJUSTMENT

Item	Adjustment	P.C.B.	Procedure
CH1 100 Hz square wave	VR104	X75-1220	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> V.MODE: CH1  AC-DC: DC  VARIABLE: CAL <div style="float: right; text-align: right;"> VOLTS: 10 mV  H.MODE: AUTO </div> </div> <p>1) Input a 100 Hz square wave signal to CH1 and set it so that it extends by 6 divisions.  2) Adjust so that the waveform is flat.</p> <div style="text-align: center;"> </div>
CH2 100 Hz square wave	VR205	X75-1220	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> V.MODE: CH2  AC-DC: DC  VARIABLE: CAL <div style="float: right; text-align: right;"> VOLTS: 10 mV  H.MODE: AUTO </div> </div> <p>1) Input a 100 Hz square wave signal to CH2 and set it so that it extends by 6 divisions.  2) Adjust so that the waveform is flat.</p> <div style="text-align: center;"> </div>
CH2 GAIN	VR101	X73-2090	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> V.MODE: CH2  AC-DC: DC  VARIABLE: CAL <div style="float: right; text-align: right;"> VOLTS: 10 mV  H.MODE: AUTO </div> </div> <p>1) Input a 50 mV square wave signal.  2) Adjust so that the amplitude 5 divisions.</p> <div style="text-align: center;"> </div>
CH1 GAIN	VR103	X75-1220	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> V.MODE: CH1  AC-DC: DC  VARIABLE: CAL <div style="float: right; text-align: right;"> VOLTS: 10 mV  H.MODE: AUTO </div> </div> <p>1) Input a 50 mV square wave signal.  2) Adjust so that the amplitude 5 divisions.</p> <div style="text-align: center;"> </div>
CH1 waveform shaping	TC104 (0.1 V) TC102 (1 V)	X75-1220	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> V.MODE: CH1  AC-DC: DC  VARIABLE: CAL <div style="float: right; text-align: right;"> VOLTS: 10 mV (ideal waveform)  H.MODE: AUTO </div> </div> <p>1) Input a 1 kHz square wave signal to CH2 and set it so that it extends by CRT 6 divisions. (ideal waveform)  2) Adjust so that the same capacity value for ideal waveform is obtained in both waveforms at 0.1 V and 1 V.</p> <div style="text-align: center;"> </div>

# CS-4125 (~S/NO.7121000) ADJUSTMENT

Item	Adjustment	P.C.B.	Procedure
CH2 waveform shaping	TC204 (0.1 V) TC202 (1 V)	X75-1220	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> V.MODE: CH2 AC-DC: DC VARIABLE: CAL <span style="float: right;">VOLTS: 10 mV (ideal waveform) H.MODE: AUTO</span> </div> <ol style="list-style-type: none"> <li>1) Input a 1 kHz square wave signal to CH2 and set it so that it extends by CRT 6 divisions. (ideal waveform)</li> <li>2) Adjust so that the same capacity value for ideal waveform is obtained in both waveforms at 0.1 V and 1 V.</li> </ol> <div style="text-align: center; margin-top: 10px;"> </div>
CH1 Input Capacity	TC103 (0.1 V) TC101 (1 V)	X75-1220	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> V.MODE: CH1 AC-DC: DC VARIABLE: CAL <span style="float: right;">VOLTS: 10 mV (reference) H.MODE: AUTO</span> </div> <ol style="list-style-type: none"> <li>1) Connect a capacity meter to the INPUT.</li> <li>2) Measure the capacity of the 10 mV. (23 pF ± 3 pF)</li> <li>3) At 0.1 V and 1 V, adjust to obtain the same values as 10 mV.</li> </ol>
CH2 Input Capacity	TC203 (0.1 V) TC201 (1 V)	X75-1220	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> V.MODE: CH2 AC-DC: DC VARIABLE: CAL <span style="float: right;">VOLTS: 10 mV (reference) H.MODE: AUTO</span> </div> <ol style="list-style-type: none"> <li>1) Connect a capacity meter to the INPUT.</li> <li>2) Measure the capacity of the 10 mV. (23 pF ± 3 pF)</li> <li>3) At 0.1 V and 1 V, adjust to obtain the same values as 10 mV.</li> </ol>
SWEEP TIME 0.1 ms	VR302	X75-1220	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> V.MODE: CH1 SWEEP TIME: 0.1 ms VARIABLE: CAL <span style="float: right;">VOLTS: Arbitrary AC-DC: DC H.MODE: AUTO</span> </div> <ol style="list-style-type: none"> <li>1) Input a 0.1 ms marker signal.</li> <li>2) Adjust so that the marker peak and scale coincides at every divisions.</li> </ol> <div style="text-align: center; margin-top: 10px;"> </div>
SWEEP TIME 1 ms	VR301	X75-1220	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> V.MODE: CH1 SWEEP TIME: 1 ms VARIABLE: CAL <span style="float: right;">VOLTS: Arbitrary AC-DC: DC H.MODE: AUTO</span> </div> <ol style="list-style-type: none"> <li>1) Input a 0.1 ms marker signal.</li> <li>2) Adjust so that the marker peak and scale coincides at every divisions.</li> </ol> <div style="text-align: center; margin-top: 10px;"> </div>

# CS-4125 (~S/NO.7121000) ADJUSTMENT

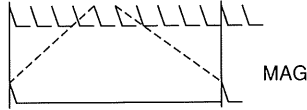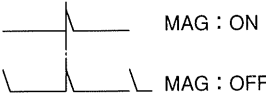Item	Adjustment	P.C.B.	Procedure
MAG GAIN	VR202	X73-2090	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> V.MODE: CH1  SWEEP TIME: 0.1 ms  VARIABLE: CAL <span style="float: right;">VOLTS: Arbitrary AC-DC: DC H.MODE: AUTO</span> </div> <ol style="list-style-type: none"> <li>1) Input a 0.1 ms marker signal.</li> <li>2) Adjust POSI so that the marker peak and scale coincides at every divisions.</li> <li>3) Switch X10 MAG ON and adjust so that the interval between two peaks is 10 divisions.</li> </ol> <div style="text-align: center; margin-top: 10px;">  </div>
MAG Center	VR201	X73-2090	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> V.MODE: CH1  SWEEP TIME: 0.1 ms  VARIABLE: CAL  VOLTS: Arbitrary <span style="float: right;">AC-DC: DC H.MODE: AUTO X10 MAG: ON</span> </div> <ol style="list-style-type: none"> <li>1) Input a 0.5 ms marker signal.</li> <li>2) Adjust H.POSI so that the center peak is aligned with the scale center.</li> <li>3) Switch X10 MAG OFF and adjust so that the center marker peak is aligned with the scale center. (Adjust by repeating a few times)</li> </ol> <div style="text-align: center; margin-top: 10px;">  </div>
X-GAIN	VR203	X75-1220	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> V.MODE: CH2  CH2 VOLTS: 10 mV  VARIABLE: CAL <span style="float: right;">CH2 AC-DC: AC X-Y: ON</span> </div> <ol style="list-style-type: none"> <li>1) Input a 5 mV square wave signal.</li> <li>2) Adjust so that the amplitude is 5 divisions. * Make the adjustment to 5 divisions, at the CRT center.</li> </ol> <div style="text-align: center; margin-top: 10px;">  </div>
X-POSITION	VR204	X75-1220	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> X-Y: ON  AC-DC: GND (both CH) <span style="float: right;">V.POSITION: 12 o'clock (both CH) H.POSITION: 12 o'clock</span> </div> <ol style="list-style-type: none"> <li>1) Adjust the spot to the center of scale.</li> </ol>
ALT start	VR401	X74-1660	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> VOLTS: 10 mV (both CH)  VARIABLE: CAL <span style="float: right;">AC-DC: DC V.MODE: ALT</span> </div> <ol style="list-style-type: none"> <li>1) Set the luminescent line of both CH to the CRT center position.</li> <li>2) Input a 1 kHz sine wave to both CH and set it so that it extends by 6 divisions. (Distribute the signal using a T connector.)</li> <li>3) Adjust so that the start point of both CH are aligned.</li> </ol>




# CS-4125 (~S/NO.7121000) ADJUSTMENT

Item	Adjustment	P.C.B.	Procedure
CH1 1 MHz square wave	TC101	X73-2090	<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;"> V.MODE: CH1                      CH1 AC-DC: DC  CH1 VOLTS: 10 mV              H.MODE: AUTO  VARIABLE: CAL                  * Use a 50-ohm terminator. </div> <p>1) Input a 1 MHz square wave to CH1 and set it so that it extends by 6 divisions.  2) Adjust so that the overshoot is 0.2 divisions.</p> <div style="text-align: center; margin-top: 10px;"> </div>
CH2 1 MHz square wave	TC205	X75-1220	<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;"> V.MODE: CH2                      CH2 AC-DC: DC  CH2 VOLTS: 10 mV              H.MODE: AUTO  VARIABLE: CAL                  * Use a 50-ohm terminator. </div> <p>1) Input a 1 MHz square wave to CH1 and set it so that it extends by 6 divisions.  2) Adjust so that the overshoot is 0.2 divisions.</p>
FIXTRIG Center	VR303	X75-1220	<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;"> V.MODE: CH1                      CH1 AC-DC: DC  TRIG-MODE: FIX                  CH1 POSITION: 12 o'clock </div> <p>1) Input a 50 kHz sine wave to CH1 and set it so that it extends by 6 divisions.  2) Adjust so that the waveform starts from the waveform center line when SLOPE is switched between <math>\pm</math>.</p> <div style="text-align: center; margin-top: 10px;"> </div>


# CS-4125 (~S/NO.7121000) ADJUSTMENT


FINAL UNIT (X73-2090-00)

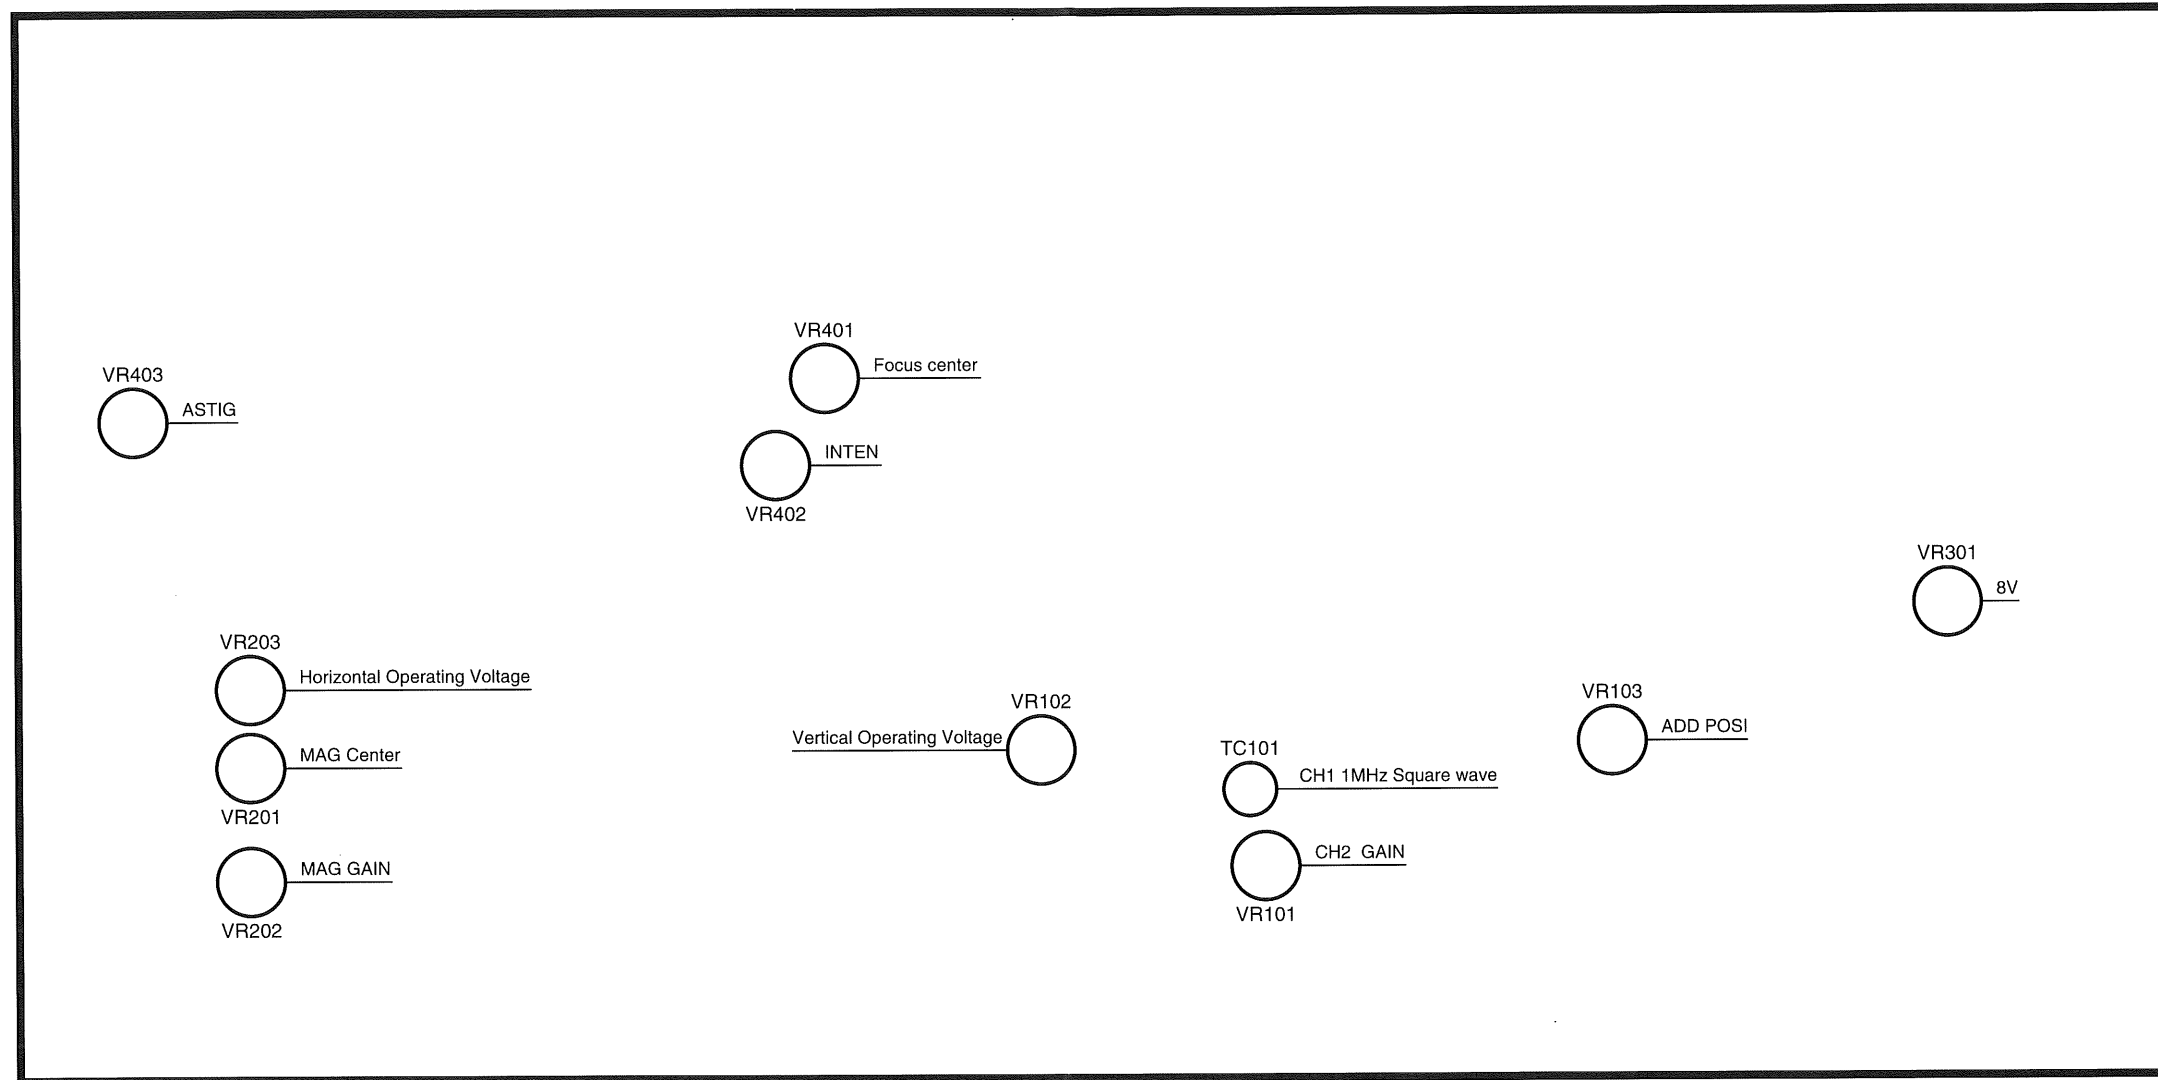

# CS-4125 (~S/NO.7121000) ADJUSTMENT

SWEEP UNIT (X74-1600-00)

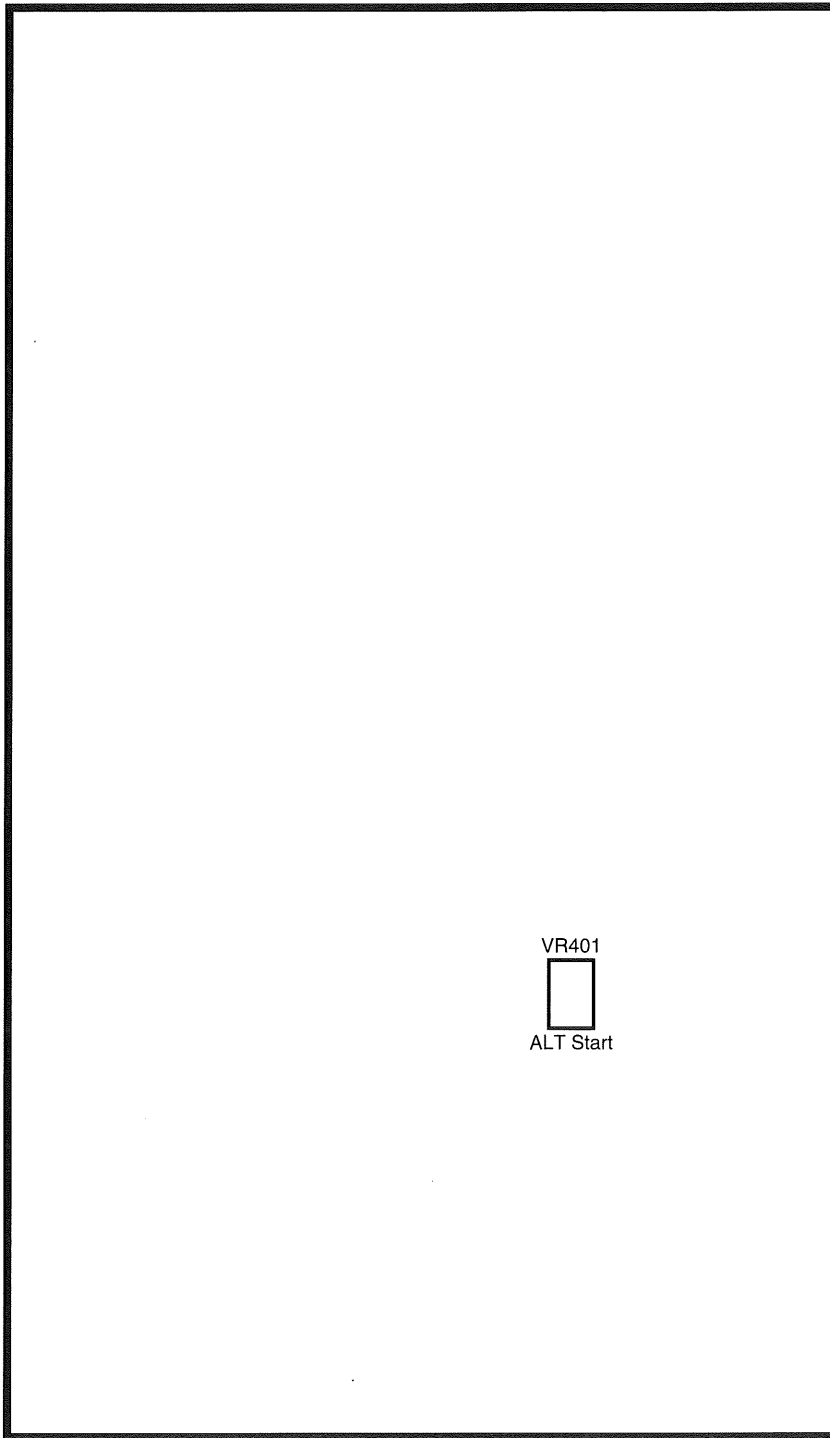


VR401  
  
ALT Start



FRONT

# CS-4125 (~S/NO.7121000) ADJUSTMENT

## ATTENUATOR UNIT (X75-1220-00)

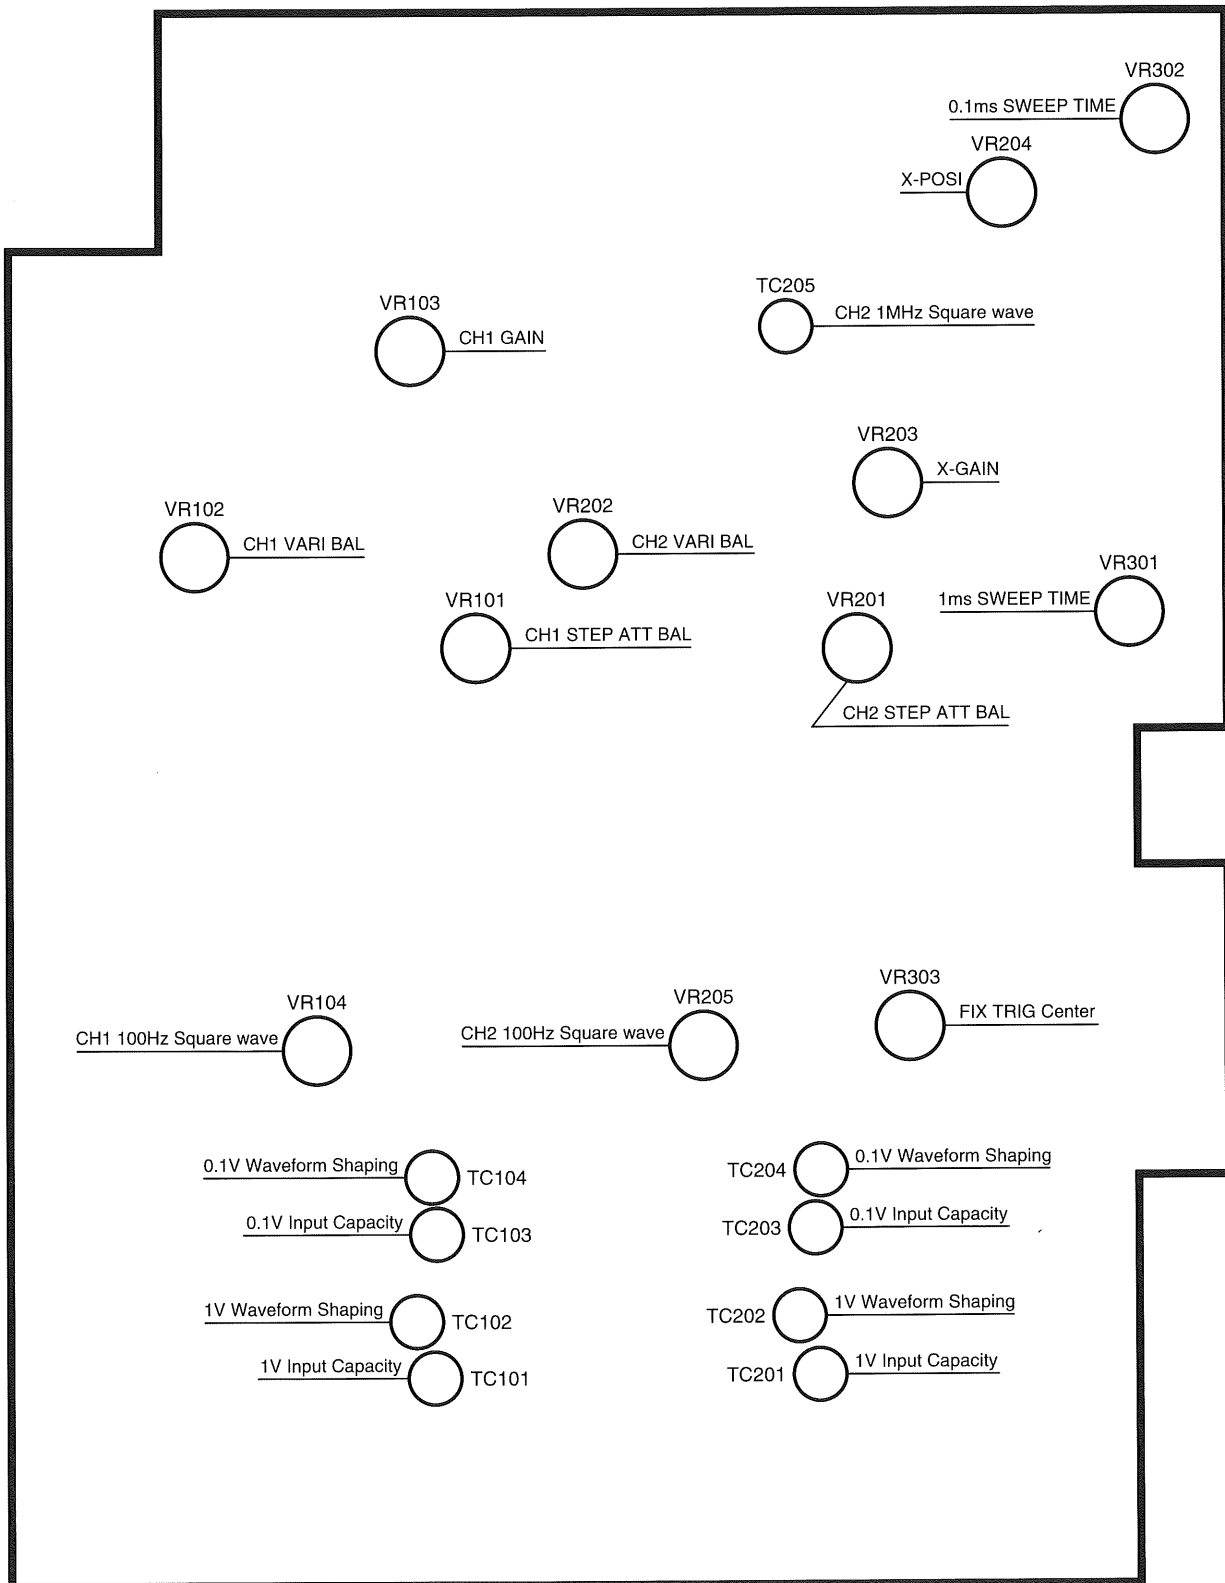

# CS-4125/CS-4135 ADJUSTMENT

To obtain the best performance, periodically calibrate the unit. Sometimes, only one mode need be calibrated, while at other times, all modes should be calibrated. When one mode is calibrated, it must be noted that the other modes may be affected. When calibrating all modes, perform the calibration in the specified sequence.

The following calibration required an accurate measuring instrument and an insulated adjusting flat blade screwdriver. If they are not available, contact your dealer. For optimum adjustment, turn the power on and warm up the scope sufficiently (more than 30 minutes) before starting.

Before calibrating the scope, check the power supply voltage.

## TEST EQUIPMENT REQUIRED

The following instrument or their equivalent should be used for making adjustment.

Test Equipment	Model	Minimum Specification
Digital Multi-Meter	DL-712 (KENWOOD)	Impedance: More than 10 M $\Omega$ , Measuring range: 0.2 V to 1000 V
Sine-Wave Generator	651 B (YHP)	Frequency: 10 Hz to 10 MHz, constant voltage over tuning range
Sine-Wave Generator	SG-503 (Tektronix)	Frequency: 50 kHz to 100 MHz, Output impedance: 50 $\Omega$ , constant voltage over tuning range
Square-Wave Generator	PG-506 (Tektronix)	Output signal: 1 kHz, Amplitude: 10 mVp-p to 10 Vp-p, Accuracy: within $\pm 1\%$ , Rise time: 35ns or less 100 kHz, Rise time: 1 ns or less
Q Meter	4343B (YHP)	—
Color Pattern Generator	CG-921 (KENWOOD)	—
Oscilloscope	CS-6040 (KENWOOD)	Sensitivity: more than 1 mV Frequency response: More than 150 MHz
Time-Marker Generator	TG-501 (Tektronix)	Time mark: 0.5 s to 0.1 $\mu$ s repetitive waveform
High-Voltage Probe	—	Input Impedance: 1000 M $\Omega$
Termination	—	Impedance: 50 $\Omega$ Accuracy: within 3%
Termination	—	3 watts type impedance: 50 $\Omega$
Attenuator	—	— 20 dB attenuation (50 $\Omega$ )

Table 1

## PREPARATION FOR ADJUSTMENT

### Control Settings

The control settings listed below must be used for each adjustment procedure.

Exceptions to these settings will be noted as they occur. After completing a adjustment, return the controls to the following settings.


NEME OF KNOBS	POSITION
INTEN	12 o'clock
FOCUS	12 o'clock
SCALE ILLUM	12 o'clock
◀ ▶ POSITION	12 o'clock
× 10 MAG	OFF
VARIABLE	CAL
VERTICAL MODE	CH 1
INV	OFF
X - Y	OFF
TRIGGERING SOURCE	VERT MODE
TRIGGERING MODE	AUTO
TRIGGERING LEVEL	12 o'clock
VOLTS / DIV (CH1 and CH2)	5 V / DIV
SWEEP TIME / DIV	0.5 s / 50 ms
VOLTS / DIV LEVER	AC
SLOPE	■ +

Table 2

# CS-4125/CS-4135 ADJUSTMENT

Item	Adjustment	P.C.B.	Procedure								
Supply voltage	VR301	X73-2150	<p>-8.0 V Adjustment range: -7.96 to -8.04 V (<math>\pm 0.5\%</math>)</p> <p>Apply the digital multimeter probe to VR301 and adjust to the adjustment range.</p>								
Vertical operating voltage	VR102	X73-2150	<table border="1" style="width: 100%;"> <tr> <td>V.MODE: CH1</td> <td>VOLTS: 10 mV (both CH)</td> </tr> <tr> <td>AC-DC: GND (both CH)</td> <td>TRIG.MODE: AUTO</td> </tr> <tr> <td>VARIABLE: CAL (both CH)</td> <td></td> </tr> </table> <p>1) Move the luminescent line to the CRT center by operating the POSI controls.</p> <p>2) Plug the dedicated connector into CN503.</p> <p>3) CS-4125: Adjust so that the multimeter is 60.0 V. (Adjustment range: 59.9 to 60.1 V) CS-4135: Adjust so that the multimeter is 40.0 V. (Adjustment range: 39.9 to 40.1 V)</p> <p>4) After adjustment, unplug the connector.</p> <p>* In case the dedicated connector is not available, adjust so that the center value of the + and - electrodes is 60.0 V. (Example) When the + electrode (adjustment) is 60.0 V and the - electrode (check) is 62.0 V; the + electrode (adjustment) should be 59.0 V and the - electrode (check) should be 61.0 V.</p>	V.MODE: CH1	VOLTS: 10 mV (both CH)	AC-DC: GND (both CH)	TRIG.MODE: AUTO	VARIABLE: CAL (both CH)			
V.MODE: CH1	VOLTS: 10 mV (both CH)										
AC-DC: GND (both CH)	TRIG.MODE: AUTO										
VARIABLE: CAL (both CH)											
Horizontal operating voltage	VR203	X73-2150	<table border="1" style="width: 100%;"> <tr> <td>V.MODE: CH1</td> <td>VOLTS: 10 mV (both CH)</td> </tr> <tr> <td>AC-DC: GND (both CH)</td> <td>X-Y: ON</td> </tr> <tr> <td>VARIABLE: CAL (both CH)</td> <td></td> </tr> </table> <p>1) Move the luminescent line to the CRT center by operating the POSI controls.</p> <p>2) Plug the dedicated connector into CN503.</p> <p>3) Adjust so that the multimeter is 70.0 V. (Adjustment range: 69.5 to 70.5 V)</p> <p>4) After adjustment, unplug the connector.</p> <p>* In case the dedicated connector is not available, adjust so that the center value of the + and - electrodes is 70.0 V. (Example) When the + electrode (adjustment) is 70.0 V and the - electrode (check) is 73.0 V; the + electrode (adjustment) should be 68.5 V and the - electrode (check) should be 71.5 V.</p>	V.MODE: CH1	VOLTS: 10 mV (both CH)	AC-DC: GND (both CH)	X-Y: ON	VARIABLE: CAL (both CH)			
V.MODE: CH1	VOLTS: 10 mV (both CH)										
AC-DC: GND (both CH)	X-Y: ON										
VARIABLE: CAL (both CH)											
Focus center and ASTIG	VR401 (Focus) VR403 (ASTIG)	X73-2150	<table border="1" style="width: 100%;"> <tr> <td>V.MODE: CH1</td> <td>H.MODE: X-Y</td> </tr> <tr> <td>AC-DC: GND (both CH)</td> <td>FOCUS: 12 o'clock</td> </tr> <tr> <td>VARIABLE: CAL (both CH)</td> <td>INTEN: Arbitrary</td> </tr> <tr> <td>VOLTS: 10 mV (both CH)</td> <td></td> </tr> </table> <p>1) Set FOCUS on the panel to the 12 o'clock position. Adjust VR401 and VR403 to move the spot to the best point.</p> <div style="text-align: center;"> </div>	V.MODE: CH1	H.MODE: X-Y	AC-DC: GND (both CH)	FOCUS: 12 o'clock	VARIABLE: CAL (both CH)	INTEN: Arbitrary	VOLTS: 10 mV (both CH)	
V.MODE: CH1	H.MODE: X-Y										
AC-DC: GND (both CH)	FOCUS: 12 o'clock										
VARIABLE: CAL (both CH)	INTEN: Arbitrary										
VOLTS: 10 mV (both CH)											

# CS-4125/CS-4135 ADJUSTMENT

Item	Adjustment	P.C.B.	Procedure						
INTENSITY	VR402	X73-2150	<table border="1" style="width: 100%;"> <tr> <td>V.MODE: CH1</td> <td>VOLTS: 10 mV (both CH)</td> </tr> <tr> <td>AC-DC: GND (both CH)</td> <td>X-Y: ON</td> </tr> <tr> <td>VARIABLE: CAL (both CH)</td> <td></td> </tr> </table> <p>1) Set INTEN to the 9 o'clock position.                  2) At the 9 o'clock position, adjust so that the spot disappears.                  3) Set INTEN to the fully counterclockwise position then rotate it clockwise until the fully clockwise position and check that the luminous intensity increases uniformly.</p> <p style="text-align: center;">INTEN control position  </p> <p style="text-align: center;">From the positions indicated above, set to the 9:00 position.</p> <p>* In the following adjustments, the INTEN control can be set in any arbitrary position.</p>	V.MODE: CH1	VOLTS: 10 mV (both CH)	AC-DC: GND (both CH)	X-Y: ON	VARIABLE: CAL (both CH)	
V.MODE: CH1	VOLTS: 10 mV (both CH)								
AC-DC: GND (both CH)	X-Y: ON								
VARIABLE: CAL (both CH)									
CH1 STEP ATT Balance	VR101	X75-1250	<table border="1" style="width: 100%;"> <tr> <td>V.MODE: CH1</td> <td>VOLTS: 5 mV (both CH)</td> </tr> <tr> <td>AC-DC: GND (both CH)</td> <td>TRIG.MODE: AUTO</td> </tr> <tr> <td>VARIABLE: CAL (both CH)</td> <td></td> </tr> </table> <p>1) Adjust so that the luminescent line does not move when VOLTS is switched from 5 mV to 1 mV.                  * Adjust after switching to 1 mV with reference to the 5 mV position.</p>	V.MODE: CH1	VOLTS: 5 mV (both CH)	AC-DC: GND (both CH)	TRIG.MODE: AUTO	VARIABLE: CAL (both CH)	
V.MODE: CH1	VOLTS: 5 mV (both CH)								
AC-DC: GND (both CH)	TRIG.MODE: AUTO								
VARIABLE: CAL (both CH)									
CH1 VARIABLE Balance	VR102	X75-1250	<table border="1" style="width: 100%;"> <tr> <td>V.MODE: CH1</td> <td>VOLTS: 1 mV (both CH)</td> </tr> <tr> <td>AC-DC: GND (both CH)</td> <td>TRIG.MODE: AUTO</td> </tr> <tr> <td>VARIABLE: CAL (both CH)</td> <td></td> </tr> </table> <p>1) Adjust by setting VARIABLE to the MIN (fully counterclockwise) position with reference to the MAX (CAL) position.                  * Ensure that the luminescent line does not move when VARIABLE is switched between MIN ↔ MAX.</p>	V.MODE: CH1	VOLTS: 1 mV (both CH)	AC-DC: GND (both CH)	TRIG.MODE: AUTO	VARIABLE: CAL (both CH)	
V.MODE: CH1	VOLTS: 1 mV (both CH)								
AC-DC: GND (both CH)	TRIG.MODE: AUTO								
VARIABLE: CAL (both CH)									
CH2 STEP ATT Balance	VR201	X75-1250	<table border="1" style="width: 100%;"> <tr> <td>V.MODE: CH2</td> <td>VOLTS: 5 mV (both CH)</td> </tr> <tr> <td>AC-DC: GND (both CH)</td> <td>TRIG.MODE: AUTO</td> </tr> <tr> <td>VARIABLE: CAL (both CH)</td> <td></td> </tr> </table> <p>1) Adjust so that the luminescent line does not move when VOLTS is switched from 5 mV to 1 mV.                  * Adjust after switching to 1 mV with reference to the 5 mV position.</p>	V.MODE: CH2	VOLTS: 5 mV (both CH)	AC-DC: GND (both CH)	TRIG.MODE: AUTO	VARIABLE: CAL (both CH)	
V.MODE: CH2	VOLTS: 5 mV (both CH)								
AC-DC: GND (both CH)	TRIG.MODE: AUTO								
VARIABLE: CAL (both CH)									
CH2 VARIABLE Balance	VR202	X75-1250	<table border="1" style="width: 100%;"> <tr> <td>V.MODE: CH2</td> <td>VOLTS: 1 mV (both CH)</td> </tr> <tr> <td>AC-DC: GND (both CH)</td> <td>TRIG.MODE: AUTO</td> </tr> <tr> <td>VARIABLE: CAL (both CH)</td> <td></td> </tr> </table> <p>1) Adjust by setting VARIABLE to the MIN (fully counterclockwise) position with reference to the MAX (CAL) position.                  * Ensure that the luminescent line does not move when VARIABLE is switched between MIN ↔ MAX.</p>	V.MODE: CH2	VOLTS: 1 mV (both CH)	AC-DC: GND (both CH)	TRIG.MODE: AUTO	VARIABLE: CAL (both CH)	
V.MODE: CH2	VOLTS: 1 mV (both CH)								
AC-DC: GND (both CH)	TRIG.MODE: AUTO								
VARIABLE: CAL (both CH)									
ADD POSITION	VR103	X73-2150	<table border="1" style="width: 100%;"> <tr> <td>V.MODE: ALT or CHOP</td> <td>VOLTS: 5 mV (both CH)</td> </tr> <tr> <td>AC-DC: GND (both CH)</td> <td>TRIG.MODE: AUTO</td> </tr> <tr> <td>VARIABLE: CAL (both CH)</td> <td></td> </tr> </table> <p>1) Bring the luminescent line to the center for both CH1 and CH2.                  2) Switch V-MODE to ADD and adjust VR101 so that the luminescent line comes to the center.</p>	V.MODE: ALT or CHOP	VOLTS: 5 mV (both CH)	AC-DC: GND (both CH)	TRIG.MODE: AUTO	VARIABLE: CAL (both CH)	
V.MODE: ALT or CHOP	VOLTS: 5 mV (both CH)								
AC-DC: GND (both CH)	TRIG.MODE: AUTO								
VARIABLE: CAL (both CH)									










# CS-4125/CS-4135 ADJUSTMENT

Item	Adjustment	P.C.B.	Procedure
CH1 waveform shaping	TC104 (0.1 V) TC102 (1 V)	X75-1250	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;">           MODE: CH1 AC-DC: DC VARIABLE: CAL           <span style="float: right;">VOLTS: 10 mV (ideal waveform) TRIG.MODE: AUTO</span> </div> <p>1) Input a 1 kHz square wave signal to CH2 and set it so that it extends by CRT 6 divisions. (ideal waveform)</p> <p>2) Adjust so that the same capacity value for ideal waveform is obtained in both waveforms at 0.1 V and 1 V.</p> <div style="text-align: center;"> </div>
CH2 waveform shaping	TC204 (0.1 V) TC202 (1 V)	X75-1250	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;">           V.MODE: CH2 AC-DC: DC VARIABLE: CAL           <span style="float: right;">VOLTS: 10 mV (ideal waveform) TRIG.MODE: AUTO</span> </div> <p>1) Input a 1 kHz square wave signal to CH2 and set it so that it extends by CRT 6 divisions. (ideal waveform)</p> <p>2) Adjust so that the same capacity value for ideal waveform is obtained in both waveforms at 0.1 V and 1 V.</p> <div style="text-align: center;"> </div>
CH1 Input Capacity	TC103 (0.1 V) TC101 (1 V)	X75-1250	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;">           V.MODE: CH1 AC-DC: DC VARIABLE: CAL           <span style="float: right;">VOLTS: 10 mV (reference) TRIG.MODE: AUTO</span> </div> <p>1) Connect a capacity meter to the CH1 INPUT.</p> <p>2) Measure the capacity of the 10 mV. (23 pF ± 3 pF)</p> <p>3) At 0.1 V and 1 V, adjust to obtain the same values as 10 mV.</p>
CH2 Input Capacity	TC203 (0.1 V) TC201 (1 V)	X75-1250	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;">           V.MODE: CH2 AC-DC: DC VARIABLE: CAL           <span style="float: right;">VOLTS: 10 mV (reference) TRIG.MODE: AUTO</span> </div> <p>1) Connect a capacity meter to the CH2 INPUT.</p> <p>2) Measure the capacity of the 10 mV. (23 pF ± 3 pF)</p> <p>3) At 0.1 V and 1 V, adjust to obtain the same values as 10 mV.</p>
SWEEP TIME 0.1 ms	VR302	X75-1250	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;">           V.MODE: CH1 SWEEP TIME: 0.1 ms VARIABLE: CAL           <span style="float: right;">VOLTS: Arbitrary AC-DC: DC TRIG.MODE: AUTO</span> </div> <p>1) Input a 0.1 ms marker signal.</p> <p>2) Adjust so that the marker peak and scale coincides at every divisions.</p> <div style="text-align: center;"> </div>

# CS-4125/CS-4135 ADJUSTMENT

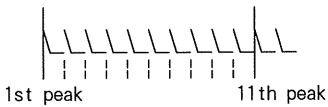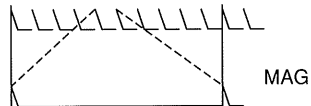
Item	Adjustment	P.C.B.	Procedure								
SWEEP TIME 1 ms	VR301	X75-1250	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">V.MODE: CH1</td> <td style="width: 50%;">VOLTS: Arbitrary</td> </tr> <tr> <td>SWEEP TIME: 1 ms</td> <td>AC-DC: DC</td> </tr> <tr> <td>VARIABLE: CAL</td> <td>TRIG.MODE: AUTO</td> </tr> </table> </div> <p>1) Input a 0.1 ms marker signal. 2) Adjust so that the marker peak and scale coincides at every divisions.</p> <div style="text-align: center; margin-top: 10px;">  </div>	V.MODE: CH1	VOLTS: Arbitrary	SWEEP TIME: 1 ms	AC-DC: DC	VARIABLE: CAL	TRIG.MODE: AUTO		
V.MODE: CH1	VOLTS: Arbitrary										
SWEEP TIME: 1 ms	AC-DC: DC										
VARIABLE: CAL	TRIG.MODE: AUTO										
MAG GAIN	VR202	X73-2150	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">V.MODE: CH1</td> <td style="width: 50%;">VOLTS: Arbitrary</td> </tr> <tr> <td>SWEEP TIME: 0.1 ms</td> <td>AC-DC: DC</td> </tr> <tr> <td>VARIABLE: CAL</td> <td>TRIG.MODE: AUTO</td> </tr> </table> </div> <p>1) Input a 0.1 ms marker signal. 2) Adjust POS1 so that the marker peak and scale coincides at every divisions. 3) Switch X10 MAG ON and adjust so that the interval between two peaks is 10 divisions.</p> <div style="text-align: center; margin-top: 10px;">  </div>	V.MODE: CH1	VOLTS: Arbitrary	SWEEP TIME: 0.1 ms	AC-DC: DC	VARIABLE: CAL	TRIG.MODE: AUTO		
V.MODE: CH1	VOLTS: Arbitrary										
SWEEP TIME: 0.1 ms	AC-DC: DC										
VARIABLE: CAL	TRIG.MODE: AUTO										
MAG Center	VR201	X73-2150	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">V.MODE: CH1</td> <td style="width: 50%;">AC-DC: DC</td> </tr> <tr> <td>SWEEP TIME: 0.1 ms</td> <td>TRIG.MODE: AUTO</td> </tr> <tr> <td>VARIABLE: CAL</td> <td>X10 MAG: ON</td> </tr> <tr> <td colspan="2">VOLTS: Arbitrary</td> </tr> </table> </div> <p>1) Input a 0.5 ms marker signal. 2) Adjust H.POS1 so that the center peak is aligned with the scale center. 3) Switch X10 MAG OFF and adjust so that the center marker peak is aligned with the scale center. (Adjust by repeating a few times)</p> <div style="text-align: center; margin-top: 10px;">  </div>	V.MODE: CH1	AC-DC: DC	SWEEP TIME: 0.1 ms	TRIG.MODE: AUTO	VARIABLE: CAL	X10 MAG: ON	VOLTS: Arbitrary	
V.MODE: CH1	AC-DC: DC										
SWEEP TIME: 0.1 ms	TRIG.MODE: AUTO										
VARIABLE: CAL	X10 MAG: ON										
VOLTS: Arbitrary											
X-GAIN	VR203	X75-1250	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">V.MODE: CH2</td> <td style="width: 50%;">CH2 AC-DC: AC</td> </tr> <tr> <td>CH2 VOLTS: 10 mV</td> <td>X-Y: ON</td> </tr> <tr> <td colspan="2">VARIABLE: CAL</td> </tr> </table> </div> <p>1) Input a 5 mV square wave signal. 2) Adjust so that the amplitude is 5 divisions. * Make the adjustment to 5 divisions, at the CRT center.</p> <div style="text-align: center; margin-top: 10px;">  </div>	V.MODE: CH2	CH2 AC-DC: AC	CH2 VOLTS: 10 mV	X-Y: ON	VARIABLE: CAL			
V.MODE: CH2	CH2 AC-DC: AC										
CH2 VOLTS: 10 mV	X-Y: ON										
VARIABLE: CAL											

# CS-4125/CS-4135 ADJUSTMENT

Item	Adjustment	P.C.B.	Procedure						
X-POSITION	VR205	X75-1250	<table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">X-Y: ON</td> <td style="width: 50%;">V.POSITION: 12 o'clock (both CH)</td> </tr> <tr> <td>AC-DC: GND (both CH)</td> <td>H.POSITION: 12 o'clock</td> </tr> </table> <p>1) Adjust the spot to the center of scale.</p>	X-Y: ON	V.POSITION: 12 o'clock (both CH)	AC-DC: GND (both CH)	H.POSITION: 12 o'clock		
X-Y: ON	V.POSITION: 12 o'clock (both CH)								
AC-DC: GND (both CH)	H.POSITION: 12 o'clock								
CH1 1 MHz square wave	TC101 TC105	X73-2150 X75-1250 [not used with the CS-4125]	<table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">V.MODE: CH1</td> <td style="width: 50%;">CH1 AC-DC: DC</td> </tr> <tr> <td>CH1 VOLTS: 10 mV</td> <td>H.MODE: AUTO</td> </tr> <tr> <td>VARIABLE: CAL</td> <td>* Use a 50-ohm terminator.</td> </tr> </table> <p>1) Input a 1 MHz square wave to CH1 and set it so that it extends by 6 divisions. 2) CS-4125: Adjust so that the overshoot is 0.2 divisions. CS-4135: Adjust so that the overshoot is 0.3 divisions and the under side is 0.1 divisions.</p>	V.MODE: CH1	CH1 AC-DC: DC	CH1 VOLTS: 10 mV	H.MODE: AUTO	VARIABLE: CAL	* Use a 50-ohm terminator.
V.MODE: CH1	CH1 AC-DC: DC								
CH1 VOLTS: 10 mV	H.MODE: AUTO								
VARIABLE: CAL	* Use a 50-ohm terminator.								
CH2 1 MHz square wave	TC205	X75-1250	<table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">V.MODE: CH2</td> <td style="width: 50%;">CH2 AC-DC: DC</td> </tr> <tr> <td>CH2 VOLTS: 10 mV</td> <td>TRIG.MODE: AUTO</td> </tr> <tr> <td>VARIABLE: CAL</td> <td>* Use a 50-ohm terminator.</td> </tr> </table> <p>1) Input a 1 MHz square wave to CH1 and set it so that it extends by 6 divisions. 2) CS-4125: Adjust so that the overshoot is 0.2 divisions. CS-4135: Adjust so that the overshoot is 0.3 divisions and the under side is 0.1 divisions.</p>	V.MODE: CH2	CH2 AC-DC: DC	CH2 VOLTS: 10 mV	TRIG.MODE: AUTO	VARIABLE: CAL	* Use a 50-ohm terminator.
V.MODE: CH2	CH2 AC-DC: DC								
CH2 VOLTS: 10 mV	TRIG.MODE: AUTO								
VARIABLE: CAL	* Use a 50-ohm terminator.								
ALT start	VR401	X74-1660	<table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">VOLTS: 10 mV (both CH)</td> <td style="width: 50%;">AC-DC: DC</td> </tr> <tr> <td>VARIABLE: CAL</td> <td>V.MODE: ALT</td> </tr> </table> <p>1) Set the luminescent line of both CH to the CRT center position. 2) Input a 1 kHz sine wave to both CH and set it so that it extends by 6 divisions. (Distribute the signal using a T connector.) 3) Adjust so that the start point of both CH are aligned.</p>	VOLTS: 10 mV (both CH)	AC-DC: DC	VARIABLE: CAL	V.MODE: ALT		
VOLTS: 10 mV (both CH)	AC-DC: DC								
VARIABLE: CAL	V.MODE: ALT								
FIX	VR303	X75-1250	<table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">V.MODE: CH1</td> <td style="width: 50%;">CH1 AC-DC: DC</td> </tr> <tr> <td>TRIG-MODE: FIX</td> <td>CH1 POSITION: 12 o'clock</td> </tr> </table> <p>1) Input a 50 kHz sine wave to CH1 and set it so that it extends by 1 divisions. 2) Adjust so that the waveform starts from the waveform center line when SLOPE is switched between <math>\pm</math>.</p> <p style="text-align: center;">  </p>	V.MODE: CH1	CH1 AC-DC: DC	TRIG-MODE: FIX	CH1 POSITION: 12 o'clock		
V.MODE: CH1	CH1 AC-DC: DC								
TRIG-MODE: FIX	CH1 POSITION: 12 o'clock								

# CS-4125/CS-4135 ADJUSTMENT


FINAL UNIT (X73-2150-0X)

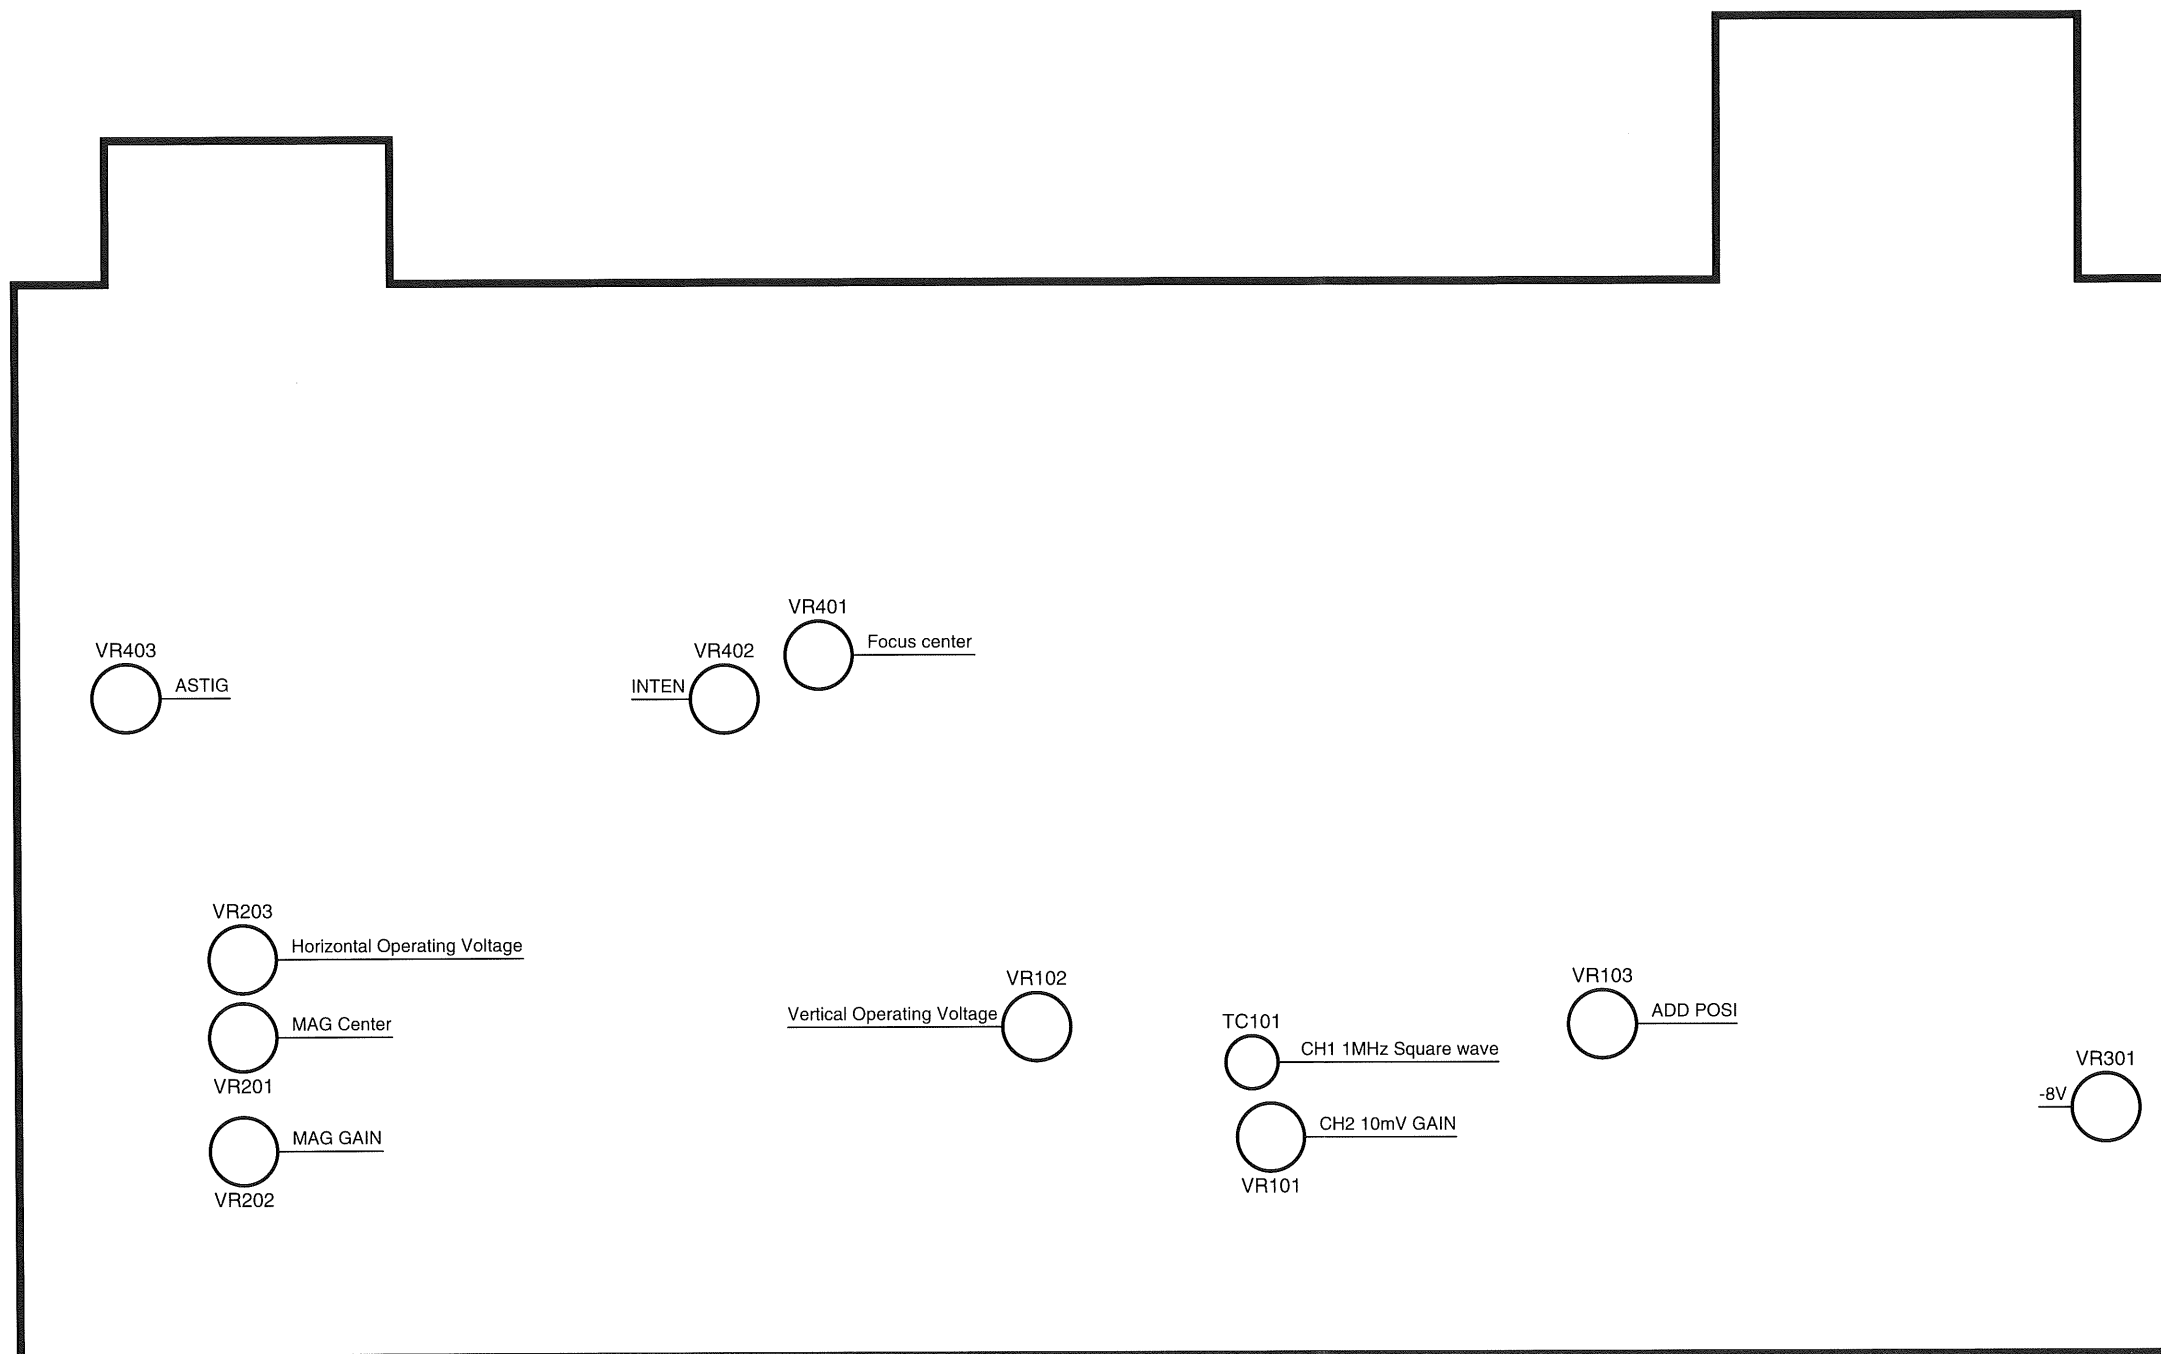


FRONT

# CS-4125/CS-4135 ADJUSTMENT

SWEEP UNIT (X74-1610-0X)

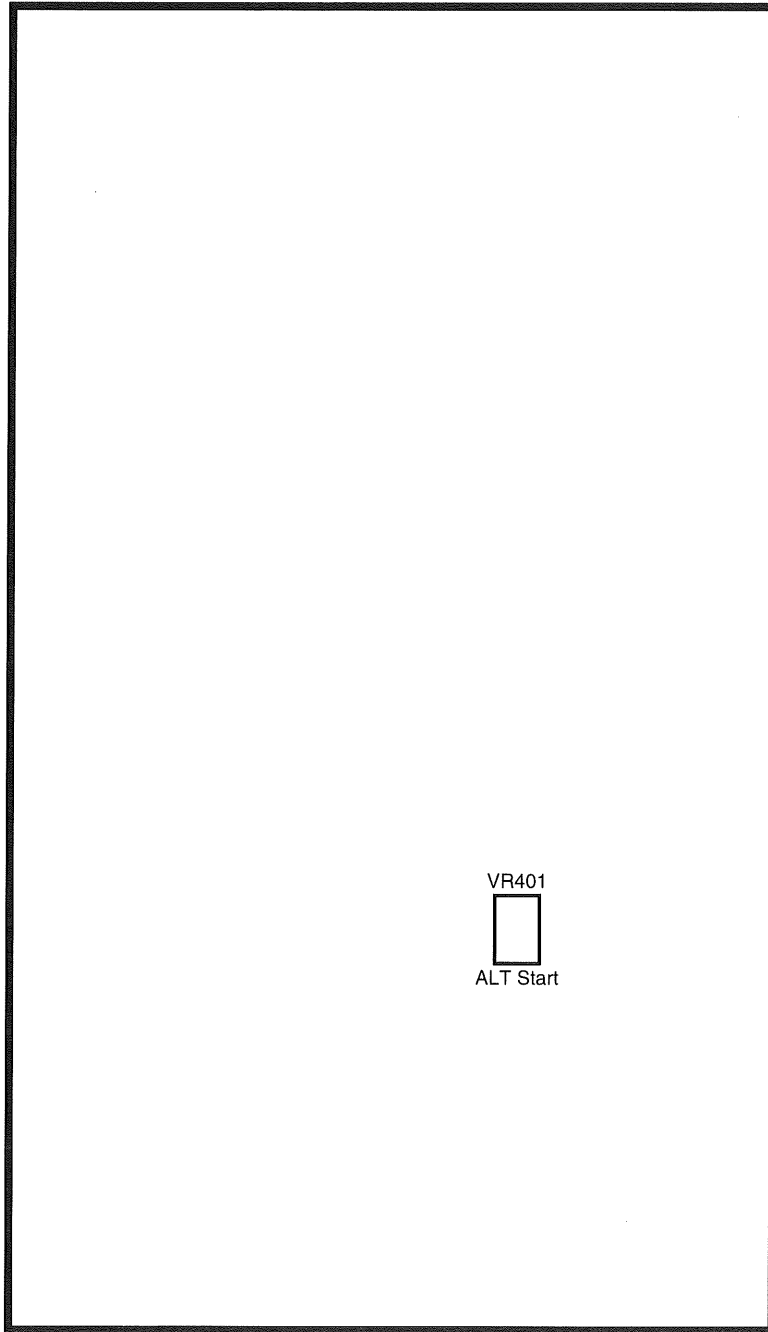


VR401  
  
ALT Start



FRONT

# CS-4125/CS-4135 ADJUSTMENT

## ATTENUATOR UNIT (X75-1250-0X)

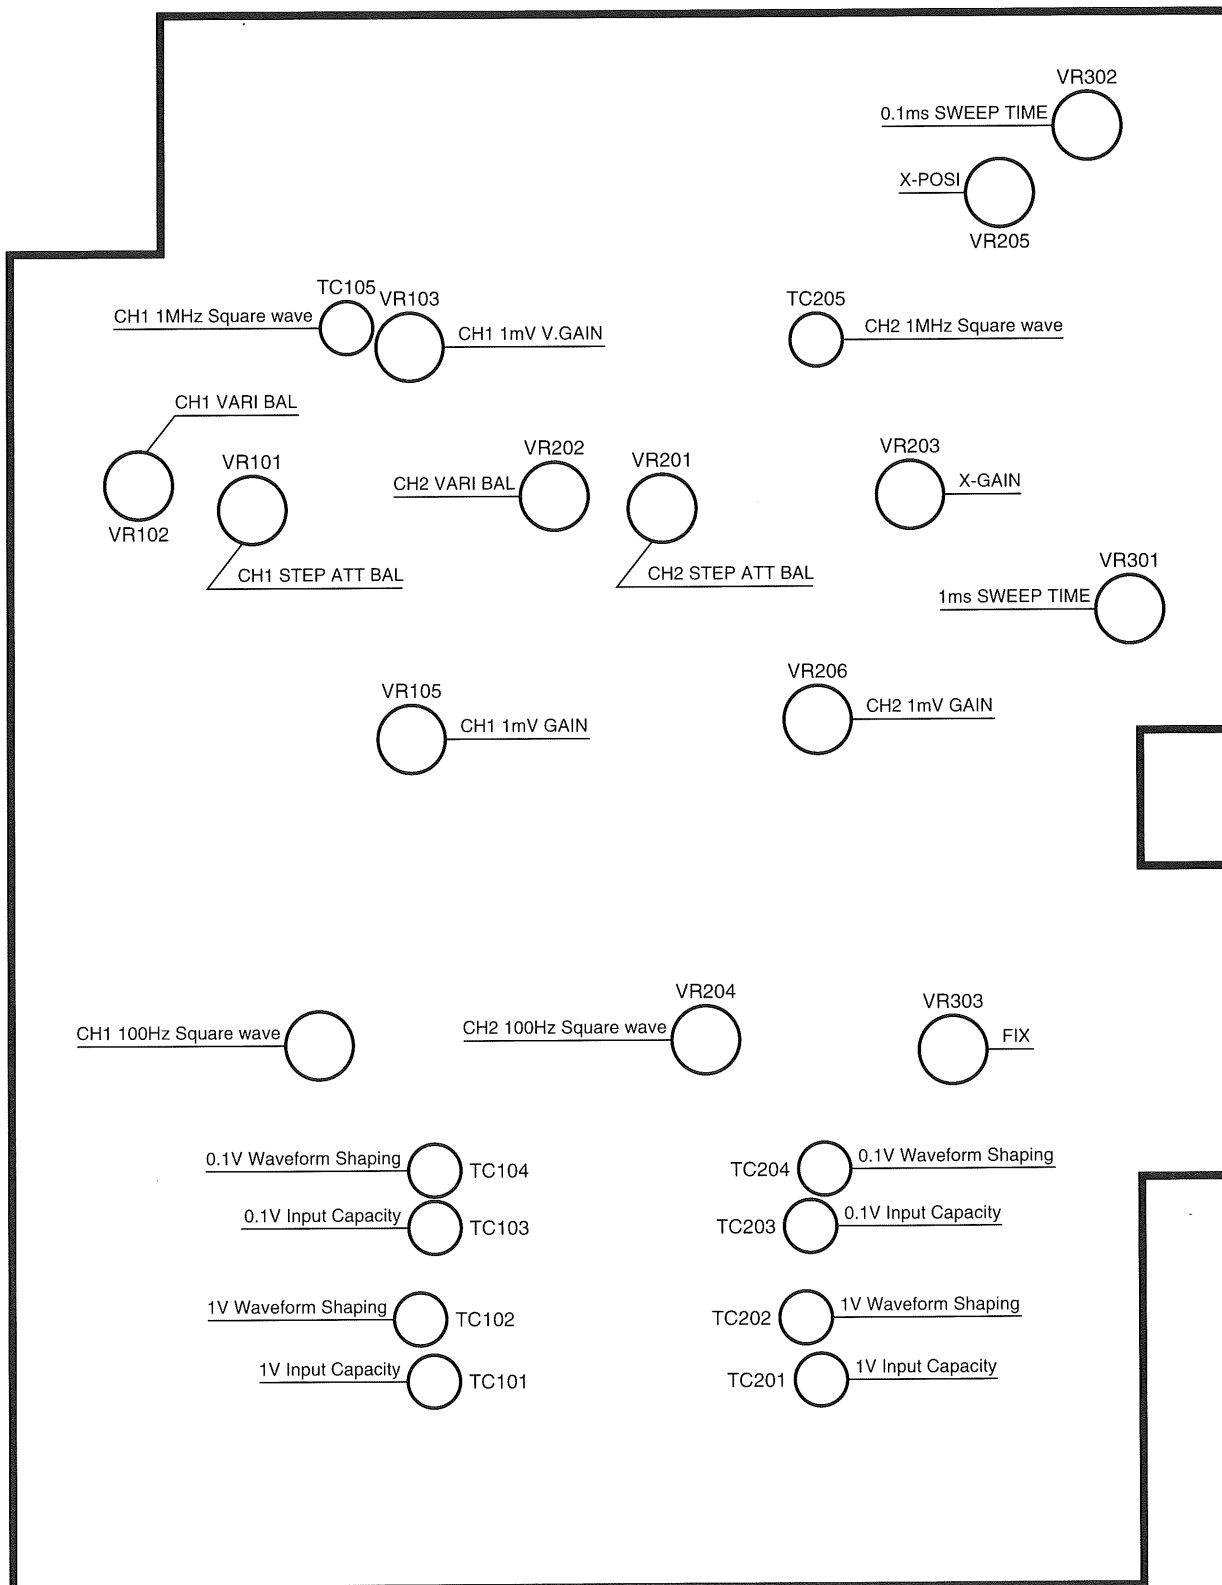

If any of these setups is incorrect, even a normal unit may function abnormally.

If there is any function that you are not familiar with, confirm the instruction manual.

If the operation is abnormal even when you operate the unit properly, remove the top case and bottom panel.

## CAUTION

There are very hazardous high voltage parts inside the set.

Ensure that all of the PC boards are connected properly without stripping off of connectors or soldering defect.

Some of the troubles occurring with the unit can be restored to normal condition by performing correct adjustments. For the adjustment methods, refer to the adjustment procedures.

The circuit names mentioned in the following troubleshooting description are identical to the names used in the block diagram. Refer to the block diagram.

Start checking with the power supply circuitry.

Collector of Q301: +140 V

Collector of Q303: +8 V

Collector of Q304: +5 V

Collector of Q305: -8 V

OK: Go to next step.

NG: There is a problem in the power supply circuitry.

Check the regulator circuit.

### a: No spot is displayed on the CRT in the X-Y mode.

Check the voltages at pins 1 and 3 of CN201, X73-2090.

OK: Check the voltages at pins 1 and 4 of W103, X73-2090.

OK: There is a problem in the blanking amp section.  
(Go to b.)

NG: There is a problem in the vertical amp section.

NG: There is a problem in the horizontal amp section. (Go to c.)

### b: Check if the voltage at W401, X72-2090, is normal.

OK: There is a problem in the blanking amp.

NG: There is a problem in the high-voltage circuit.

### c: Short-circuit the base of Q202, X72-2090, and the base of Q214.

If spot is displayed:

There is a problem in the circuitry before the X-amp. (Go to d.)

If spot is not displayed:

There is a problem in the horizontal final amp.

### d: Short-circuit the base of Q224, X75-1220, and the base of Q231.

If spot is displayed:

There is a problem in the vertical amp.

If spot is not displayed:

There is a problem in the X-amp.

### e: Trace is not displayed in the AUTO mode.

Measure the waveform at the emitter of Q308, X75-1220.

OK: Measure the waveform of the horizontal final amp and check for abnormality.

NG: Measure the waveforms of the sweep gate, sweep, sweep stop and hold-off and check for abnormality.

### f: Triggering is not possible.

Measure the waveform at the base of Q420, X74-1600.

OK: There is a problem in the TRIG LEVEL or TRIG COUPLING selector.

NG: There is a problem in the TRIG SOURCE selector.

### g: Trace is not displayed.

Short-circuit pins 7 and 8 of W555, X75-1220, and check if the trace is displayed near the CRT center.

OK: There is a problem in the circuitry before the channels selector. Identify the defective position by shorting the signal lines.

NG: There is a problem in the vertical final amp.

### h: TV sync is not possible.

Measure the waveform at the base of Q410, X74-1600.

OK: Measure the waveform at the collector of Q417, X74-1600.

OK: There is a problem in the TRIG COUPLING selector.

NG: There is a problem in the TV sync signal separation.

NG: There is a problem in the TRIG SOURCE selector.

\* Check both TV-FRAME and TV-LINE.

### i: The input signals of the two channels are not displayed correctly.

Check pins 1 and 2 of CN56, X75-1220.

V-MODE:

With CH1, pin 1 should be H and pin 2 should be L.

With CH2, pin 1 should be L and pin 2 should be H.

OK: There is a problem in the circuitry before the channels selector of each channel.

NG: There is a problem in the channel control.

### j: ADD operation does not occur.

There is a problem in Q101 of X73-2090.

# CS-4125 (~S/NO.7121000) TROUBLESHOOTING

## **k: CHOP sweep does not occur.**

Check the waveform at pin 3 of IC401, X74-1600.

OK: There is a problem in the channel control.

NG: Check the waveform at pin 2 of IC403, X74-1600.

OK: There is a problem in the ALT-CHOP selector.

NG: There is a problem in the CHOP generator.

## **l: Auto free-run does not occur.**

Check that the voltage at Q423, X74-1600, is +5 V.

OK: There is a problem in the sweep gate.

NG: There is a problem in the auto free-run circuit.



If any of these setups is incorrect, even a normal unit may function abnormally.

If there is any function that you are not familiar with, confirm the instruction manual.

If the operation is abnormal even when you operate the unit properly, remove the top case and bottom panel.

## CAUTION

There are very hazardous high voltage parts inside the set.

Ensure that all of the PC boards are connected properly without stripping off of connectors or soldering defect.

Some of the troubles occurring with the unit can be restored to normal condition by performing correct adjustments. For the adjustment methods, refer to the adjustment procedures.

The circuit names mentioned in the following troubleshooting description are identical to the names used in the block diagram. Refer to the block diagram.

Start checking with the power supply circuitry.

X73-2150

Collector of Q301 : +140 V

Collector of Q303 : +8 V

Pin1 of IC303 : +5 V

Collector of Q305 : -8 V

Collector of Q306 : +80 V

OK: Go to next step.

NG: There is a problem in the power supply circuitry.

Check the regulator circuit.

### a: No spot is displayed on the CRT in the X-Y mode.

Check the voltages at pins 1 and 4 of CN551, X73-2150.

OK: Check the voltages at pins 1 and 4 of W103, X73-2150.

OK: There is a problem in the blanking amp section.

(Go to b.)

NG: There is a problem in the vertical amp section.

NG: There is a problem in the horizontal amp section. (Go to c.)

### b: Check if the voltage at W401, X72-2150, is normal.

OK: There is a problem in the blanking amp.

NG: There is a problem in the high-voltage circuit.

### c: Short-circuit the base of Q202, X72-2150, and the base of Q214.

If spot is displayed:

There is a problem in the circuitry before the X-amp. (Go to d.)

If spot is not displayed:

There is a problem in the horizontal final amp.

### d: Short-circuit the base of Q224, X75-1250, and the base of Q231.

If spot is displayed:

There is a problem in the vertical amp.

If spot is not displayed:

There is a problem in the X-amp.

### e: Trace is not displayed in the AUTO mode.

Measure the waveform at the emitter of Q308, X75-1250.

OK: Measure the waveform of the horizontal final amp and check for abnormality.

NG: Measure the waveforms of the sweep gate, sweep, sweep stop and hold-off and check for abnormality.

### f: Triggering is not possible.

Measure the waveform at the base of Q420, X74-1610.

OK: There is a problem in the TRIG LEVEL or TRIG COUPLING selector.

NG: There is a problem in the TRIG SOURCE selector.

### g: Trace is not displayed.

Short-circuit pins 7 and 8 of W555, X75-1250, and check if the trace is displayed near the CRT center.

OK: There is a problem in the circuitry before the channels selector. Identify the defective position by shorting the signal lines.

NG: There is a problem in the vertical final amp.

### h: TV sync is not possible.

Measure the waveform at the base of Q410, X74-1610.

OK: Measure the waveform at the collector of Q417, X74-1610.

OK: There is a problem in the TRIG COUPLING selector.

NG: There is a problem in the TV sync signal separation.

NG: There is a problem in the TRIG SOURCE selector.

\* Check both TV-FRAME and TV-LINE.

### i: The input signals of the two channels are not displayed correctly.

Check pins 1 and 2 of CN56, X75-1250.

V-MODE:

With CH1, pin 1 should be H and pin 2 should be L.

With CH2, pin 1 should be L and pin 2 should be H.

OK: There is a problem in the circuitry before the channels selector of each channel.

NG: There is a problem in the channel control.

### j: ADD operation does not occur.

There is a problem in Q101 of X73-2150.

### k: CHOP sweep does not occur.

Check the waveform at pin 3 of IC401, X74-1610.

OK: There is a problem in the channel control.

NG: Check the waveform at pin 2 of IC403, X74-1610.

OK: There is a problem in the ALT-CHOP selector.

NG: There is a problem in the CHOP generator.

### l: Auto free-run does not occur.

Check that the voltage at Q423, X74-1610, is +5 V.

OK: There is a problem in the sweep gate.

NG: There is a problem in the auto free-run circuit.

# PARTS LIST

CS-4125

~S/NO.7121000

REF. NO	PARTS NO	NAME & DESCRIPTION
	B41-2078-04	CAUTION LABEL
	B41-2086-04	CAUTION LABEL;PL GND 3LANG.
	B42-3819-05	SERIAL NO. PLATE
	B42-3820-05	LABEL;CARTON BOX
	B42-6090-04	LABEL;MADE IN TAIWAN
	B63-0240-00	INSTRUCTION MANUAL;JAPANESE
	B63-0248-00	INSTRUCTION MANUAL;ENG./CHINA
	E30-1947-05	BS POWER CORD
	E30-1950-05	JIS POWER CORD
	E30-1951-05	UL/CSA POWER CORD
	E30-1952-05	CEE POWER CORD
	E30-1953-05	SAA POWER CORD
	E38-1160-05	WIRE ASS'Y;17P
	F05-5015-05	FUSE(5X20MM) 0.5A/250V
	F05-8012-05	FUSE(5X20MM) 0.8A/250V
	G16-0609-04	RUBBER SHEET
	H10-2886-02	FOAMED STYRENE PAD;FRONT
	H10-2887-02	FOAMED STYRENE PAD;REAR
	H20-1749-08	VINYL COVER
	H53-0171-04	CARTON BOX
	LN322GP	LED;GREEN
1	A01-4043-12	CASE
2	A10-1500-01	CHASSIS;BOTTOM
3	A13-2217-04	FRAME;RIGHT
4	A13-2218-04	FRAME;LEFT
5	A40-0717-02	PLATE;BOTTOM
6	A63-0194-01	MOLD PANEL;FRONT
7	A63-0195-01	MOLD PANEL;REAR
8	A83-0078-02	REAR PANEL
9	B11-0518-04	FILTER
10	D21-0942-04	EXTENSION SHAFT
11	E03-0218-05	AC INLET
12	E21-0686-04	TERMINAL;CAL
14	E38-1164-05	WIRE ASS'Y;GND
16	F11-1281-14	CRT SHIELD
17	F20-3032-04	INSULATOR
18	G13-0756-03	CUSHION
19	J02-0540-05	LEG
20	J19-1695-03	HOLDER
21	J21-4923-04	BRACKET;SWEEP UNIT
22	J21-4924-03	BRACKET;CRT
23	K01-0561-02	HANDLE
24	K24-3005-04	PUSH SW;POWER
25	K24-3010-14	PUSH SW
26	K27-3618-14	LEVER
27	K29-0877-04	KNOB
28	K29-0890-03	KNOB;ATT
29	K29-0891-04	KNOB;VARI
30	L07-1529-05	POWER TRANSFORMER
32	X73-2090-00	FINAL UNIT
33	X74-1600-00	SWEEP UNIT
34	X75-1220-00	ATTENUATOR UNIT
35	D14-363GV/123	CRT

CS-4125

Y70-2060-00

REF. NO	PARTS NO	NAME & DESCRIPTION
	B41-2078-14	CAUTION LABEL
	B41-2086-04	CAUTION LABEL;PL GND 3LANG.
	B42-3819-05	SERIAL NO. PLATE
	B42-3820-05	LABEL;CARTON BOX
	B42-6090-04	LABEL;MADE IN TAIWAN
	B63-0301-08	INSTRUCTION MANUAL;JAPANESE
	B63-0302-08	INSTRUCTION MANUAL;ENG./CHINA
	E30-1950-05	JIS POWER CORD
	E30-1951-05	UL/CSA POWER CORD
	E30-1952-05	CEE POWER CORD
	E30-1953-05	SAA POWER CORD
	E30-1963-15	BS POWER CORD
	F05-5015-05	FUSE(5X20MM) 0.5A/250V
	F05-8012-05	FUSE(5X20MM) 0.8A/250V
	G16-0609-04	RUBBER SHEET
	H10-2886-02	FOAMED STYRENE PAD;FRONT
	H10-2887-02	FOAMED STYRENE PAD;REAR
	H20-1749-08	VINYL COVER
	H53-0171-14	CARTON BOX
	LN322GP	LED;GREEN
D4	A01-4043-12	CASE
1	A10-1500-11	CHASSIS
2	A13-2217-04	FRAME;RIGHT
3	A13-2218-14	FRAME;LEFT
4	A40-0717-02	PLATE;BOTTOM
5	A63-0195-01	MOLD PANEL;REAR
6	A63-0251-01	MOLD PANEL;FRONT
7	A83-0078-02	REAR PANEL
8	B11-0518-04	FILTER
9	D21-0942-04	EXTENSION SHAFT
10	E03-0218-05	AC INLET
11	E21-0686-04	TERMINAL;CAL
12	E38-1164-05	WIRE ASS'Y;GND
14	F11-1281-14	CRT SHIELD
16	F20-3032-04	INSULATOR
17	G13-0756-03	CUSHION
18	J02-0540-05	LEG
19	J19-1695-03	HOLDER
20	J21-4923-04	BRACKET;SWEEP UNIT
21	J21-4924-13	BRACKET;CRT
22	K01-0561-02	HANDLE
23	K24-3005-04	PUSH SW;POWER
24	K24-3010-14	PUSH SW
25	K27-3618-14	LEVER
26	K29-0877-04	KNOB
27	K29-0890-03	KNOB;ATT
28	K29-0891-04	KNOB;VARI
29	L07-1529-05	POWER TRANSFORMER
30	X73-2150-01	FINAL UNIT
32	X74-1610-01	SWEEP UNIT
33	X75-1250-01	ATTENUATOR UNIT
34	150BTB31A(1G)	CRT


CS-4135

Y70-2090-00

REF. NO	PARTS NO	NAME & DESCRIPTION
	B41-0710-14	CAUTION LABEL;HIGH VOLTAGE
	B41-2082-04	CAUTION LABEL
	B41-2086-04	CAUTION LABEL;PL GND 3LANG.
	B42-3819-05	SERIAL NO. PLATE
	B42-3820-05	LABEL;CARTON BOX
	B42-6090-04	LABEL;MADE IN TAIWAN
	B63-0301-08	INSTRUCTION MANUAL;JAPANESE
	B63-0302-08	INSTRUCTION MANUAL;ENG./CHINA
	E30-1950-05	JIS POWER CORD
	E30-1951-05	UL/CSA POWER CORD
	E30-1952-05	CEE POWER CORD
	E30-1953-05	SAA POWER CORD
	E30-1963-15	BS POWER CORD
	E38-1446-05	WIRE ASS'Y;CRT
	F05-3112-05	FUSE(5X20MM) 0.3AT/250V
	F05-5016-05	FUSE(5X20MM) 0.5AT/250V
	G16-0618-04	SHEET
	G16-0620-04	SHEET
	H10-2886-02	FOAMED STYRENE PAD;FRONT
	H10-2887-02	FOAMED STYRENE PAD;REAR
	H20-1749-08	VINYL COVER
	H53-0221-04	CARTON BOX
	LN322GP	LED;GREEN
D4	A01-4043-12	CASE
1	A10-1500-11	CHASSIS
2	A13-2217-04	FRAME;RIGHT
3	A13-2218-14	FRAME;LEFT
4	A40-0717-02	PLATE;BOTTOM
5	A63-0195-01	MOLD PANEL;REAR
6	A63-0223-01	MOLD PANEL;FRONT
7	A83-0078-02	REAR PANEL
8	B11-0518-04	FILTER
9	D21-0942-04	EXTENSION SHAFT
10	E03-0218-05	AC INLET
11	E21-0686-04	TERMINAL;CAL
12	E23-0552-04	EARTH TERMINAL
13	E38-1164-05	WIRE ASS'Y;GND
14	F10-2507-03	SHIELD PLATE;CENTER
15	F11-1286-04	CRT SHIELD
16	F20-3032-04	INSULATOR
17	G13-0756-03	CUSHION
18	J02-0540-05	LEG
19	J19-1695-03	HOLDER
20	J21-4923-04	BRACKET;SWEEP UNIT
21	J21-4924-13	BRACKET;CRT
22	K01-0561-02	HANDLE
23	K24-3005-04	PUSH SW;POWER
24	K24-3010-14	PUSH SW
25	K27-3618-14	LEVER
26	K29-0877-04	KNOB
27	K29-0890-03	KNOB;ATT
28	K29-0891-04	KNOB;VARI
29	L07-1535-05	POWER TRANSFORMER
30	L39-1406-05	ROTATION COIL
31	X73-2150-00	FINAL UNIT
32	X74-1610-00	SWEEP UNIT
33	X75-1250-00	ATTENUATOR UNIT
34	150VTK31A	CRT

# PARTS LIST

## MODEL PC-41 (SWITCHABLE PROBE)

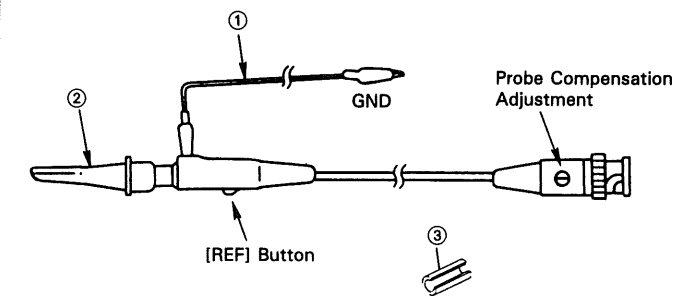


ITEM	DESCRIPTION	PARTS NO.
①	Ground Wire Assembly	E30-1883-08
②	Retractable Hook Tip	E29-0540-08
③	Marker (Orange)	B42-1950-08

## SCREWS

	Parts No.	Parts Name	Figure
A	N09-0623-04	SCREW, SEMS PAN HD (M3 x 8)	
B	N09-0748-04	SCREW, SEMS PAN HD (M4 x 12)	
C	N14-0622-05	NUT, WITH TOOTH (M4)	
D	N19-0748-05	WASHER	
E	N30-4010-41	SCREW, PAN HD (M4 x 10)	
F	N88-3008-41	SCREW, FLAT HD TAPTITE (3 x 8)	
G	N89-3008-41	SCREW, BINDING TAPTITE (3 x 8)	
H	N89-3010-41	SCREW, BINDING TAPTITE (3 x 10)	

# DISASSEMBLY

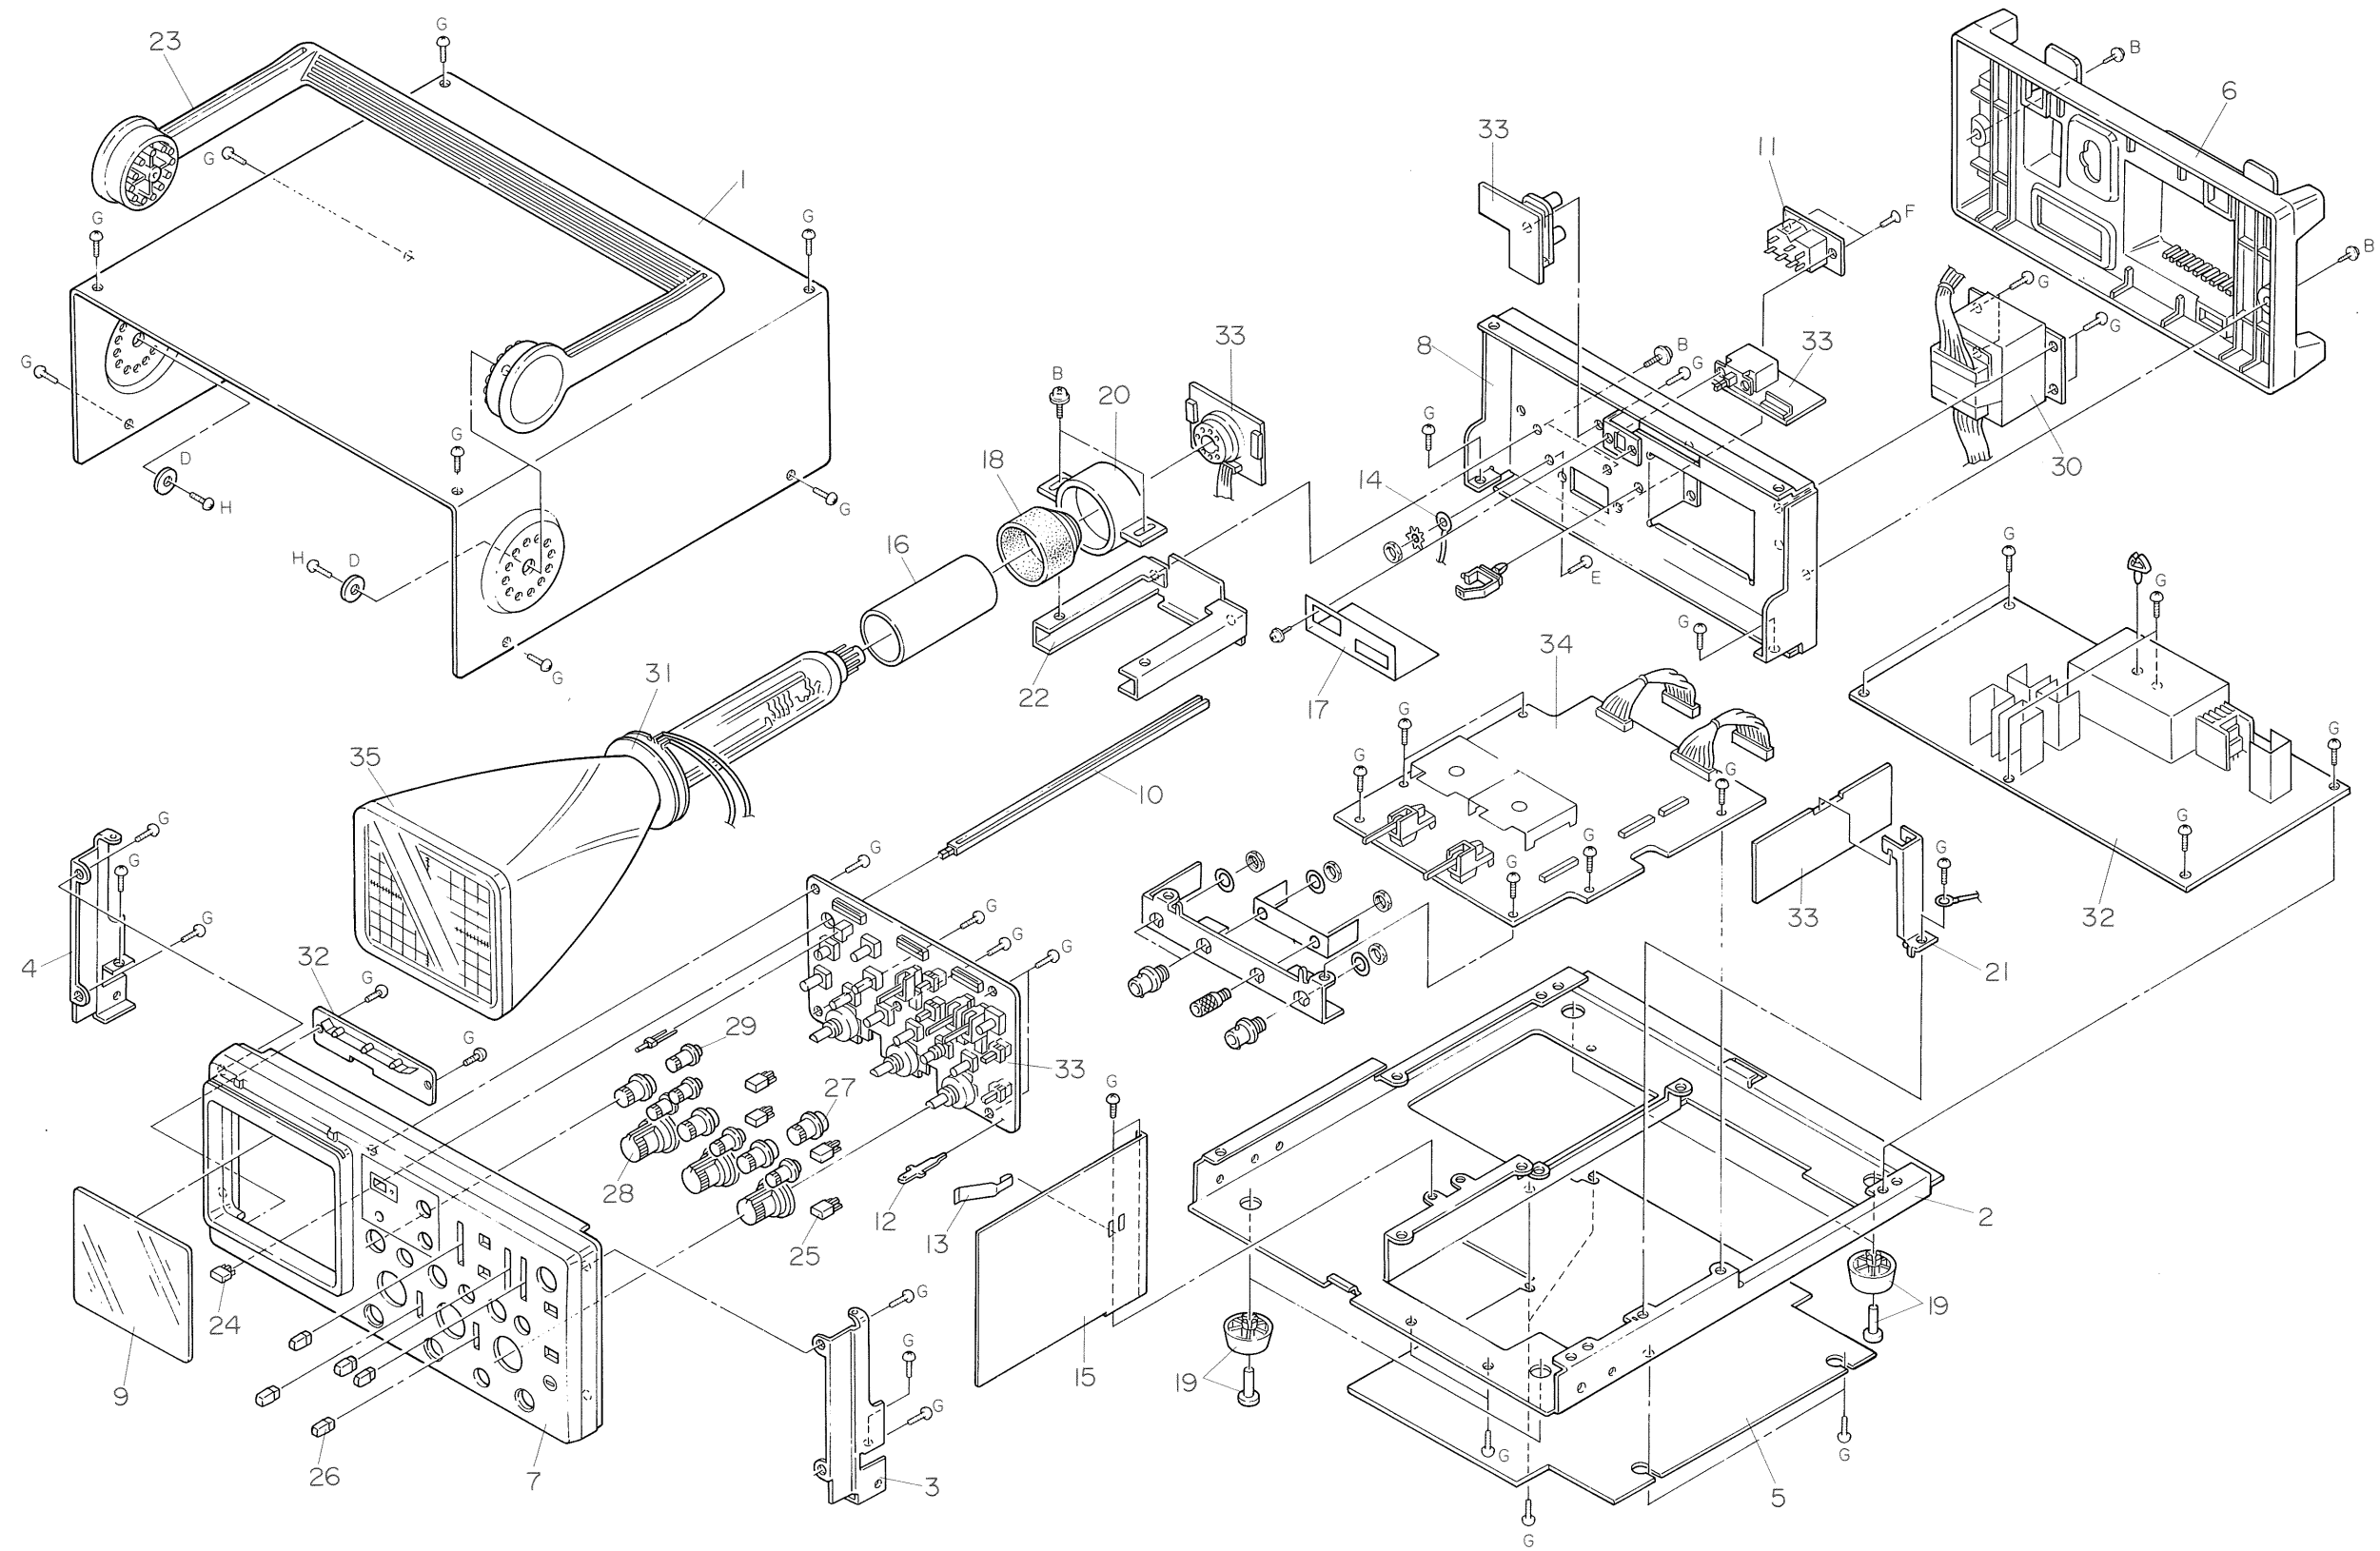

# PARTS LIST

## CS-4125 (~S/NO.7121000) FINAL UNIT

### X73-2090-00

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT
E23-0557-14	EARTH LUG; THERMAL FUSE			
F01-0867-05	HEAT SINK; HIGH VOLTAGE			
F01-2329-05	HEAT SINK			
F11-1282-14	SHIELD CASE			
J73-0363-02	PCB (UNMOUNTED)			
N09-0623-04	SCREW, SENS PAN HD M3X8			
C104	CC45FCH1H150J	CAP. CERAMIC 15P 5% 50V		
C105	NO USE			
C106	CC45FCH1H181J	CAP. CERAMIC 180P 5% 50V		
C107	CF92FV1H103J	CAP. FILM 0.01 5% 50V		
C108	CF92FV1H103J	CAP. FILM 0.01 5% 50V		
C109	CC45FCH2H040C	CAP. CERAMIC 4P 0.25P 500V		
C110	CC45FCH2H040C	CAP. CERAMIC 4P 0.25P 500V		
C111	CC45FCH2H040C	CAP. CERAMIC 4P 0.25P 500V		
C112	CC45FCH2H040C	CAP. CERAMIC 4P 0.25P 500V		
C113	CC45FCH2H040C	CAP. CERAMIC 4P 0.25P 500V		
C114	CC45FCH2H040C	CAP. CERAMIC 4P 0.25P 500V		
C115	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V		
C116	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V		
C117	NO USE			
C118	C91-2662-05	CAP. FILM 0.1 10% 250V		
C119	C91-2538-05	CAP. FILM 0.1 10% 63V		
C120	C91-2662-05	CAP. FILM 0.1 10% 250V		
C121	CE04LW1A101M	CAP. ELECTRO 100 20% 10V		
C122	NO USE			
C123	CE04CW1A470M	CAP. ELECTRO 47 20% 10V		
C124	CE04CW1A470M	CAP. ELECTRO 47 20% 10V		
C125	CE04LW2C3R3M	CAP. ELECTRO 3.3 20% 160V		
C126	CE04LW2C3R3M	CAP. ELECTRO 3.3 20% 160V		
C127	CE04LW1A470M	CAP. ELECTRO 47 20% 10V		
C201	CK45FF1H103Z	CAP. CERAMIC 0.01 10% 50V		
C202	CC45FSL1H681J	CAP. CERAMIC 680P 5% 50V		
C203	C91-1309-05	CAP. CERAMIC 0.01 10% 500V		
C204	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V		
C205	NO USE			
C206	C91-1309-05	CAP. CERAMIC 0.01 10% 500V		
C207	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V		
C208	CE04LW1A470M	CAP. ELECTRO 47 20% 10V		
C209	CE04LW1A470M	CAP. ELECTRO 47 20% 10V		
C210	CE04LW1A470M	CAP. ELECTRO 47 20% 10V		
C211	CE04LW2C3R3M	CAP. ELECTRO 3.3 20% 160V		
C212	CE04LW1A470M	CAP. ELECTRO 47 20% 10V		
C213	CC45FSL1H331J	CAP. CERAMIC 330P 5% 50V		
C214	CK45B2H332K	CAP. CERAMIC 3300P 10% 500V		
C301	CE04W2E101M	CAP. ELECTRO 100 20% 250V		
C302	CE04LW2C3R3M	CAP. ELECTRO 3.3 20% 160V		
C303	CE04EW1C472M	CAP. ELECTRO 4700 20% 16V		
C304	CE04LW1A221M	CAP. ELECTRO 220 20% 10V		
C305	CE04LW1A221M	CAP. ELECTRO 220 20% 10V		
C306	CE04EW1C472M	CAP. ELECTRO 4700 20% 16V		
C307	CE04LW1A221M	CAP. ELECTRO 220 20% 10V		
C308	CE04HW1H010M	CAP. ELECTRO 1 20% 50V		
C309	CE04LW1A330M	CAP. ELECTRO 33 20% 10V		
C310	CE04LW1A101M	CAP. ELECTRO 100 20% 10V		
C311	CE04LW1A101M	CAP. ELECTRO 100 20% 10V		
C401	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V		
C402	CE04LW1C470M	CAP. ELECTRO 47 20% 16V		
C403	CE04EW1V221M	CAP. ELECTRO 220 20% 35V		
C404	CK45E3D102P	CAP. CERAMIC 1000P 2KV		
C405	C91-2663-05	CAP. FILM 4700P 5% 2KV		
C406	C91-2663-05	CAP. FILM 4700P 5% 2KV		
C407	NO USE			
C408	CK45B2H102K	CAP. CERAMIC 1000P 10% 500V		
C409	CK45E3D102P	CAP. CERAMIC 1000P 2KV		
C410	C91-2585-05	CAP. FILM 0.01 10% 250V		
C411	C91-2663-05	CAP. FILM 4700P 5% 2KV		
C412	C91-2663-05	CAP. FILM 4700P 5% 2KV		
C413	CE04LW2C3R3M	CAP. ELECTRO 3.3 20% 160V		
C414	NO USE			
C415	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V		
C416	CE04LW2C3R3M	CAP. ELECTRO 3.3 20% 160V		
C417	CK45FF1H103Z	CAP. CERAMIC 0.01 10% 50V		
C418	CK45FB1H102K	CAP. CERAMIC 1000P 10% 50V		
C419	NO USE			
C420	CK45FF1H103Z	CAP. CERAMIC 0.01 10% 50V		
C421	NO USE			
C422	CE04LW1C101M	CAP. ELECTRO 100 20% 16V		
C423	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V		
C501	CC45FSL1H100J	CAP. CERAMIC 10P 5% 50V		
C502	CC45FSL1H100J	CAP. CERAMIC 10P 5% 50V		
CN101	E40-5066-05	PIN CONNECTOR 9P		
CN102	E40-5066-05	PIN CONNECTOR 9P		
CN151	E40-3237-05	PIN CONNECTOR 2P		
CN201	E40-3238-05	PIN CONNECTOR 3P		

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT
CN202	E40-3237-05	PIN CONNECTOR 2P		
CN301	E40-3242-05	PIN CONNECTOR 7P		
CN351	E40-3237-05	PIN CONNECTOR 2P		
CN503	E40-3238-05	PIN CONNECTOR 3P		
CN504	E40-3238-05	PIN CONNECTOR 3P		
D101	1SS133	DIODE		
D102	1SS133	DIODE		
D103	1SS133	DIODE		
D104	1SS133	DIODE		
D105	1SS133	DIODE		
D106	1SS133	DIODE		
D201	1SS83	DIODE		
D202	MA700	DIODE		
D203	1SS133	DIODE		
D204	1SS83	DIODE		
D301	1SS133	DIODE		
D302	NO USE			
D303	MTZ101J	DIODE, ZENER		
D304	MTZ101J	DIODE, ZENER		
D305	MTZ5.1JB	DIODE, ZENER		
D306	MTZ5.1JB	DIODE, ZENER		
D307	1G4B-42	DIODE, BRIDGE		
D308	1G4B-42	DIODE, BRIDGE		
D401	1SS133	DIODE		
D402	DHM3FJ60	DIODE		
D403	DHM3FJ60	DIODE		
D404	1SS83	DIODE		
D405	1SS83	DIODE		
D406	1SS83	DIODE		
D407	1SS83	DIODE		
D408	1SS133	DIODE		
D409	1SS133	DIODE		
D410	1SS133	DIODE		
D411	1SS133	DIODE		
F401	F53-0107-05	THERMAL FUSE		
IC301	NJM4558D	IC, DUAL OP-AMP		
IC302	NJM4558D	IC, DUAL OP-AMP		
L401	L33-0841-05	FERRI INDUCTOR 100		
L402	L33-0841-05	FERRI INDUCTOR 100		
L403	L33-0840-05	FERRI INDUCTOR 1000		
NL401	RA-201P-V6-2A	NEON LAMP		
Q101	2SC1740S(R,S)	TR. SI, NPN		
Q102	2SA933S(R,S)	TR. SI, PNP		
Q103	2SA933S(R,S)	TR. SI, PNP		
Q104	2SC1923(O)	TR. SI, NPN		
Q105	2SC1923(O)	TR. SI, NPN		
Q106	2SA1005(K)	TR. SI, PNP		
Q107	2SA1005(K)	TR. SI, PNP		
Q108	2SC1923(O)	TR. SI, NPN		
Q109	2SC1923(O)	TR. SI, NPN		
Q110	2SA1360(Y)	TR. SI, PNP		
Q111	2SA1360(Y)	TR. SI, PNP		
Q112	2SC3787(S)	TR. SI, NPN		
Q113	2SC3787(S)	TR. SI, NPN		
Q201	2SC1740S(R,S)	TR. SI, NPN		
Q202	2SA933S(R,S)	TR. SI, PNP		
Q203	2SK583	FET, N-CHANNEL		
Q204	2SK583	FET, N-CHANNEL		
Q205	2SA1005(K)	TR. SI, PNP		
Q206	2SA1005(K)	TR. SI, PNP		
Q207	2SA1209(S)	TR. SI, PNP		
Q208	2SA1209(S)	TR. SI, PNP		
Q209	2SC1923(O)	TR. SI, NPN		
Q210	2SC1923(O)	TR. SI, NPN		
Q211	2SC2911(S)	TR. SI, NPN		
Q212	2SC2911(S)	TR. SI, NPN		
Q213	NO USE			
Q214	2SA933S(R,S)	TR. SI, PNP		
Q215	2SA933S(R,S)	TR. SI, PNP		
Q301	2SA1381(D)	TR. SI, PNP		
Q302	2SC2909(S)	TR. SI, NPN		
Q303	2SA1534A(R)	TR. SI, PNP		
Q304	2SA1534A(R)	TR. SI, PNP		
Q305	2SC3940A(R)	TR. SI, NPN		
Q351	2SC3940A(R)	TR. SI, NPN		
Q352	2SA1534A(R)	TR. SI, PNP		
Q401	2SD1666(R)	TR. SI, NPN		
Q402	2SA933S(R,S)	TR. SI, PNP		
Q403	2SC1740S(R,S)	TR. SI, NPN		
Q404	2SA933S(R,S)	TR. SI, PNP		

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT
Q405	2SA1091(O)	TR. SI, PNP		
Q406	2SA1091(O)	TR. SI, PNP		
Q407	2SA1091(O)	TR. SI, PNP		
Q408	2SA1091(O)	TR. SI, PNP		
Q409	2SA1208(S)	TR. SI, PNP		
Q410	2SC2910(S)	TR. SI, NPN		
Q411	2SA933S(R,S)	TR. SI, PNP		
R101	RN14BK2C2700F	RES. METAL FILM 270 1% 1/6W		
R102	RN14BK2C2700F	RES. METAL FILM 270 1% 1/6W		
R103	NO USE			
R104	RN14BK2C1201F	RES. METAL FILM 1.2K 1% 1/6W		
R105	RN14BK2C1201F	RES. METAL FILM 1.2K 1% 1/6W		
R106	RD14BB2C102J	RES. CARBON 1K 5% 1/6W		
R107	RD14BB2C473J	RES. CARBON 47K 5% 1/6W		
R108	RN14BK2C6200F	RES. METAL FILM 620 1% 1/6W		
R109	RN14BK2C9100F	RES. METAL FILM 910 1% 1/6W		
R110	RN14BK2C9100F	RES. METAL FILM 910 1% 1/6W		
R111	RD14BB2C220J	RES. CARBON 22 5% 1/6W		
R112	RD14BB2C220J	RES. CARBON 22 5% 1/6W		
R113	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W		
R114	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W		
R115	RD14BB2C220J	RES. CARBON 22 5% 1/6W		
R116	RD14BB2C331J	RES. CARBON 330 5% 1/6W		
R117	NO USE			
R118	RD14BB2C621J	RES. CARBON 620 5% 1/6W		
R119	RD14BB2C132J	RES. CARBON 1.3K 5% 1/6W		
R120	RD14BB2C220J	RES. CARBON 22 5% 1/6W		
R121	RD14BB2C220J	RES. CARBON 22 5% 1/6W		
R122	RD14BB2C751J	RES. CARBON 750 5% 1/6W		
R123	RD14BB2C751J	RES. CARBON 750 5% 1/6W		
R124	RD14BB2C470J	RES. CARBON 47 5% 1/6W		
R125	RD14BB2C470J	RES. CARBON 47 5% 1/6W		
R126	R92-1654-05	RES. METAL FILM 22K 5% 2W		
R127	RD14BB2E471J	RES. CARBON 470 5% 1/4W		
R132	R92-1654-05	RES. METAL FILM 22K 5% 2W		
R133	RD14BB2E471J	RES. CARBON 470 5% 1/4W		
R138	RD14BB2C203J	RES. CARBON 20K 5% 1/6W		
R139	RD14BB2C164J	RES. CARBON 160K 5% 1/6W		
R140	NO USE			
R141	RD14BB2E621J	RES. CARBON 620 5% 1/4W		
R142	RD14BB2E621J	RES. CARBON 620 5% 1/4W		
R143	RD14BB2E621J	RES. CARBON 620 5% 1/4W		
R144	RD14BB2E621J	RES. CARBON 620 5% 1/4W		
R145	NO USE			
R146	R92-1654-05	RES. METAL FILM 22K 5% 2W		
R150</				

# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
TP1	E23-1520-05	EARTH TERMINAL
TP2	E23-1520-05	EARTH TERMINAL
TP3	E23-1520-05	EARTH TERMINAL
TP4	E23-1520-05	EARTH TERMINAL
TP5	E23-1520-05	EARTH TERMINAL
TP6	E23-1520-05	EARTH TERMINAL
VR101	R12-0871-05	RES. SEMI FIXED 470 B
VR102	R12-5085-05	RES. SEMI FIXED 100 B
VR103	R12-5085-05	RES. SEMI FIXED 100 B
VR201	R12-1589-05	RES. SEMI FIXED 1KB
VR202	R12-5085-05	RES. SEMI FIXED 100 B
VR203	R12-1591-05	RES. SEMI FIXED 4.7K
VR301	R12-1589-05	RES. SEMI FIXED 1KB
VR401	R12-8525-05	RES. SEMI FIXED 1MB
VR402	R12-5560-05	RES. SEMI FIXED 100KB
VR403	R12-5560-05	RES. SEMI FIXED 100KB
W103	E38-1156-05	WIRE ASS'Y:Y-CRT
W401	E38-1155-05	WIRE ASS'Y:HIGH VOLTAGE

## CS-4125 FINAL UNIT

### X73-2150-01

REF. NO	PARTS NO	NAME & DESCRIPTION
	E23-0557-14	EARTH LUG:THERMAL FUSE
	F01-0867-05	HEAT SINK:HIGH VOLTAGE
	F01-2329-05	HEAT SINK
	F11-1282-24	SHIELD CASE
	J73-0408-02	PCB (UNMOUNTED)
	N09-0623-04	SCREW,SEMS PAN HD M3X8
C104	CC45FCH1H150J	CAP. CERAMIC 15P 5% 50V
C105	CC45FCH1H080D	CAP. CERAMIC 8P 0.5P 50V
C106	CC45FCH1H080D	CAP. CERAMIC 8P 0.5P 50V
C107	CF92FV1H103J	CAP. POLYESTER 0.01 5% 50V
C108	CF92FV1H103J	CAP. POLYESTER 0.01 5% 50V
C109	CC45FCH2H040C	CAP. CERAMIC 4P 0.25P 500V
C110	CC45FCH2H040C	CAP. CERAMIC 4P 0.25P 500V
C111	CC45FCH2H040C	CAP. CERAMIC 4P 0.25P 500V
C112	CC45FCH2H040C	CAP. CERAMIC 4P 0.25P 500V
C113	CC45FCH2H040C	CAP. CERAMIC 4P 0.25P 500V
C114	CC45FCH2H040C	CAP. CERAMIC 4P 0.25P 500V
C115	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V
C116	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V
C117	NO USE	
C118	C91-2662-05	CAP. FILM 0.1 10% 250V
C119	C91-2538-05	CAP. FILM 0.1 10% 63V
C120	C91-2662-05	CAP. FILM 0.1 10% 250V
C121	CE04LW1A101M	CAP. ELECTRO 100 20% 10V
C122	NO USE	
C123	CE04LW1A470M	CAP. ELECTRO 47 20% 10V
C124	CE04LW1A470M	CAP. ELECTRO 47 20% 10V
C125	CE04LW2C3R3M	CAP. ELECTRO 3.3 20% 160V
C126	CE04LW2C3R3M	CAP. ELECTRO 3.3 20% 160V
C127	CE04LW1A470M	CAP. ELECTRO 47 20% 10V
C130	CC45FCH1H121J	CAP. CERAMIC 120P 5% 50V
C201	CK45FF1H103Z	CAP. CERAMIC 0.01 10% 50V
C202	CC45FSL1H681J	CAP. CERAMIC 680P 5% 50V
C203	C91-1309-05	CAP. CERAMIC 0.01 10% 500V
C204	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V
C205	NO USE	
C206	C91-1309-05	CAP. CERAMIC 0.01 10% 500V
C207	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V
C208	CE04LW1A470M	CAP. ELECTRO 47 20% 10V
C209	CE04LW1A470M	CAP. ELECTRO 47 20% 10V
C210	CE04LW1A470M	CAP. ELECTRO 47 20% 10V
C211	CE04LW2C3R3M	CAP. ELECTRO 3.3 20% 160V
C212	CE04LW1A470M	CAP. ELECTRO 47 20% 10V
C302	CE04LW2C3R3M	CAP. ELECTRO 3.3 20% 160V
C303	CE04EW1C472M	CAP. ELECTRO 4700 20% 16V
C304	CE04LW1A221M	CAP. ELECTRO 220 20% 10V
C305	NO USE	
C306	CE04EW1C472M	CAP. ELECTRO 4700 20% 16V
C307	CE04LW1A221M	CAP. ELECTRO 220 20% 10V
C308	CE04HW1H010M	CAP. ELECTRO 1 20% 50V
C309	CE04LW1A330M	CAP. ELECTRO 33 20% 10V
C310	CE04LW1A101M	CAP. ELECTRO 100 20% 10V
C311	CE04LW1A101M	CAP. ELECTRO 100 20% 10V
C332	CE04LW1A221M	CAP. ELECTRO 220 20% 10V
C333	CE04EW2E101M	CAP. ELECTRO 100 20% 250V
C401	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V
C402	CE04LW1C470M	CAP. ELECTRO 47 20% 16V
C403	CE04EW1Y221M	CAP. ELECTRO 220 20% 35V
C404	CK45E3D102P	CAP. CERAMIC 1000P 2KV

REF. NO	PARTS NO	NAME & DESCRIPTION
C405	C91-2663-05	CAP. FILM 4700P 5% 2KV
C406	C91-2663-05	CAP. FILM 4700P 5% 2KV
C407	NO USE	
C408	CK45FB2H102K	CAP. CERAMIC 1000P 10% 500V
C409	CK45E3D102P	CAP. CERAMIC 1000P 2KV
C410	C91-2585-05	CAP. MYLAR 0.01 10% 250V
C411	C91-2663-05	CAP. FILM 4700P 5% 2KV
C412	C91-2663-05	CAP. FILM 4700P 5% 2KV
C413	CE04LW2C3R3M	CAP. ELECTRO 3.3 20% 160V
C414	NO USE	
C415	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V
C416	CE04LW2C3R3M	CAP. ELECTRO 3.3 20% 160V
C417	CF92FV1H103J	CAP. POLYESTER 0.01 5% 50V
C418	CK45FB1H102K	CAP. CERAMIC 1000P 10% 50V
C419	NO USE	
C420	CK45FF1H103Z	CAP. CERAMIC 0.01 10% 50V
C421	NO USE	
C422	CE04LW1C101M	CAP. ELECTRO 100 20% 16V
C423	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V
C501	CC45FSL1H100J	CAP. CERAMIC 10P 5% 50V
C502	CC45FSL1H100J	CAP. CERAMIC 10P 5% 50V
CN101	E40-5066-05	PIN CONNECTOR 9P
CN102	E40-5066-05	PIN CONNECTOR 9P
CN151	E40-3237-05	PIN CONNECTOR 2P
CN301	E40-3242-05	PIN CONNECTOR 7P
CN351	E40-3237-05	PIN CONNECTOR 2P
CN503	E40-3238-05	PIN CONNECTOR 3P
CN504	E40-3238-05	PIN CONNECTOR 3P
CN551	E40-3238-05	PIN CONNECTOR 3P
CN556	E40-3237-05	PIN CONNECTOR 2P
D101	1SS133	DIODE
D102	1SS133	DIODE
D103	1SS133	DIODE
D104	1SS133	DIODE
D105	1SS133	DIODE
D106	1SS133	DIODE
D107	1SS133	DIODE
D108	1SS133	DIODE
D201	1SS83	DIODE
D202	MA700	DIODE
D203	1SS133	DIODE
D204	1SS83	DIODE
D301	1SS133	DIODE
D302	NO USE	
D303	MTZ10JC	DIODE,ZENER
D304	MTZ10JC	DIODE,ZENER
D305	MTZ5.1JB	DIODE,ZENER
D306	MTZ5.1JB	DIODE,ZENER
D307	1G4B-42	DIODE,BRIDGE
D312	1G4B-42	DIODE,BRIDGE
D401	1SS133	DIODE
D402	DHM3FJ60	DIODE
D403	DHM3FJ60	DIODE
D404	1SS83	DIODE
D405	1SS83	DIODE
D406	1SS83	DIODE
D407	1SS83	DIODE
D408	1SS133	DIODE
D409	1SS133	DIODE
D410	1SS133	DIODE
D411	1SS133	DIODE
F401	F53-0107-05	THERMAL FUSE
IC301	NJM4558D	IC,DUAL OP-AMP
IC302	NJM4558D	IC,DUAL OP-AMP
L401	L40-1011-50	FERRI INDUCTOR 100UH
L402	L40-1011-50	FERRI INDUCTOR 100UH
L403	L40-1025-49	FERRI INDUCTOR 1MH
NL401	RA-201P-V6-2A	NEON LAMP
P1	E23-1520-05	EARTH TERMINAL
P2	E23-1520-05	EARTH TERMINAL
P3	E23-1520-05	EARTH TERMINAL
P4	E23-1520-05	EARTH TERMINAL
P5	E23-1520-05	EARTH TERMINAL
P6	E23-1520-05	EARTH TERMINAL
Q101	2SC1740S(R,S)	TR. SI, NPN
Q102	2SA933ASLN(R,S)	TR. SI, PNP
Q103	2SA933ASLN(R,S)	TR. SI, PNP

# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
Q104	2SC1923(O)	TR. SI, NPN
Q105	2SC1923(O)	TR. SI, NPN
Q106	2SA1005(K)	TR. SI, PNP
Q107	2SA1005(K)	TR. SI, PNP
Q108	2SC1923(O)	TR. SI, NPN
Q109	2SC1923(O)	TR. SI, NPN
Q110	2SA1360(Y)	TR. SI, PNP
Q111	2SA1360(Y)	TR. SI, PNP
Q112	2SC3787(S)	TR. SI, NPN
Q113	2SC3787(S)	TR. SI, NPN
Q201	2SC1740S(R,S)	TR. SI, NPN
Q202	2SA933ASLN(R,S)	TR. SI, PNP
Q203	2SK583	FET, N-CHANNEL
Q204	2SK583	FET, N-CHANNEL
Q205	2SA1005(K)	TR. SI, PNP
Q206	2SA1005(K)	TR. SI, PNP
Q207	2SA1209(R,S)	TR. SI, PNP
Q208	2SA1209(R,S)	TR. SI, PNP
Q209	2SC1923(O)	TR. SI, NPN
Q210	2SC1923(O)	TR. SI, NPN
Q211	2SC2911(S)	TR. SI, NPN
Q212	2SC2911(S)	TR. SI, NPN
Q213	NO USE	
Q214	2SA933ASLN(R,S)	TR. SI, PNP
Q215	2SA933ASLN(R,S)	TR. SI, PNP
Q301	2SA1381(D)	TR. SI, PNP
Q302	2SC2909(S)	TR. SI, NPN
Q303	2SA1534A(R)	TR. SI, PNP
Q304	NO USE	
Q305	2SC3940A(R)	TR. SI, NPN
Q306	2SA1534A(R)	TR. SI, PNP
Q351	2SC3940A(R)	TR. SI, NPN
Q352	2SA1534A(R)	TR. SI, PNP
Q401	2SD1666(R)	TR. SI, NPN
Q402	2SA933ASLN(R,S)	TR. SI, PNP
Q403	2SC1740S(R,S)	TR. SI, NPN
Q404	2SA933ASLN(R,S)	TR. SI, PNP
Q405	2SA1091(O)	TR. SI, PNP
Q406	2SA1091(O)	TR. SI, PNP
Q407	2SA1091(O)	TR. SI, PNP
Q408	2SA1091(O)	TR. SI, PNP
Q409	2SA1208(S)	TR. SI, PNP
Q410	2SC2910(S)	TR. SI, NPN
Q411	2SA933ASLN(R,S)	TR. SI, PNP
R101	RN14BK2C2700F	RES. METAL FILM 270 1% 1/6W
R102	RN14BK2C2700F	RES. METAL FILM 270 1% 1/6W
R103	NO USE	
R104	RN14BK2C1201F	RES. METAL FILM 1.2K 1% 1/6W
R105	RN14BK2C1201F	RES. METAL FILM 1.2K 1% 1/6W
R106	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R107	RD14BB2C473J	RES. CARBON 47K 5% 1/6W
R108	RN14BK2C6200F	RES. METAL FILM 620 1% 1/6W
R109	RN14BK2C9100F	RES. METAL FILM 910 1% 1/6W
R110	RN14BK2C9100F	RES. METAL FILM 910 1% 1/6W
R111	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R112	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R113	RN14BK2C2201F	RES. METAL FILM 2.2K 1% 1/6W
R114	RN14BK2C2201F	RES. METAL FILM 2.2K 1% 1/6W
R115	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R116	R92-1061-05	JUMPING RES. ZERO OHM(5MM)
R117	RD14BB2C563J	RES. CARBON 56K 5% 1/6W
R118	RD14BB2C511J	RES. CARBON 510 5% 1/6W
R119	RD14BB2C471J	RES. CARBON 470 5% 1/6W
R120	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R121	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R122	RD14BB2C751J	RES. CARBON 750 5% 1/6W
R123	RD14BB2C751J	RES. CARBON 750 5% 1/6W
R124	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R125	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R126	NO USE	
R127	RD14BB2E471J	RES. CARBON 470 5% 1/4W
R128	R92-1654-05	RES. METAL FILM 22K 5% 2W
R133	RD14BB2E471J	RES. CARBON 470 5% 1/4W
R134	R92-1654-05	RES. METAL FILM 22K 5% 2W
R138	RD14BB2C203J	RES. CARBON 20K 5% 1/6W
R139	RD14BB2C164J	RES. CARBON 160K 5% 1/6W
R140	NO USE	
R141	RD14BB2E621J	RES. CARBON 620 5% 1/4W
R142	RD14BB2E621J	RES. CARBON 620 5% 1/4W
R143	RD14BB2E621J	RES. CARBON 620 5% 1/4W
R144	RD14BB2E621J	RES. CARBON 620 5% 1/4W
R147	R92-1654-05	RES. METAL FILM 22K 5% 2W
R150	RD14BB2C203J	RES. CARBON 20K 5% 1/6W
R151	RD14BB2C164J	RES. CARBON 160K 5% 1/6W
R152	RD14BB2E621J	RES. CARBON 620 5% 1/4W
R153	RD14BB2E621J	RES. CARBON 620 5% 1/4W
R154	RD14BB2E621J	RES. CARBON 620 5% 1/4W

REF. NO	PARTS NO	NAME & DESCRIPTION
R155	RD14BB2E621J	RES. CARBON 620 5% 1/4W
R159	R92-1654-05	RES. METAL FILM 22K 5% 2W
R162	RD14BB2C100J	RES. CARBON 10 5% 1/6W
R163	RN14BK2C680F	RES. METAL FILM 68.0 1% 1/6W
R164	RN14BK2C680F	RES. METAL FILM 68.0 1% 1/6W
R165	RN14BK2C2002F	RES. METAL FILM 20K 1% 1/6W
R166	RN14BK2C2002F	RES. METAL FILM 20K 1% 1/6W
R167	NO USE	
R168	RD14BB2C220J	RES. CARBON 22 5% 1/6W

# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT	REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT
R342	RN14BK2E1602F	RES. METAL FILM 16K	1%	1/4W					
R343	RN14BK2C1002F	RES. METAL FILM 10K	1%	1/6W					
R344	RD14BB2C622J	RES. CARBON 6.2K	5%	1/6W					
R351	RD14BB2C120J	RES. CARBON 12	5%	1/6W					
R373	RD14KB3H751J	RES. CARBON 750	5%	5W					
R401	RD14BB2C2R2J	RES. CARBON 2.2	5%	1/6W					
R402	RD14BB2C473J	RES. CARBON 47K	5%	1/6W					
R403	RD14BB2C473J	RES. CARBON 47K	5%	1/6W					
R404	RD14BB2C473J	RES. CARBON 47K	5%	1/6W					
R405	RD14BB2C334J	RES. CARBON 330K	5%	1/6W					
R406	RD14BB2C222J	RES. CARBON 2.2K	5%	1/6W					
R407	RD14BB2C473J	RES. CARBON 47K	5%	1/6W					
R408	RD14BB2C103J	RES. CARBON 10K	5%	1/6W					
R409	RD14BB2C220J	RES. CARBON 22	5%	1/6W					
R410	NO USE								
R411	RD14BB2C102J	RES. CARBON 1K	5%	1/6W					
R412	NO USE								
R413	R92-1564-05	RES. METAL FILM 15M	1%	1/2W					
R420	RN14BK2C6802F	RES. METAL FILM 68K	1%	1/6W					
R421	R92-1652-05	RES. METAL FILM 12M	1%	1/2W					
R427	RD14BB2E515J	RES. CARBON 5.1M	5%	1/4W					
R428	RN14BK2E3904F	RES. METAL FILM 3.9M	1%	1/4W					
R429	RN14BK2E3904F	RES. METAL FILM 3.9M	1%	1/4W					
R430	RN14BK2E3904F	RES. METAL FILM 3.9M	1%	1/4W					
R431	RN14BK2E3904F	RES. METAL FILM 3.9M	1%	1/4W					
R432	RD14BB2C101J	RES. CARBON 100	5%	1/6W					
R433	RD14BB2C513J	RES. CARBON 51K	5%	1/6W					
R434	RD14BB2C114J	RES. CARBON 110K	5%	1/6W					
R435	RD14BB2C470J	RES. CARBON 47	5%	1/6W					
R436	RD14BB2E683J	RES. CARBON 68K	5%	1/4W					
R437	RD14BB2C821J	RES. CARBON 820	5%	1/6W					
R438	RD14BB2C562J	RES. CARBON 5.6K	5%	1/6W					
R439	RD14BB2C164J	RES. CARBON 160K	5%	1/6W					
R440	RD14BB2C104J	RES. CARBON 100K	5%	1/6W					
R441	RD14BB2C104J	RES. CARBON 100K	5%	1/6W					
R442	RD14BB2C272J	RES. CARBON 2.7K	5%	1/6W					
R443	RD14BB2C432J	RES. CARBON 4.3K	5%	1/6W					
R444	RD14BB2C272J	RES. CARBON 2.7K	5%	1/6W					
R445	RD14BB2C391J	RES. CARBON 390	5%	1/6W					
R446	RD14BB2C203J	RES. CARBON 20K	5%	1/6W					
R447	RD14BB2E272J	RES. CARBON 2.7K	5%	1/4W					
R448	RD14BB2C513J	RES. CARBON 51K	5%	1/6W					
R449	RD14BB2C753J	RES. CARBON 75K	5%	1/6W					
R450	R92-1561-05	RES. METAL GLACE 3.9M	5%	1/4W					
R451	RD14BB2C101J	RES. CARBON 100	5%	1/6W					
R452	RD14BB2C473J	RES. CARBON 47K	5%	1/6W					
R453	RD14BB2E242J	RES. CARBON 2.4K	5%	1/4W					
T1	L19-0427-05	CONVERTOR TRANSFORMER							
TC101	C05-0469-05	CAP. TRIMMER 10P							
VR101	R12-0871-05	RES. SEMI FIXED 470 B							
VR102	R12-0869-05	RES. SEMI FIXED 100 B							
VR103	R12-0869-05	RES. SEMI FIXED 100 B							
VR201	R12-1590-05	RES. SEMI FIXED 2.2KB							
VR202	R12-0869-05	RES. SEMI FIXED 100 B							
VR203	R12-1591-05	RES. SEMI FIXED 4.7K							
VR301	R12-1589-05	RES. SEMI FIXED 1KB							
VR401	R12-8525-05	RES. SEMI FIXED 1MB							
VR402	R12-5560-05	RES. SEMI FIXED 100KB							
VR403	R12-5560-05	RES. SEMI FIXED 100KB							
W103	E38-1280-05	WIRE ASS'Y:Y-CRT							
W401	E38-1155-05	WIRE ASS'Y:HIG VOLTAGE							

## CS-4135 FINAL UNIT

### X73-2150-00

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT	REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT
	A33-0505-04	REFLECTOR							
	E23-0557-14	EARTH LUG:THERMAL FUSE							
	E38-1281-05	WIRE ASS'Y;ILLUMINATION(CN403)							
	F01-0867-05	HEAT SINK:HIGH VOLTAGE							
	F01-2329-05	HEAT SINK							
	F01-2343-05	HEAT SINK							
	F11-1282-24	SHIELD CASE							
	J73-0408-02	PCB (UNMOUNTED)							
	N09-0623-04	SCREW,SEMS PAN HD #3X8							
	W02-0474-05	HIGH VOLTAGE BLOCK							
A401									
C104	CC45FCH1H6R8D	CAP. CERAMIC 6.8P 0.5P 50V							
C105	NO USE								
C106	CC45FSL1H331J	CAP. CERAMIC 330P 5% 50V							
C107	CF92FV1H103J	CAP. POLYESTER 0.01 5% 50V							
C108	CF92FV1H103J	CAP. POLYESTER 0.01 5% 50V							
C109	CC45FCH1H050C	CAP. CERAMIC 5P 0.25P 50V							
C110	CC45FCH1H050C	CAP. CERAMIC 5P 0.25P 50V							
C111	CC45FCH1H050C	CAP. CERAMIC 5P 0.25P 50V							
C112	CC45FCH1H050C	CAP. CERAMIC 5P 0.25P 50V							
C113	CC45FCH1H050C	CAP. CERAMIC 5P 0.25P 50V							
C114	CC45FCH1H050C	CAP. CERAMIC 5P 0.25P 50V							
C115	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V							
C116	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V							
C117	NO USE								
C118	C91-2662-05	CAP. FILM 0.1 10% 250V							
C119	C91-2538-05	CAP. FILM 0.1 10% 63V							
C120	C91-2662-05	CAP. FILM 0.1 10% 250V							
C121	CE04LW1A101M	CAP. ELECTRO 100 20% 10V							
C122	NO USE								
C123	CE04LW1A470M	CAP. ELECTRO 47 20% 10V							
C124	CE04LW1A470M	CAP. ELECTRO 47 20% 10V							
C125	CE04LW2C3R3M	CAP. ELECTRO 3.3 20% 160V							
C126	CE04LW2C3R3M	CAP. ELECTRO 3.3 20% 160V							
C127	CE04LW1A470M	CAP. ELECTRO 47 20% 10V							
C128	CC45FCH1H120J	CAP. CERAMIC 12P 5% 50V							
C129	CC45FCH1H120J	CAP. CERAMIC 12P 5% 50V							
C130	CC45FCH1H121J	CAP. CERAMIC 120P 5% 50V							
C201	CK45FF1H103Z	CAP. CERAMIC 0.01 10% 50V							
C202	CC45FSL1H681J	CAP. CERAMIC 680P 5% 50V							
C203	C91-1309-05	CAP. CERAMIC 0.01 10% 500V							
C204	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V							
C205	NO USE								
C206	C91-1309-05	CAP. CERAMIC 0.01 10% 500V							
C207	CK45FB2H472K	CAP. CERAMIC 4700P 10% 500V							
C208	CE04LW1A470M	CAP. ELECTRO 47 20% 10V							
C209	CE04LW1A470M	CAP. ELECTRO 47 20% 10V							
C210	CE04LW1A470M	CAP. ELECTRO 47 20% 10V							
C211	CE04LW2C3R3M	CAP. ELECTRO 3.3 20% 160V							
C212	CE04LW1A470M	CAP. ELECTRO 47 20% 10V							
C221	C91-2585-05	CAP. NYLAR 0.01 10% 250V							
C222	CK45FF1H103Z	CAP. CERAMIC 0.01 10% 50V							
C301	CE04EW2E470M	CAP. ELECTRO 47 20% 250V							
C302	CE04LW2C3R3M	CAP. ELECTRO 3.3 20% 160V							
C303	CE04EW1G472M	CAP. ELECTRO 4700 20% 16V							
C304	CE04LW1A221M	CAP. ELECTRO 220 20% 10V							
C305	CE04LW1A221M	CAP. ELECTRO 220 20% 10V							
C306	CE04EW1G472M	CAP. ELECTRO 4700 20% 16V							
C307	CE04LW1A221M	CAP. ELECTRO 220 20% 10V							
C308	CE04HW1H010M	CAP. ELECTRO 1 20% 50V							
C309	CE04LW1A330M	CAP. ELECTRO 33 20% 10V							
C310	CE04LW1A101M	CAP. ELECTRO 100 20% 10V							
C311	CE04LW1A101M	CAP. ELECTRO 100 20% 10V							
C331	CE04EW2C221M	CAP. ELECTRO 220 20% 160V							
C332	CE04LW2C3R3M	CAP. ELECTRO 3.3 20% 160V							
C402	CE04LW1C470M	CAP. ELECTRO 47 20% 16V							
C403	CE04EW1V221M	CAP. ELECTRO 220 20% 35V							
C404	NO USE								
C405	C91-2663-05	CAP. FILM 4700P 5% 2KV							
C406	C91-2663-05	CAP. FILM 4700P 5% 2KV							
C407	CK45E3D472P	CAP. CERAMIC 4700P 2KV							
C408	CK45FB2H102K	CAP. CERAMIC 1000P 10% 500V							
C409	CK45E3D102P	CAP. CERAMIC 1000P 2KV							
C410	C91-2585-05	CAP. NYLAR 0.01 10% 250V							
C411	C91-2663-05	CAP. FILM 4700P 5% 2KV							
C412	C91-2663-05	CAP. FILM 4700P 5% 2KV							
C413	CE04LW2C3R3M	CAP. ELECTRO 3.3 20% 160V							



# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT	REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT
R166	RN14BK2C2002F	RES. METAL FILM 20K 1%	1	1/6W	R401	RD14BB2C2R2J	RES. CARBON 2.2	5%	1/6W
R167	NO USE				R402	RD14BB2C473J	RES. CARBON 47K	5%	1/6W
R168	RD14BB2C101J	RES. CARBON 100	5%	1/6W	R403	RD14BB2C473J	RES. CARBON 47K	5%	1/6W
R169	RD14BB2C101J	RES. CARBON 100	5%	1/6W	R404	RD14BB2C473J	RES. CARBON 47K	5%	1/6W
R170	R92-1061-05	JUMPING RES. ZERO OHM (5MM)			R405	RD14BB2C334J	RES. CARBON 330K	5%	1/6W
R171	R92-1061-05	JUMPING RES. ZERO OHM (5MM)			R406	RD14BB2C222J	RES. CARBON 2.2K	5%	1/6W
R172	RD14BB2C104J	RES. CARBON 100K	5%	1/6W	R407	RD14BB2C473J	RES. CARBON 47K	5%	1/6W
R173	RD14BB2C104J	RES. CARBON 100K	5%	1/6W	R408	RD14BB2C103J	RES. CARBON 10K	5%	1/6W
R174	RD14BB2C911J	RES. CARBON 910	5%	1/6W	R409	RD14BB2C220J	RES. CARBON 22	5%	1/6W
R201	RD14BB2C220J	RES. CARBON 22	5%	1/6W	R410	NO USE			
R202	RD14BB2C362J	RES. CARBON 3.6K	5%	1/6W	R411	RD14BB2C102J	RES. CARBON 1K	5%	1/6W
R203	NO USE				R412	NO USE			
R204	RD14BB2C220J	RES. CARBON 22	5%	1/6W	R413	R92-1564-05	RES. METAL FILM 15M	1%	1/2W
R205	RD14BB2C304J	RES. CARBON 300K	5%	1/6W	R419	RN14BK2C1603F	RES. METAL FILM 160K	1%	1/6W
R206	RD14BB2C101J	RES. CARBON 100	5%	1/6W	R420	RN14BK2C1603F	RES. METAL FILM 160K	1%	1/6W
R207	RD14BB2C821J	RES. CARBON 820	5%	1/6W	R421	R92-1674-05	RES. METAL FILM 7.5M	5%	1/4W
R208	RD14BB2C101J	RES. CARBON 100	5%	1/6W	R427	RD14BB2E515J	RES. CARBON 5.1K	5%	1/4W
R209	RD14BB2C392J	RES. CARBON 3.9K	5%	1/6W	R428	R92-1061-05	JUMPING RES. ZERO OHM (5MM)		
R210	RD14BB2C132J	RES. CARBON 1.3K	5%	1/6W	R429	RN14BK2E3904F	RES. METAL FILM 3.9K	1%	1/4W
R211	RD14BB2C182J	RES. CARBON 1.8K	5%	1/6W	R430	RN14BK2E3904F	RES. METAL FILM 3.9K	1%	1/4W
R212	RD14BB2C362J	RES. CARBON 3.6K	5%	1/6W	R431	RN14BK2E3904F	RES. METAL FILM 3.9K	1%	1/4W
R213	RD14BB2C223J	RES. CARBON 22K	5%	1/6W	R432	RD14BB2C101J	RES. CARBON 100	5%	1/6W
R214	RD14BB2C220J	RES. CARBON 22	5%	1/6W	R433	RD14BB2C513J	RES. CARBON 51K	5%	1/6W
R215	RN14BK2C3301F	RES. METAL FILM 3.3K	1%	1/4W	R434	RD14BB2C224J	RES. CARBON 220K	5%	1/6W
R216	RN14BK2E3902F	RES. METAL FILM 39K	1%	1/4W	R435	RD14BB2C470J	RES. CARBON 47	5%	1/6W
R217	RN14BK2E4302F	RES. METAL FILM 43K	1%	1/4W	R436	RD14BB2E683J	RES. CARBON 68K	5%	1/4W
R218	RD14BB2C164J	RES. CARBON 160K	5%	1/6W	R437	RD14BB2C821J	RES. CARBON 820	5%	1/6W
R219	RD14BB2C822J	RES. CARBON 8.2K	5%	1/6W	R438	RD14BB2C562J	RES. CARBON 5.6K	5%	1/6W
R220	RD14BB2C102J	RES. CARBON 1K	5%	1/6W	R439	RD14BB2C164J	RES. CARBON 160K	5%	1/6W
R221	RD14BB2C472J	RES. CARBON 4.7K	5%	1/6W	R440	RD14BB2C753J	RES. CARBON 75K	5%	1/6W
R222	RD14BB2C472J	RES. CARBON 4.7K	5%	1/6W	R441	RD14BB2C823J	RES. CARBON 82K	5%	1/6W
R223	RD14BB2C242J	RES. CARBON 2.4K	5%	1/6W	R442	RD14BB2C622J	RES. CARBON 6.2K	5%	1/6W
R224	R92-1653-05	RES. METAL FILM 27K	5%	2W	R443	RD14BB2C392J	RES. CARBON 3.9K	5%	1/6W
R225	RD14BB2C104J	RES. CARBON 100K	5%	1/6W	R444	RD14BB2C822J	RES. CARBON 8.2K	5%	1/6W
R226	RD14BB2C104J	RES. CARBON 100K	5%	1/6W	R445	RD14BB2C391J	RES. CARBON 390	5%	1/6W
R227	RN14BK2C1000F	RES. METAL FILM 100	1%	1/6W	R446	R92-1061-05	JUMPING RES. ZERO OHM (5MM)		
R228	RD14BB2C391J	RES. CARBON 390	5%	1/6W	R447	RD14BB2E272J	RES. CARBON 2.7K	5%	1/4W
R229	RN14BK2E3902F	RES. METAL FILM 39K	1%	1/4W	R448	RD14BB2C434J	RES. CARBON 430K	5%	1/6W
R230	RN14BK2E4302F	RES. METAL FILM 43K	1%	1/4W	R449	RD14BB2C914J	RES. CARBON 910K	5%	1/6W
R231	RN14BK2C3301F	RES. METAL FILM 3.3K	1%	1/6W	R450	R92-1674-05	RES. METAL FILM 7.5M	5%	1/4W
R232	RD14BB2C164J	RES. CARBON 160K	5%	1/6W	R451	RD14BB2C101J	RES. CARBON 100	5%	1/6W
R233	RD14BB2C562J	RES. CARBON 5.6K	5%	1/6W	R452	RD14BB2C473J	RES. CARBON 47K	5%	1/6W
R234	RD14BB2C102J	RES. CARBON 1K	5%	1/6W	R453	RD14BB2E242J	RES. CARBON 2.4K	5%	1/4W
R235	RD14BB2C272J	RES. CARBON 2.7K	5%	1/6W	R461	RD14BB2C220J	RES. CARBON 22	5%	1/6W
R236	RD14BB2C622J	RES. CARBON 6.2K	5%	1/6W	R462	RD14BB2C472J	RES. CARBON 4.7K	5%	1/6W
R237	RD14BB2C272J	RES. CARBON 2.7K	5%	1/6W					
R238	RD14BB2C512J	RES. CARBON 5.1K	5%	1/6W					
R239	RD14BB2C912J	RES. CARBON 9.1K	5%	1/6W					
R240	RD14BB2C102J	RES. CARBON 1K	5%	1/6W					
R241	RD14BB2C822J	RES. CARBON 8.2K	5%	1/6W					
R242	NO USE								
R243	RD14BB2C470J	RES. CARBON 47	5%	1/6W					
R244	RD14BB2C470J	RES. CARBON 47	5%	1/6W					
R245	NO USE								
R246	RD14BB2C471J	RES. CARBON 470	5%	1/6W					
R247	RD14BB2C101J	RES. CARBON 100	5%	1/6W					
R248	RD14BB2C471J	RES. CARBON 470	5%	1/6W					
R249	RD14BB2C101J	RES. CARBON 100	5%	1/6W					
R254	RD14BB2C104J	RES. CARBON 100K	5%	1/6W					
R255	RD14BB2C683J	RES. CARBON 68K	5%	1/6W					
R301	RS14KB3F272J	RES. METAL FILM 2.7K	5%	3W					
R302	RN14BK2E8202F	RES. METAL FILM 82K	1%	1/4W					
R303	RD14BB2C102J	RES. CARBON 1K	5%	1/6W					
R304	RD14BB2C104J	RES. CARBON 100K	5%	1/6W					
R305	RD14BB2C102J	RES. CARBON 1K	5%	1/6W					
R306	RN14BK2E4701F	RES. METAL FILM 4.7K	1%	1/4W					
R307	RD14BB2C432J	RES. CARBON 4.3K	5%	1/6W					
R308	RS14KB3F220J	RES. METAL FILM 22	5%	3W					
R309	RD14BB2C221J	RES. CARBON 220	5%	1/6W					
R310	RN14BK2E1002F	RES. METAL FILM 10K	1%	1/4W					
R311	RN14BK2E1002F	RES. METAL FILM 10K	1%	1/4W					
R312	RD14BB2C512J	RES. CARBON 5.1K	5%	1/6W					
R317	RS14KB3F330J	RES. METAL FILM 33	5%	3W					
R318	RD14BB2C221J	RES. CARBON 220	5%	1/6W					
R319	RD14BB2C242J	RES. CARBON 2.4K	5%	1/6W					
R320	RD14BB2C102J	RES. CARBON 1K	5%	1/6W					
R321	RN14BK2C3301F	RES. METAL FILM 3.3K	1%	1/6W					
R322	RN14BK2C6201F	RES. METAL FILM 6.2K	1%	1/6W					
R323	NO USE								
R324	RD14BB2C103J	RES. CARBON 10K	5%	1/6W					
R325	RD14BB2C103J	RES. CARBON 10K	5%	1/6W					
R331	R92-1690-05	RES. METAL FILM 750	5%	3W					
R332	RD14BB2C101J	RES. CARBON 100	5%	1/6W					
R333	RD14BB2C102J	RES. CARBON 1K	5%	1/6W					
R334	RD14BB2C102J	RES. CARBON 1K	5%	1/6W					
R335	RN14BK2E2203F	RES. METAL FILM 220K	1%	1/4W					
R336	RN14BK2E2202F	RES. METAL FILM 22K	1%	1/4W					
R337	RD14BB2C203J	RES. CARBON 20K	5%	1/6W					
R351	RD14BB2C120J	RES. CARBON 12	5%	1/6W					

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT	REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT
R401	RD14BB2C2R2J	RES. CARBON 2.2	5%	1/6W	R401	RD14BB2C2R2J	RES. CARBON 2.2	5%	1/6W
R402	RD14BB2C473J	RES. CARBON 47K	5%	1/6W	R402	RD14BB2C473J	RES. CARBON 47K	5%	1/6W
R403	RD14BB2C473J	RES. CARBON 47K	5%	1/6W	R403	RD14BB2C473J	RES. CARBON 47K	5%	1/6W
R404	RD14BB2C473J	RES. CARBON 47K	5%	1/6W	R404	RD14BB2C473J	RES. CARBON 47K	5%	1/6W
R405	RD14BB2C334J	RES. CARBON 330K	5%	1/6W	R405	RD14BB2C334J	RES. CARBON 330K	5%	1/6W
R406	RD14BB2C222J	RES. CARBON 2.2K	5%	1/6W	R406	RD14BB2C222J	RES. CARBON 2.2K	5%	1/6W
R407	RD14BB2C473J	RES. CARBON 47K	5%	1/6W	R407	RD14BB2C473J	RES. CARBON 47K	5%	1/6W
R408	RD14BB2C103J	RES. CARBON 10K	5%	1/6W	R408	RD14BB2C103J	RES. CARBON 10K	5%	1/6W
R409	RD14BB2C220J	RES. CARBON 22	5%	1/6W	R409	RD14BB2C220J	RES. CARBON 22	5%	1/6W
R410	NO USE				R410	NO USE			
R411	RD14BB2C102J	RES. CARBON 1K	5%	1/6W	R411	RD14BB2C102J	RES. CARBON 1K	5%	1/6W
R412	NO USE				R412	NO USE			
R413	R92-1564-05	RES. METAL FILM 15M	1%	1/2W	R413	R92-1564-05	RES. METAL FILM 15M	1%	1/2W
R419	RN14BK2C1603F	RES. METAL FILM 160K	1%	1/6W	R419	RN14BK2C1603F	RES. METAL FILM 160K	1%	1/6W
R420	RN14BK2C1603F	RES. METAL FILM 160K	1%	1/6W	R420	RN14BK2C1603F	RES. METAL FILM 160K	1%	1/6W
R421	R92-1674-05	RES. METAL FILM 7.5M	5%	1/4W	R421	R92-1674-05	RES. METAL FILM 7.5M	5%	1/4W
R427	RD14BB2E515J	RES. CARBON 5.1K	5%	1/4W	R427	RD14BB2E515J	RES. CARBON 5.1K	5%	1/4W
R428	R92-1061-05	JUMPING RES. ZERO OHM (5MM)			R428	R92-1061-05	JUMPING RES. ZERO OHM (5MM)		
R429	RN14BK2E3904F	RES. METAL FILM 3.9K	1%	1/4W	R429	RN14BK2E3904F	RES. METAL FILM 3.9K	1%	1/4W
R430	RN14BK2E3904F	RES. METAL FILM 3.9K	1%	1/4W	R430	RN14BK2E3904F	RES. METAL FILM 3.9K	1%	1/4W
R431	RN14BK2E3904F	RES. METAL FILM 3.9K	1%	1/4W	R431	RN14BK2E3904F	RES. METAL FILM 3.9K	1%	1/4W
R432	RD14BB2C101J	RES. CARBON 100	5%	1/6W	R432	RD14BB2C101J	RES. CARBON 100	5%	1/6W
R433	RD14BB2C513J	RES. CARBON 51K	5%	1/6W	R433	RD14BB2C513J	RES. CARBON 51K	5%	1/6W
R434	RD14BB2C224J	RES. CARBON 220K	5%	1/6W	R434	RD14BB2C224J	RES. CARBON 220K		

# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT	REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT
R408	RD14BB2C101J	RES. CARBON	100	5%	1/6W				
R409	RD14BB2C101J	RES. CARBON	100	5%	1/6W				
R410	RD14BB2C512J	RES. CARBON	5.1K	5%	1/6W				
R411	RD14BB2C512J	RES. CARBON	5.1K	5%	1/6W				
R412	RD14BB2C202J	RES. CARBON	2K	5%	1/6W				
R413	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W				
R414	RD14BB2C392J	RES. CARBON	3.9K	5%	1/6W				
R415	RD14BB2C123J	RES. CARBON	12K	5%	1/6W				
R416	RD14BB2C272J	RES. CARBON	2.7K	5%	1/6W				
R417	RD14BB2C103J	RES. CARBON	10K	5%	1/6W				
R418	NO USE								
R419	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W				
R420	RD14BB2C101J	RES. CARBON	100	5%	1/6W				
R421	RD14BB2C822J	RES. CARBON	8.2K	5%	1/6W				
R422	RD14BB2C113J	RES. CARBON	11K	5%	1/6W				
R423	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W				
R424	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W				
R425	RD14BB2C101J	RES. CARBON	100	5%	1/6W				
R426	RD14BB2C821J	RES. CARBON	820	5%	1/6W				
R427	RD14BB2C512J	RES. CARBON	5.1K	5%	1/6W				
R428	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W				
R429	RD14BB2C562J	RES. CARBON	5.6K	5%	1/6W				
R430	RN14BK2C1102F	RES. METAL FILM	11K	1%	1/6W				
R434	RD14BB2C474J	RES. CARBON	470K	5%	1/6W				
R435	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W				
R436	RD14BB2C103J	RES. CARBON	10K	5%	1/6W				
R437	RD14BB2C102J	RES. CARBON	1K	5%	1/6W				
R438	RD14BB2C272J	RES. CARBON	2.7K	5%	1/6W				
R439	RD14BB2C152J	RES. CARBON	1.5K	5%	1/6W				
R440	RD14BB2C182J	RES. CARBON	1.8K	5%	1/6W				
R441	RN14BK2C3301F	RES. METAL FILM	3.3K	1%	1/6W				
R442	RD14BB2C152J	RES. CARBON	1.5K	5%	1/6W				
R443	RD14BB2C153J	RES. CARBON	15K	5%	1/6W				
R444	RD14BB2C181J	RES. CARBON	180	5%	1/6W				
R445	RD14BB2C103J	RES. CARBON	10K	5%	1/6W				
R446	RD14BB2C393J	RES. CARBON	39K	5%	1/6W				
R447	RD14BB2C821J	RES. CARBON	820	5%	1/6W				
R448	RD14BB2C473J	RES. CARBON	47K	5%	1/6W				
R449	RD14BB2C220J	RES. CARBON	22	5%	1/6W				
R450	RD14BB2C103J	RES. CARBON	10K	5%	1/6W				
R451	RD14BB2C103J	RES. CARBON	10K	5%	1/6W				
R452	RD14BB2C102J	RES. CARBON	1K	5%	1/6W				
R453	RD14BB2C123J	RES. CARBON	12K	5%	1/6W				
R454	RD14BB2C103J	RES. CARBON	10K	5%	1/6W				
R455	RD14BB2C103J	RES. CARBON	10K	5%	1/6W				
R456	RD14BB2C103J	RES. CARBON	10K	5%	1/6W				
R459	RD14BB2C103J	RES. CARBON	10K	5%	1/6W				
R460	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W				
R461	RD14BB2C302J	RES. CARBON	3K	5%	1/6W				
R462	RD14BB2C362J	RES. CARBON	3.6K	5%	1/6W				
R463	RD14BB2C104J	RES. CARBON	100K	5%	1/6W				
R464	RD14BB2C104J	RES. CARBON	100K	5%	1/6W				
R465	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W				
R466	RD14BB2C102J	RES. CARBON	1K	5%	1/6W				
R467	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W				
R468	RD14BB2C103J	RES. CARBON	10K	5%	1/6W				
R469	RN14BK2C1041D	RES. METAL FILM	1.04K	0.5%	1/6W				
R470	RN14BK2C1301D	RES. METAL FILM	1.3K	0.5%	1/6W				
R471	RN14BK2C1671D	RES. METAL FILM	1.67K	0.5%	1/6W				
R472	RN14BK2C1002D	RES. METAL FILM	10K	0.5%	1/6W				
R473	RD14BB2C203J	RES. CARBON	20K	5%	1/6W				
R474	RN14BK2C6800D	RES. METAL FILM	680	0.5%	1/6W				
R475	RN14BK2C6802D	RES. METAL FILM	68K	0.5%	1/6W				
R476	RN14BK2C6801D	RES. METAL FILM	6.8K	0.5%	1/6W				
R477	RN14BK2E6803D	RES. METAL FILM	680K	0.5%	1/6W				
R478	RD14BB2C101J	RES. CARBON	100	5%	1/6W				
R479	RD14BB2C122J	RES. CARBON	1.2K	5%	1/6W				
R480	RD14BB2C122J	RES. CARBON	1.2K	5%	1/6W				
R481	RD14BB2C221J	RES. CARBON	220	5%	1/6W				
R482	RD14BB2C221J	RES. CARBON	220	5%	1/6W				
R483	RD14BB2C103J	RES. CARBON	10K	5%	1/6W				
R484	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W				
R485	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W				
R490	RD14BB2C471J	RES. CARBON	470	5%	1/6W				
R491	RD14BB2C471J	RES. CARBON	470	5%	1/6W				
R492	RD14BB2C132J	RES. CARBON	1.3K	5%	1/6W				
R493	RD14BB2C103J	RES. CARBON	10K	5%	1/6W				
R494	RD14BB2C103J	RES. CARBON	10K	5%	1/6W				
R505	RD14BB2C512J	RES. CARBON	5.1K	5%	1/6W				
R506	RD14BB2C102J	RES. CARBON	1K	5%	1/6W				
R507	RD14BB2C100J	RES. CARBON	10	5%	1/6W				
R508	RD14BB2C391J	RES. CARBON	390	5%	1/6W				
R509	RD14BB2C104J	RES. CARBON	100K	5%	1/6W				
R510	RD14BB2C470J	RES. CARBON	47	5%	1/6W				
R511	R92-0150-05	JUMPING RES.	ZERO	0HM(10MM)					
R601	RD14BB2C511J	RES. CARBON	510	5%	1/6W				
R602	RD14BB2C511J	RES. CARBON	510	5%	1/6W				
R603	RD14BB2C104J	RES. CARBON	100K	5%	1/6W				
R604	RD14BB2C104J	RES. CARBON	100K	5%	1/6W				

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT	REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT
S1	S60-0618-05	ROTARY SWITCH							
S2	S60-0618-05	ROTARY SWITCH							
S3	S60-0617-05	ROTARY SWITCH							
S4	S68-0643-05	PUSH SWITCH							
S5	S68-0643-05	PUSH SWITCH							
S6	S68-0643-05	PUSH SWITCH							
S7	S68-0643-05	PUSH SWITCH							
S8	S64-0605-05	LEVER SWITCH							
S9	S64-0605-05	LEVER SWITCH							
S10	S64-0605-05	LEVER SWITCH							
S101	S68-0642-05	PUSH SWITCH							
VR1	R05-3522-05	V. R.		10KB					
VR2	R05-3522-05	V. R.		10KB					
VR3	R05-3524-05	V. R.		10KB					
VR4	R05-3522-05	V. R.		10KB					
VR5	R05-3523-05	V. R.		10KB					
VR6	R05-3523-05	V. R.		10KB					
VR7	R05-3523-05	V. R.		10KB					
VR8	NO USE								
VR9	R05-3522-05	V. R.		10KB					
VR10	R05-3522-05	V. R.		10KB					
VR11	R31-0805-05	V. R.		50K					
VR401	R12-0876-05	RES. SEMI FIXED	470	B					
W551	E38-1157-05	WIRE ASS'Y:X-CRT							
W554	E38-1158-05	WIRE ASS'Y:CHI OUT							
W559	E38-1190-05	WIRE ASS'Y:CH SW							
W560	NO USE								
W561	E38-1191-05	WIRE ASS'Y:SWP END							
W901	E38-1192-05	WIRE ASS'Y:GND X2							

## CS-4125 SWEEP UNIT

### X74-1610-01

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT	REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT
C1	E38-1451-05	WIRE ASS'Y:G							
C2	J73-0415-12	PCB (UNMOUNTED)							
C3	CF92FV1H103J	CAP. POLYESTER	0.01	5% 50V					
C401	CE04CW1A101H	CAP. ELECTRO	100	20% 10V					
C402	CE04CW1E101H	CAP. ELECTRO	100	20% 25V					
C403	C91-0769-05	CAP. CERAMIC	0.01	20% 16V					
C404	CE04LW1H2R2H	CAP. ELECTRO	2.2	20% 50V					
C405	CE04LW1A470H	CAP. ELECTRO	47	20% 10V					
C406	C91-2538-05	CAP. FILM	0.1	10% 63V					
C407	CF92FV1H103J	CAP. POLYESTER	0.01	5% 50V					
C408	CC45FSL1H121J	CAP. CERAMIC	120P	5% 50V					
C411	CC45FSL1H220J	CAP. CERAMIC	22P	5% 50V					
C412	CE04LW1H2R2H	CAP. ELECTRO	2.2	20% 50V					
C413	CK45FB1H472K	CAP. CERAMIC	4700P	10% 50V					
C414	CE04LW1H010H	CAP. ELECTRO	1	20% 50V					
C415	CC45FSL1H470J	CAP. CERAMIC	47P	5% 50V					
C416	NO USE								
C417	C91-0769-05	CAP. CERAMIC	0.01	20% 16V					
C418	CK45FB1H222K	CAP. CERAMIC	2200P	10% 50V					
C419	CC45FSL1H331J	CAP. CERAMIC	330P	5% 50V					
C420	CC45FSL1H221J	CAP. CERAMIC	220P	5% 50V					
C421	CC45FSL1H471J	CAP. CERAMIC	470P	5% 50V					
C422	CE04LW1A101H	CAP. ELECTRO	100	20% 10V					
C423	CE04LW1A101H	CAP. ELECTRO	100	20% 10V					
C424	CE04LW1A101H	CAP. ELECTRO	100	20% 10V					
C425	C91-2538-05	CAP. FILM	0.1	10% 63V					
C426	C91-2538-05	CAP. FILM	0.1	10% 63V					
C427	C91-0769-05	CAP. CERAMIC	0.01	20% 16V					
C428	C91-0769-05	CAP. CERAMIC	0.01	20% 16V					
C429	CE04LW1A101H	CAP. ELECTRO	100	20% 10V					
C430	C91-2538-05	CAP. FILM	0.1	10% 63V					
C431	CE04LW1H010H	CAP. ELECTRO	1	20% 50V					
C432	CF92FV1H103J	CAP. POLYESTER	0.01	5% 50V					
C433	CE04LW1A470H	CAP. ELECTRO	47	20% 10V					
C434	CE04LW1H010H	CAP. ELECTRO	1	20% 50V					
C435	CC45FCH1H470J	CAP. CERAMIC	47P	5% 50V					
C436	C91-2538-05	CAP. FILM	0.1	10% 63V					
C437	CC45FSL1H150J	CAP. CERAMIC	15P	5% 50V					
C438	CE04LW1A101H	CAP. ELECTRO	100	20% 10V					
C439	C91-0769-05	CAP. CERAMIC	0.01	20% 16V					
C440	C91-0769-05	CAP. CERAMIC	0.01	20% 16V					
C450	CC45FSL1H330J	CAP. CERAMIC	33P	5% 50V					
C457	CE04EW1A101H	CAP. ELECTRO	100	20% 10V					
C458	NO USE								
C459	CE04LW1A221H	CAP. ELECTRO	220	20% 10V					

# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT	REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT
C504	CE04CW1C101H	CAP. ELECTRO	100	20% 16V					
C505	CE04CW1C220H	CAP. ELECTRO	22	20% 16V					
C551	CC45FCH1H030C	CAP. CERAMIC	3P	0.25P 50V					
CN4	E40-0218-05	PIN CONNECTOR	2P						
CN51	E40-7512-05	PIN CONNECTOR	15P						
CN52	E40-7550-05	PIN CONNECTOR	7P						
CN53	E40-7550-05	PIN CONNECTOR	7P						
CN103	E40-3301-05	PIN CONNECTOR	4P						
CN205	E40-7568-05	PIN CONNECTOR	9P						
CN206	E40-7566-05	PIN CONNECTOR	5P						
CN209	E40-7565-05	PIN CONNECTOR	3P						
CN404	E40-3239-05	PIN CONNECTOR	4P						
CN491	E40-3304-05	PIN CONNECTOR	7P						
CN501	E40-7420-05	PIN CONNECTOR	4P						
CN601	E01-0103-05	CRT SOCKET							
CP401	R90-0286-05	RES. NETWORK	4X4.7K						
CP402	R90-0645-05	RES. NETWORK	4X10K						
CP403	R90-0653-05	RES. NETWORK	8X10K						
D1	1SS133	DIODE							
D2	1SS133	DIODE							
D3	1SS133	DIODE							
D401	1SS133	DIODE							
D402	1SS133	DIODE							
D403	1SS133	DIODE							
D404	1SS133	DIODE							
D405	NO USE								
D406	1SS133	DIODE							
D407	1SS133	DIODE							
D408	NO USE								
D409	1SS133	DIODE							
D410	1SS133	DIODE							
D411	1SS133	DIODE							
D412	1SS133	DIODE							
D413	1SS133	DIODE							
D414	1SS133	DIODE							
D415	1SS133	DIODE							
D416	1SS133	DIODE							
D417	1SS133	DIODE							
D418	NA700	DIODE							
D419	1SS133	DIODE							
D420	1SS133	DIODE							
IC1	NJM4558D	IC,DUAL OP-AMP							
IC401	SN74LS74AN	IC,D-FLIP FLOP							
IC402	SN74LS86AN	IC,QUAD 2 INPUT EX-OR GATE							
IC403	SN74LS51N	IC,2W 3-IN/2-IN & OR INV. GATE							
IC404	SN74LS51N	IC,2W 3-IN/2-IN & OR INV. GATE							
IC405	SN74LS00N	IC,QUAD 2-INPUT NAND GATE							
IC406	SN74LS00N	IC,QUAD 2-INPUT NAND GATE							
IC407	TC4052BP	IC,DIFFERENTIAL 4CH MPX/DE-MPX							
IC408	TC4052BP	IC,DIFFERENTIAL 4CH MPX/DE-MPX							
IC409	LF412CN	IC,DUAL JFET INPUT OP AMP							
IC410	NJM4558D	IC,DUAL OP-AMP							
J5	E04-0291-0								



# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT	REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT		
R446	RD14BB2C393J	RES. CARBON	39K	5%	1/6W	R447	RD14BB2C821J	RES. CARBON	820	5%	1/6W
R448	RD14BB2C473J	RES. CARBON	47K	5%	1/6W	R449	RD14BB2C220J	RES. CARBON	22	5%	1/6W
R450	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	R451	RD14BB2C681J	RES. CARBON	680	5%	1/6W
R452	RD14BB2C271J	RES. CARBON	270	5%	1/6W	R453	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W
R454	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	R455	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R456	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	R457	R92-1061-05	JUMPING RES.	ZERO	OHM (5MM)	
R460	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W	R461	RD14BB2C302J	RES. CARBON	3K	5%	1/6W
R462	RD14BB2C362J	RES. CARBON	3.6K	5%	1/6W	R463	RD14BB2C104J	RES. CARBON	100K	5%	1/6W
R464	RD14BB2C104J	RES. CARBON	100K	5%	1/6W	R465	RD14BB2C472J	RES. CARBON	4.7K	5%	1/6W
R466	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	R467	RD14BB2C332J	RES. CARBON	3.3K	5%	1/6W
R468	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	R469	RN14BK2C1041D	RES. METAL FILM	1.04K0.5%	1/6W	
R470	RN14BK2C1301D	RES. METAL FILM	1.3K	0.5%	1/6W	R471	RN14BK2C1671D	RES. METAL FILM	1.67K0.5%	1/6W	
R472	RN14BK2C1002D	RES. METAL FILM	10K	0.5%	1/6W	R473	RD14BB2C203J	RES. CARBON	20K	5%	1/6W
R474	RN14BK2C6800D	RES. METAL FILM	680	0.5%	1/6W	R475	RN14BK2C6802D	RES. METAL FILM	68K	0.5%	1/6W
R476	RN14BK2C6801D	RES. METAL FILM	6.8K	0.5%	1/6W	R477	RN14BK2E6803D	RES. METAL FILM	680K	0.5%	1/4W
R478	RD14BB2C101J	RES. CARBON	100	5%	1/6W	R479	RD14BB2C122J	RES. CARBON	1.2K	5%	1/6W
R480	RD14BB2C122J	RES. CARBON	1.2K	5%	1/6W	R481	RD14BB2C221J	RES. CARBON	220	5%	1/6W
R482	RD14BB2C221J	RES. CARBON	220	5%	1/6W	R483	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R484	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W	R485	RD14BB2C222J	RES. CARBON	2.2K	5%	1/6W
R486	R92-1061-05	JUMPING RES.	ZERO	OHM (5MM)	R487	RD14BB2E471J	RES. CARBON	470	5%	1/4W	
R488	R92-1061-05	JUMPING RES.	ZERO	OHM (5MM)	R489	NO USE					
R490	RD14BB2E471J	RES. CARBON	470	5%	1/4W	R491	RD14BB2E471J	RES. CARBON	470	5%	1/4W
R492	RD14BB2E132J	RES. CARBON	1.3K	5%	1/4W	R493	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R494	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	R495	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R496	RD14BB2C103J	RES. CARBON	10K	5%	1/6W	R505	RD14BB2C362J	RES. CARBON	3.6K	5%	1/6W
R506	RD14BB2C102J	RES. CARBON	1K	5%	1/6W	R507	RD14BB2C100J	RES. CARBON	10	5%	1/6W
R508	RD14BB2C391J	RES. CARBON	390	5%	1/6W	R509	RD14BB2C104J	RES. CARBON	100K	5%	1/6W
R510	RD14BB2C470J	RES. CARBON	47	5%	1/6W	R551	RD14BB2C392J	RES. CARBON	3.9K	5%	1/6W
R601	RD14BB2C511J	RES. CARBON	510	5%	1/6W	R602	RD14BB2C511J	RES. CARBON	510	5%	1/6W
S1	S60-0618-05	ROTARY SWITCH				S2	S60-0618-05	ROTARY SWITCH			
S3	S60-0617-05	ROTARY SWITCH				S4	S68-0643-05	PUSH SWITCH			
S5	S68-0643-05	PUSH SWITCH				S6	S68-0643-05	PUSH SWITCH			
S7	S68-0643-05	PUSH SWITCH				S8	S64-0605-05	LEVER SWITCH			
S9	S64-0605-05	LEVER SWITCH				S10	S64-0605-05	LEVER SWITCH			
S101	S68-0642-05	PUSH SWITCH				VR1	R05-3522-05	V. R.	10KB		
VR2	R05-3522-05	V. R.	10KB			VR3	R05-3524-05	V. R.	10KB		
VR4	R05-3522-05	V. R.	10KB			VR5	R05-3523-05	V. R.	10KB		
VR6	R05-3523-05	V. R.	10KB			VR7	R05-3523-05	V. R.	10KB		
VR8	NO USE					VR9	R05-3522-05	V. R.	10KB		
VR10	R05-3522-05	V. R.	10KB			VR11	R31-0805-05	V. R.	50K		
VR401	R12-0567-05	RES. SEMI FIXED	500			W201	E38-1271-05	WIRE ASS'Y			
W202	E38-1272-05	WIRE ASS'Y				W203	NO USE				
W204	E38-1274-05	WIRE ASS'Y				W205	E38-1275-05	WIRE ASS'Y WITH W207			
W206	E38-1276-05	WIRE ASS'Y									

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT	REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT		
W207	NO USE				W208	E38-1278-05	WIRE ASS'Y				
W551	E38-1157-05	WIRE ASS'Y; X-CRT			W554	E38-1158-05	WIRE ASS'Y; CH1 OUT				
W559	E38-1190-05	WIRE ASS'Y; CH SW			W560	NO USE					
W561	E38-1191-05	WIRE ASS'Y; SWP END			W901	E38-1192-05	WIRE ASS'Y; GND X2				
C1	CF92FV1H103J	CAP. POLYESTER	0.01	5%	50V	C2	CE04CW1A101M	CAP. ELECTRO	100	20%	10V
C3	CE04CW1E101M	CAP. ELECTRO	100	20%	25V	C101	C91-0769-05	CAP. CERAMIC	0.01	20%	16V
C401	C91-0769-05	CAP. CERAMIC	0.01	20%	16V	C402	CE04LW1H2R2M	CAP. ELECTRO	2.2	20%	50V
C403	CE04LW1A470M	CAP. ELECTRO	47	20%	10V	C406	C91-2538-05	CAP. FILM	0.1	10%	63V
C407	CF92FV1H103J	CAP. POLYESTER	0.01	5%	50V	C408	CC45FSL1H121J	CAP. CERAMIC	120P	5%	50V
C411	CC45FSL1H100J	CAP. CERAMIC	10P	5%	50V	C412	CE04LW1H2R2M	CAP. ELECTRO	2.2	20%	50V
C413	CK45FB1H472K	CAP. CERAMIC	4700P	10%	50V	C414	CE04LW1H101M	CAP. ELECTRO	1	20%	50V
C415	CC45FSL1H270J	CAP. CERAMIC	27P	5%	50V	C416	NO USE				
C417	C91-0769-05	CAP. CERAMIC	0.01	20%	16V	C418	CK45FB1H222K	CAP. CERAMIC	2200P	10%	50V
C419	CC45FSL1H331J	CAP. CERAMIC	330P	5%	50V	C420	CC45FSL1H221J	CAP. CERAMIC	220P	5%	50V
C421	CC45FSL1H101J	CAP. CERAMIC	100P	5%	50V	C422	CE04LW1A101M	CAP. ELECTRO	100	20%	10V
C423	CE04LW1A101M	CAP. ELECTRO	100	20%	10V	C424	CE04LW1A101M	CAP. ELECTRO	100	20%	10V
C425	C91-2538-05	CAP. FILM	0.1	10%	63V	C426	C91-2538-05	CAP. FILM	0.1	10%	63V
C427	C91-0769-05	CAP. CERAMIC	0.01	20%	16V	C428	C91-0769-05	CAP. CERAMIC	0.01	20%	16V
C429	CE04LW1A101M	CAP. ELECTRO	100	20%	10V	C430	C91-2538-05	CAP. FILM	0.1	10%	63V
C431	CE04LW1H101M	CAP. ELECTRO	1	20%	50V	C432	CF92FV1H103J	CAP. POLYESTER	0.01	5%	50V
C433	CE04LW1A470M	CAP. ELECTRO	47	20%	10V	C434	CE04LW1H101M	CAP. ELECTRO	1	20%	50V
C435	CC45FCH1H470J	CAP. CERAMIC	47P	5%	50V	C436	C91-2538-05	CAP. FILM	0.1	10%	63V
C437	CC45FSL1H150J	CAP. CERAMIC	15P	5%	50V	C438	CE04LW1A101M	CAP. ELECTRO	100	20%	10V
C439	C91-0769-05	CAP. CERAMIC	0.01	20%	16V	C440	C91-0769-05	CAP. CERAMIC	0.01	20%	16V
C450	CC45FSL1H330J	CAP. CERAMIC	33P	5%	50V	C451	C91-2538-05	CAP. FILM	0.1	10%	63V
C452	CC45FCH1H680J	CAP. CERAMIC	68P	5%	50V	C453	CC45FSL1H221J	CAP. CERAMIC	220P	5%	50V
C454	C91-0769-05	CAP. CERAMIC	0.01	20%	16V	C455	CC45FSL1H470J	CAP. CERAMIC	47P	5%	50V
C456	CE04EW0J221M	CAP. ELECTRO	220	20%	6.3V	C457	CE04EW1A101M	CAP. ELECTRO	100	20%	10V
C458	CC45FSL1H221J	CAP. CERAMIC	220P	5%	50V	C459	CE04LW1A221M	CAP. ELECTRO	220	20%	10V
C498	CC45FSL1H330J	CAP. CERAMIC	33P	5%	50V	C504	CE04CW1C101M	CAP. ELECTRO	100	20%	16V
C505	CE04CW1C220M	CAP. ELECTRO	22	20%	16V	C551	CC45FCH1H020C	CAP. CERAMIC	2P	0.25P	50V
CN4	E40-0218-05	PIN CONNECTOR	2P			CN5	E40-3238-05	PIN CONNECTOR	3P		
CN51	E40-7512-05	PIN CONNECTOR	15P			CN52	E40-7550-05	PIN CONNECTOR	7P		
CN53	E40-7550-05	PIN CONNECTOR	7P			CN103	E40-3301-05	PIN CONNECTOR	4P		
CN205	E40-7568-05	PIN CONNECTOR	9P			CN206	E40-7566-05	PIN CONNECTOR	5P		

## CS-4135 SWEEP UNIT

### X74-1610-00

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT	REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT	
D1	1SS133	DIODE			D2	1SS133	DIODE			
D3	1SS133	DIODE			D401	1SS133	DIODE			
D402	1SS133	DIODE			D403	1SS133	DIODE			
D404	1SS133	DIODE			D405	NO USE				
D406	1SS133	DIODE			D407	1SS133	DIODE			
D408	NO USE				D409	1SS133	DIODE			
D410	1SS133	DIODE			D411	1SS133	DIODE			
D412	1SS133	DIODE			D413	1SS133	DIODE			
D414	1SS133	DIODE			D415	1SS133	DIODE			
D416	1SS133	DIODE			D417	1SS133	DIODE			
D418	MA700	DIODE			D419	1SS133	DIODE			
D420	1SS133	DIODE			D421	MA700	DIODE			
IC1	NJM4558D	IC, DUAL OP-AMP			IC401	SN74AS74AN	IC, DUAL D-F.F. WITH PR&CLR			
IC402	SN74ALS86N	IC, QUAD 2-EXCLUSIVE-OR GATE			IC403	SN74LS51N	IC, 2W 3-IN/2-IN & OR INV. GATE			
IC404	SN74LS51N	IC, 2W 3-IN/2-IN & OR INV. GATE			IC405	SN74LS00N	IC, QUAD 2-INPUT NAND GATE			
IC406	SN74LS00N	IC, QUAD 2-INPUT NAND GATE			IC407	TC4052BP	IC, DIFFERENTIAL 4CH NPX/DE-NPX			
IC408	TC4052BP	IC, DIFFERENTIAL 4CH NPX/DE-NPX			IC409	LF412CN	IC, DUAL JFET INPUT OP AMP			
IC410	NJM4558D	IC, DUAL OP-AMP			J5	E04-0291-05	BNC RECEPTACLE			
L401	L40-1011-50	FERRI INDUCTOR	100UH		L601	L40-4781-17	FERRI INDUCTOR	0.47UH		
L602	L40-4781-17	FERRI INDUCTOR	0.47UH		NL1	RA-201P-V6-2A	NEON LAMP			
Q1	2SC1740S(R,S)	TR. SI, NPN			Q402	2SC1740S(R,S)	TR. SI, NPN			
Q403	2SC1740S(R,S)	TR. SI, NPN			Q404	2SC1740S(R,S)	TR. SI, NPN			
Q405	2SC1740S(R,S)	TR. SI, NPN			Q406	DTC114Y(S)	TR. SI, NPN			
Q407	DTC114Y(S)	TR. SI, NPN			Q408	2SC1907	TR. SI, NPN			
Q409	2SA1005(K)	TR. SI, PNP			Q410	2SA933ASLN(R,S)	TR. SI, PNP			
Q411	2SA933ASLN(R,S)	TR. SI, PNP			Q412	2SC1740S(R,S)	TR. SI, NPN			
Q416	2SA933ASLN(R,S)	TR. SI, PNP			Q417	2SA933ASLN(R,S)	TR. SI, PNP			
Q418	DTC114Y(S)	TR. SI, NPN			Q419	2SC1907	TR. SI, NPN			
Q420	2SC1906	TR. SI, NPN			Q421	2SC1906	TR. SI, NPN			
Q422	DTC114Y(S)	TR. SI, NPN			Q423	2SA1005(K)	TR. SI, PNP			
Q424	2SC1906	TR. SI, NPN			Q425	2SA933ASLN(R,S)	TR. SI, PNP			
Q426	2SC1740S(R,S)	TR. SI, NPN			Q427	2SC3732(L)	TR. SI, NPN			
Q428	2SA933ASLN(R,S)	TR. SI, PNP			Q429	2SC1740S(R,S)	TR. SI, NPN			
Q430	2SC1740S(R,S)	TR. SI, NPN			Q431	DTC114Y(S)	TR. SI, NPN			
Q432	2SC1740S(R,S)	TR. SI, NPN			Q433	2SA1174(E,F)	TR. SI, PNP			
Q434	2SC1906	TR. SI, NPN			Q435	2SC1906	TR. SI, NPN			
Q436	2SC1906	TR. SI, NPN								

# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT
R460	RD14BB2C472J	RES. CARBON	4.7K	5% 1/6W
R461	RD14BB2C302J	RES. CARBON	3K	5% 1/6W
R462	RD14BB2C362J	RES. CARBON	3.6K	5% 1/6W
R463	RD14BB2C104J	RES. CARBON	100K	5% 1/6W
R464	RD14BB2C104J	RES. CARBON	100K	5% 1/6W
R465	NO USE			
R466	RD14BB2C272J	RES. CARBON	2.7K	5% 1/6W
R467	RD14BB2C332J	RES. CARBON	3.3K	5% 1/6W
R468	RD14BB2C103J	RES. CARBON	10K	5% 1/6W
R469	RN14BK2C1041D	RES. METAL FILM	1.04K0.5%	1/6W
R470	RN14BK2C1301D	RES. METAL FILM	1.3K 0.5%	1/6W
R471	RN14BK2C1671D	RES. METAL FILM	1.67K0.5%	1/6W
R472	RN14BK2C1002D	RES. METAL FILM	10K 0.5%	1/6W
R473	RD14BB2C203J	RES. CARBON	20K	5% 1/6W
R474	RN14BK2C6800D	RES. METAL FILM	680 0.5%	1/6W
R475	RN14BK2C6802D	RES. METAL FILM	68K 0.5%	1/6W
R476	RN14BK2C6801D	RES. METAL FILM	6.8K 0.5%	1/6W
R477	RN14BK2E6803D	RES. METAL FILM	680K 0.5%	1/4W
R478	RD14BB2C101J	RES. CARBON	100	5% 1/6W
R479	RD14BB2C122J	RES. CARBON	1.2K	5% 1/6W
R480	RD14BB2C122J	RES. CARBON	1.2K	5% 1/6W
R481	RD14BB2C221J	RES. CARBON	220	5% 1/6W
R482	RD14BB2C221J	RES. CARBON	220	5% 1/6W
R483	RD14BB2C103J	RES. CARBON	10K	5% 1/6W
R484	RD14BB2C222J	RES. CARBON	2.2K	5% 1/6W
R485	RD14BB2C222J	RES. CARBON	2.2K	5% 1/6W
R486	RD14BB2C220J	RES. CARBON	22	5% 1/6W
R487	RD14BB2E471J	RES. CARBON	470	5% 1/4W
R488	RD14BB2C221J	RES. CARBON	220	5% 1/6W
R489	NO USE			
R490	RD14BB2E471J	RES. CARBON	470	5% 1/4W
R491	RD14BB2E471J	RES. CARBON	470	5% 1/4W
R492	RD14BB2E102J	RES. CARBON	1K	5% 1/4W
R493	RD14BB2C103J	RES. CARBON	10K	5% 1/6W
R494	RD14BB2C103J	RES. CARBON	10K	5% 1/6W
R495	RD14BB2C103J	RES. CARBON	10K	5% 1/6W
R496	RD14BB2C103J	RES. CARBON	10K	5% 1/6W
R497	NO USE			
R498	RD14BB2C104J	RES. CARBON	100K	5% 1/6W
R499	RD14BB2C222J	RES. CARBON	2.2K	5% 1/6W
R505	RD14BB2C362J	RES. CARBON	3.6K	5% 1/6W
R506	RD14BB2C471J	RES. CARBON	470	5% 1/6W
R507	RD14BB2C100J	RES. CARBON	10	5% 1/6W
R508	RD14BB2C391J	RES. CARBON	390	5% 1/6W
R509	RD14BB2C104J	RES. CARBON	100K	5% 1/6W
R510	RD14BB2C470J	RES. CARBON	47	5% 1/6W
R551	RD14BB2C182J	RES. CARBON	1.8K	5% 1/6W
R601	RD14BB2C471J	RES. CARBON	470	5% 1/6W
R602	RD14BB2C471J	RES. CARBON	470	5% 1/6W
S1	S60-0618-05	ROTARY SWITCH		
S2	S60-0618-05	ROTARY SWITCH		
S3	S60-0617-05	ROTARY SWITCH		
S4	S68-0643-05	PUSH SWITCH		
S5	S68-0643-05	PUSH SWITCH		
S6	S68-0643-05	PUSH SWITCH		
S7	S68-0643-05	PUSH SWITCH		
S8	S64-0605-05	LEVER SWITCH		
S9	S64-0605-05	LEVER SWITCH		
S10	S64-0605-05	LEVER SWITCH		
S101	S68-0642-05	PUSH SWITCH		
VR1	R05-3522-05	V. R.	10KB	
VR2	R05-3522-05	V. R.	10KB	
VR3	R05-3524-05	V. R.	10KB	
VR4	R05-3522-05	V. R.	10KB	
VR5	R05-3523-05	V. R.	10KB	
VR6	R05-3523-05	V. R.	10KB	
VR7	R05-3523-05	V. R.	10KB	
VR8	NO USE			
VR9	R05-3522-05	V. R.	10KB	
VR10	R05-3522-05	V. R.	10KB	
VR11	R31-0805-05	V. R.	50K	
VR101	R05-3522-05	V. R.	10KB	
VR401	R12-0567-05	RES. SEMI FIXED	500	B
W201	E38-1271-05	WIRE ASS'Y		
W202	E38-1272-05	WIRE ASS'Y		
W203	NO USE			
W204	E38-1274-05	WIRE ASS'Y		
W205	E38-1275-05	WIRE ASS'Y; WITH W207		
W206	E38-1276-05	WIRE ASS'Y		
W207	NO USE			
W208	E38-1278-05	WIRE ASS'Y		
W551	E38-1280-05	WIRE ASS'Y; Y-CRT		
W554	E38-1158-05	WIRE ASS'Y; CHI OUT		
W559	E38-1190-05	WIRE ASS'Y; CH SW		

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT
W560	NO USE			
W561	E38-1191-05	WIRE ASS'Y; SWP END		
W901	E38-1192-05	WIRE ASS'Y; GND X2		
<b>CS-4125 (~S/NO.7121000) ATTENUATOR UNIT</b>				
<b>X75-1220-00</b>				
REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT
A22	A22-1314-03	SUB PANEL		
E21	E21-0667-05	METAL TERMINAL		
F10	F10-1699-04	SHIELD PLATE; BNC		
F11	F11-1283-04	SHIELD CASE; ATT		
G13	G13-0757-04	CUSHION		
J73	J73-0364-02	PCB (UNMOUNTED)		
N89	N89-3008-41	SCREW; BINDING TAPTITE 3X8		
C101	C91-2664-05	CAP. FILM	0.022	10% 630V
C102	CC93FCH1H301J	CAP. CERAMIC	300P	5% 50V
C103	CC45FCH1H390J	CAP. CERAMIC	39P	5% 50V
C104	C91-2584-05	CAP. CERAMIC	1000P	10% 400V
C105	CC45FCH1H101J	CAP. CERAMIC	100P	5% 50V
C106	CC45FCH1H560J	CAP. CERAMIC	56P	5% 50V
C107	CE04LW1A470M	CAP. ELECTRO	47	20% 10V
C108	C91-0769-05	CAP. CERAMIC	0.01	20% 16V
C109	CC45FSL1H270J	CAP. CERAMIC	27P	5% 50V
C110	CF92FV1H122J	CAP. FILM	1200P	5% 50V
C111	CE04LW1A221M	CAP. ELECTRO	220	20% 10V
C112	C91-0769-05	CAP. CERAMIC	0.01	20% 16V
C113	C91-0769-05	CAP. CERAMIC	0.01	20% 16V
C114	C91-0769-05	CAP. CERAMIC	0.01	20% 16V
C115	CE04LW1A101M	CAP. ELECTRO	100	20% 10V
C118	C91-2670-05	CAP. CERAMIC	180P	5% 50V
C119	CC45FSL1H391J	CAP. CERAMIC	390P	5% 50V
C120	C91-0769-05	CAP. CERAMIC	0.01	20% 16V
C123	CC45FCH1H680J	CAP. CERAMIC	68P	5% 50V
C124	C91-0727-05	CAP. CERAMIC	18P	5% 50V
C125	NO USE			
C126	CC45FCH2H030C	CAP. CERAMIC	3P	0.25P 500V
C127	CC45FCH2H050C	CAP. CERAMIC	5P	0.25P 500V
C128	C91-2538-05	CAP. FILM	0.1	10% 63V
C129	C91-0769-05	CAP. CERAMIC	0.01	20% 16V
C130	CC45CH1H180JTA	CAP. CERAMIC	18P	5% 50V
C153	CE04LW1A101M	CAP. ELECTRO	100	20% 10V
C154	CE04LW1A221M	CAP. ELECTRO	220	20% 10V
C157	CE04LW1A470M	CAP. ELECTRO	47	20% 10V
C158	CE04LW1A101M	CAP. ELECTRO	100	20% 10V
C159	NO USE			
C160	CE04LW1A101M	CAP. ELECTRO	100	20% 10V
C161	CE04LW1A470M	CAP. ELECTRO	47	20% 10V
C162	CE04LW1A101M	CAP. ELECTRO	100	20% 10V
C163	CE04LW1A101M	CAP. ELECTRO	100	20% 10V
C164	CE04LW1A221M	CAP. ELECTRO	220	20% 10V
C201	C91-2664-05	CAP. FILM	0.022	10% 630V
C202	CC93FCH1H301J	CAP. CERAMIC	300P	5% 50V
C203	CC45FCH1H390J	CAP. CERAMIC	39P	5% 50V
C204	C91-2584-05	CAP. CERAMIC	1000P	10% 400V
C205	CC45FCH1H101J	CAP. CERAMIC	100P	5% 50V
C206	CC45FCH1H560J	CAP. CERAMIC	56P	5% 50V
C207	CE04LW1A470M	CAP. ELECTRO	47	20% 10V
C208	C91-0769-05	CAP. CERAMIC	0.01	20% 16V
C209	NO USE			
C210	CF92FV1H122J	CAP. FILM	1200P	5% 50V
C211	CE04LW1A221M	CAP. ELECTRO	220	20% 10V
C212	C91-0769-05	CAP. CERAMIC	0.01	20% 16V
C213	C91-0769-05	CAP. CERAMIC	0.01	20% 16V
C214	C91-0769-05	CAP. CERAMIC	0.01	20% 16V
C215	CC45FSL1H681J	CAP. CERAMIC	680P	5% 50V
C216	C91-0769-05	CAP. CERAMIC	0.01	20% 16V
C217	NO USE			
C218	C91-2670-05	CAP. CERAMIC	180P	5% 50V
C219	CC45FSL1H391J	CAP. CERAMIC	390P	5% 50V
C220	C91-0769-05	CAP. CERAMIC	0.01	20% 16V
C223	CC45FCH1H680J	CAP. CERAMIC	68P	5% 50V
C224	C91-0727-05	CAP. CERAMIC	18P	5% 50V
C225	NO USE			
C226	CC45FCH2H030C	CAP. CERAMIC	3P	0.25P 500V
C227	CC45FCH2H050C	CAP. CERAMIC	5P	0.25P 500V
C228	C91-2538-05	CAP. FILM	0.1	10% 63V
C229	C91-0769-05	CAP. CERAMIC	0.01	20% 16V
C253	CE04LW1A101M	CAP. ELECTRO	100	20% 10V
C254	CE04LW1A221M	CAP. ELECTRO	220	20% 10V
C255	NO USE			
C256	CE04LW1A101M	CAP. ELECTRO	100	20% 10V
C257	CE04LW1A101M	CAP. ELECTRO	100	20% 10V
C258	CE04LW1A101M	CAP. ELECTRO	100	20% 10V
C259	NO USE			

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT
C260	C91-2538-05	CAP. FILM	0.1	10% 63V
C261	CE04LW1A470M	CAP. ELECTRO	47	20% 10V
C301	C91-2584-05	CAP. CERAMIC	1000P	10% 400V
C302	CC45FCH1H100D	CAP. CERAMIC	10P	0.5P 50V
C303	CE04HW1C100M	CAP. ELECTRO	10	20% 16V
C304	C91-2660-05	CAP. FILM	1200P	10% 400V
C305	C91-2661-05	CAP. FILM	1	10% 63V
C306	CC45FSL1H470J	CAP. CERAMIC	47P	5% 50V
C307	CC45FCH1H120J	CAP. CERAMIC	12P	5% 50V
C308	C91-0769-05	CAP. CERAMIC	0.01	20% 16V
C309	C91-0769-05	CAP. CERAMIC	0.01	20% 16V
C310	CE04HW1H010M	CAP. ELECTRO	1	20% 50V
C316	CE04LW1A101M	CAP. ELECTRO	100	20% 10V
C317	C91-2538-05	CAP. FILM	0.1	10% 63V
C321	CC45FCH1H470J	CAP. CERAMIC	47P	5% 50V
CN1	E40-7509-05	PIN CONNECTOR	17P	
CN2	E40-7509-05	PIN CONNECTOR	17P	
CN3	E40-7509-05	PIN CONNECTOR	17P	
CN51	E40-9008-05	PIN CONNECTOR	15P	
CN52	E40-9008-05	PIN CONNECTOR	15P	
CN53	E40-9008-05	PIN CONNECTOR	15P	
CN56	E40-3237-05	PIN CONNECTOR	2P	
CN152	E40-3237-05	PIN CONNECTOR	2P	
CP301	R90-0665-05	RES. NETWORK	7X10K	
CP302	R90-0665-05	RES. NETWORK	7X10K	
D101	1SS133	DIODE		
D102	1SS133	DIODE		
D151	1SS133	DIODE		
D152	1SS133	DIODE		
D153	1SS133	DIODE		
D154	1SS133	DIODE		
D155	1SS133	DIODE		
D201	1SS133	DIODE		
D202	1SS133	DIODE		
D251	1SS133	DIODE		
D252	1SS133	DIODE		
D253	1SS133	DIODE		
D254	1SS133	DIODE		
D255	1SS133	DIODE		
D301	1SS133	DIODE		
IC101	LT1097CN8	IC, OP-AMP		
IC201	LT1097CN8	IC, OP-AMP		
J1	E04-0259-05	COAXIAL CONNECTOR		
J2	E04-0259-05	COAXIAL CONNECTOR		
J3	E04-0259-05	COAXIAL CONNECTOR		
K101	S76-0027-05	RELAY		
K102	S76-0027-05	RELAY		
K103	S76-0027-05	RELAY		
K104	S76-0027-05	RELAY		
K105	S76-0027-05	RELAY		
K201	S76-0027-05	RELAY		
K202	S76-0027-05	RELAY		
K203	S76-0027-05	RELAY		
K204	S76-0027-05	RELAY		
K205	S76-0027-05	RELAY		
L101	L40-1011-70	FERRI INDUCTOR	100UH	10%
L201	L40-1011-70	FERRI INDUCTOR	100UH	10%
P1	E23-1520-05	EARTH TERMINAL		
P2	E23-1520-05	EARTH TERMINAL		
P3	E23-1520-05	EARTH TERMINAL		
P4	E23-1520-05	EARTH TERMINAL		
P5	E23-1520-05	EARTH TERMINAL		
P6	E23-1520-05	EARTH TERMINAL		
Q101	2SK304(E)	FET, N-CHANNEL		
Q102	2SC1923(O)	TR. SI, NPN		
Q103	2SA933S(R,S)	TR. SI, PNP		
Q104	2SA1005(K)	TR. SI, PNP		
Q105	2SC3779(D)	TR. SI, NPN		
Q106	2SC1740S(R,S)			

# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT
R130	RD14BB2C390J	RES. CARBON	39	5%
R131	RD14BB2C101J	RES. CARBON	100	5%
R132	RD14BB2C623J	RES. CARBON	62K	5%
R133	RD14BB2C151J	RES. CARBON	150	5%
R134	RD14BB2C751J	RES. CARBON	750	5%
R135	RN14BK2C5003F	RES. METAL FILM	500K	1%
R136	RD14BB2C101J	RES. CARBON	100	5%
R137	RN14BK2C75R0F	RES. METAL FILM	75.0	1%
R138	RN14BK2C75R0F	RES. METAL FILM	75.0	1%
R139	RD14BB2C273J	RES. CARBON	27K	5%
R140	RD14BB2C432J	RES. CARBON	4.3K	5%
R141	RD14BB2C391J	RES. CARBON	390	5%
R142	RN14BK2C1000F	RES. METAL FILM	100	1%
R143	RD14BB2C163J	RES. CARBON	16K	5%
R144	RD14BB2C163J	RES. CARBON	16K	5%
R145	RN14BK2C1000F	RES. METAL FILM	100	1%
R146	RD14BB2C103J	RES. CARBON	10K	5%
R147	RD14BB2C392J	RES. CARBON	3.9K	5%
R148	RD14BB2C912J	RES. CARBON	9.1K	5%
R149	RN14BK2C4300F	RES. METAL FILM	430	1%
R150	RN14BK2C4300F	RES. METAL FILM	430	1%
R151	RD14BB2C124J	RES. CARBON	120K	5%
R152	RN14BK2C1801F	RES. METAL FILM	1.8K	1%
R153	RN14BK2C1801F	RES. METAL FILM	1.8K	1%
R154	RD14BB2C220J	RES. CARBON	22	5%
R155	RD14BB2C182J	RES. CARBON	1.8K	5%
R156	RD14BB2C182J	RES. CARBON	1.8K	5%
R157	RD14BB2C220J	RES. CARBON	22	5%
R158	RD14BB2C101J	RES. CARBON	100	5%
R159	RD14BB2C101J	RES. CARBON	100	5%
R160	RD14BB2C162J	RES. CARBON	1.6K	5%
R161	RD14BB2C162J	RES. CARBON	1.6K	5%
R162	RD14BB2C271J	RES. CARBON	270	5%
R163	RD14BB2C183J	RES. CARBON	18K	5%
R164	RD14BB2C181J	RES. CARBON	180	5%
R165	RD14BB2C222J	RES. CARBON	2.2K	5%
R166	RD14BB2C103J	RES. CARBON	10K	5%
R167	RD14BB2C101J	RES. CARBON	100	5%
R168	RD14BB2C101J	RES. CARBON	100	5%
R169	RD14BB2C752J	RES. CARBON	7.5K	5%
R170	RD14BB2C362J	RES. CARBON	3.6K	5%
R171	RD14BB2C220J	RES. CARBON	22	5%
R172	RD14BB2C132J	RES. CARBON	1.3K	5%
R173	NO USE			
R174	RD14BB2C561J	RES. CARBON	560	5%
R175	RD14BB2C103J	RES. CARBON	10K	5%
R176	RD14BB2C332J	RES. CARBON	3.3K	5%
R177	RD14BB2C101J	RES. CARBON	100	5%
R178	RD14BB2C220J	RES. CARBON	22	5%
R179	RD14BB2C272J	RES. CARBON	2.7K	5%
R180	RD14BB2C220J	RES. CARBON	22	5%
R181	RD14BB2C102J	RES. CARBON	1K	5%
R182	NO USE			
R183	RD14BB2C101J	RES. CARBON	100	5%
R187	RD14BB2C133J	RES. CARBON	13K	5%
R191	RD14BB2C620J	RES. CARBON	62	5%
R192	RD14BB2C620J	RES. CARBON	62	5%
R193	RD14BB2E620J	RES. CARBON	62	5%
R194	RD14BB2E620J	RES. CARBON	62	5%
R195	RD14BB2C620J	RES. CARBON	62	5%
R198	RD14BB2C562J	RES. CARBON	5.6K	5%
R199	RD14BB2C101J	RES. CARBON	100	5%
R202	RD14BB2C105J	RES. CARBON	1K	5%
R203	RD14BB2C220J	RES. CARBON	22	5%
R204	RN14BK2E9903D	RES. METAL FILM	990K	0.5%
R205	RD14BB2C362J	RES. CARBON	3.6K	5%
R206	RN14BK2C1012D	RES. METAL FILM	10.1K	0.5%
R207	RD14BB2C510J	RES. CARBON	51	5%
R208	RD14BB2C220J	RES. CARBON	22	5%
R209	RN14BK2E9903D	RES. METAL FILM	990K	0.5%
R210	RD14BB2C102J	RES. CARBON	1K	5%
R211	RN14BK2C1113D	RES. METAL FILM	111K	0.5%
R212	RD14BB2C161J	RES. CARBON	160	5%
R213	RN14BK2C5003F	RES. METAL FILM	500K	1%
R214	RD14BB2E684J	RES. CARBON	680K	5%
R215	RD14BB2C101J	RES. CARBON	100	5%
R216	RD14BB2C392J	RES. CARBON	3.9K	5%
R217	RD14BB2C202J	RES. CARBON	2K	5%
R218	RD14BB2C471J	RES. CARBON	470	5%
R219	RD14BB2C273J	RES. CARBON	27K	5%
R220	RD14BB2C622J	RES. CARBON	6.2K	5%
R221	RD14BB2C472J	RES. CARBON	4.7K	5%
R222	RD14BB2C332J	RES. CARBON	3.3K	5%
R223	RD14BB2C272J	RES. CARBON	2.7K	5%
R224	RD14BB2C162J	RES. CARBON	1.6K	5%
R225	RN14BK2C3000D	RES. METAL FILM	300	0.5%
R226	RN14BK2C1500D	RES. METAL FILM	150	0.5%
R227	RN14BK2C90R0D	RES. METAL FILM	90.0	0.5%
R228	RN14BK2C60R0D	RES. METAL FILM	60.0	0.5%
R229	RD14BB2C151J	RES. CARBON	150	5%
R230	RD14BB2C390J	RES. CARBON	39	5%
R231	RD14BB2C101J	RES. CARBON	100	5%

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT
R232	RD14BB2C623J	RES. CARBON	62K	5%
R233	RD14BB2C151J	RES. CARBON	150	5%
R234	RD14BB2C751J	RES. CARBON	750	5%
R235	RN14BK2C5003F	RES. METAL FILM	500K	1%
R236	RD14BB2C101J	RES. CARBON	100	5%
R237	RN14BK2C75R0F	RES. METAL FILM	75.0	1%
R238	RN14BK2C75R0F	RES. METAL FILM	75.0	1%
R239	RD14BB2C273J	RES. CARBON	27K	5%
R240	RD14BB2C432J	RES. CARBON	4.3K	5%
R241	RD14BB2C391J	RES. CARBON	390	5%
R242	RN14BK2C1000F	RES. METAL FILM	100	1%
R243	RD14BB2C163J	RES. CARBON	16K	5%
R244	RD14BB2C163J	RES. CARBON	16K	5%
R245	RN14BK2C1000F	RES. METAL FILM	100	1%
R246	RD14BB2C103J	RES. CARBON	10K	5%
R247	RD14BB2C392J	RES. CARBON	3.9K	5%
R248	RD14BB2C912J	RES. CARBON	9.1K	5%
R249	RN14BK2C4300F	RES. METAL FILM	430	1%
R250	RN14BK2C4300F	RES. METAL FILM	430	1%
R251	RD14BB2C823J	RES. CARBON	82K	5%
R252	RN14BK2C1801F	RES. METAL FILM	1.8K	1%
R253	RN14BK2C1801F	RES. METAL FILM	1.8K	1%
R254	RD14BB2C220J	RES. CARBON	22	5%
R255	RD14BB2C182J	RES. CARBON	1.8K	5%
R256	RD14BB2C182J	RES. CARBON	1.8K	5%
R257	RD14BB2C220J	RES. CARBON	22	5%
R258	RD14BB2C101J	RES. CARBON	100	5%
R259	RD14BB2C101J	RES. CARBON	100	5%
R260	RD14BB2C162J	RES. CARBON	1.6K	5%
R261	RD14BB2C162J	RES. CARBON	1.6K	5%
R262	RD14BB2C471J	RES. CARBON	470	5%
R263	RD14BB2C183J	RES. CARBON	18K	5%
R264	RN14BK2C2200F	RES. METAL FILM	220	1%
R265	RD14BB2C222J	RES. CARBON	2.2K	5%
R266	RD14BB2C103J	RES. CARBON	10K	5%
R267	RD14BB2C101J	RES. CARBON	100	5%
R268	RD14BB2C101J	RES. CARBON	100	5%
R269	RD14BB2C752J	RES. CARBON	7.5K	5%
R270	RD14BB2C362J	RES. CARBON	3.6K	5%
R271	RD14BB2C101J	RES. CARBON	100	5%
R272	RD14BB2C101J	RES. CARBON	100	5%
R273	RD14BB2C752J	RES. CARBON	7.5K	5%
R274	RD14BB2C362J	RES. CARBON	3.6K	5%
R275	RD14BB2C103J	RES. CARBON	10K	5%
R276	NO USE			
R277	RD14BB2C101J	RES. CARBON	100	5%
R278	RD14BB2C220J	RES. CARBON	22	5%
R279	RD14BB2C272J	RES. CARBON	2.7K	5%
R280	RD14BB2C220J	RES. CARBON	22	5%
R281	RD14BB2C102J	RES. CARBON	1K	5%
R282	RD14BB2C221J	RES. CARBON	220	5%
R283	RD14BB2C101J	RES. CARBON	100	5%
R284	RD14BB2C101J	RES. CARBON	100	5%
R285	RD14BB2C101J	RES. CARBON	100	5%
R286	RD14BB2C101J	RES. CARBON	100	5%
R287	RD14BB2C133J	RES. CARBON	13K	5%
R290	RD14BB2C112J	RES. CARBON	1.1K	5%
R291	RD14BB2C620J	RES. CARBON	62	5%
R292	RD14BB2C620J	RES. CARBON	62	5%
R293	RD14BB2E620J	RES. CARBON	62	5%
R294	RD14BB2C620J	RES. CARBON	62	5%
R295	RD14BB2C620J	RES. CARBON	62	5%
R296	RD14BB2C112J	RES. CARBON	1.1K	5%
R297	NO USE			
R298	RD14BB2C562J	RES. CARBON	5.6K	5%
R299	RD14BB2C101J	RES. CARBON	100	5%
R300	NO USE			
R301	RD14BB2E105J	RES. CARBON	1K	5%
R302	RD14BB2E684J	RES. CARBON	680K	5%
R303	RD14BB2C392J	RES. CARBON	3.9K	5%
R304	RD14BB2C392J	RES. CARBON	3.9K	5%
R305	RD14BB2C152J	RES. CARBON	1.5K	5%
R306	RD14BB2C103J	RES. CARBON	10K	5%
R307	NO USE			
R308	RN14BK2C3001F	RES. METAL FILM	3K	1%
R309	RN14BK2C3901F	RES. METAL FILM	3.9K	1%
R310	RN14BK2C3301F	RES. METAL FILM	3.3K	1%
R311	RD14BB2C223J	RES. CARBON	22K	5%
R312	RD14BB2C223J	RES. CARBON	22K	5%
R313	NO USE			
R314	RD14BB2C103J	RES. CARBON	10K	5%
R315	RD14BB2C101J	RES. CARBON	100	5%
R316	RD14BB2C101J	RES. CARBON	100	5%
R317	RD14BB2C222J	RES. CARBON	2.2K	5%
R318	RD14BB2C912J	RES. CARBON	9.1K	5%
R319	RD14BB2C393J	RES. CARBON	39K	5%
R320	RN14BK2C1501F	RES. METAL FILM	1.5K	1%
R321	RD14BB2C512J	RES. CARBON	5.1K	5%
R322	RD14BB2C912J	RES. CARBON	9.1K	5%
R323	RD14BB2C392J	RES. CARBON	3.9K	5%
R324	RD14BB2C561J	RES. CARBON	560	5%
R325	RD14BB2C202J	RES. CARBON	2K	5%
R326	RD14BB2C622J	RES. CARBON	6.2K	5%
R327	RD14BB2C392J	RES. CARBON	3.9K	5%
R328	RD14BB2C112J	RES. CARBON	1.1K	5%

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT
R329	RD14BB2C392J	RES. CARBON	3.9K	5%
R330	RD14BB2C103J	RES. CARBON	10K	5%
R331	RD14BB2C103J	RES. CARBON	10K	5%
R332	RD14BB2C103J	RES. CARBON	10K	5%
R333	RD14BB2C103J	RES. CARBON	10K	5%
R334	RD14BB2C103J	RES. CARBON	10K	5%
R351	RD14BB2C113J	RES. CARBON	11K	5%
S101	S64-0603-05	LEVER SWITCH		
S201	S64-0603-05	LEVER SWITCH		
TC101	C05-0496-05	CAP. TRIMMER	10P	
TC102	C05-0495-05	CAP. TRIMMER	6P	
TC103	C05-0495-05	CAP. TRIMMER	6P	
TC104	C05-0495-05	CAP. TRIMMER	6P	
TC201	C05-0496-05	CAP. TRIMMER	10P	
TC202	C05-0495-05	CAP. TRIMMER	6P	
TC203	C05-0495-05	CAP. TRIMMER	6P	
TC204	C05-0495-05	CAP. TRIMMER	6P	
TC205	C05-0472-05	CAP. TRIMMER	50P	
VR101	R12-3584-05	RES. SEMI FIXED	47KB	
VR102	R12-0869-05	RES. SEMI FIXED	100 B	
VR103	R12-5085-05	RES. SEMI FIXED	100 B	
VR104	R12-1589-05	RES. SEMI FIXED	1KB	
VR201	R12-3584-05	RES. SEMI FIXED	47KB	
VR202	R12-0869-05	RES. SEMI FIXED	100 B	
VR203	R12-0869-05	RES. SEMI FIXED	100 B	
VR204	R12-3584-05	RES. SEMI FIXED	47KB	
VR205	R12-1589-05	RES. SEMI FIXED	1KB	
VR301	R12-3585-05	RES. SEMI FIXED	10KB	
VR302	R12-0873-05	RES. SEMI FIXED	470 B	
VR303	R12-3583-05	RES. SEMI FIXED	22KB	
W555	E38-1159-05	WIRE ASS'Y:ATT TO FINAL		
W556	E38-1161-05	WIRE ASS'Y:ATT TO FINAL		
W557	E38-1162-05	WIRE ASS'Y:WITH W 558		
<b>CS-4125 ATTENUATOR UNIT</b>				
<b>X75-1250-01</b>				
REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT
A22	-1314-13	SUB PANEL		
E21	-0667-05	METAL TERMINAL		
F10	-1699-04	SHIELD PLATE;BNC		
F11	-1283-04	SHIELD CASE;ATT		
J73	-0416-02	PCB (UNMOUNTED)		
N89	-3008-41	SCREW,BINDING TAPTITE 3X8		
C101	C91-2664-05	CAP. FILM	0.022	10%
C102	CC93FCH1H301J	CAP. CERAMIC	300P	5%
C103	CC45FCH1H390J	CAP. CERAMIC	39P	5%
C104	C91-2584-05	CAP. CERAMIC	1000P	10%
C105	CC45FCH1H101J	CAP. CERAMIC	100P	5%
C106				

# PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
D254	1SS133	DIODE
D255	1SS133	DIODE
IC101	LT1097CN8	IC, OP-AMP
IC201	LT1097CN8	IC, OP-AMP
J1	E04-0259-05	COAXIAL CONNECTOR
J2	E04-0259-05	COAXIAL CONNECTOR
J3	E04-0259-05	COAXIAL CONNECTOR
K101	S76-0027-05	RELAY
K102	S76-0027-05	RELAY
K103	S76-0027-05	RELAY
K104	S76-0027-05	RELAY
K105	S76-0027-05	RELAY
K201	S76-0027-05	RELAY
K202	S76-0027-05	RELAY
K203	S76-0027-05	RELAY
K204	S76-0027-05	RELAY
K205	S76-0027-05	RELAY
L101	L40-1011-70	FERRI INDUCTOR 100
L201	L40-1011-70	FERRI INDUCTOR 100
P1	E23-1520-05	EARTH TERMINAL
P2	E23-1520-05	EARTH TERMINAL
P3	E23-1520-05	EARTH TERMINAL
P4	E23-1520-05	EARTH TERMINAL
P5	E23-1520-05	EARTH TERMINAL
P6	E23-1520-05	EARTH TERMINAL
P7	E23-1520-05	EARTH TERMINAL
Q101	2SK304(E)	FET, N-CHANNEL
Q102	2SC1923(O)	TR. SI, NPN
Q103	2SA933ASLN(R,S)	TR. SI, PNP
Q104	2SA1005(K)	TR. SI, PNP
Q105	2SC3779(D)	TR. SI, NPN
Q106	2SC1740S(R,S)	TR. SI, NPN
Q107	2SC3381(GR)	TR. SI, NPN
Q108	2SC1923(O)	TR. SI, NPN
Q109	3SK73(GR)	FET, N-CHANNEL
Q110	1MX4	TR. SI, NPN
Q111	2SC1740S(R,S)	TR. SI, NPN
Q112	2SC1740S(R,S)	TR. SI, NPN
Q113	2SC1906	TR. SI, NPN
Q114	2SA1005(K)	TR. SI, PNP
Q115	2SA1005(K)	TR. SI, PNP
Q116	2SA1005(K)	TR. SI, PNP
Q117	2SA933ASLN(R,S)	TR. SI, PNP
Q118	2SA933ASLN(R,S)	TR. SI, PNP
Q119	2SA933ASLN(R,S)	TR. SI, PNP
Q120	2SA933ASLN(R,S)	TR. SI, PNP
Q131	2SA1459(K)	TR. SI, PNP
Q151	DTA114Y(S)	TR. SI, PNP
Q152	DTA114Y(S)	TR. SI, PNP
Q153	DTA114Y(S)	TR. SI, PNP
Q154	DTA114Y(S)	TR. SI, PNP
Q155	DTA114Y(S)	TR. SI, PNP
Q201	2SK304(E)	FET, N-CHANNEL
Q202	2SC1923(O)	TR. SI, NPN
Q203	2SA933ASLN(R,S)	TR. SI, PNP
Q204	2SA1005(K)	TR. SI, PNP
Q205	2SC3779(D)	TR. SI, NPN
Q206	2SC1740S(R,S)	TR. SI, NPN
Q207	2SC3381(GR)	TR. SI, NPN
Q208	2SC1923(O)	TR. SI, NPN
Q209	3SK73(GR)	FET, N-CHANNEL
Q210	1MX4	TR. SI, NPN
Q211	2SC1740S(R,S)	TR. SI, NPN
Q212	2SC1740S(R,S)	TR. SI, NPN
Q213	2SC1906	TR. SI, NPN
Q214	2SA1005(K)	TR. SI, PNP
Q215	2SA1005(K)	TR. SI, PNP
Q216	2SA1005(K)	TR. SI, PNP
Q217	2SA933ASLN(R,S)	TR. SI, PNP
Q218	2SA933ASLN(R,S)	TR. SI, PNP
Q219	2SA933ASLN(R,S)	TR. SI, PNP
Q220	2SA933ASLN(R,S)	TR. SI, PNP
Q221	2SA933ASLN(R,S)	TR. SI, PNP
Q222	2SA933ASLN(R,S)	TR. SI, PNP
Q223	DTA114Y(S)	TR. SI, NPN
Q224	2SA933ASLN(R,S)	TR. SI, PNP
Q231	2SA933ASLN(R,S)	TR. SI, PNP
Q251	DTA114Y(S)	TR. SI, PNP
Q252	DTA114Y(S)	TR. SI, PNP
Q253	DTA114Y(S)	TR. SI, PNP
Q254	DTA114Y(S)	TR. SI, PNP
Q255	DTA114Y(S)	TR. SI, PNP

REF. NO	PARTS NO	NAME & DESCRIPTION
Q301	2SK161(GR)	FET, N-CHANNEL
Q302	2SC1740S(R,S)	TR. SI, NPN
Q303	2SC1740S(R,S)	TR. SI, NPN
Q304	DTA114Y(S)	TR. SI, NPN
Q305	2SC1740S(R,S)	TR. SI, NPN
Q306	2SC1740S(R,S)	TR. SI, NPN
Q307	2SK389(GR)	FET, N-CHANNEL
Q308	2SC1740S(R,S)	TR. SI, NPN
Q309	DTA114Y(S)	TR. SI, PNP
Q310	2SC1740S(R,S)	TR. SI, NPN
Q311	2SC1740S(R,S)	TR. SI, NPN
Q312	2SC1740S(R,S)	TR. SI, NPN
R1	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R2	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R3	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R102	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
R103	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R104	RN14BK2E9903D	RES. METAL FILM 990K 0.5% 1/4W
R105	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W
R106	RN14BK2C1012D	RES. METAL FILM 10.1K 0.5% 1/6W
R107	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R108	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R109	RN14BK2E9903D	RES. METAL FILM 990K 0.5% 1/4W
R110	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R111	RN14BK2C1113D	RES. METAL FILM 111K 0.5% 1/6W
R112	RD14BB2C161J	RES. CARBON 160 5% 1/6W
R113	RN14BK2C5003F	RES. METAL FILM 500K 1% 1/6W
R114	RD14BB2E684J	RES. CARBON 680K 5% 1/4W
R115	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R116	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W
R117	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R118	RD14BB2C471J	RES. CARBON 470 5% 1/6W
R119	RD14BB2C273J	RES. CARBON 27K 5% 1/6W
R120	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W
R121	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R122	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R123	RD14BB2E272J	RES. CARBON 2.7K 5% 1/4W
R124	RD14BB2C162J	RES. CARBON 1.6K 5% 1/6W
R125	RN14BK2C3000D	RES. METAL FILM 300 0.5% 1/6W
R126	RN14BK2C1500D	RES. METAL FILM 150 0.5% 1/6W
R127	RN14BK2C9090D	RES. METAL FILM 90.0 0.5% 1/6W
R128	RN14BK2C6090D	RES. METAL FILM 60.0 0.5% 1/6W
R129	RD14BB2C151J	RES. CARBON 150 5% 1/6W
R130	RD14BB2C390J	RES. CARBON 39 5% 1/6W
R131	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R132	RD14BB2C623J	RES. CARBON 62K 5% 1/6W
R133	RD14BB2C151J	RES. CARBON 150 5% 1/6W
R134	RD14BB2C621J	RES. CARBON 620 5% 1/6W
R135	RN14BK2C5003F	RES. METAL FILM 500K 1% 1/6W
R136	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R137	RN14BK2C1500F	RES. METAL FILM 150 1% 1/6W
R138	RN14BK2C1500F	RES. METAL FILM 150 1% 1/6W
R139	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R140	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R141	RN14BK2C6800F	RES. METAL FILM 680 1% 1/6W
R142	RD14BB2E101J	RES. CARBON 100 5% 1/4W
R143	RD14BB2E822J	RES. CARBON 8.2K 5% 1/4W
R144	NO USE	
R145	RD14BB2E101J	RES. CARBON 100 5% 1/4W
R146	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R147	RD14BB2C113J	RES. CARBON 11K 5% 1/6W
R148	RD14BB2C912J	RES. CARBON 9.1K 5% 1/6W
R149	RD14BB2C390J	RES. CARBON 39 5% 1/6W
R150	NO USE	
R151	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W
R152	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R153	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R154	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R155	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W
R156	RD14BB2C182J	RES. CARBON 1.8K 5% 1/6W
R157	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R158	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R159	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R160	RN14BK2C1601F	RES. METAL FILM 1.6K 1% 1/6W
R161	RN14BK2C1601F	RES. METAL FILM 1.6K 1% 1/6W
R162	NO USE	
R163	RD14BB2C183J	RES. CARBON 18K 5% 1/6W
R164	RD14BB2C181J	RES. CARBON 180 5% 1/6W
R165	RD14BB2C222J	RES. CARBON 2.2K 5% 1/6W
R166	RD14BB2C113J	RES. CARBON 11K 5% 1/6W
R167	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R168	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R169	RD14BB2C752J	RES. CARBON 7.5K 5% 1/6W
R170	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W
R171	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R172	RD14BB2C112J	RES. CARBON 1.1K 5% 1/6W
R173	R92-1061-05	JUMPING RES. ZERO-OHM (5MM)
R174	RD14BB2C561J	RES. CARBON 560 5% 1/6W
R175	RD14BB2C822J	RES. CARBON 8.2K 5% 1/6W
R176	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W
R177	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R178	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R179	RD14BB2C272J	RES. CARBON 2.7K 5% 1/6W
R180	RD14BB2C220J	RES. CARBON 22 5% 1/6W

REF. NO	PARTS NO	NAME & DESCRIPTION
R181	RD14BB2C621J	RES. CARBON 620 5% 1/6W
R182	RD14BB2C680J	RES. CARBON 68 5% 1/6W
R183	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R184	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R185	RD14BB2C221J	RES. CARBON 220 5% 1/6W
R186	NO USE	
R187	RD14BB2C563J	RES. CARBON 56K 5% 1/6W
R188	NO USE	
R189	RD14BB2C363J	RES. CARBON 36K 5% 1/6W
R190	RD14BB2C471J	RES. CARBON 470 5% 1/6W
R191	RD14BB2C620J	RES. CARBON 62 5% 1/6W
R192	RD14BB2C620J	RES. CARBON 62 5% 1/6W
R193	RD14BB2C620J	RES. CARBON 62 5% 1/6W
R194	RD14BB2E620J	RES. CARBON 62 5% 1/4W
R195	RD14BB2E620J	RES. CARBON 62 5% 1/4W
R198	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W
R199	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R202	RD14BB2C105J	RES. CARBON 1M 5% 1/6W
R203	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R204	RN14BK2E9903D	RES. METAL FILM 990K 0.5% 1/4W
R205	RD14BB2C362J	RES. CARBON 3.6K 5% 1/6W
R206	RN14BK2C1012D	RES. METAL FILM 10.1K 0.5% 1/6W
R207	RD14BB2C470J	RES. CARBON 47 5% 1/6W
R208	RD14BB2C220J	RES. CARBON 22 5% 1/6W
R209	RN14BK2E9903D	RES. METAL FILM 990K 0.5% 1/4W
R210	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R211	RN14BK2C1113D	RES. METAL FILM 111K 0.5% 1/6W
R212	RD14BB2C161J	RES. CARBON 160 5% 1/6W
R213	RN14BK2C5003F	RES. METAL FILM 500K 1% 1/6W
R214	RD14BB2E684J	RES. CARBON 680K 5% 1/4W
R215	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R216	RD14BB2C392J	RES. CARBON 3.9K 5% 1/6W
R217	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R218	RD14BB2C471J	RES. CARBON 470 5% 1/6W
R219	RD14BB2C273J	RES. CARBON 27K 5% 1/6W
R220	RD14BB2C622J	RES. CARBON 6.2K 5% 1/6W
R221	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R222	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R223	RD14BB2E272J	RES. CARBON 2.7K 5% 1/4W
R224	RD14BB2C162J	RES. CARBON 1.6K 5% 1/6W
R225	RN14BK2C3000D	RES. METAL FILM 300 0.5% 1/6W
R226	RN14BK2C1500D	RES. METAL FILM 150 0.5% 1/6W
R227	RN14BK2C9090D	RES. METAL FILM 90.0 0.5% 1/6W
R228	RN14BK2C6090D	RES. METAL FILM 60.0 0.5% 1/6W
R229	RD14BB2C151J	RES. CARBON 150 5% 1/6W
R230	RD14BB2C390J	RES. CARBON 39 5% 1/6W
R231	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R232	RD14BB2C623J	RES. CARBON 62K 5% 1/6W
R233	RD14BB2C151J	RES. CARBON 150 5% 1/6W
R234	RD14BB2C621J	RES. CARBON 620 5% 1/6W
R235	RN14BK2C5003F	RES. METAL FILM 500K 1% 1/6W
R236	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R237	RN14BK2C1500F	RES. METAL FILM 150 1% 1/6W
R238	RN14BK2C1500F	RES. METAL FILM 150 1% 1/6W
R239	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R240	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R241	RN14BK2C6800F	RES. METAL FILM 680 1% 1/6W
R242	RD14BB2E101J	RES. CARBON 100 5% 1/4W
R243	RD14BB2E822J	RES. CARBON 8.2K 5% 1/4W
R244	RD14BB2C332J	RES. CARBON 3.3K 5% 1/6W
R245	RD14BB2E101J	RES. CARBON 100 5% 1/4W
R246	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R247	RD14BB2C113J	RES. CARBON 11K 5% 1/6W
R248	RD14BB2C912J	RES. CARBON 9.1K 5% 1/6W
R249	RD14BB2C390J	RES. CARBON 39 5% 1/6W
R250	RD14BB2C563J	RES. CARBON 56K 5% 1/6W
R251	RN14BK2C3001F	RES.



# PARTS LIST

## CS-4135 ATTENUATOR UNIT X75-1250-00

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT	REMARKS
	A22-1314-13	SUB PANEL			
	E21-0667-05	METAL TERMINAL			
	F10-1699-04	SHIELD PLATE;BNC			
	F10-2508-04	SHIELD PLATE;C101,201			
	F11-1283-04	SHIELD CASE;ATT			
	J73-0416-02	PCB (UNMOUNTED)			
	M89-3008-41	SCREW,RINDING TAPTITE 3X8			
C100	CC45FCH1H120J	CAP. CERAMIC	12P	5%	50V
C101	C91-2664-05	CAP. FILM	0.022	10%	630V
C102	CC93FCH1H301J	CAP. CERAMIC	300P	5%	50V
C103	CC45FCH1H390J	CAP. CERAMIC	39P	5%	50V
C104	C91-2584-05	CAP. CERAMIC	1000P	10%	400V
C105	CC45FCH1H101J	CAP. CERAMIC	100P	5%	50V
C106	CC45FCH1H330J	CAP. CERAMIC	33P	5%	50V
C107	CE04LW1A470M	CAP. ELECTRO	47	20%	10V
C108	C91-0769-05	CAP. CERAMIC	0.01	20%	16V
C109	NO USE				
C110	CF92FV1H222J	CAP. POLYESTER	2200P	5%	50V
C111	CE04EW1A221M	CAP. ELECTRO	220	20%	10V
C112	C91-0769-05	CAP. CERAMIC	0.01	20%	16V
C113	C91-0769-05	CAP. CERAMIC	0.01	20%	16V
C114	C91-0769-05	CAP. CERAMIC	0.01	20%	16V
C115	CE04LW1A101M	CAP. ELECTRO	100	20%	10V
C118	CC45FSL1H181J	CAP. CERAMIC	180P	5%	50V
C119	CC45FCH1H101J	CAP. CERAMIC	100P	5%	50V
C122	CC45FCH1H030C	CAP. CERAMIC	3P	0.25P	50V
C123	CC45FCH1H180J	CAP. CERAMIC	18P	5%	50V
C124	C91-0727-05	CAP. CERAMIC	18P	5%	50V
C125	NO USE				
C126	CC45FCH2H030C	CAP. CERAMIC	3P	0.25P	500V
C127	CC45FCH2H050C	CAP. CERAMIC	5P	0.25P	500V
C128	C91-2538-05	CAP. FILM	0.1	10%	63V
C129	C91-0769-05	CAP. CERAMIC	0.01	20%	16V
C130	NO USE				
C131	C91-1226-05	CAP. CERAMIC	1.8	20%	50V
C150	CF92FV1H103J	CAP. POLYESTER	0.01	5%	50V
C151	CC45FCH1H100D	CAP. CERAMIC	10P	0.5P	50V
C152	NO USE				
C153	CE04LW1A101M	CAP. ELECTRO	100	20%	10V
C154	CE04LW1A221M	CAP. ELECTRO	220	20%	10V
C157	CE04LW1A470M	CAP. ELECTRO	47	20%	10V
C158	CE04LW1A101M	CAP. ELECTRO	100	20%	10V
C159	NO USE				
C160	CE04LW1A101M	CAP. ELECTRO	100	20%	10V
C161	CE04LW1A470M	CAP. ELECTRO	47	20%	10V
C162	CE04LW1A101M	CAP. ELECTRO	100	20%	10V
C163	CE04EW1A101M	CAP. ELECTRO	100	20%	10V
C164	CE04EW1A221M	CAP. ELECTRO	220	20%	10V
C200	CC45FCH1H120J	CAP. CERAMIC	12P	5%	50V
C201	C91-2664-05	CAP. FILM	0.022	10%	630V
C202	CC93FCH1H301J	CAP. CERAMIC	300P	5%	50V
C203	CC45FCH1H390J	CAP. CERAMIC	39P	5%	50V
C204	C91-2584-05	CAP. CERAMIC	1000P	10%	400V
C205	CC45FCH1H101J	CAP. CERAMIC	100P	5%	50V
C206	CC45FCH1H270J	CAP. CERAMIC	27P	5%	50V
C207	CE04EW1A470M	CAP. ELECTRO	47	20%	10V
C208	C91-0769-05	CAP. CERAMIC	0.01	20%	16V
C209	NO USE				
C210	CF92FV1H222J	CAP. POLYESTER	2200P	5%	50V
C211	CE04LW1A221M	CAP. ELECTRO	220	20%	10V
C212	C91-0769-05	CAP. CERAMIC	0.01	20%	16V
C213	C91-0769-05	CAP. CERAMIC	0.01	20%	16V
C214	C91-0769-05	CAP. CERAMIC	0.01	20%	16V
C215	NO USE				
C216	C91-0769-05	CAP. CERAMIC	0.01	20%	16V
C217	NO USE				
C218	CC45FSL1H181J	CAP. CERAMIC	180P	5%	50V
C219	CC45FCH1H101J	CAP. CERAMIC	100P	5%	50V
C222	CC45FCH1H070D	CAP. CERAMIC	7P	0.5P	50V
C223	CC45FCH1H180J	CAP. CERAMIC	18P	5%	50V
C224	C91-0727-05	CAP. CERAMIC	18P	5%	50V
C225	NO USE				
C226	CC45FCH2H030C	CAP. CERAMIC	3P	0.25P	500V
C227	CC45FCH2H050C	CAP. CERAMIC	5P	0.25P	500V
C228	C91-2538-05	CAP. FILM	0.1	10%	63V
C229	C91-0769-05	CAP. CERAMIC	0.01	20%	16V
C230	NO USE				
C231	C91-1226-05	CAP. CERAMIC	1.8	20%	50V
C250	CF92FV1H103J	CAP. POLYESTER	0.01	5%	50V
C251	CC45FCH1H100D	CAP. CERAMIC	10P	0.5P	50V
C252	NO USE				
C253	CE04LW1A101M	CAP. ELECTRO	100	20%	10V
C256	CE04LW1A101M	CAP. ELECTRO	100	20%	10V

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT	REMARKS
C257	CE04LW1A101M	CAP. ELECTRO	100	20%	10V
C258	CE04LW1A101M	CAP. ELECTRO	100	20%	10V
C259	C91-2538-05	CAP. FILM	0.1	10%	63V
C260	C91-2538-05	CAP. FILM	0.1	10%	63V
C261	CE04EW1A470M	CAP. ELECTRO	47	20%	10V
C281	CE04EW1A331M	CAP. ELECTRO	330	20%	10V
C291	CC45FSL1H100J	CAP. CERAMIC	10P	5%	50V
C301	C91-2584-05	CAP. CERAMIC	1000P	10%	400V
C302	CC45FCH1H100D	CAP. CERAMIC	10P	0.5P	50V
C303	CE04HW1C100M	CAP. ELECTRO	10	20%	16V
C304	C91-2671-05	CAP. FILM	1200P	5%	50V
C305	C91-2661-05	CAP. FILM	1	10%	63V
C306	CC45FSL1H470J	CAP. CERAMIC	47P	5%	50V
C307	CC45FCH1H150J	CAP. CERAMIC	15P	5%	50V
C308	C91-0769-05	CAP. CERAMIC	0.01	20%	16V
C309	CF92FV1H103J	CAP. POLYESTER	0.01	5%	50V
C310	CE04LW1H010M	CAP. ELECTRO	1	20%	50V
C316	CE04LW1A101M	CAP. ELECTRO	100	20%	10V
C317	CE04LW1A101M	CAP. ELECTRO	100	20%	10V
C321	CC45FCH1H470J	CAP. CERAMIC	47P	5%	50V
C332	CF92FV1H103J	CAP. POLYESTER	0.01	5%	50V
CN51	E40-9008-05	PIN CONNECTOR	15P		
CN52	E40-5021-05	PIN CONNECTOR	7P		
CN53	E40-5021-05	PIN CONNECTOR	7P		
CN56	E40-3237-05	PIN CONNECTOR	2P		
CN152	E40-3237-05	PIN CONNECTOR	2P		
CN201	E40-7566-05	PIN CONNECTOR	5P		
CN202	E40-7565-05	PIN CONNECTOR	3P		
CN203	E40-7566-05	PIN CONNECTOR	5P		
CN204	E40-7567-05	PIN CONNECTOR	7P		
CN208	E40-7567-05	PIN CONNECTOR	7P		
CN209	NO USE				
CN210	E40-7565-05	PIN CONNECTOR	3P		
CN211	E40-7565-05	PIN CONNECTOR	3P		
D101	1SS133	DIODE			
D102	1SS133	DIODE			
D151	1SS133	DIODE			
D152	1SS133	DIODE			
D153	1SS133	DIODE			
D154	1SS133	DIODE			
D155	1SS133	DIODE			
D201	1SS133	DIODE			
D202	1SS133	DIODE			
D251	1SS133	DIODE			
D252	1SS133	DIODE			
D253	1SS133	DIODE			
D254	1SS133	DIODE			
D255	1SS133	DIODE			
IC101	LT1097CN8	IC,OP-AMP			
IC201	LT1097CN8	IC,OP-AMP			
J1	E04-0259-05	COAXIAL CONNECTOR			
J2	E04-0259-05	COAXIAL CONNECTOR			
J3	E04-0259-05	COAXIAL CONNECTOR			
K101	S76-0027-05	RELAY			
K102	S76-0027-05	RELAY			
K103	S76-0027-05	RELAY			
K104	S76-0027-05	RELAY			
K105	S76-0027-05	RELAY			
K201	S76-0027-05	RELAY			
K202	S76-0027-05	RELAY			
K203	S76-0027-05	RELAY			
K204	S76-0027-05	RELAY			
K205	S76-0027-05	RELAY			
L101	L40-1011-70	FERRI INDUCTOR	100		
L201	L40-1011-70	FERRI INDUCTOR	100		
P1	E23-1520-05	EARTH TERMINAL			
P2	E23-1520-05	EARTH TERMINAL			
P3	E23-1520-05	EARTH TERMINAL			
P4	E23-1520-05	EARTH TERMINAL			
P5	E23-1520-05	EARTH TERMINAL			
P6	E23-1520-05	EARTH TERMINAL			
P7	E23-1520-05	EARTH TERMINAL			

# PARTS LIST


REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT	REMARKS
Q101	2SK304(E)	FET, N-CHANNEL			
Q102	2SC1923(O)	TR. SI, NPN			
Q103	2SA933ASLN(R,S)	TR. SI, PNP			
Q104	2SA1005(K)	TR. SI, PNP			
Q105	2SC3779(D)	TR. SI, NPN			
Q106	2SC1740S(R,S)	TR. SI, NPN			
Q107	2SC3381(GR)	TR. SI, NPN			
Q108	2SC1923(O)	TR. SI, NPN			
Q109	3SK73(GR)	FET, N-CHANNEL			
Q110	1MX4	TR. SI, NPN			
Q111	2SC1907	TR. SI, NPN			
Q112	2SC1907	TR. SI, NPN			
Q113	2SC1906	TR. SI, NPN			
Q114	2SA1459(K)	TR. SI, PNP			
Q115	2SA1459(K)	TR. SI, PNP			
Q116	2SA1459(K)	TR. SI, PNP			
Q117	2SA1005(K)	TR. SI, PNP			
Q118	2SA1005(K)	TR. SI, PNP			
Q119	2SA933ASLN(R,S)	TR. SI, PNP			
Q120	2SA933ASLN(R,S)	TR. SI, PNP			
Q131	2SA1459(K)	TR. SI, PNP			
Q151	DTA114Y(S)	TR. SI, PNP			
Q152	DTA114Y(S)	TR. SI, PNP			
Q153	DTA114Y(S)	TR. SI, PNP			
Q154	DTA114Y(S)	TR. SI, PNP			
Q155	DTA114Y(S)	TR. SI, PNP			
Q201	2SK304(E)	FET, N-CHANNEL			
Q202	2SC1923(O)	TR. SI, NPN			
Q203	2SA933ASLN(R,S)	TR. SI, PNP			
Q204	2SA1005(K)	TR. SI, PNP			
Q205	2SC3779(D)	TR. SI, NPN			
Q206	2SC1740S(R,S)	TR. SI, NPN			
Q207	2SC3381(GR)	TR. SI, NPN			
Q208	2SC1923(O)	TR. SI, NPN			
Q209	3SK73(GR)	FET, N-CHANNEL			
Q210	1MX4	TR. SI, NPN			
Q211	2SC1907	TR. SI, NPN			
Q212	2SC1907	TR. SI, NPN			
Q213	2SC1906	TR. SI, NPN			
Q214	2SA1459(K)				

# PARTS LIST


REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT
R214	RD14BB2E684J	RES. CARBON	680K	5% 1/4W
R215	RD14BB2C101J	RES. CARBON	100	5% 1/6W
R216	RD14BB2C392J	RES. CARBON	3.9K	5% 1/6W
R217	RD14BB2C202J	RES. CARBON	2K	5% 1/6W
R218	RD14BB2C471J	RES. CARBON	470	5% 1/6W
R219	RD14BB2C273J	RES. CARBON	27K	5% 1/6W
R220	RD14BB2C622J	RES. CARBON	6.2K	5% 1/6W
R221	RD14BB2C472J	RES. CARBON	4.7K	5% 1/6W
R222	RD14BB2C332J	RES. CARBON	3.3K	5% 1/6W
R223	RD14BB2E272J	RES. CARBON	2.7K	5% 1/4W
R224	RD14BB2C162J	RES. CARBON	1.6K	5% 1/6W
R225	RN14BK2C3000D	RES. METAL FILM	300	0.5% 1/6W
R226	RN14BK2C1500D	RES. METAL FILM	150	0.5% 1/6W
R227	RN14BK2C90R0D	RES. METAL FILM	90.0	0.5% 1/6W
R228	RN14BK2C60R0D	RES. METAL FILM	60.0	0.5% 1/6W
R229	RD14BB2C151J	RES. CARBON	150	5% 1/6W
R230	RD14BB2C390J	RES. CARBON	39	5% 1/6W
R231	RD14BB2C101J	RES. CARBON	100	5% 1/6W
R232	RD14BB2C623J	RES. CARBON	62K	5% 1/6W
R233	RD14BB2C151J	RES. CARBON	150	5% 1/6W
R234	RD14BB2C241J	RES. CARBON	240	5% 1/6W
R235	RN14BK2C5003F	RES. METAL FILM	500K	1% 1/6W
R236	NO USE			
R237	RN14BK2C1500F	RES. METAL FILM	150	1% 1/6W
R238	RN14BK2C1500F	RES. METAL FILM	150	1% 1/6W
R239	RD14BB2C302J	RES. CARBON	3K	5% 1/6W
R240	RD14BB2C152J	RES. CARBON	1.5K	5% 1/6W
R241	RN14BK2C6800F	RES. METAL FILM	680	1% 1/6W
R242	R92-1061-05	JUMPING RES.	ZERO OHM (5MM)	
R243	RD14BB2E822J	RES. CARBON	8.2K	5% 1/4W
R244	RD14BB2C332J	RES. CARBON	3.3K	5% 1/6W
R245	R92-1061-05	JUMPING RES.	ZERO OHM (5MM)	
R246	RD14BB2C103J	RES. CARBON	10K	5% 1/6W
R247	RD14BB2C113J	RES. CARBON	11K	5% 1/6W
R248	RD14BB2C912J	RES. CARBON	9.1K	5% 1/6W
R249	RD14BB2C390J	RES. CARBON	39	5% 1/6W
R250	RD14BB2C513J	RES. CARBON	51K	5% 1/6W
R251	RN14BK2C3001F	RES. METAL FILM	3K	1% 1/6W
R252	RN14BK2C1001F	RES. METAL FILM	1K	1% 1/6W
R253	RN14BK2C1001F	RES. METAL FILM	1K	1% 1/6W
R254	RD14BB2C220J	RES. CARBON	22	5% 1/6W
R255	RD14BB2C182J	RES. CARBON	1.8K	5% 1/6W
R256	RD14BB2C182J	RES. CARBON	1.8K	5% 1/6W
R257	RD14BB2C220J	RES. CARBON	22	5% 1/6W
R258	RD14BB2C101J	RES. CARBON	100	5% 1/6W
R259	RD14BB2C101J	RES. CARBON	100	5% 1/6W
R260	RN14BK2C1601F	RES. METAL FILM	1.6K	1% 1/6W
R261	RN14BK2C1601F	RES. METAL FILM	1.6K	1% 1/6W
R262	RD14BB2C220J	RES. CARBON	22	5% 1/6W
R263	RD14BB2C113J	RES. CARBON	11K	5% 1/6W
R264	RN14BK2C2200F	RES. METAL FILM	220	1% 1/6W
R265	RD14BB2C222J	RES. CARBON	2.2K	5% 1/6W
R266	RD14BB2C113J	RES. CARBON	11K	5% 1/6W
R267	RD14BB2C101J	RES. CARBON	100	5% 1/6W
R268	RD14BB2C101J	RES. CARBON	100	5% 1/6W
R269	RD14BB2C752J	RES. CARBON	7.5K	5% 1/6W
R270	RD14BB2C362J	RES. CARBON	3.6K	5% 1/6W
R271	RD14BB2C101J	RES. CARBON	100	5% 1/6W
R272	RD14BB2C101J	RES. CARBON	100	5% 1/6W
R273	RD14BB2C752J	RES. CARBON	7.5K	5% 1/6W
R274	RD14BB2C362J	RES. CARBON	3.6K	5% 1/6W
R275	RD14BB2C822J	RES. CARBON	8.2K	5% 1/6W
R276	RD14BB2C101J	RES. CARBON	100	5% 1/6W
R277	RD14BB2C101J	RES. CARBON	100	5% 1/6W
R278	RD14BB2C220J	RES. CARBON	22	5% 1/6W
R279	RD14BB2C272J	RES. CARBON	2.7K	5% 1/6W
R280	RD14BB2C220J	RES. CARBON	22	5% 1/6W
R281	RD14BB2C621J	RES. CARBON	620	5% 1/6W
R282	NO USE			
R283	RD14BB2C101J	RES. CARBON	100	5% 1/6W
R284	RD14BB2C101J	RES. CARBON	100	5% 1/6W
R285	RD14BB2C101J	RES. CARBON	100	5% 1/6W
R286	RD14BB2C750J	RES. CARBON	75	5% 1/6W
R287	RD14BB2C101J	RES. CARBON	100	5% 1/6W
R288	RD14BB2C680J	RES. CARBON	68	5% 1/6W
R289	RD14BB2C363J	RES. CARBON	36K	5% 1/6W
R290	RD14BB2C621J	RES. CARBON	620	5% 1/6W
R291	RD14BB2C221J	RES. CARBON	220	5% 1/6W
R292	RD14BB2C221J	RES. CARBON	220	5% 1/6W
R293	RD14BB2E221J	RES. CARBON	220	5% 1/4W
R294	RD14BB2E221J	RES. CARBON	220	5% 1/4W
R295	RD14BB2E221J	RES. CARBON	220	5% 1/4W
R296	RD14BB2C621J	RES. CARBON	620	5% 1/6W
R297	RD14BB2C182J	RES. CARBON	1.8K	5% 1/6W
R298	RD14BB2C622J	RES. CARBON	6.2K	5% 1/6W
R299	RD14BB2C101J	RES. CARBON	100	5% 1/6W
R300	NO USE			
R301	RD14BB2E105J	RES. CARBON	1M	5% 1/4W
R302	RD14BB2E684J	RES. CARBON	680K	5% 1/4W
R303	RD14BB2C392J	RES. CARBON	3.9K	5% 1/6W
R304	RD14BB2C392J	RES. CARBON	3.9K	5% 1/6W
R305	RD14BB2C152J	RES. CARBON	1.5K	5% 1/6W
R306	RD14BB2C103J	RES. CARBON	10K	5% 1/6W

REF. NO	PARTS NO	NAME & DESCRIPTION	QTY	UNIT
R307	NO USE			
R308	RN14BK2C3001F	RES. METAL FILM	3K	1% 1/6W
R309	RN14BK2C3901F	RES. METAL FILM	3.9K	1% 1/6W
R310	RN14BK2C3301F	RES. METAL FILM	3.3K	1% 1/6W
R311	RD14BB2C223J	RES. CARBON	22K	5% 1/6W
R312	RD14BB2C223J	RES. CARBON	22K	5% 1/6W
R313	NO USE			
R314	RD14BB2C103J	RES. CARBON	10K	5% 1/6W
R315	RD14BB2C101J	RES. CARBON	100	5% 1/6W
R316	RD14BB2C101J	RES. CARBON	100	5% 1/6W
R317	RD14BB2C222J	RES. CARBON	2.2K	5% 1/6W
R318	RN14BK2C3901F	RES. METAL FILM	3.9K	1% 1/6W
R319	RN14BK2C1802F	RES. METAL FILM	18K	1% 1/6W
R320	RN14BK2C1301F	RES. METAL FILM	1.3K	1% 1/6W
R321	RD14BB2C222J	RES. CARBON	2.2K	5% 1/6W
R322	NO USE			
R323	RD14BB2C472J	RES. CARBON	4.7K	5% 1/6W
R324	RD14BB2C431J	RES. CARBON	430	5% 1/6W
R325	RD14BB2C511J	RES. CARBON	510	5% 1/6W
R326	RD14BB2C392J	RES. CARBON	3.9K	5% 1/6W
R327	RD14BB2C392J	RES. CARBON	3.9K	5% 1/6W
R328	RD14BB2C112J	RES. CARBON	1.1K	5% 1/6W
R329	RD14BB2C392J	RES. CARBON	3.9K	5% 1/6W
R330	RD14BB2C103J	RES. CARBON	10K	5% 1/6W
R331	RD14BB2C103J	RES. CARBON	10K	5% 1/6W
R332	RD14BB2C103J	RES. CARBON	10K	5% 1/6W
R333	NO USE			
R334	RD14BB2C103J	RES. CARBON	10K	5% 1/6W
R335	RD14BB2C103J	RES. CARBON	10K	5% 1/6W
R336	RD14BB2C472J	RES. CARBON	4.7K	5% 1/6W
R351	RD14BB2C113J	RES. CARBON	11K	5% 1/6W
S101	S64-0603-15	LEVER SWITCH		
S201	S64-0603-15	LEVER SWITCH		
TC101	C05-0496-05	CAP. TRIMMER	10P	
TC102	C05-0495-05	CAP. TRIMMER	6P	
TC103	C05-0495-05	CAP. TRIMMER	6P	
TC104	C05-0495-05	CAP. TRIMMER	6P	
TC105	C05-0447-05	CAP. TRIMMER	50P	
TC201	C05-0496-05	CAP. TRIMMER	10P	
TC202	C05-0495-05	CAP. TRIMMER	6P	
TC203	C05-0495-05	CAP. TRIMMER	6P	
TC204	C05-0495-05	CAP. TRIMMER	6P	
TC205	C05-0447-05	CAP. TRIMMER	50P	
TH103	112-201-2FM	THERMISTOR		
TH202	112-103-2FM	THERMISTOR		
TH203	112-201-2FM	THERMISTOR		
VR101	R12-3584-05	RES. SEMI FIXED	47KB	
VR102	R12-3582-05	RES. SEMI FIXED	10KB	
VR103	R12-0869-05	RES. SEMI FIXED	100 B	
VR104	R12-1589-05	RES. SEMI FIXED	1KB	
VR105	R12-0869-05	RES. SEMI FIXED	100 B	
VR201	R12-3584-05	RES. SEMI FIXED	47KB	
VR202	R12-3582-05	RES. SEMI FIXED	10KB	
VR203	R12-0869-05	RES. SEMI FIXED	100 B	
VR204	R12-1589-05	RES. SEMI FIXED	1KB	
VR205	R12-3584-05	RES. SEMI FIXED	47KB	
VR206	R12-0869-05	RES. SEMI FIXED	100 B	
VR301	R12-3585-05	RES. SEMI FIXED	10KB	
VR302	R12-0873-05	RES. SEMI FIXED	470 B	
VR303	R12-3582-05	RES. SEMI FIXED	10KB	
W555	E38-1159-05	WIRE ASS'Y:ATT TO FINAL		
W556	E38-1161-05	WIRE ASS'Y:ATT TO FINAL		
W557	E38-1162-05	WIRE ASS'Y:WITH W 558		
W902	E38-1327-05	WIRE ASS'Y:CH1,CH2 GND		
W903	E38-1327-05	WIRE ASS'Y:CH1,CH2 GND		

# CS-4125 (~S/NO.7121000) SCHEMATIC DIAGRAM

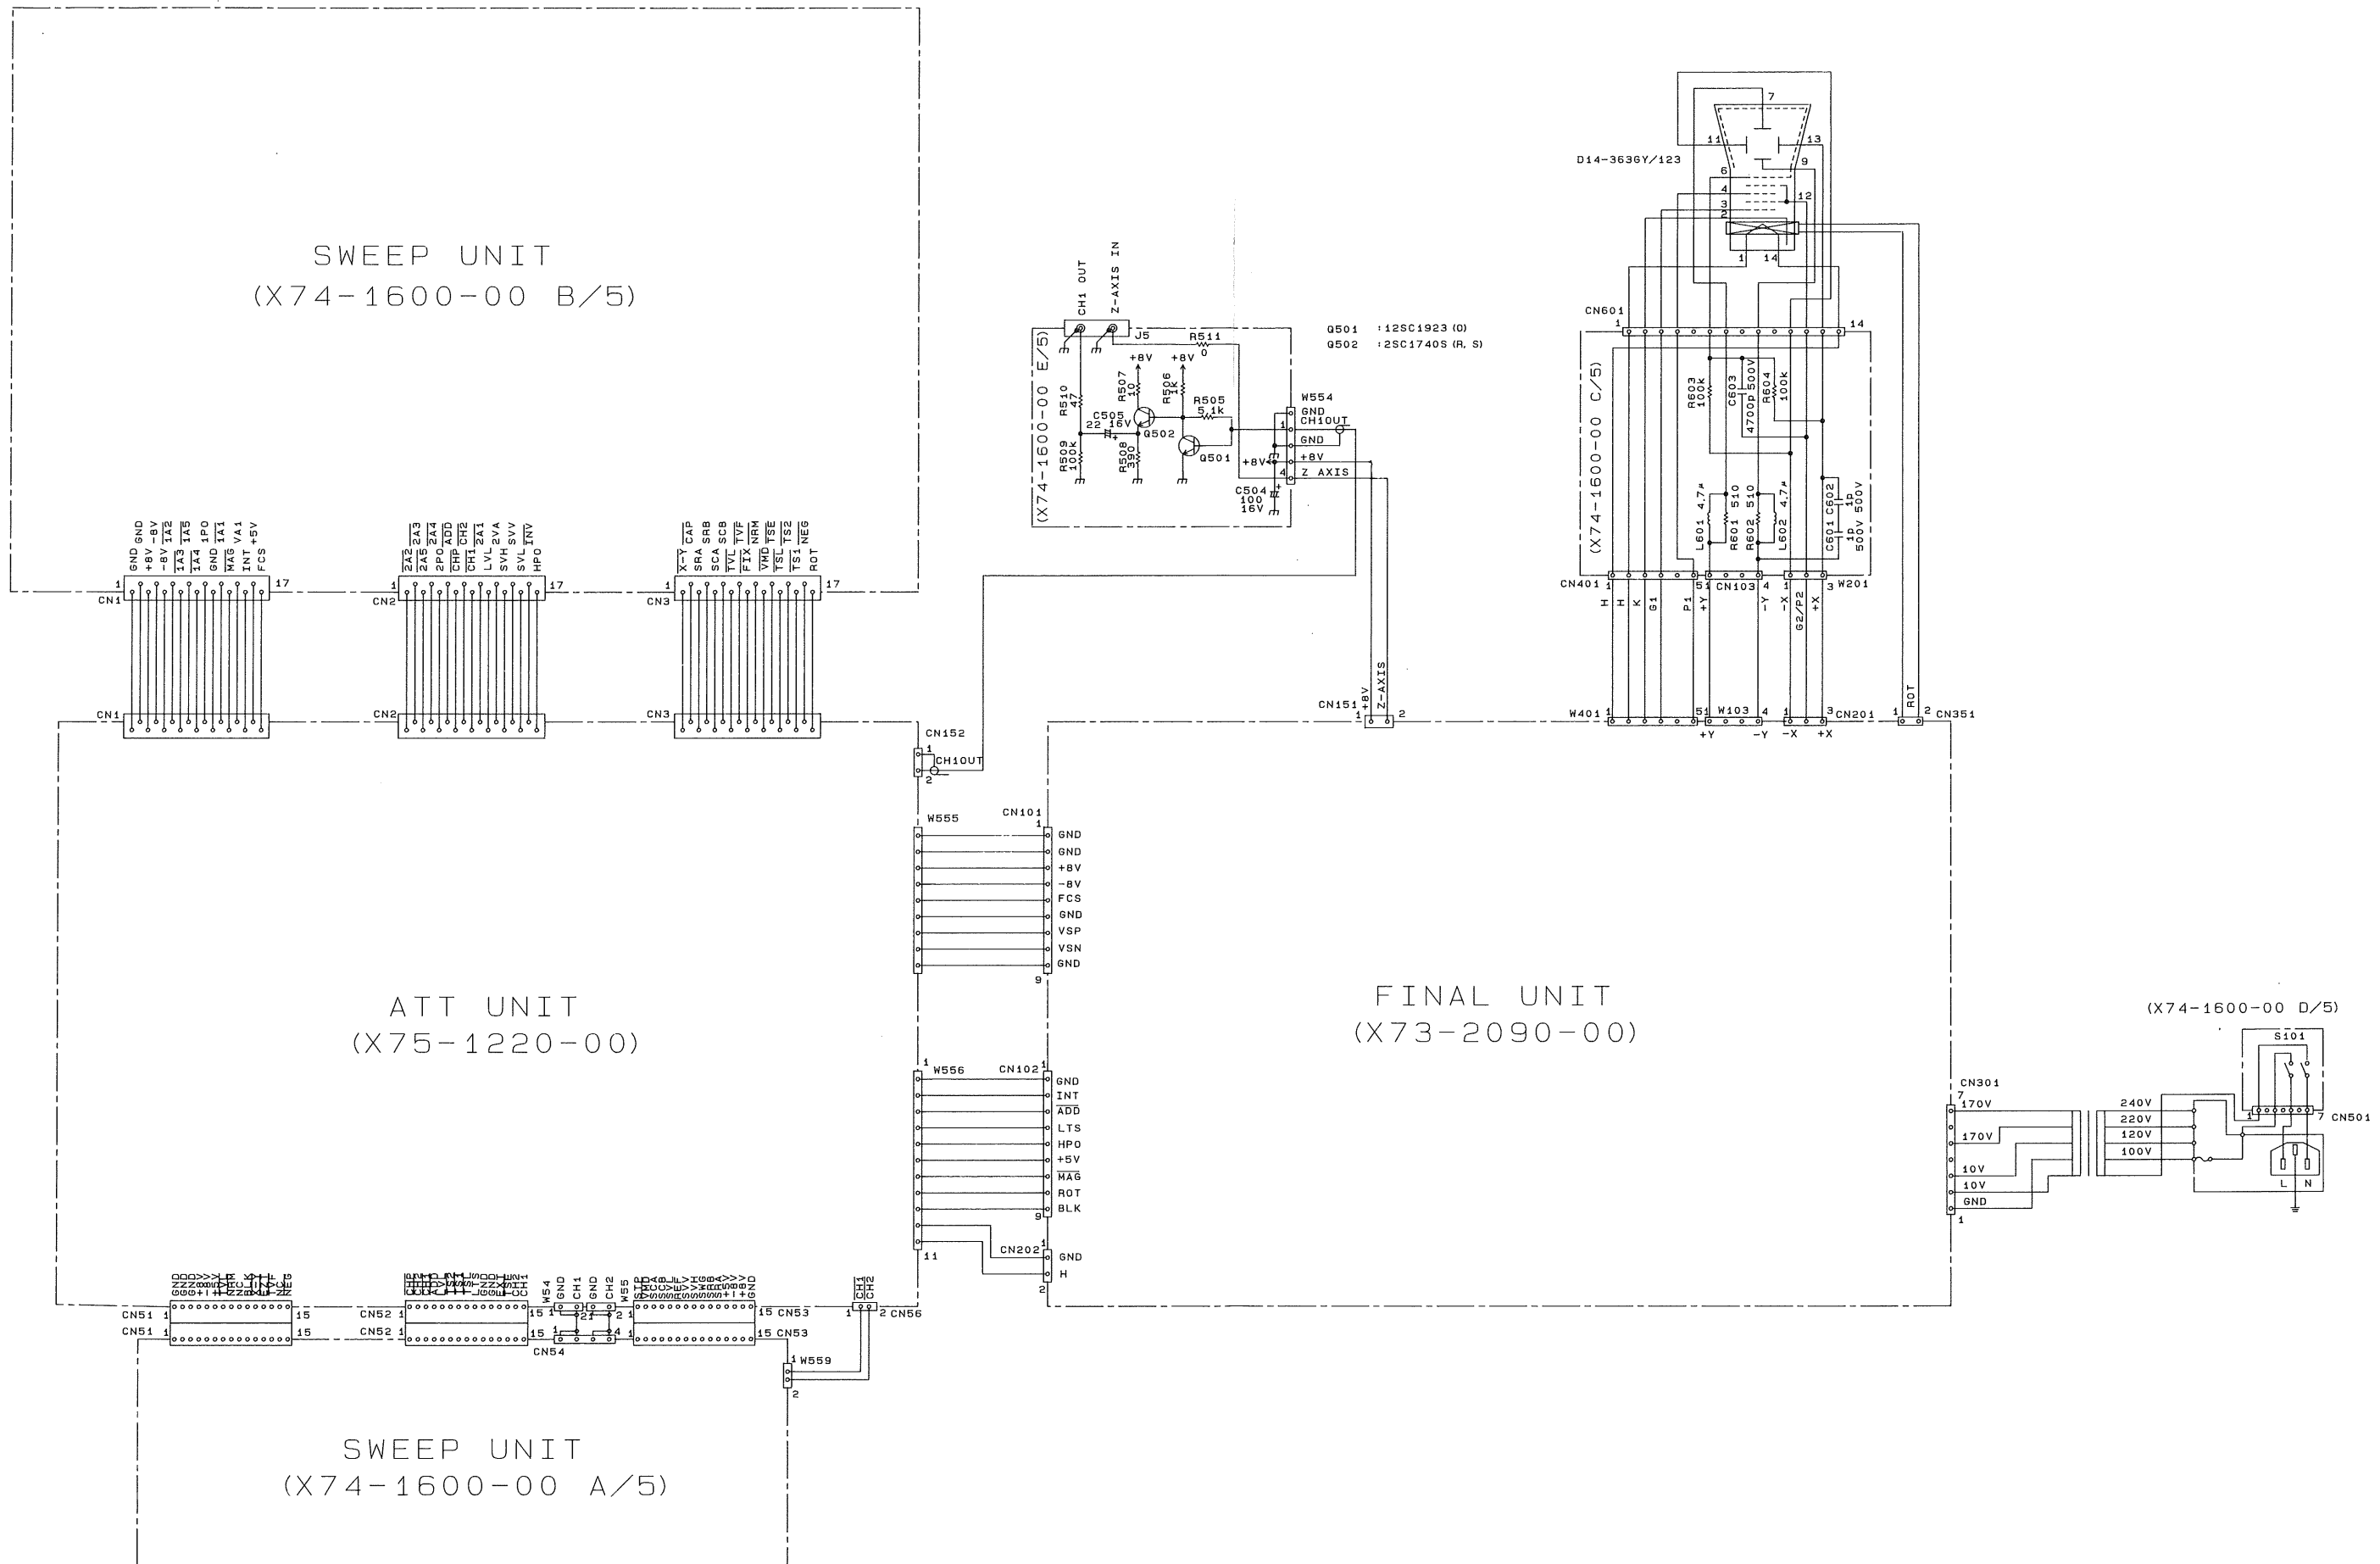


# CS-4125 SCHEMATIC DIAGRAM

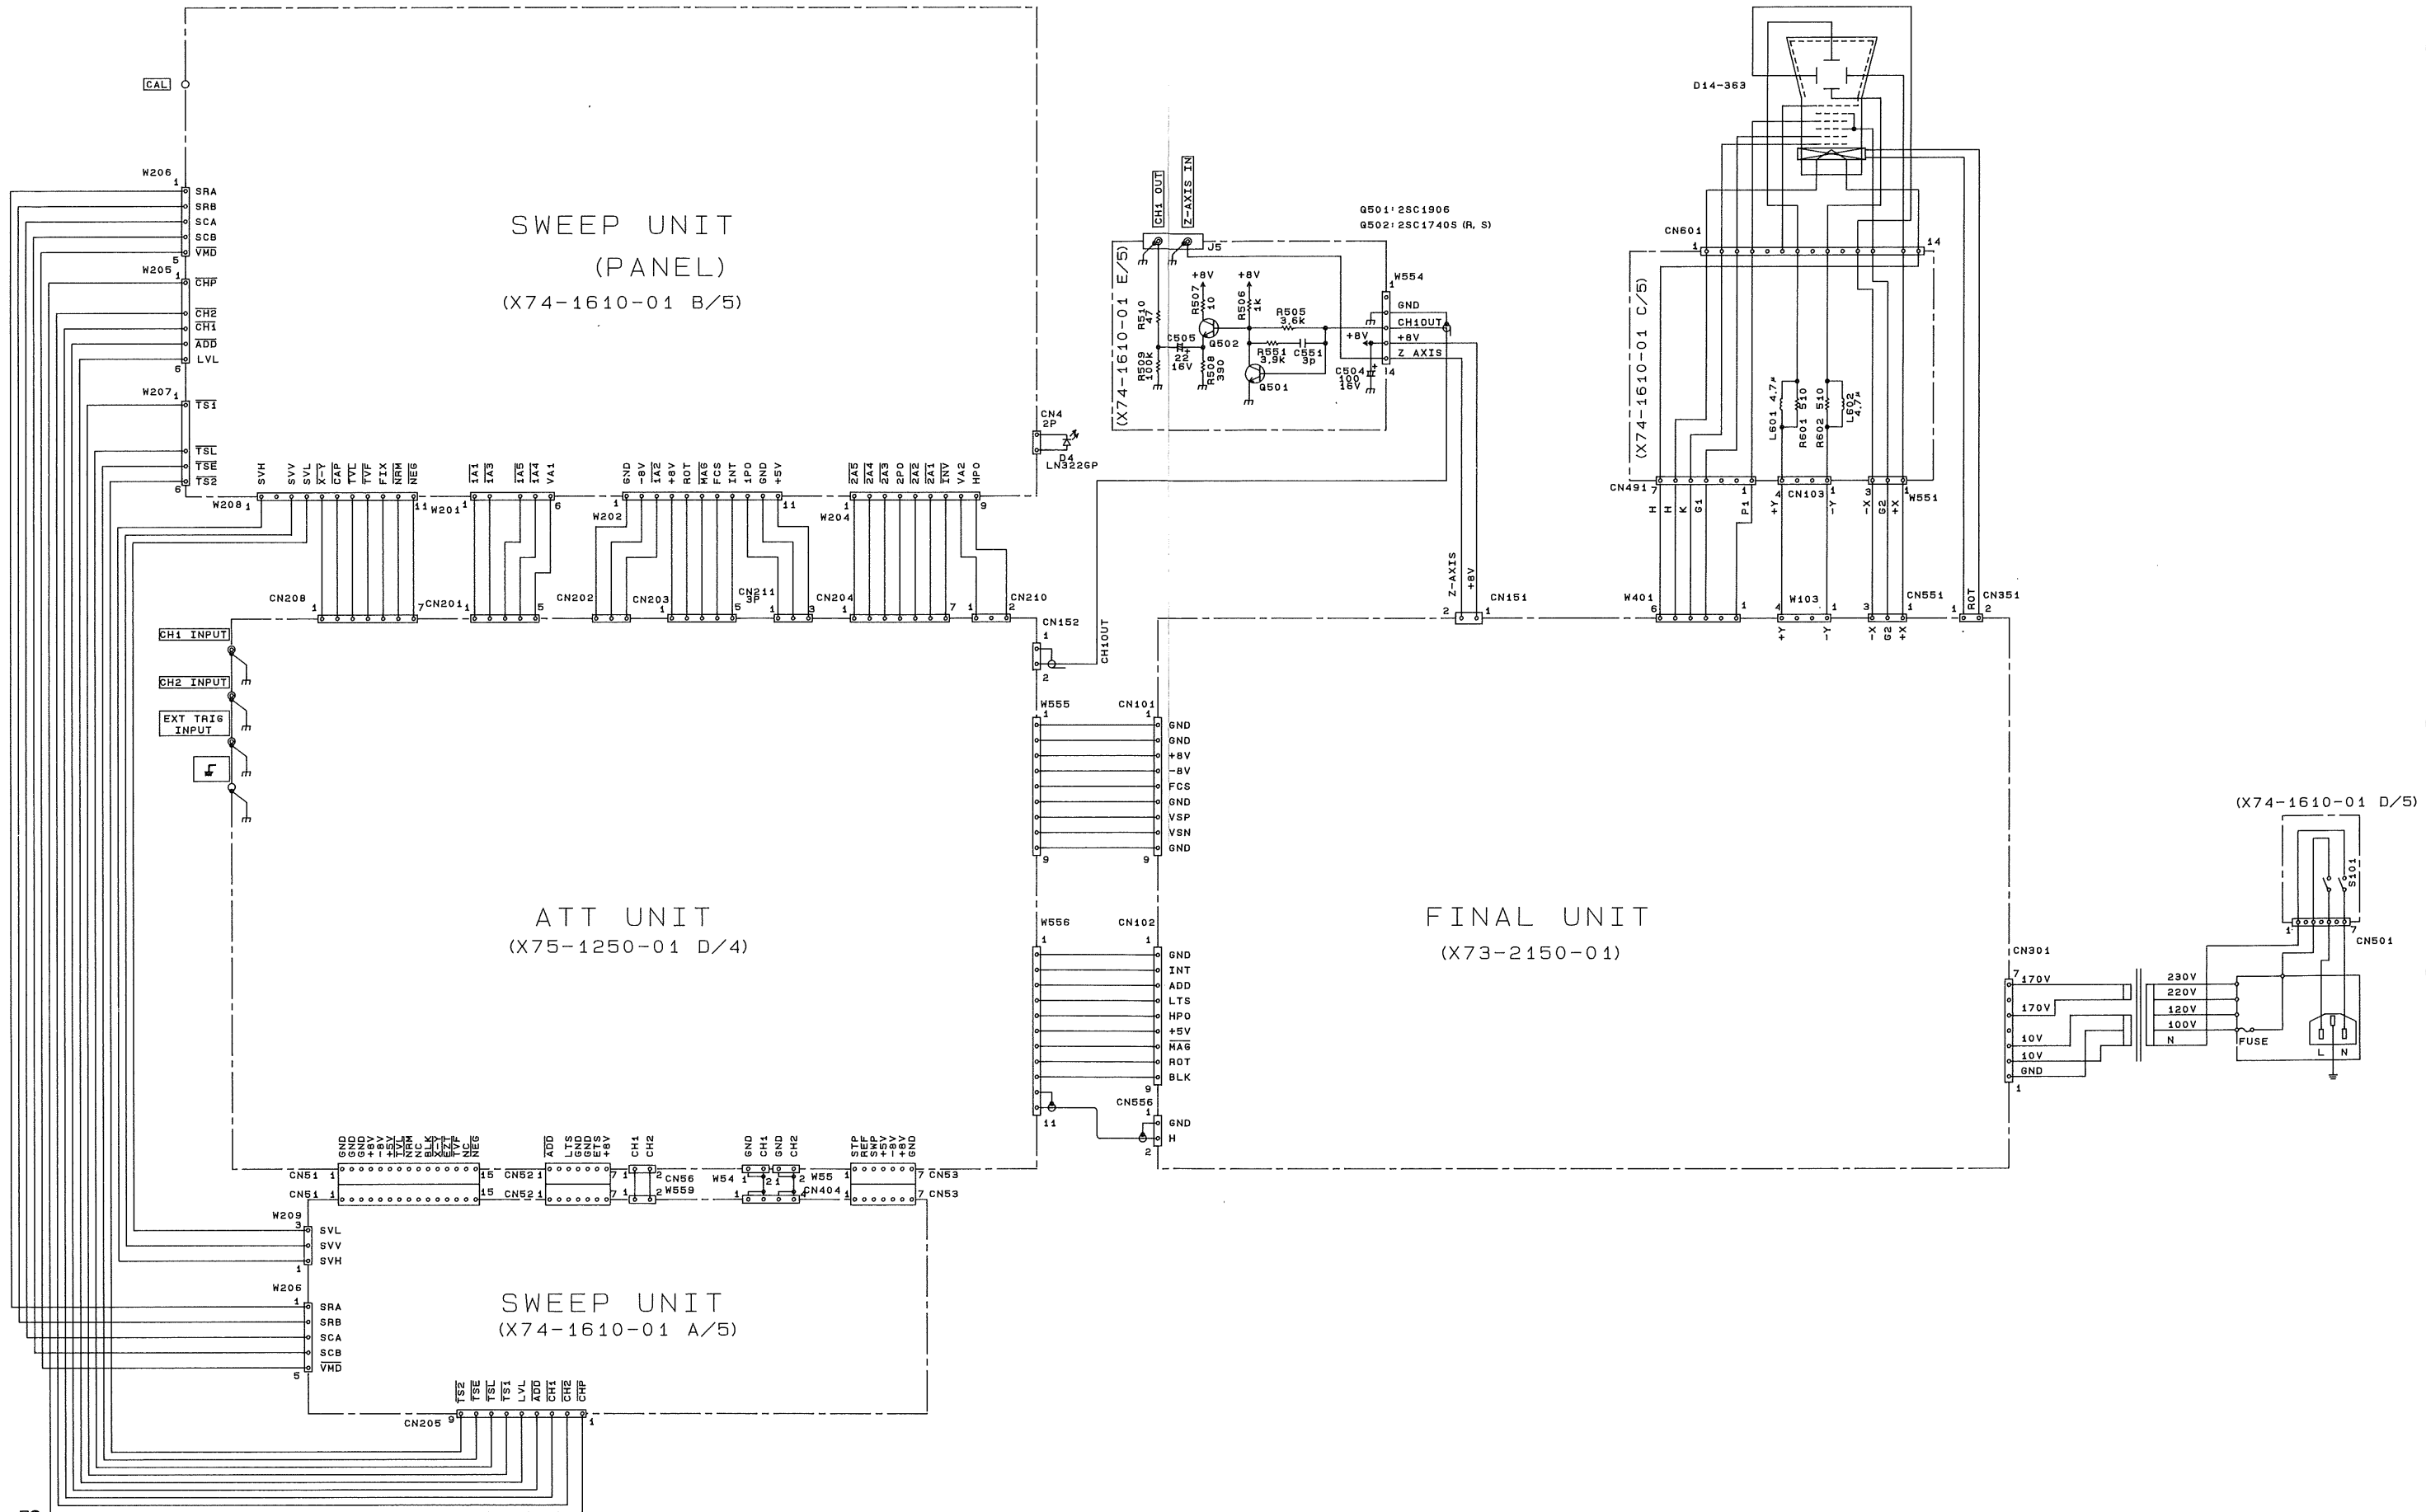




# CS-4135 SCHEMATIC DIAGRAM






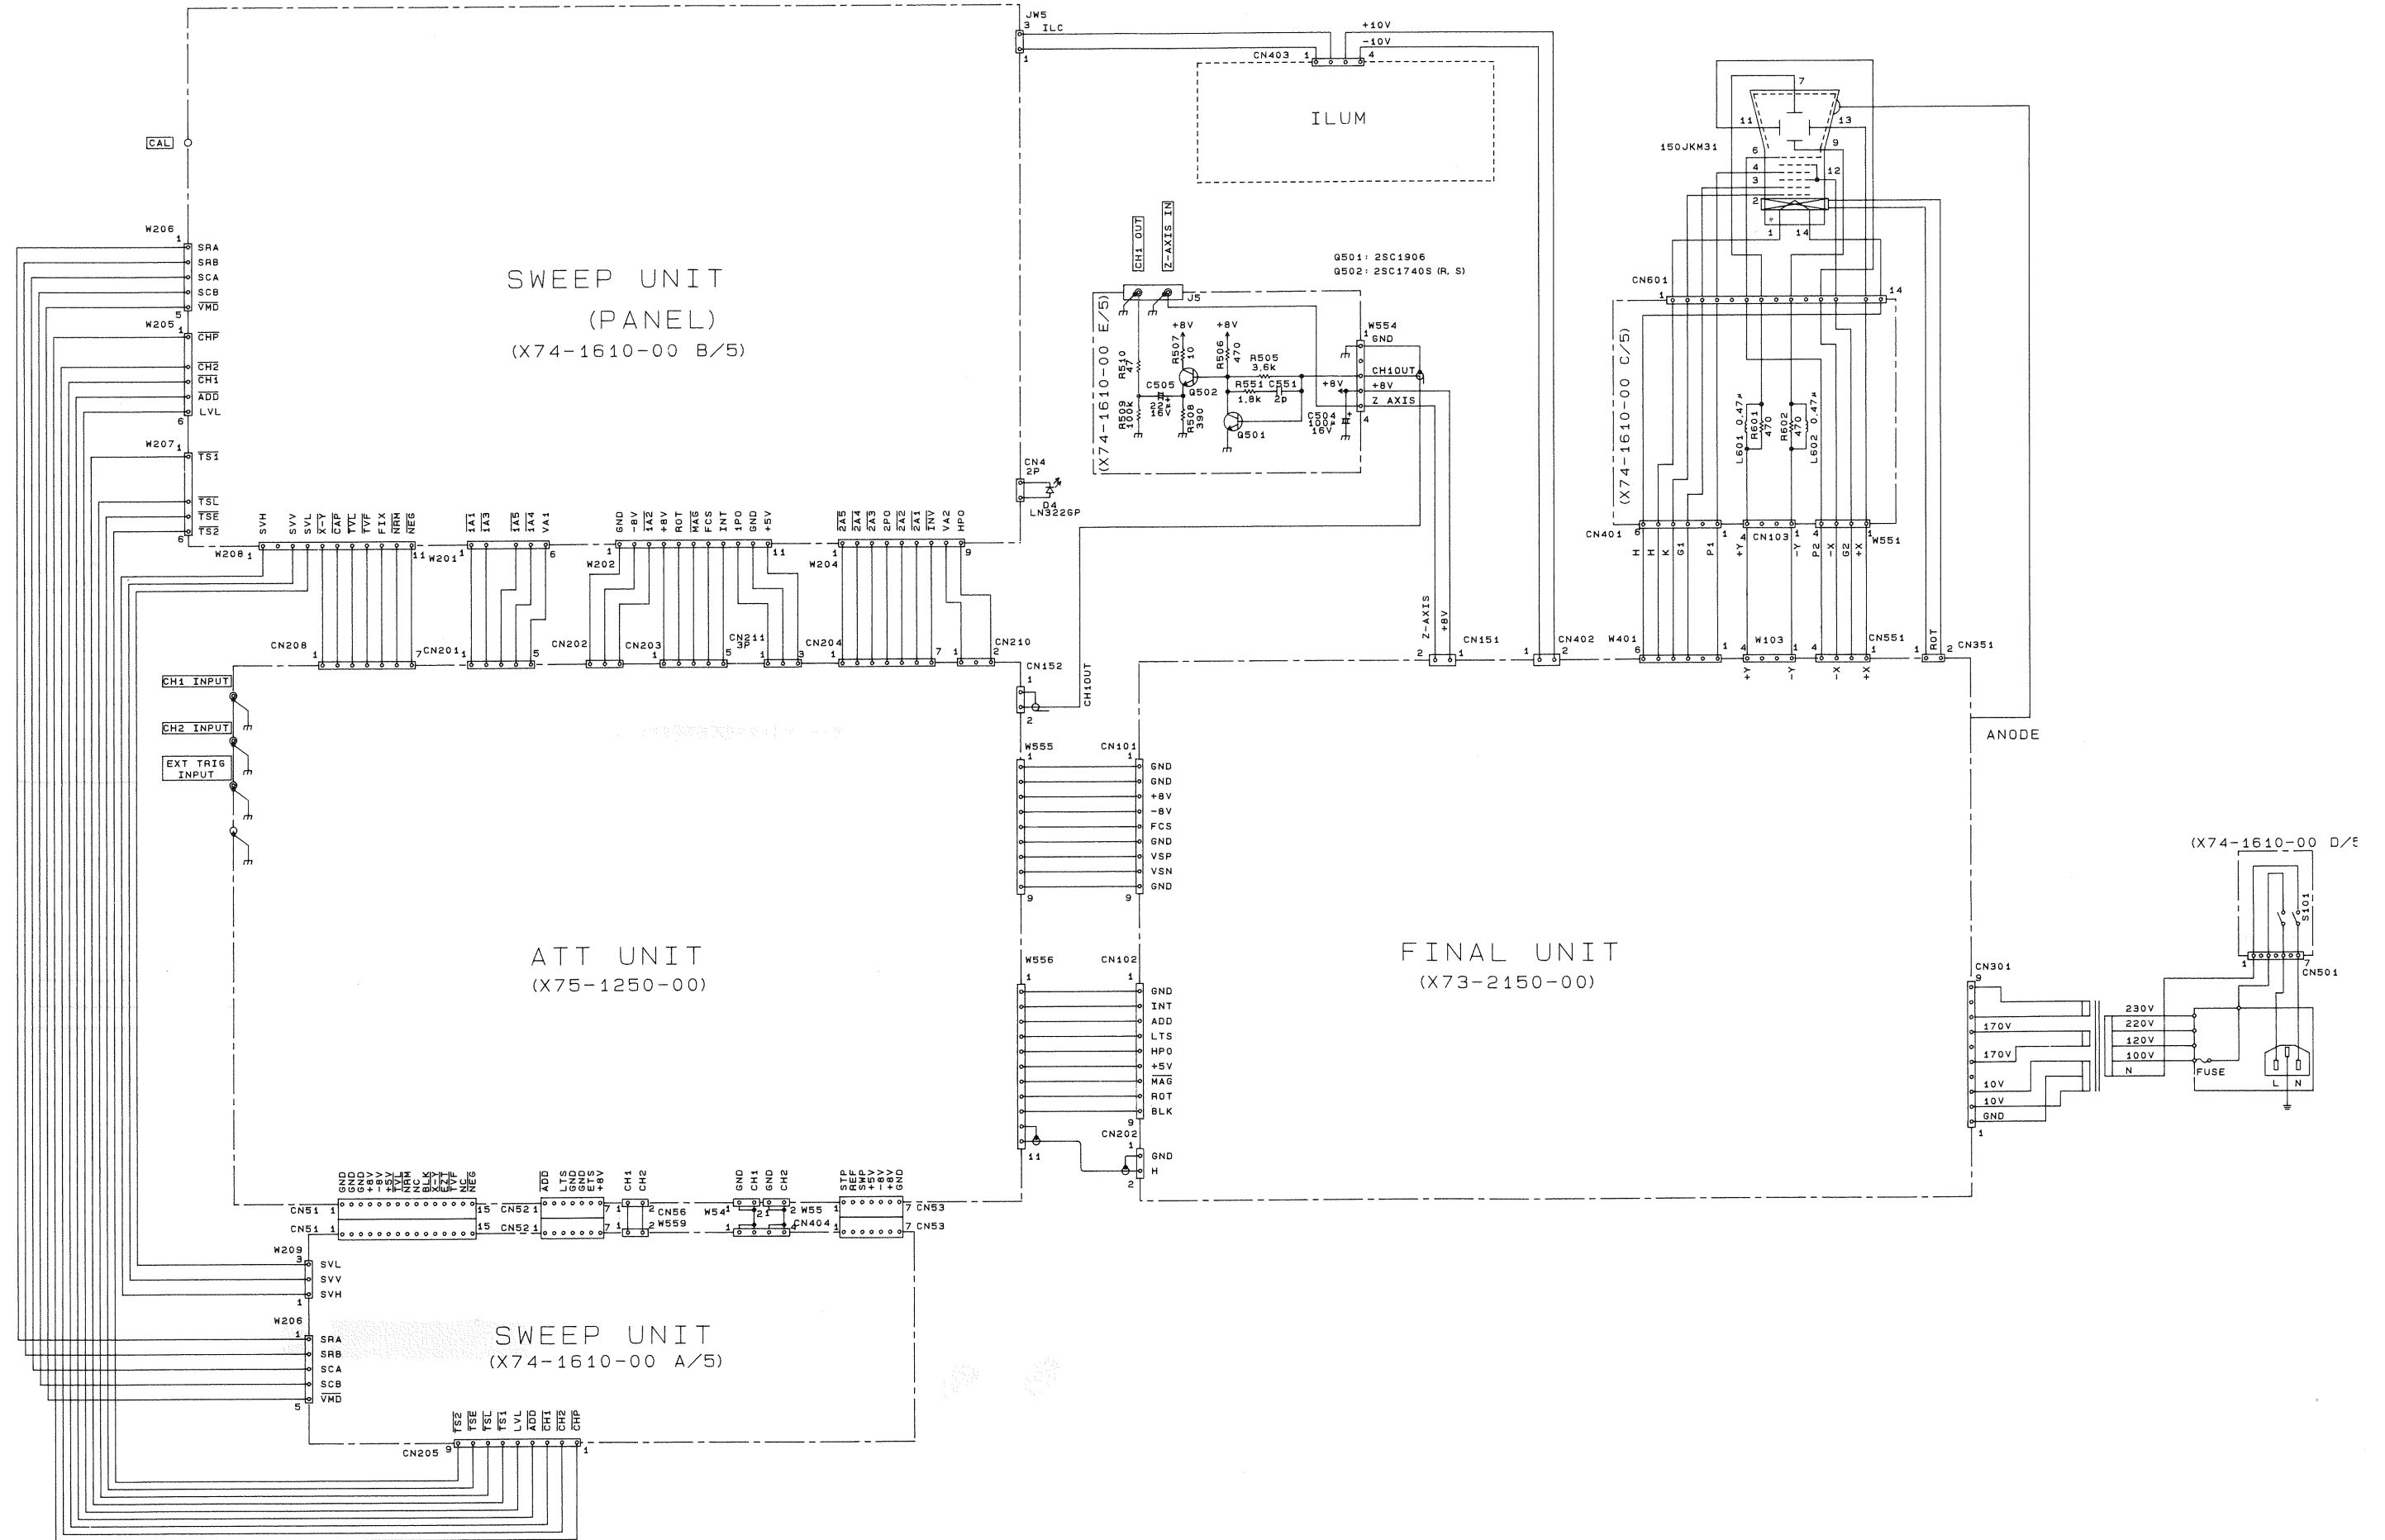


ATTENUATOR UNIT (X75-1220-00)


CS-4125 (~S/NO.7121000) SCHEMATIC DIAGRAM

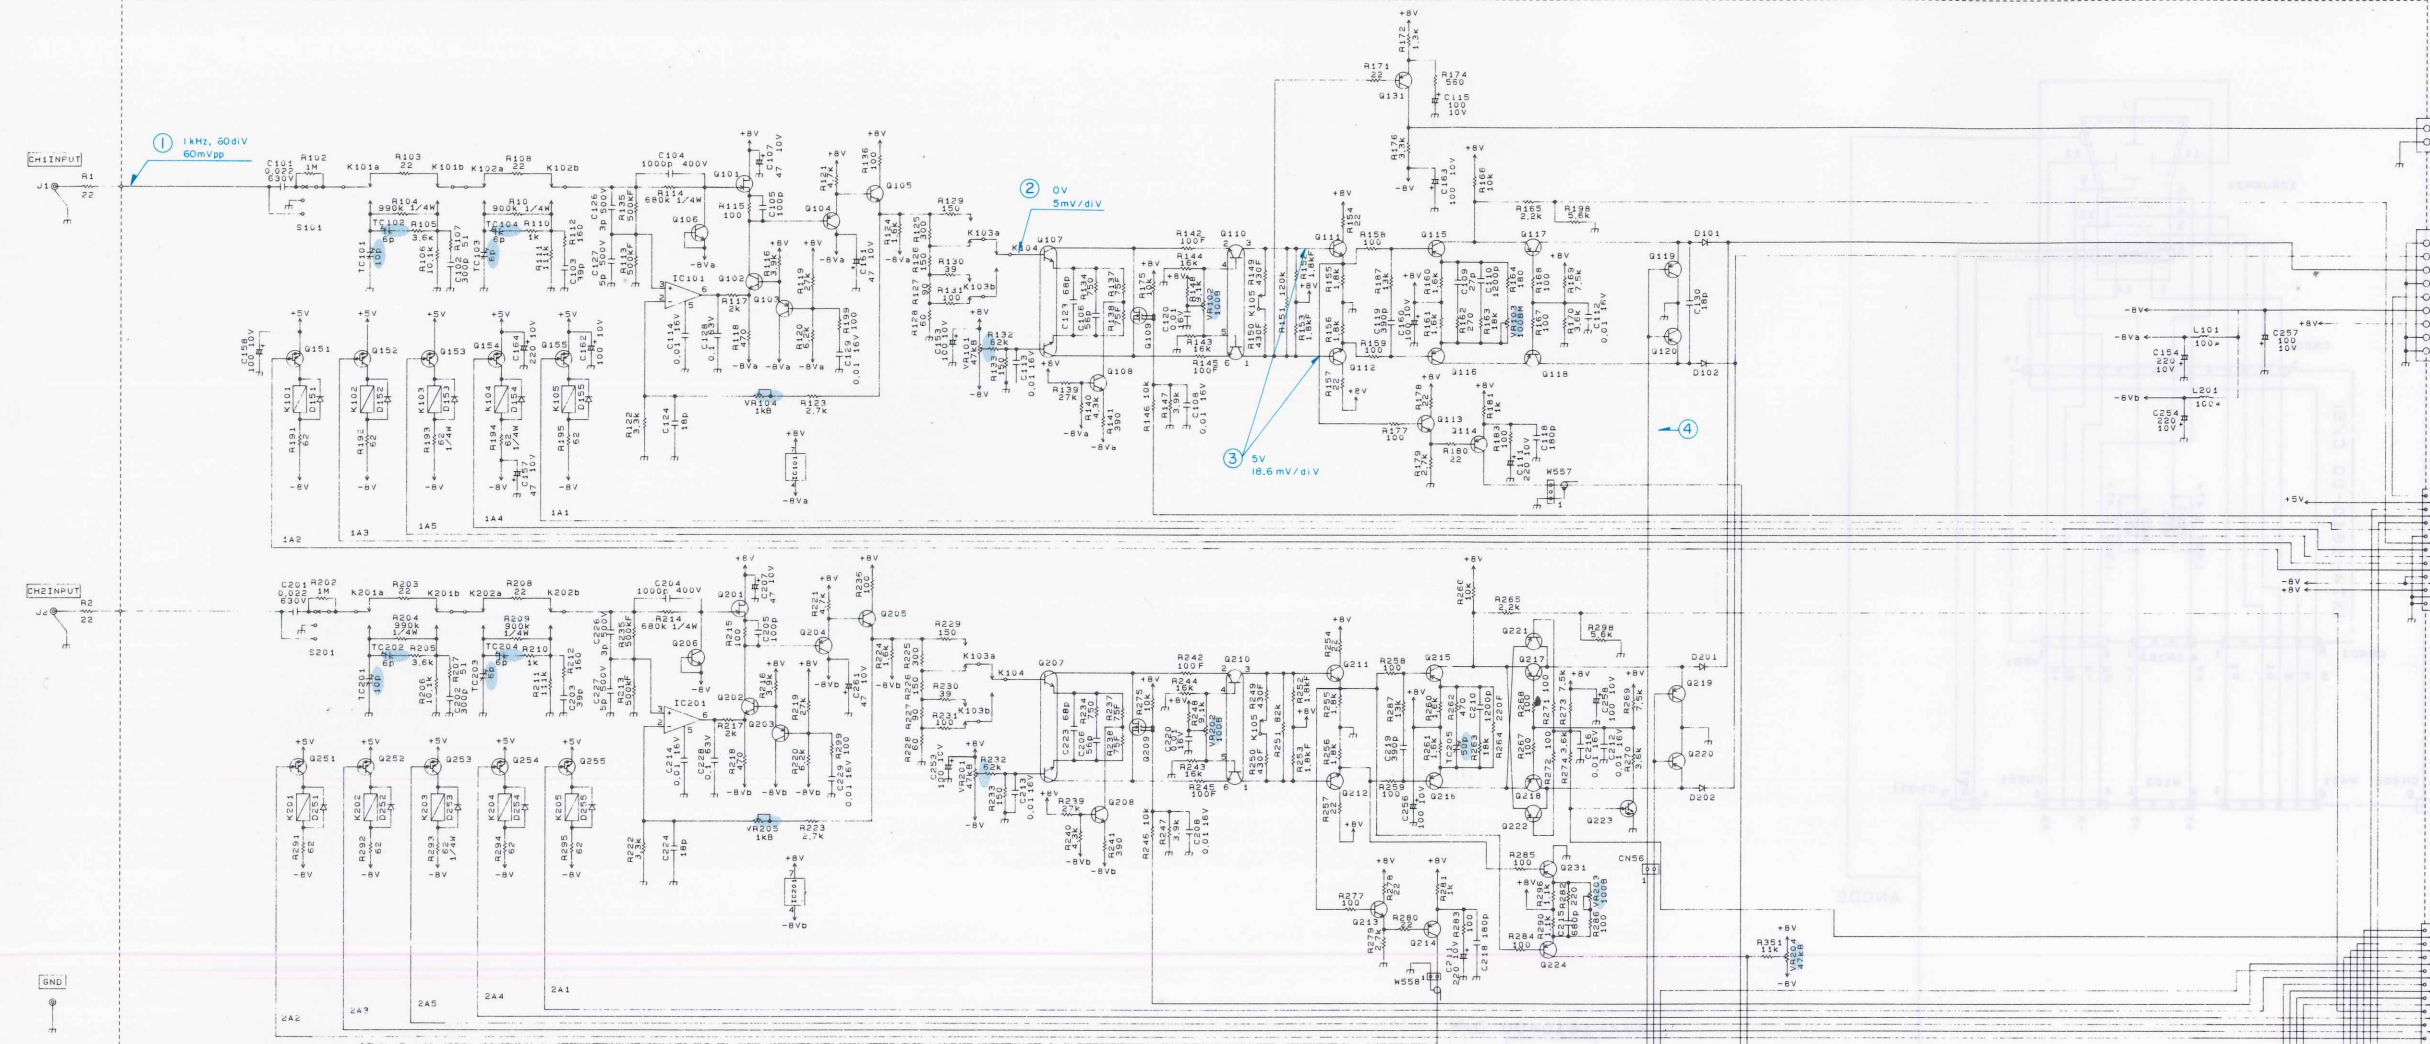


IC101, 201	: LT1097CNB
IC401	: SN74LS74AN
IC402	: SN74LS66AN
IC403, 404	: SN74LS51N
IC405, 406	: SN74LS00N
IC407, 408	: TC4052BP
IC409	: LF412CN
IC410	: NJM4558D
G101, 201	: 2SK304 (E)
G102	: 2SK1923 (D)
G103	: 2SA1007 (L)
G104	: 2SA1008 (L)
G105	: 2SA1009 (K)
G106	: 2SC3779 (D)
G107	: 2SC174US (R, S)
G108	: 2SC3281 (GR)
G109	: 3SK73 (GR)
G110	: 1MX4
G111	: 2SC2526S (P, G)
G112	: 2SA1459 (L)
G113	: 2SA1554
G114	: 2SC4049
G115	: 2SK161 (GR)
G116	: 3SK73 (GR)
G117	: 2SC3732 (L)
G118	: 2SA1174 (E, F)
D401	: 1SS133
D402	: MA70U

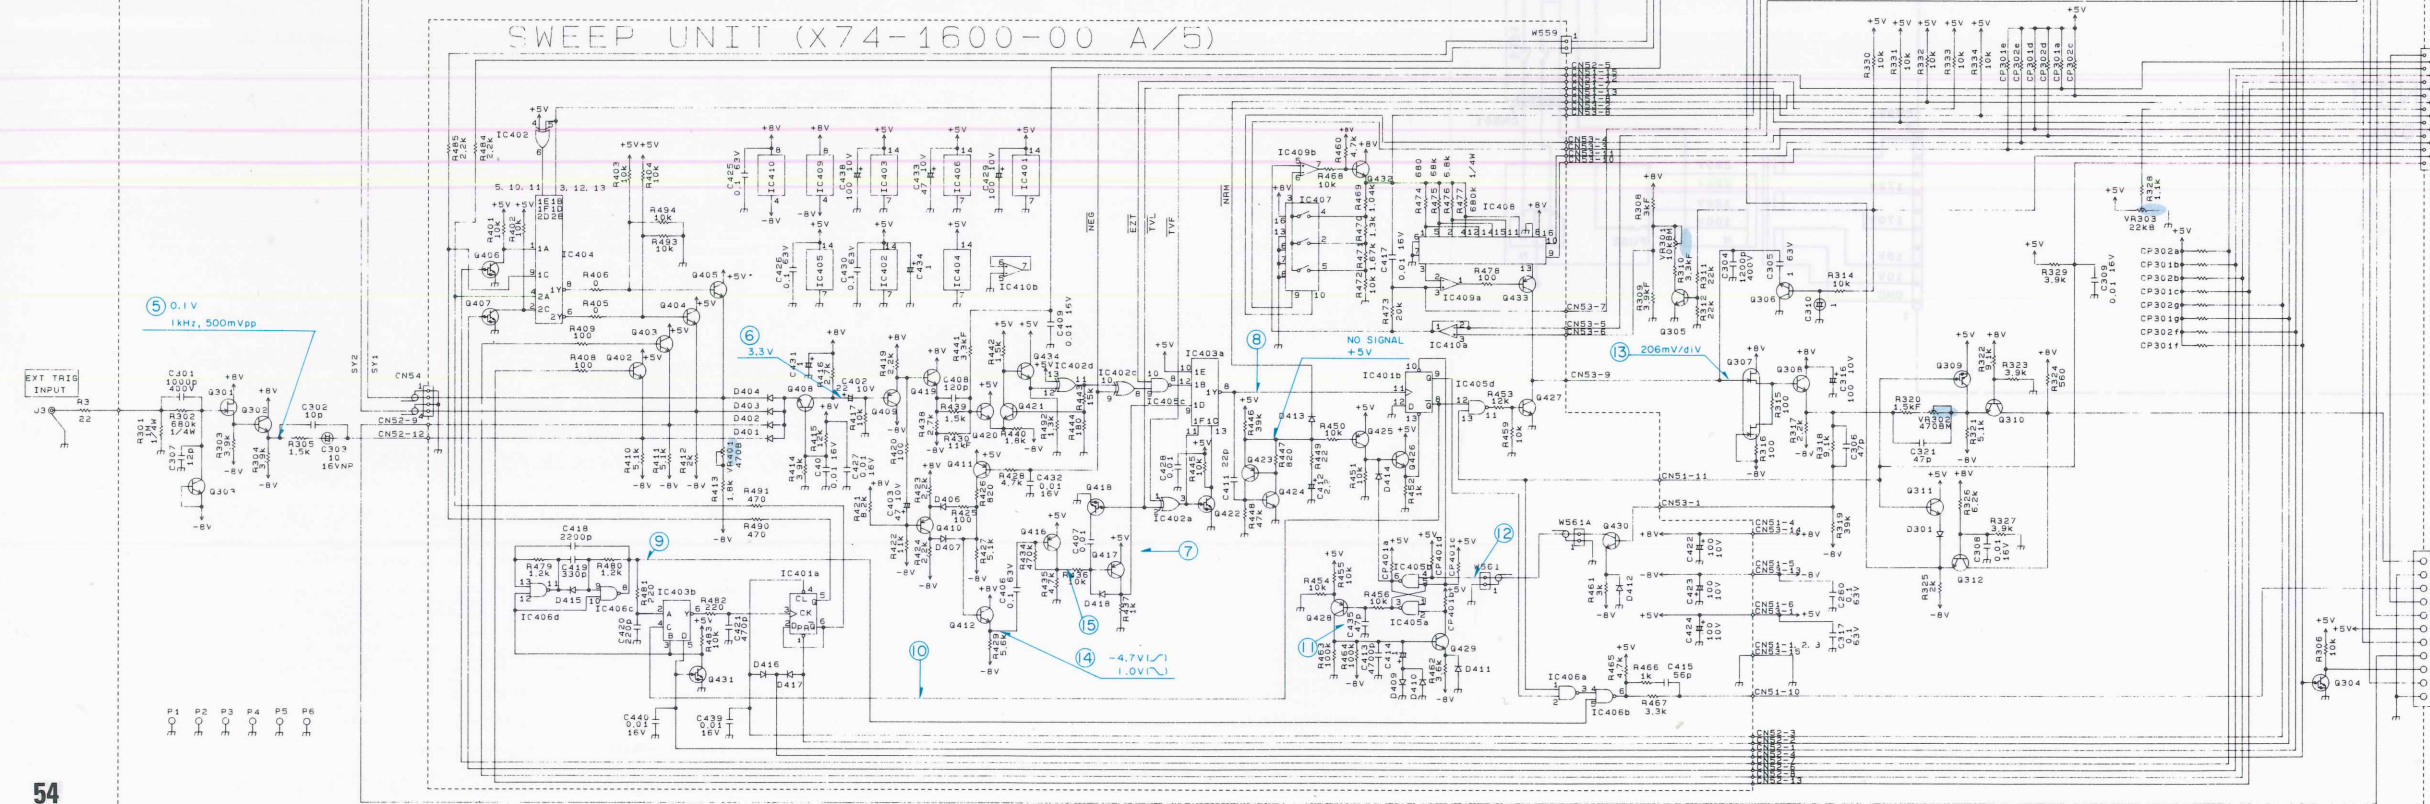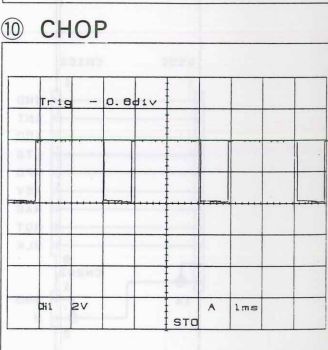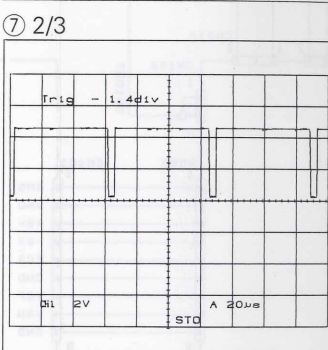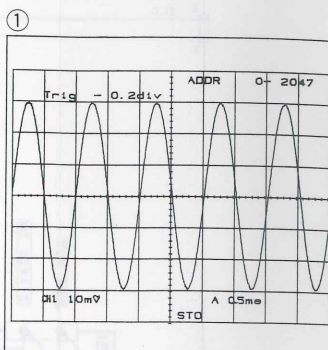








2/2 CHOP




2/3




CHOP

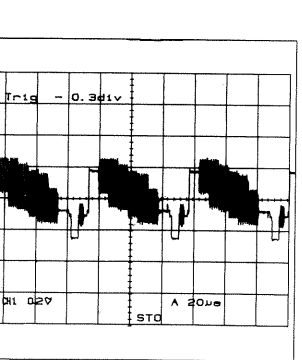


2




5




7 3/3




11




15 1/2 TV-L




3




6




8




12




15 2/2 TV-F




4 1/2 ALT




7 1/3



9 CHOP







13





ATTENUATOR UNIT (X75-1250-01)




















CS-4125 SCHEMATIC DIAGRAM

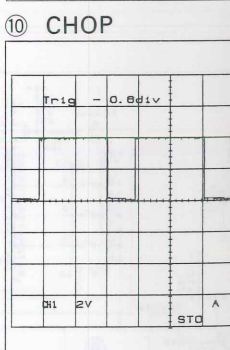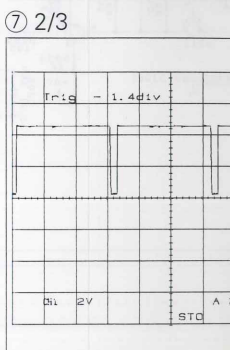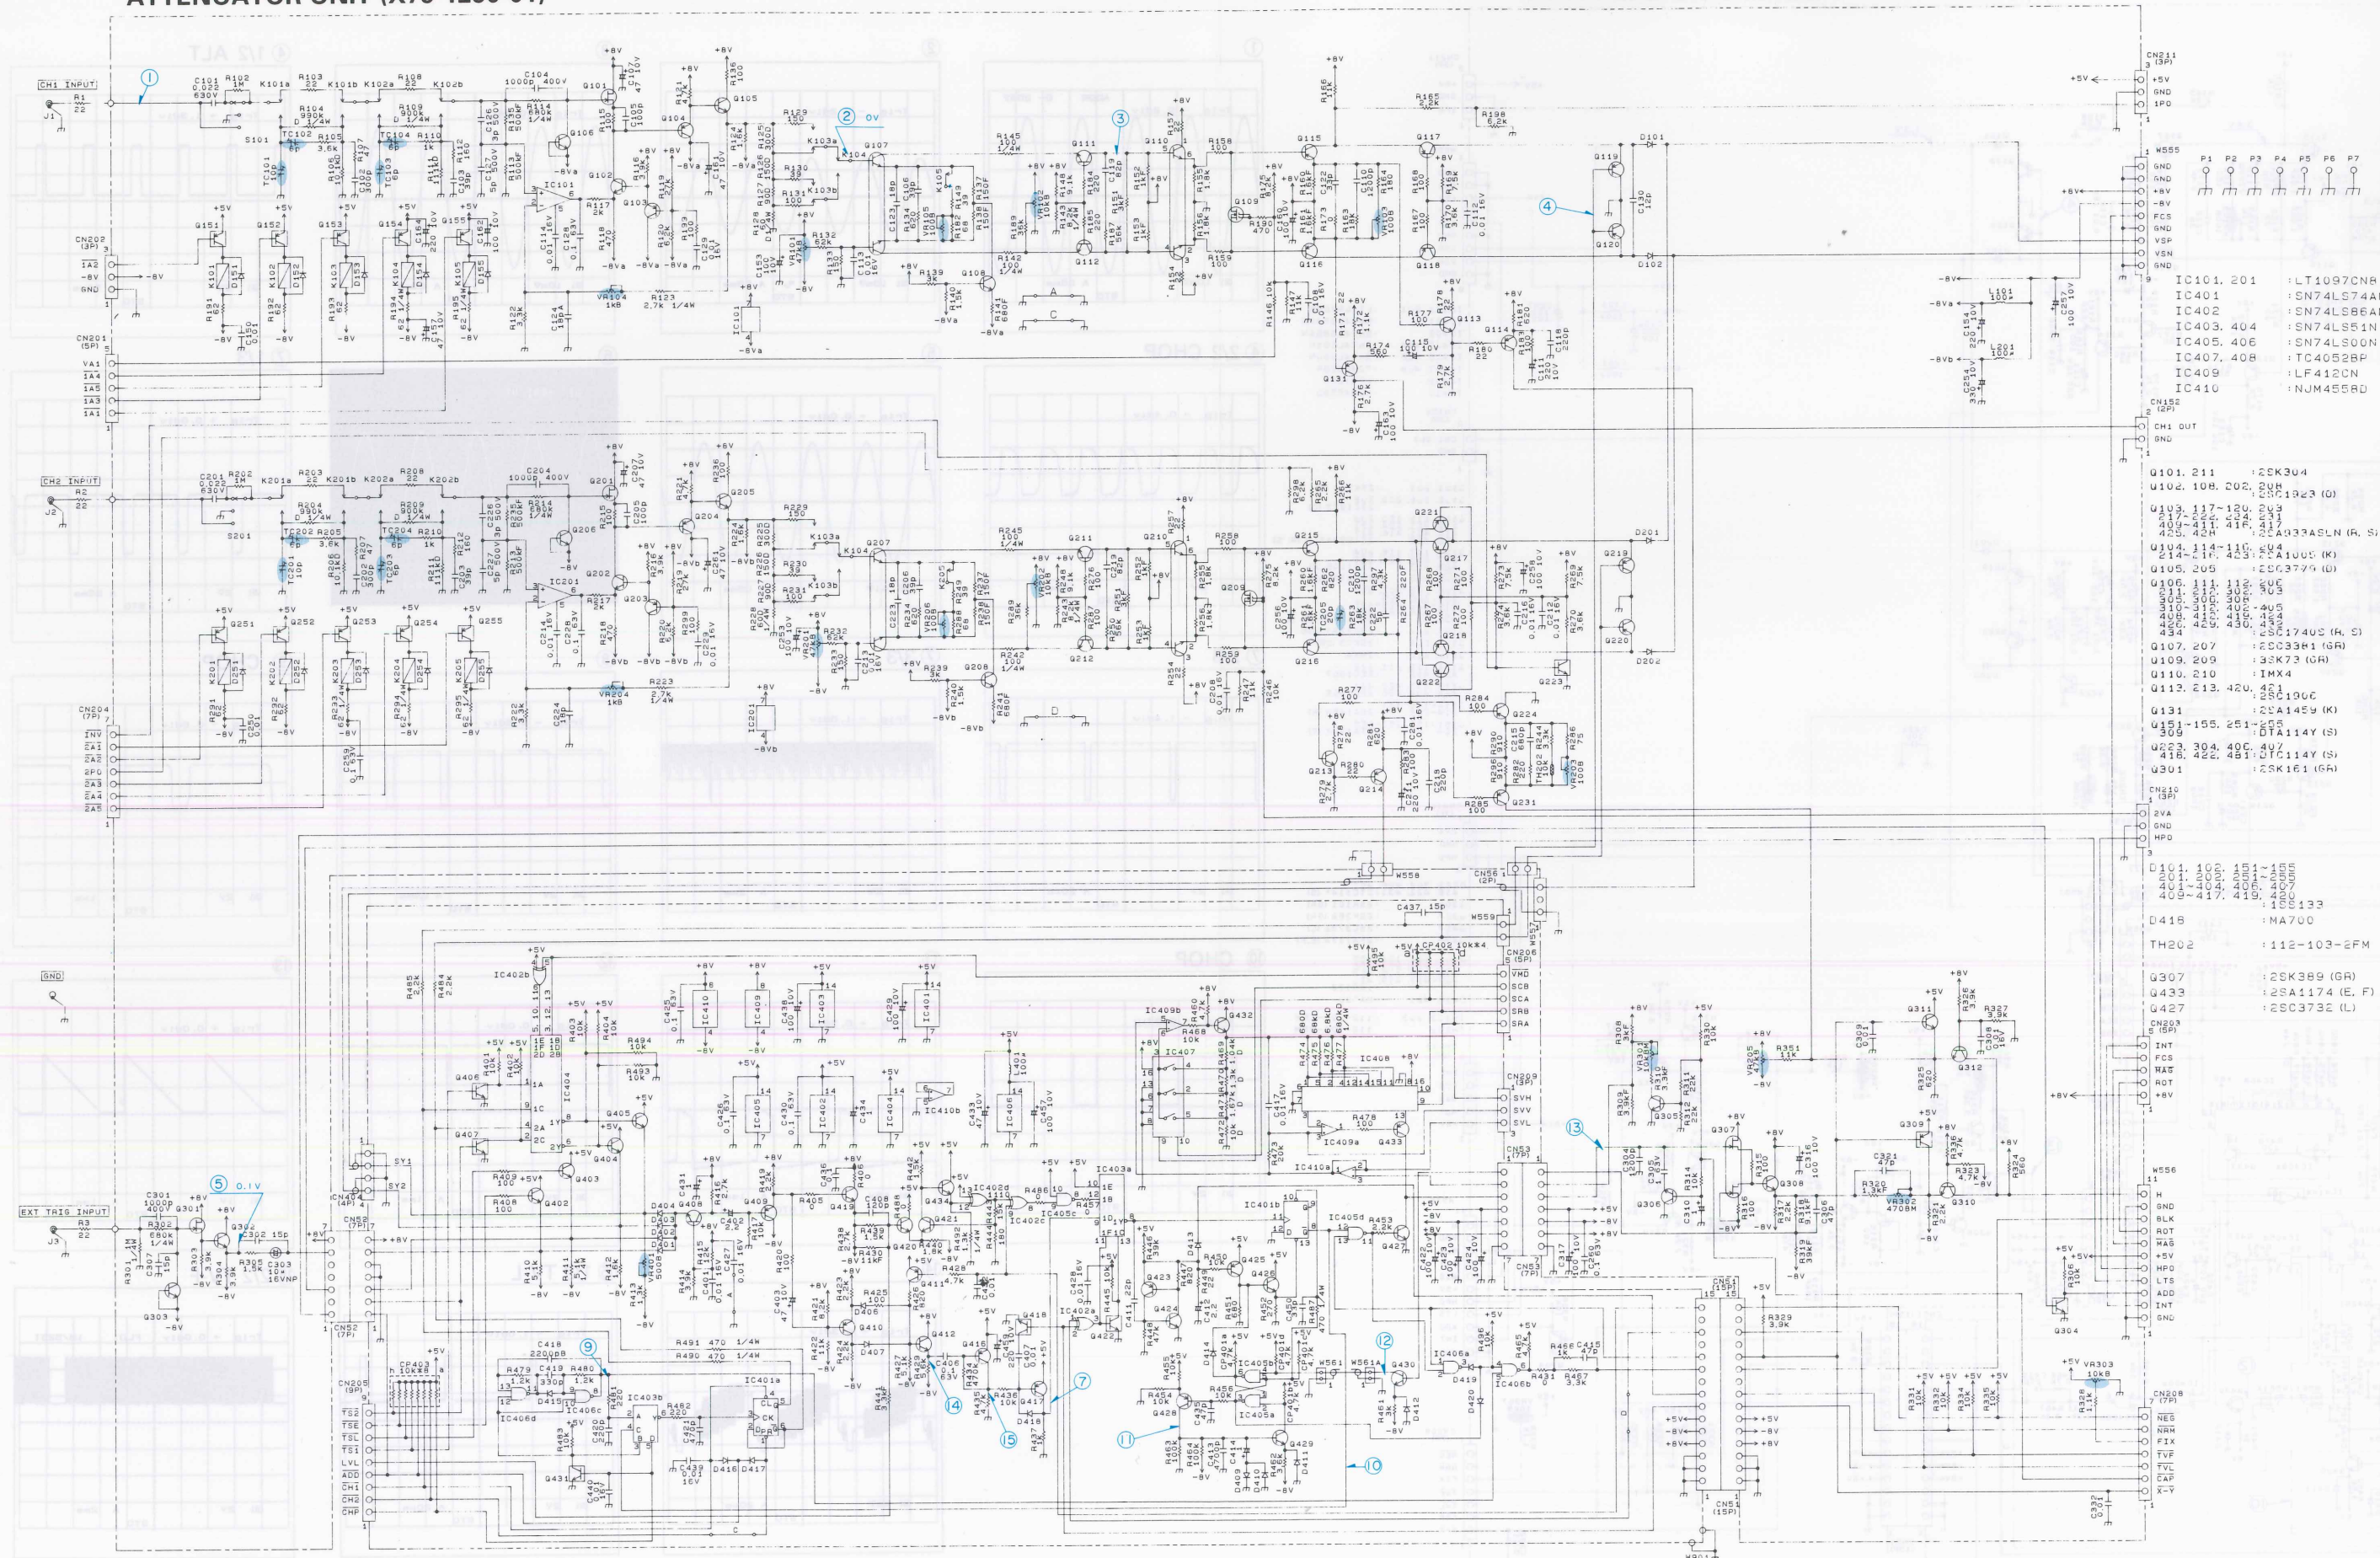

- IC101. 201 : LT1097CN
- IC401 : SN74LS74AN
- IC402 : SN74LSB6AN
- IC403. 404 : SN74LS51N
- IC405. 406 : SN74LS00N
- IC407. 408 : SN74LS00B
- IC409 : LF412CN
- IC410 : NJM4558D
- Q101. 211 : 2SK304
- Q102. 108. 202 : 2SK1923 (G)
- Q103. 117-119 : 2SK1923 (G)
- Q104. 120 : 2SK1923 (G)
- Q105. 205 : 2SK1923 (G)
- Q106. 111 : 2SK1923 (G)
- Q107. 207 : 2SK3381 (G)
- Q109. 209 : 2SK73 (G)
- Q110. 210 : 1M4
- Q112. 213. 420 : 2SK1923 (G)
- Q131 : 2SA1459 (K)
- Q151-155. 251-255 : DTA114Y (S)
- Q223. 304. 405 : 2SK114Y (S)
- Q301 : 2SK161 (G)
- D101. 1. 4 : 100V
- D102. 1. 4 : 100V
- D103. 1. 4 : 100V
- D104. 1. 4 : 100V
- D105. 1. 4 : 100V
- D106. 1. 4 : 100V
- D107. 1. 4 : 100V
- D108. 1. 4 : 100V
- D109. 1. 4 : 100V
- D110. 1. 4 : 100V
- D111. 1. 4 : 100V
- D112. 1. 4 : 100V
- D113 : 100V
- D418 : MA700
- TH202 : 112-103-5FM
- G307 : 2SK389 (G)
- G433 : 2SA1174 (E, F)
- G427 : 2SC3732 (L)

SWEEP UNIT (X74-1610-01)








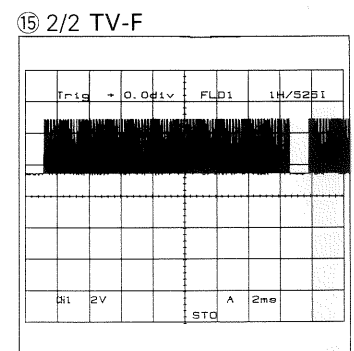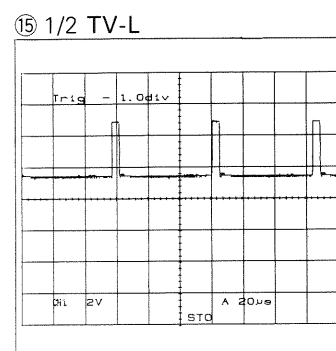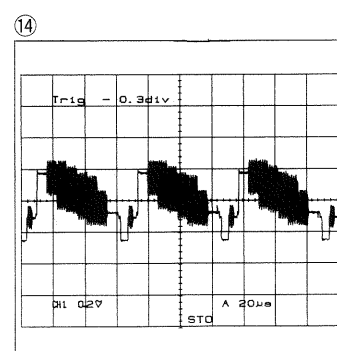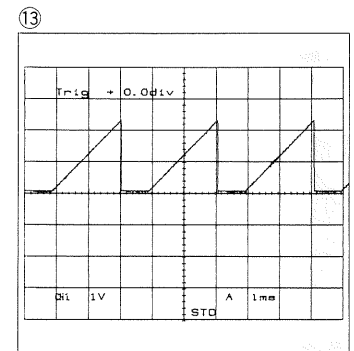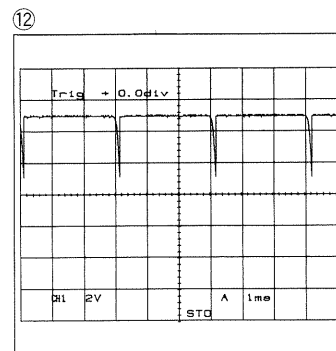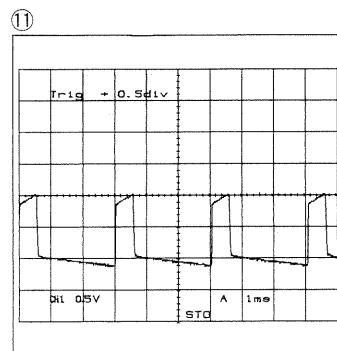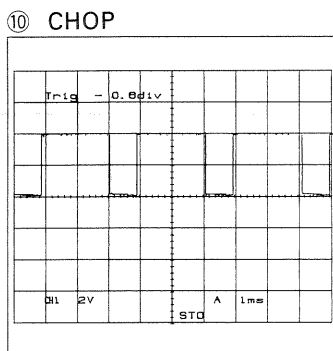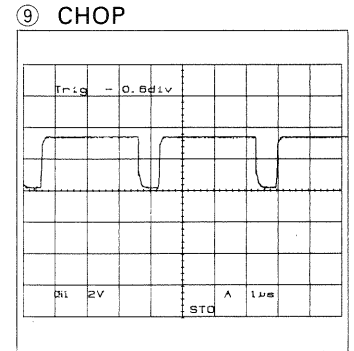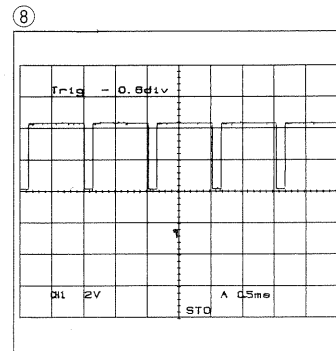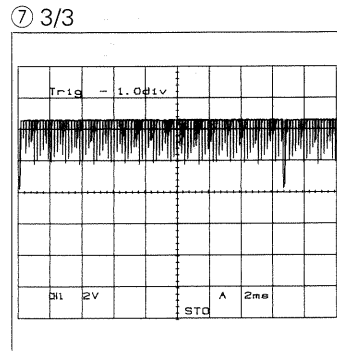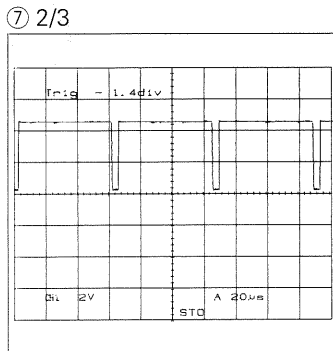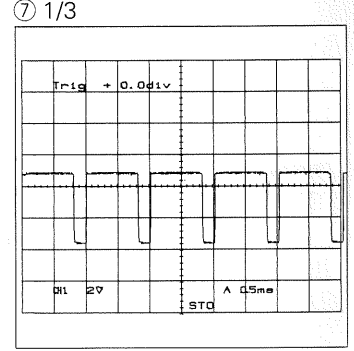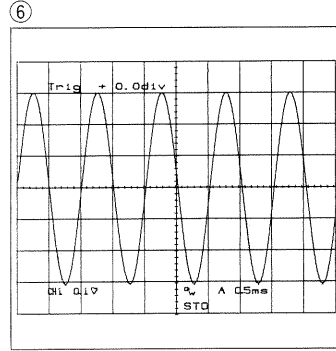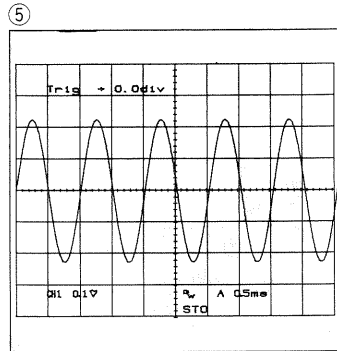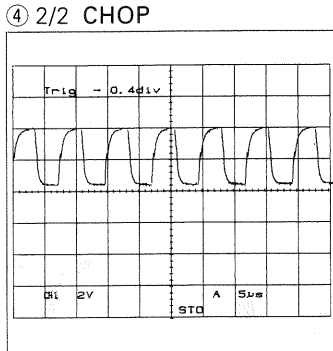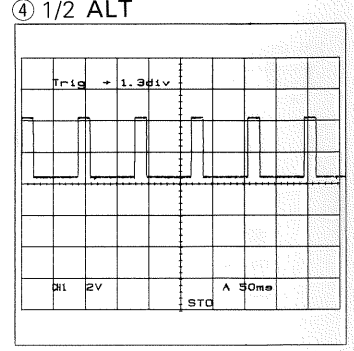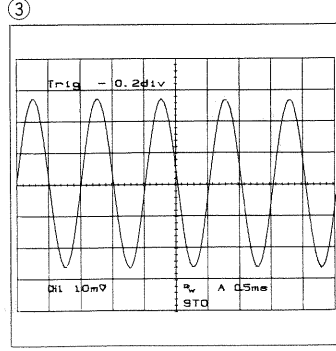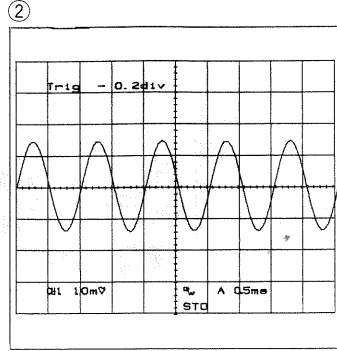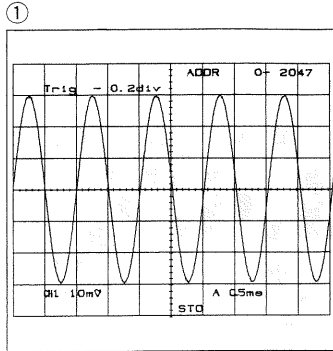




ATTENUATOR UNIT (X75-1250-00)

CS-4135 SCHEMATIC DIAGRAM

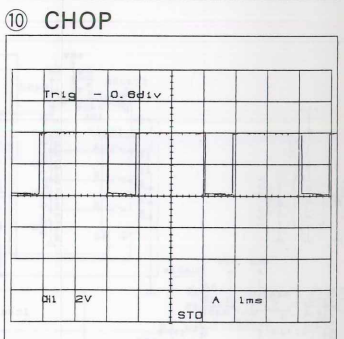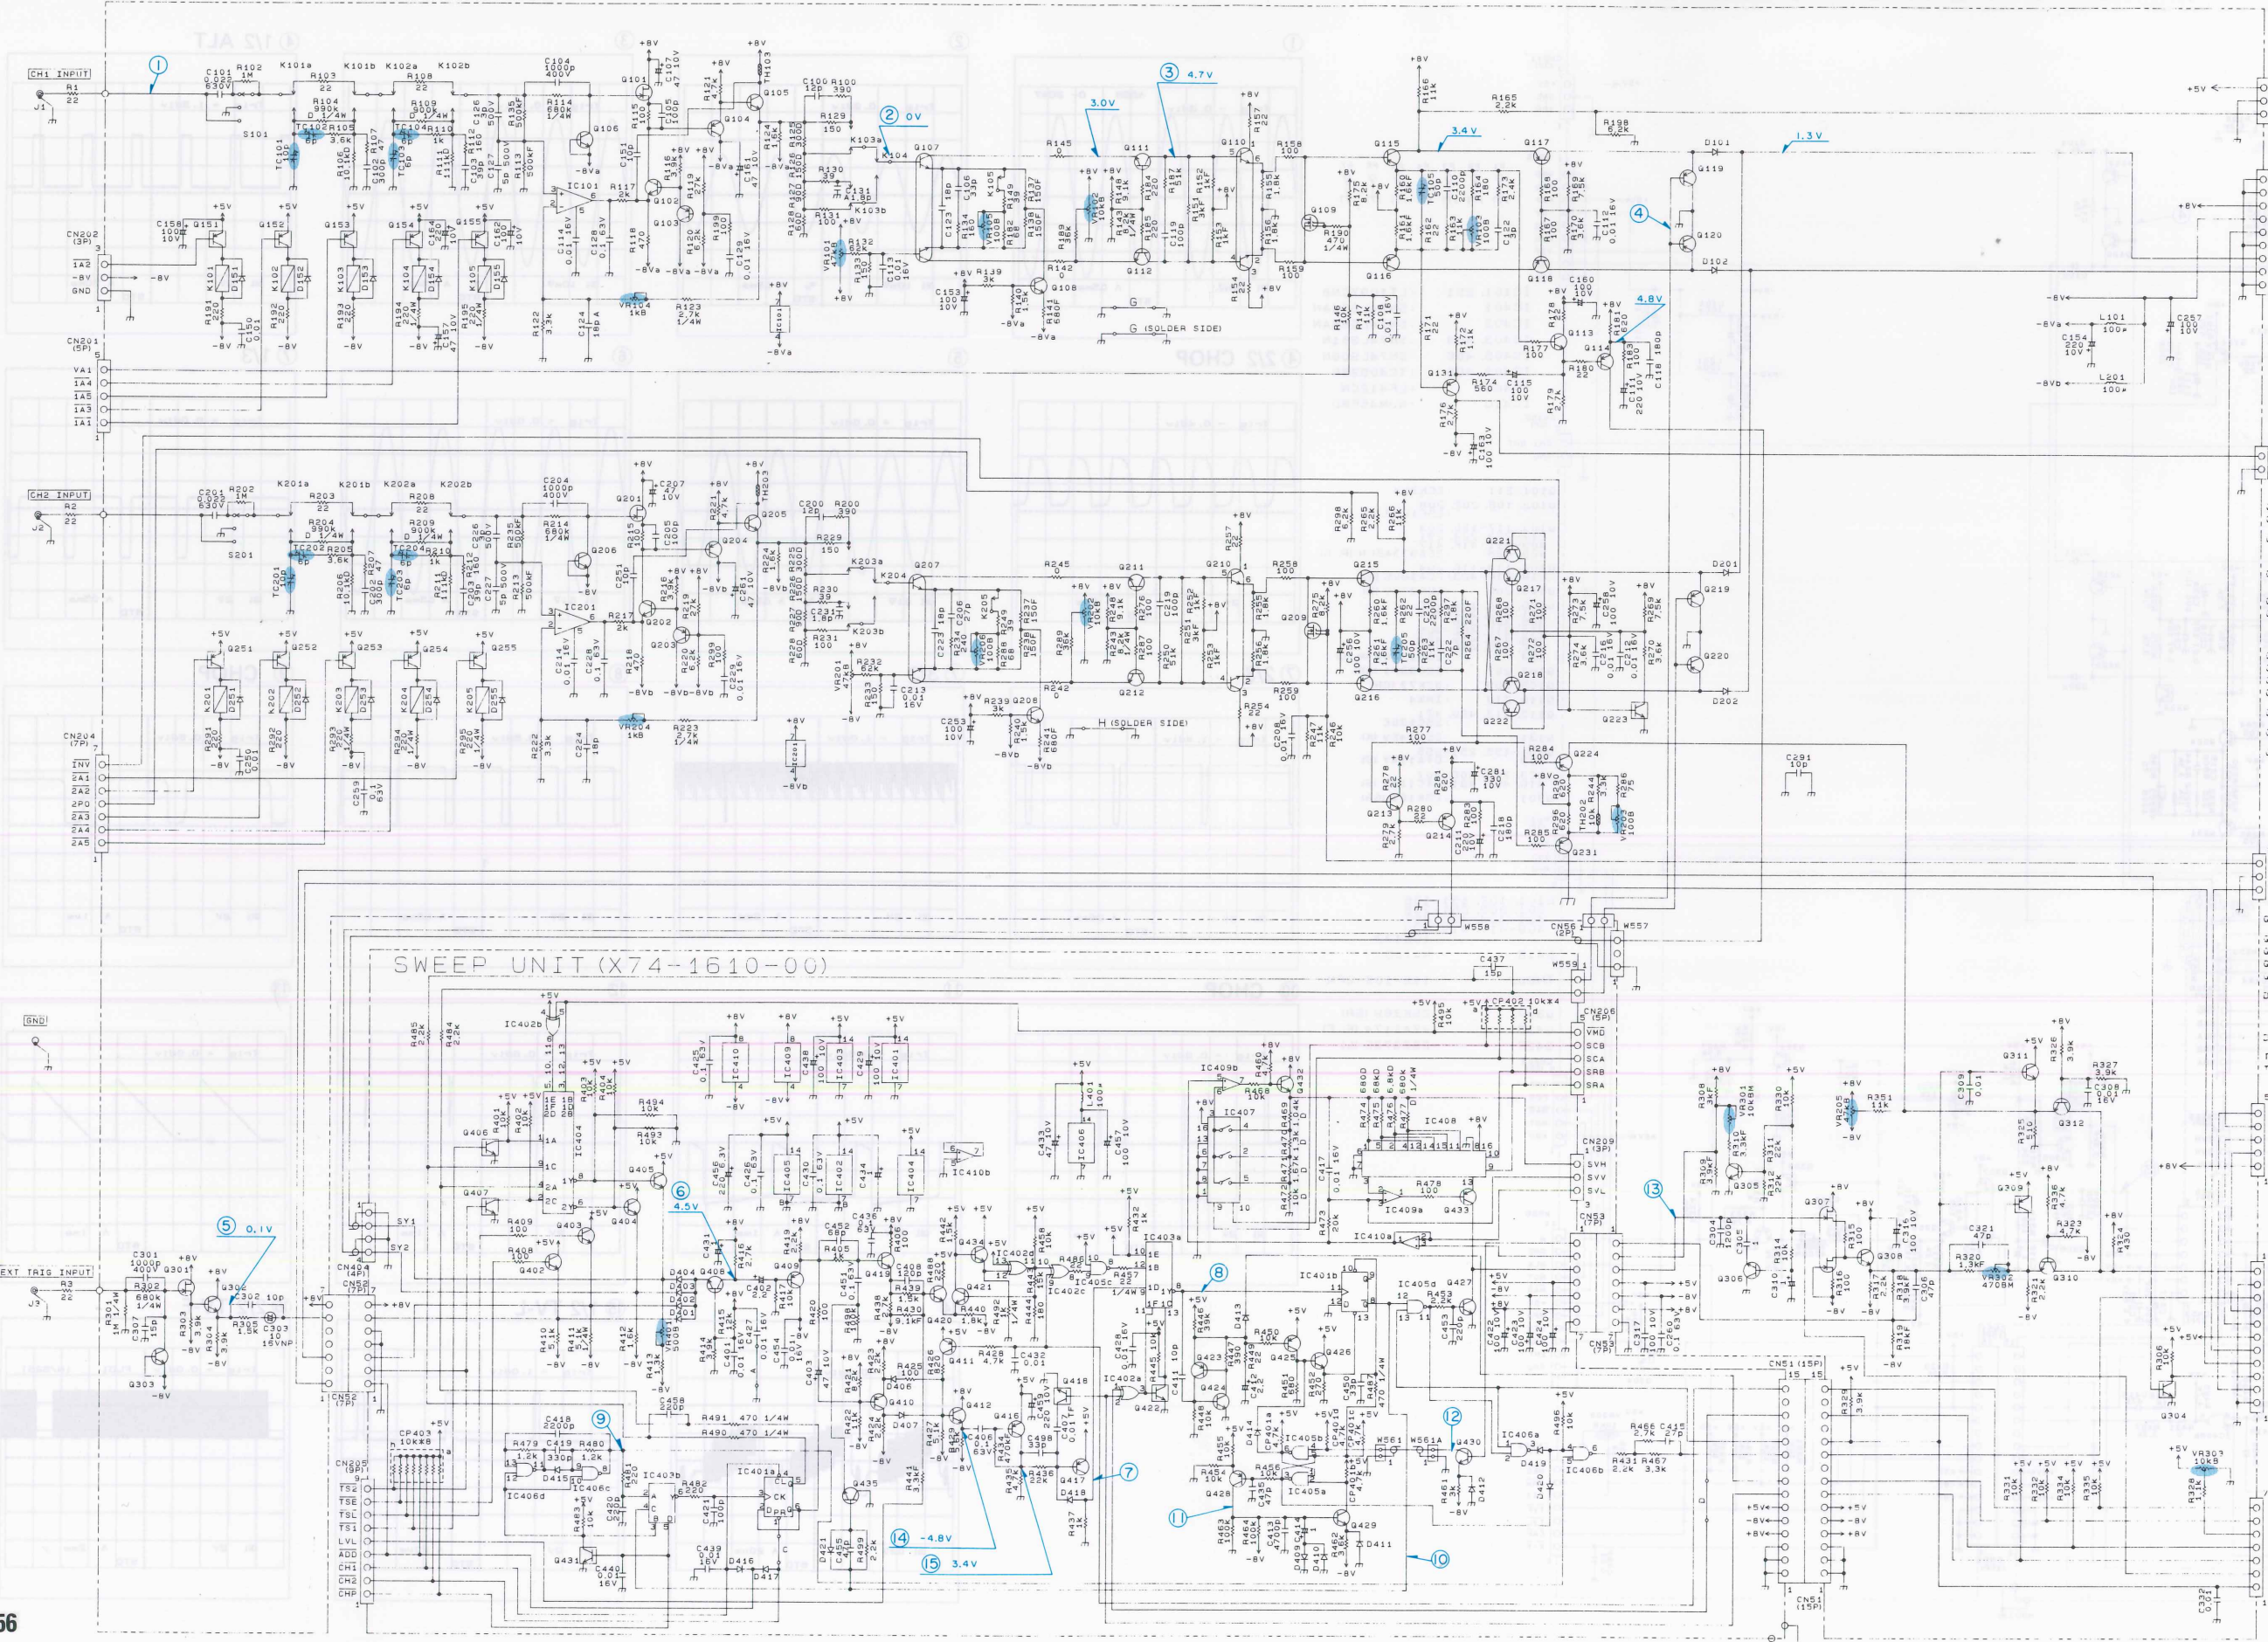


IC101	201	LT1097CNB
IC401		SN74LS74AN
IC406		SN74LS86AN
IC403	454	SN74LS61N
IC405	406	SN74LS00N
IC409	408	TC4052BP
IC410		LF412CN
		NJM4558D






















2/2 CHOP



2/3



CHOP

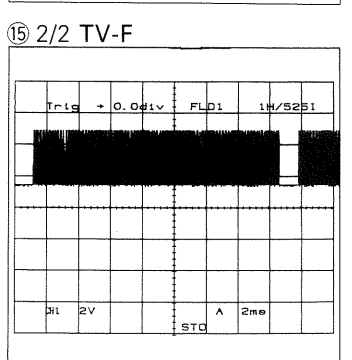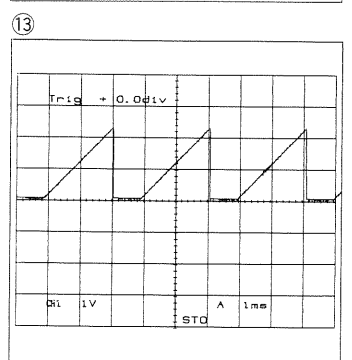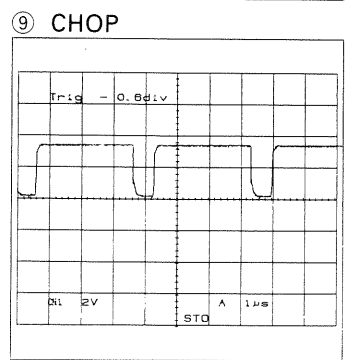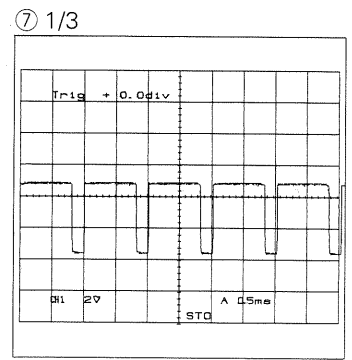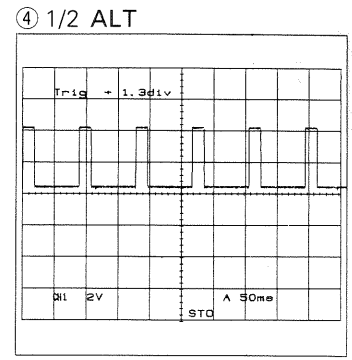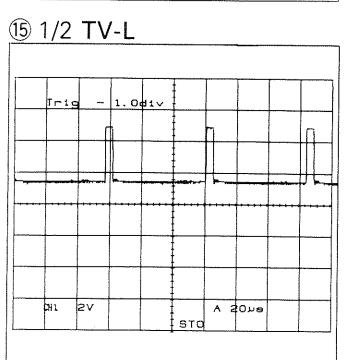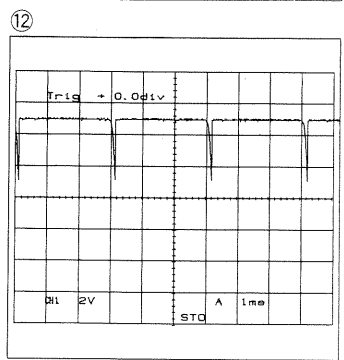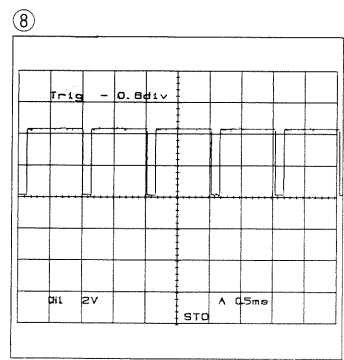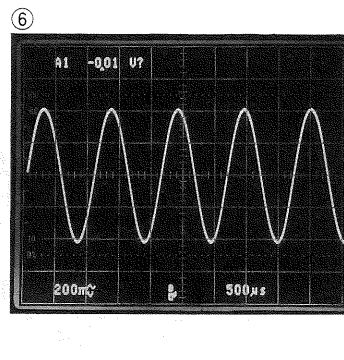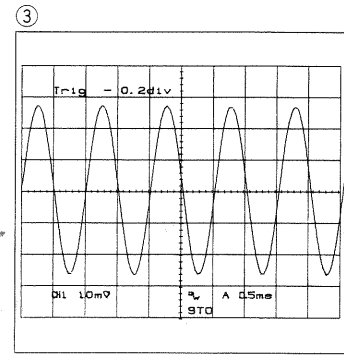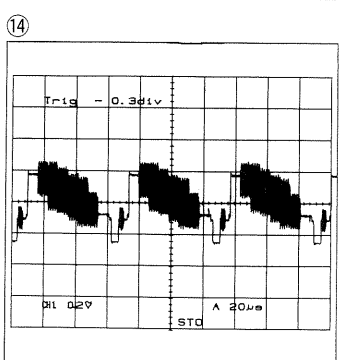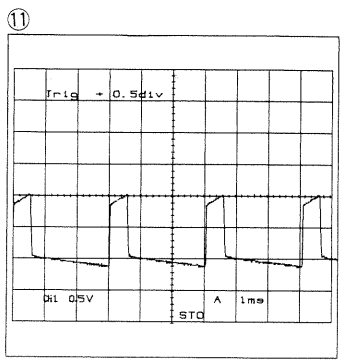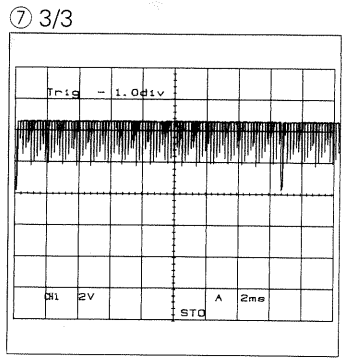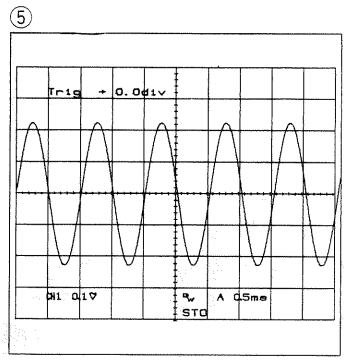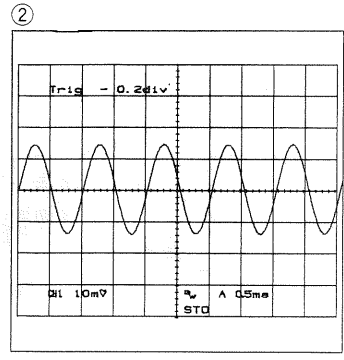


15 1/2 TV-L

15 2/2 TV-F







①




②




③




④




⑤




⑥




⑦



⑧




⑨






FINAL UNIT (X73-2150-01)

MARECS-4125 SCHEMATIC DIAGRAM

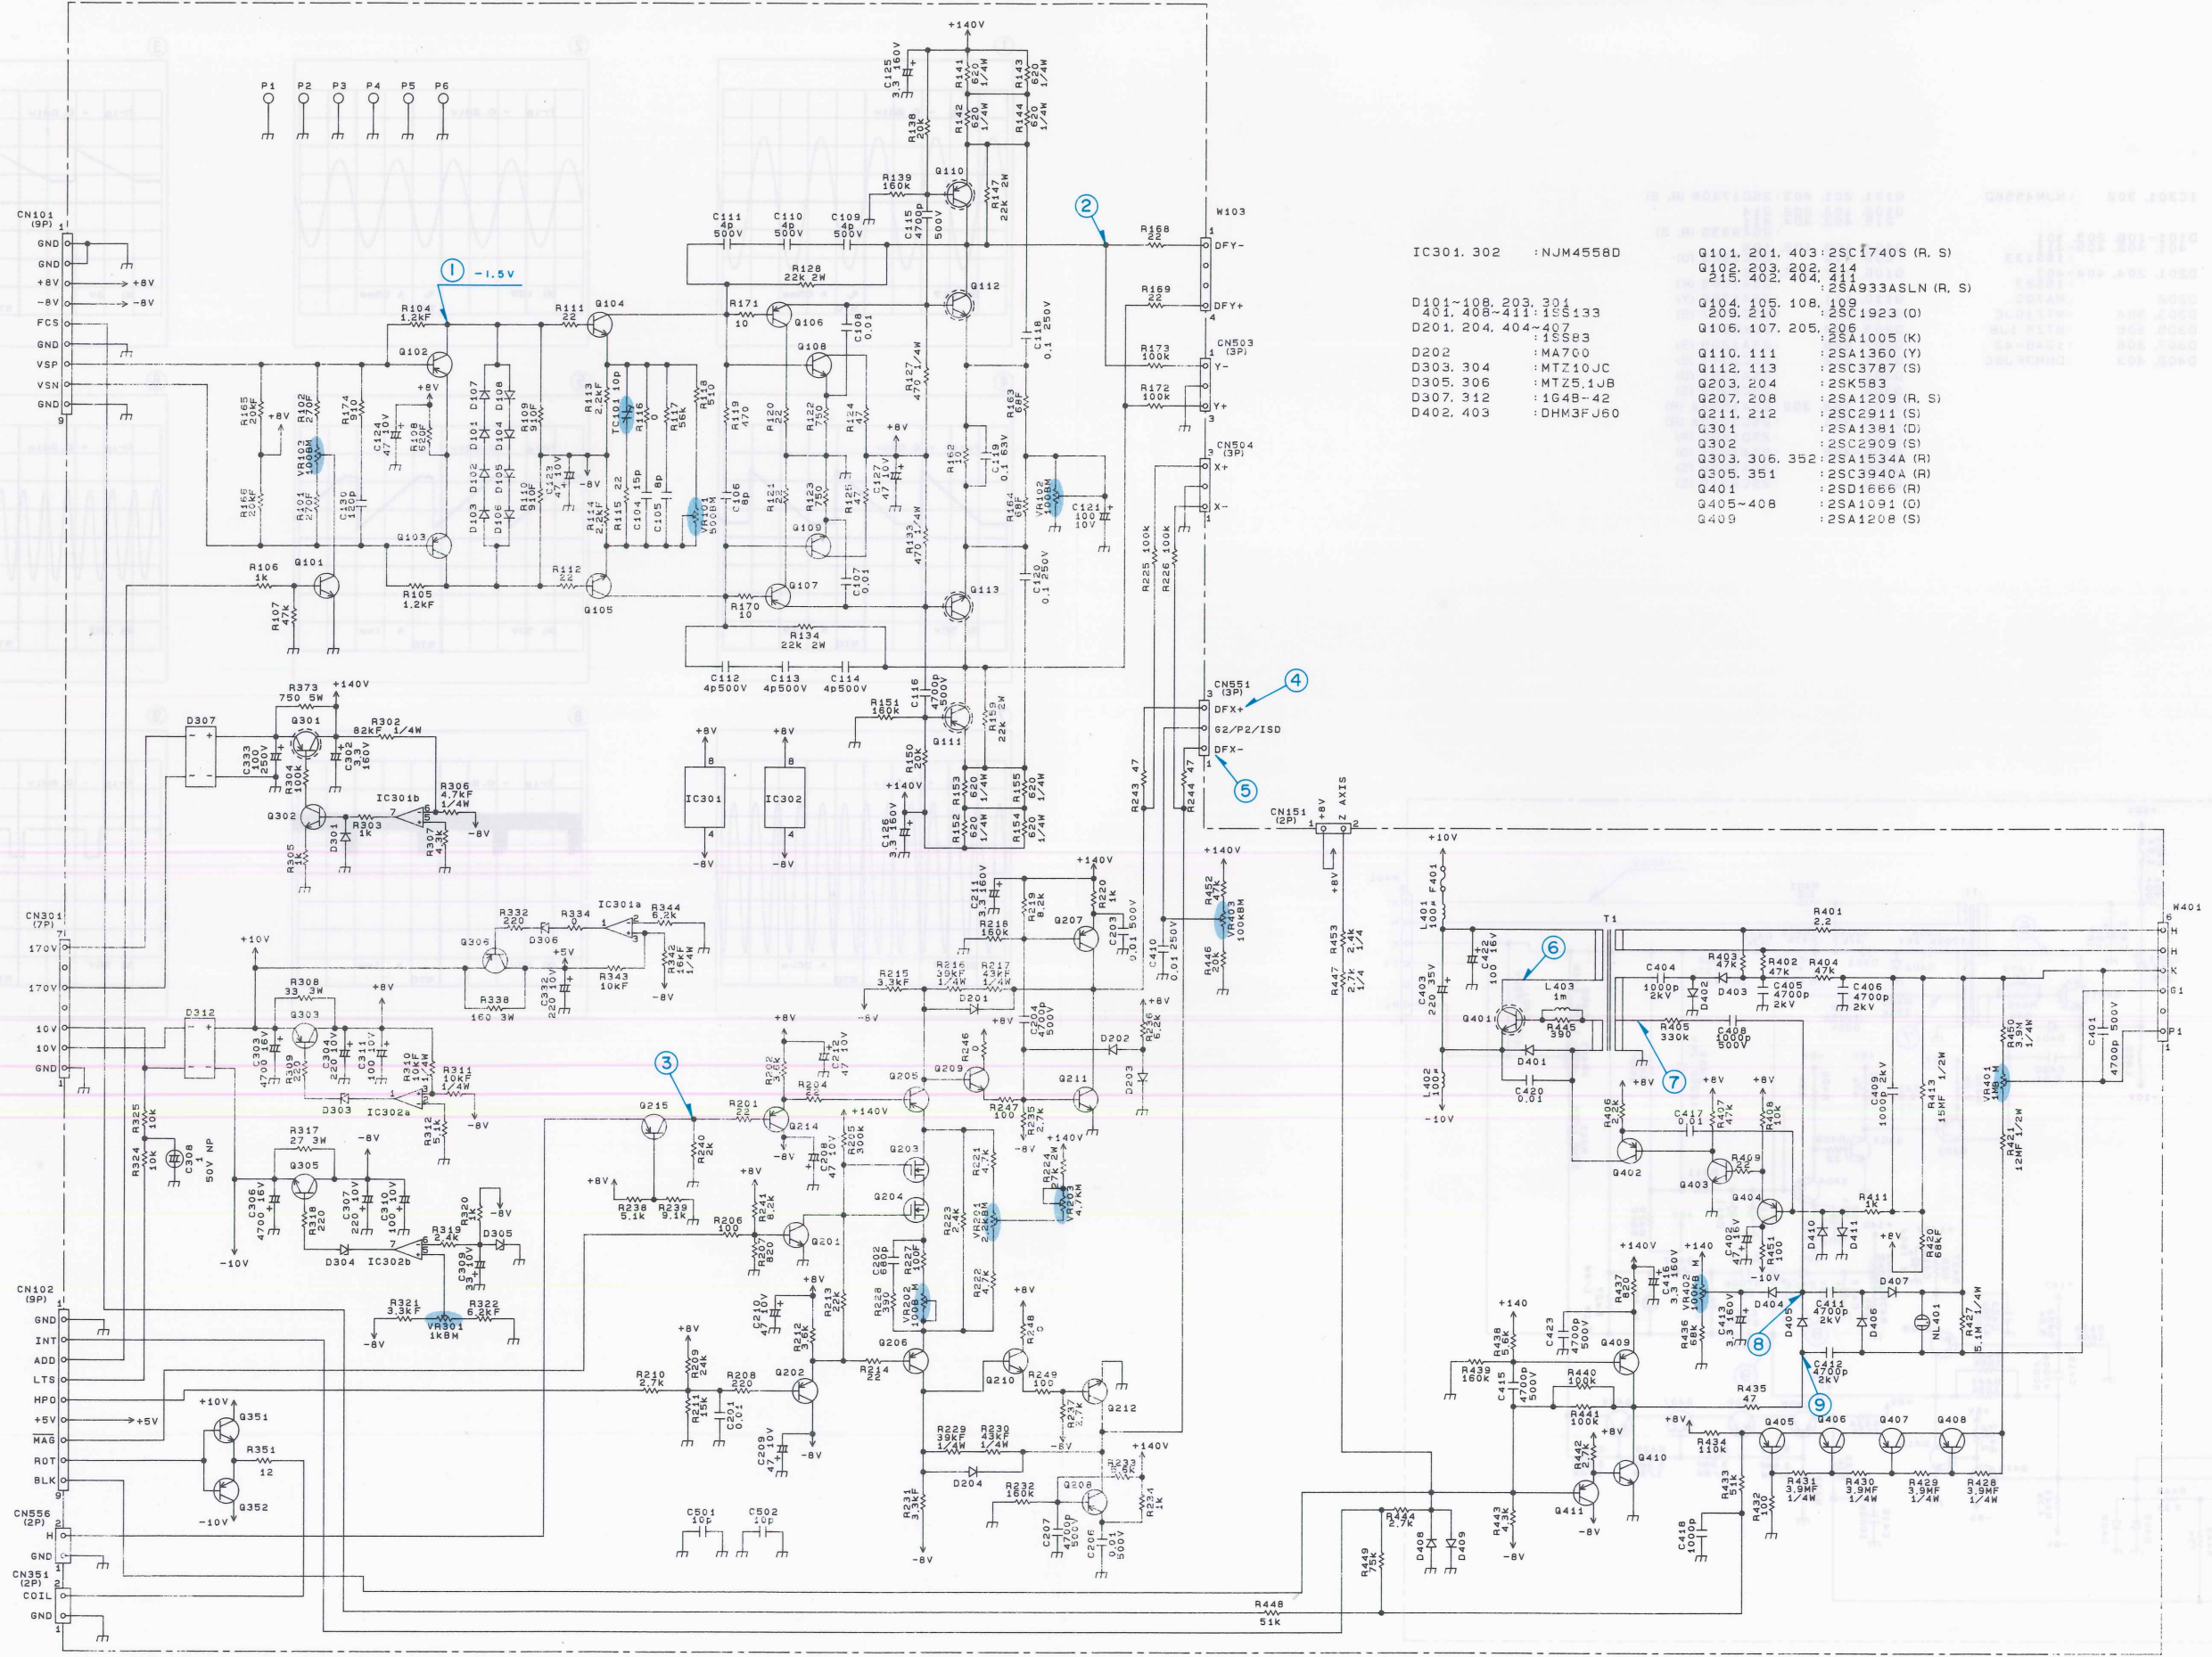


IC301, 302 : NJM4558D  
 D101~108 : 203, 304  
 401, 402, 403, 404 : 105, 133  
 D201, 204, 404 : 407, 583  
 D202 : MA700  
 D303, 304 : MTZ10JC  
 D305, 306 : MTZ5.1UB  
 D307, 312 : 164B-42  
 D402, 403 : DHM3FJ60


Q101, 201, 403 : 2SC1740S (R, S)  
 Q102, 403, 202, 401, 404 : 2SA1414  
 210, 202, 404 : 2SA933ASLN (R, S)  
 Q104, 105, 108, 109 : 2SA1923 (O)  
 203, 210 : 2SA1005 (K)  
 Q106, 107, 205 : 2SA1005 (K)  
 Q110, 111 : 2SA1360 (Y)  
 Q112, 113 : 2SC3787 (S)  
 Q203, 204 : 2SA583  
 Q207, 208 : 2SA1209 (R, S)  
 Q211, 212 : 2SC2911 (S)  
 Q301 : 2SA1381 (D)  
 Q302 : 2SC2909 (S)  
 Q303, 306, 352 : 2SA1534A (R)  
 Q305, 351 : 2SC3940A (R)  
 Q401 : 2SD1655 (R)  
 Q405~408 : 2SA1091 (O)  
 Q409 : 2SA1208 (S)




①




②




③




④




⑤




⑥




⑦



⑧




⑨





FINAL UNIT (X73-2150-00 A / 2)

CS-4135 SCHEMATIC DIAGRAM


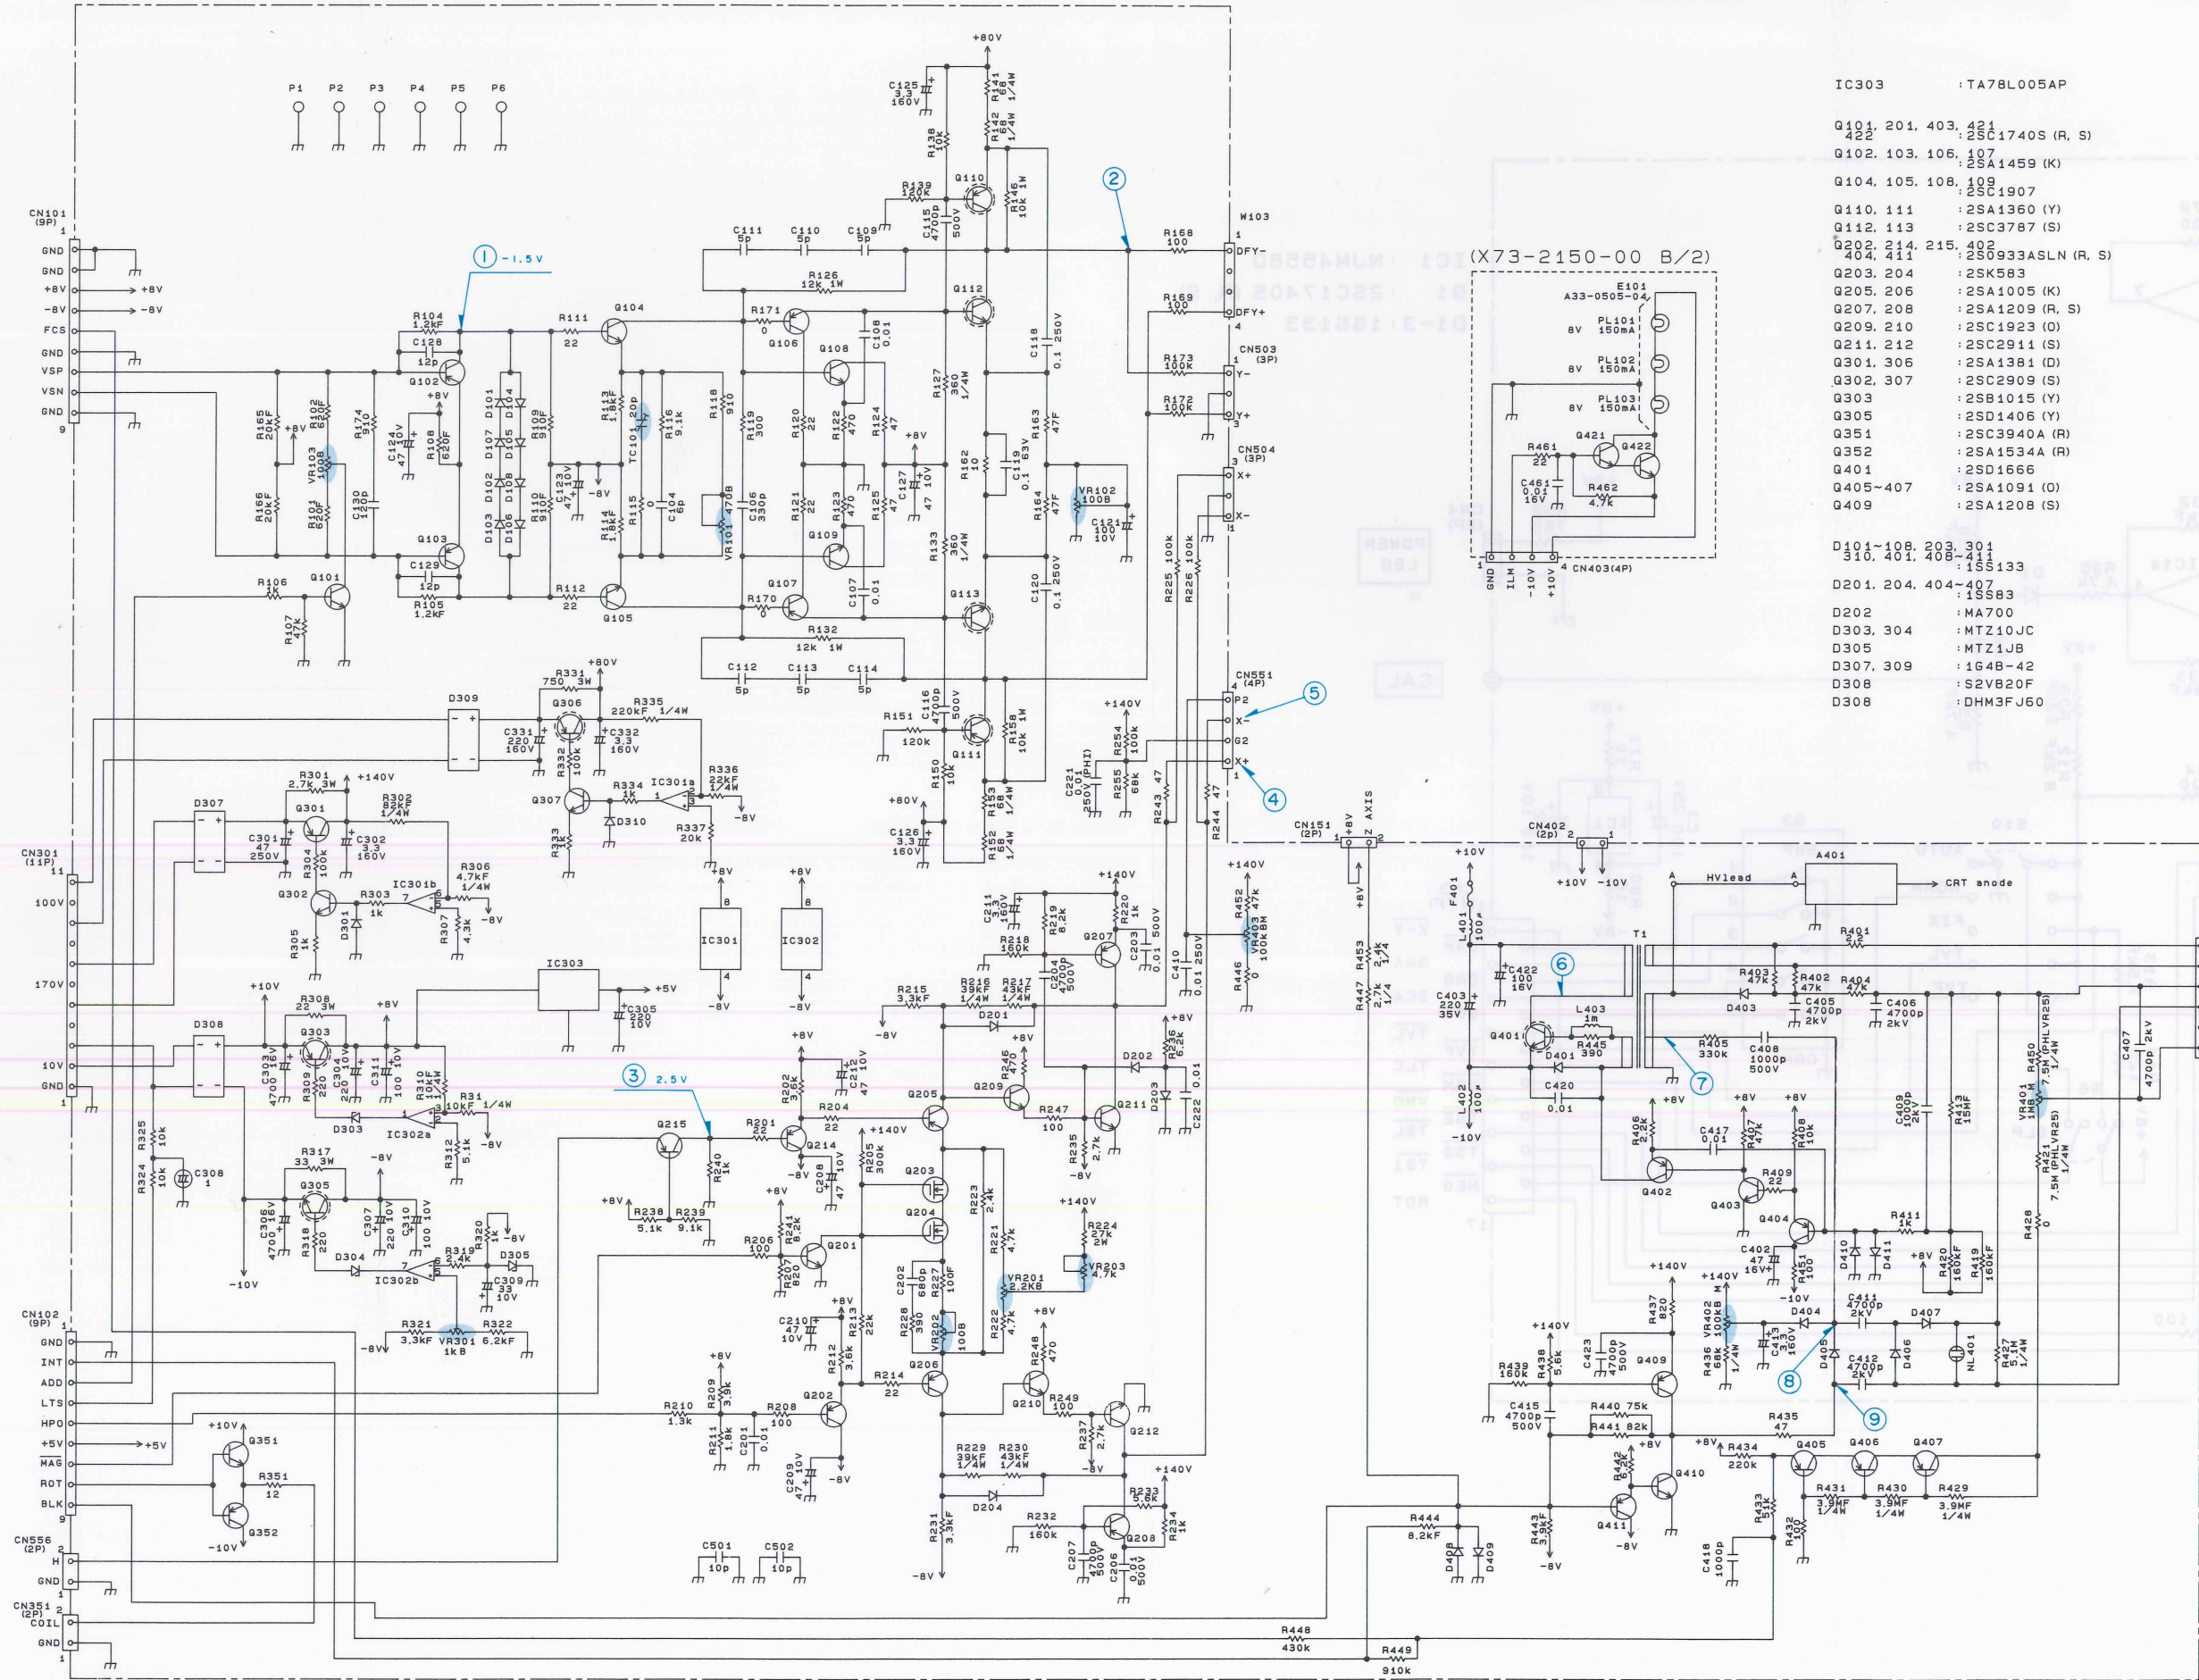











IC303 : TA78L005AP

- Q101, 201, 403, 422 : 2SC1740S (R, S)
- Q102, 103, 106, 107 : 2SA1459 (K)
- Q104, 105, 108, 109 : 2SC1907
- Q110, 111 : 2SA1360 (Y)
- Q112, 113 : 2SC3787 (S)
- Q202, 214, 215, 404, 411 : 2S0933ASLN (R, S)
- Q203, 204 : 2SK583
- Q205, 206 : 2SA1005 (K)
- Q207, 208 : 2SA1209 (R, S)
- Q209, 210 : 2SC1923 (O)
- Q211, 212 : 2SC2911 (S)
- Q301, 306 : 2SA1381 (D)
- Q302, 307 : 2SC2909 (S)
- Q303 : 2SB1015 (Y)
- Q305 : 2SD1406 (Y)
- Q351 : 2SC3940A (R)
- Q352 : 2SA1534A (R)
- Q401 : 2SD1666
- Q405-407 : 2SA1091 (O)
- Q409 : 2SA1208 (S)

- D101-108, 203, 301, 310, 401, 408-410 : 1S5133
- D201, 204, 404-407 : 1S583
- D202 : MA700
- D303, 304 : MTZ10JC
- D305 : MTZ1JB
- D307, 309 : 1G4B-42
- D308 : S2VB20F
- D308 : DHM3FJ60

(X73-2150-00 B/2)

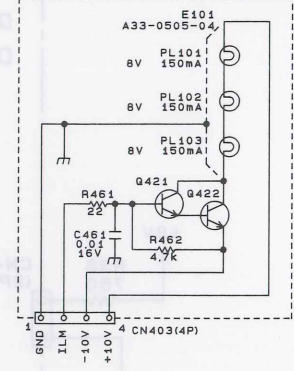

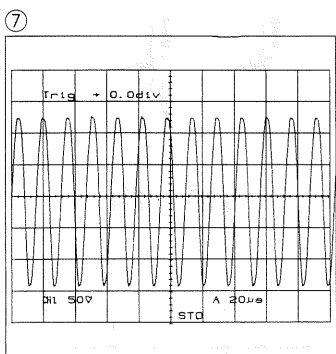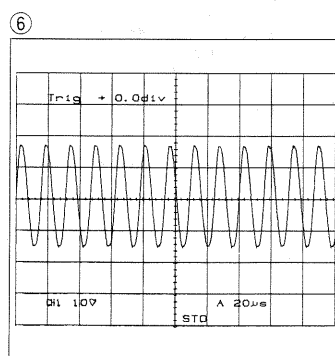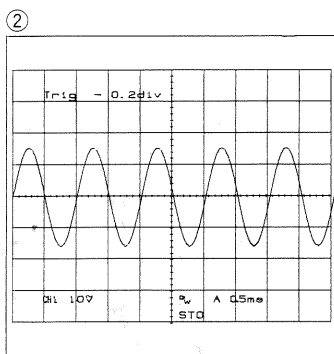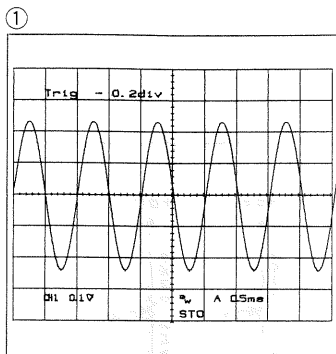







# CS-4125 SCHEMATIC DIAGRAM

SWEEP UNIT (X74-1610-01 B/5)

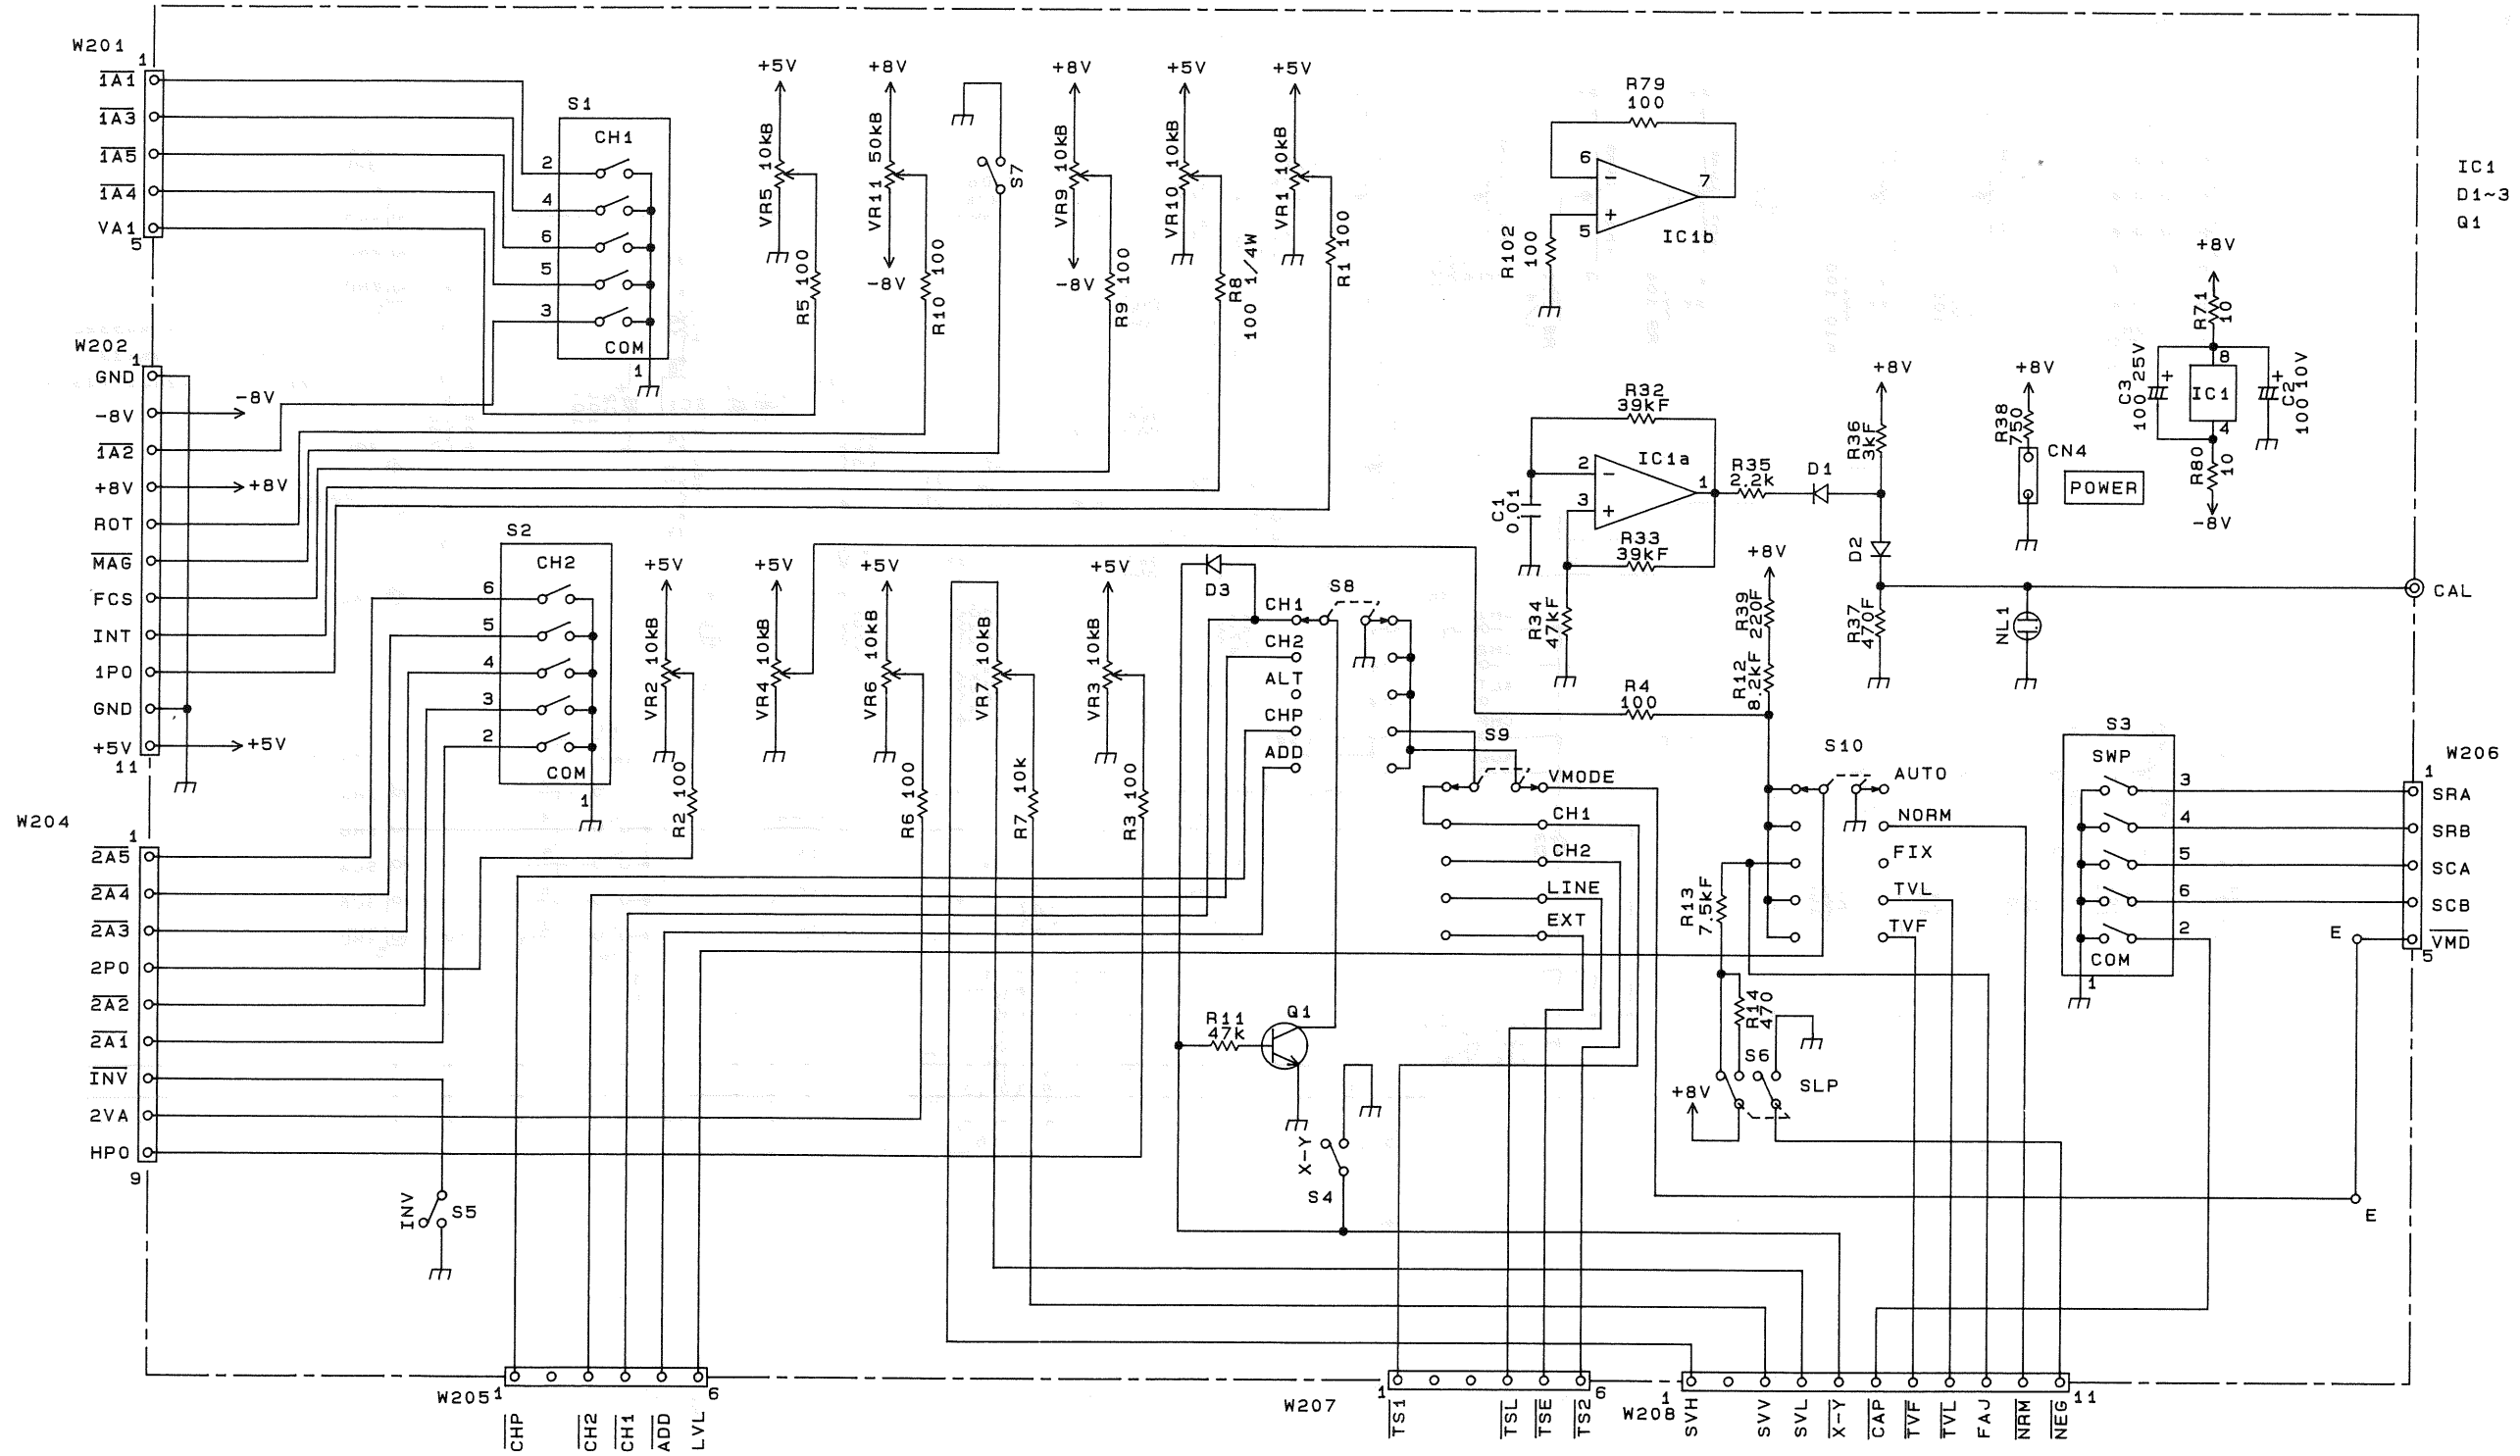

- IC1 : NJM4558D
- D1-3 : 1SS133
- Q1 : 2SC1740S (R. S)


# CS-4135 SCHEMATIC DIAGRAM

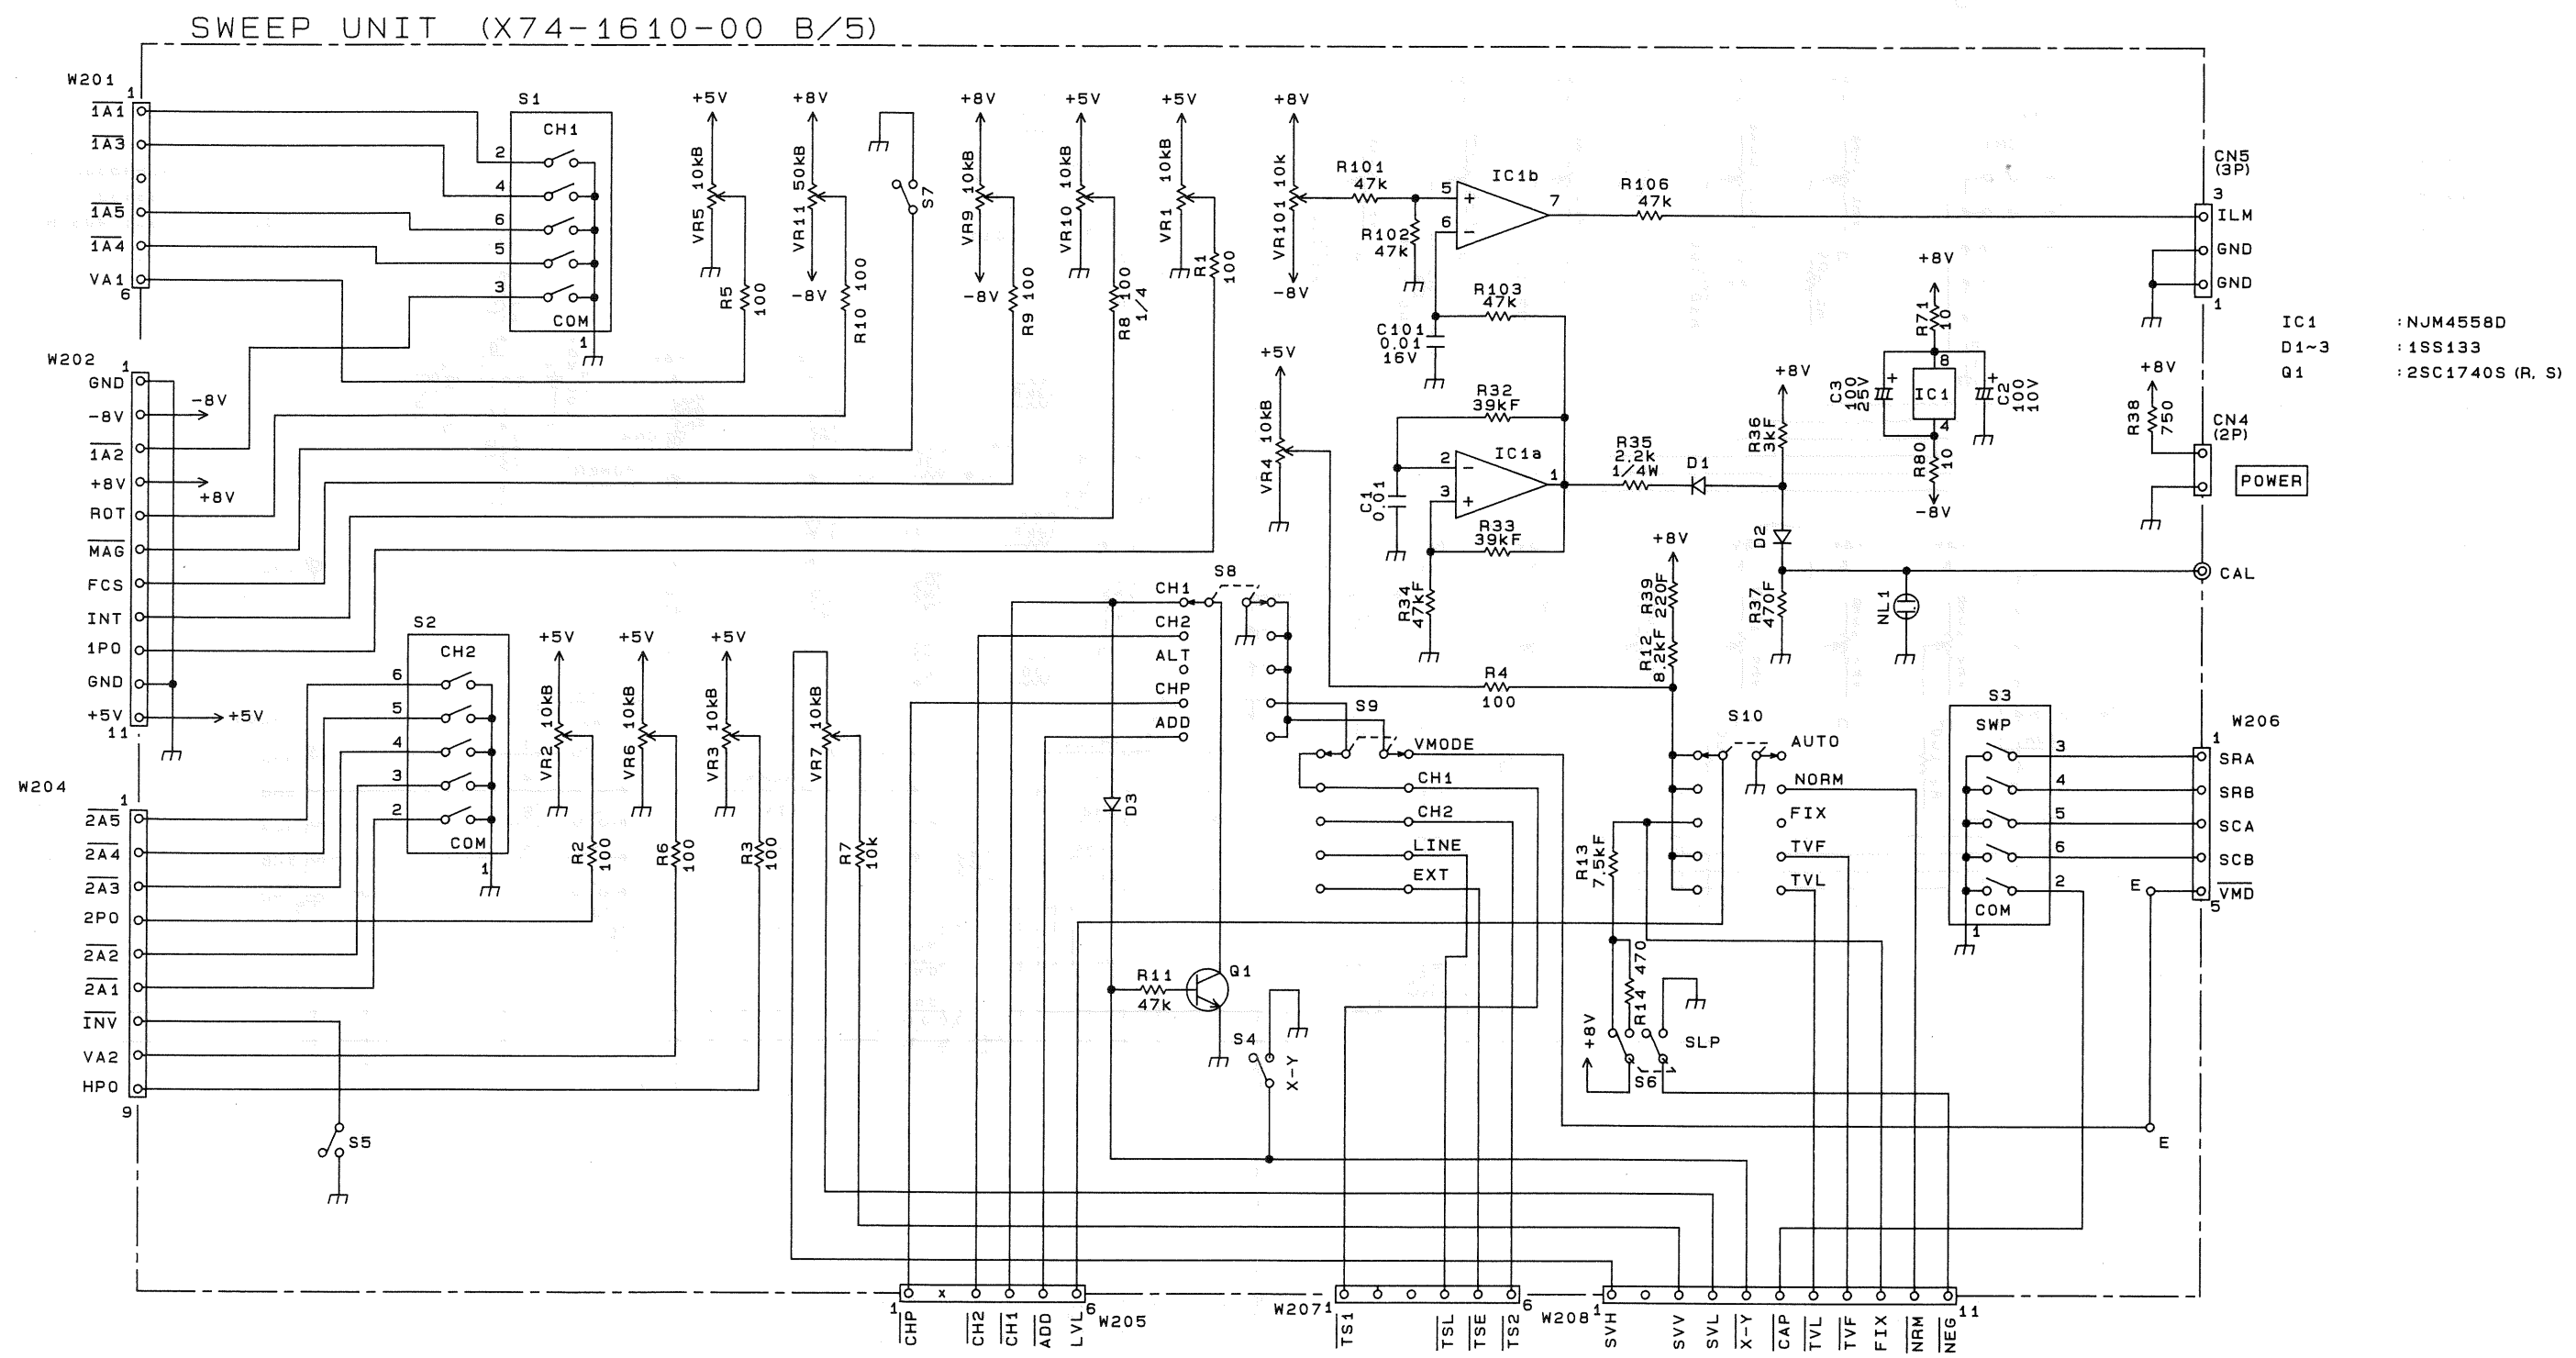



CS-4125 (~S/NO.7121000) P.C. BOARD






FINAL UNIT (X73-2090-00)

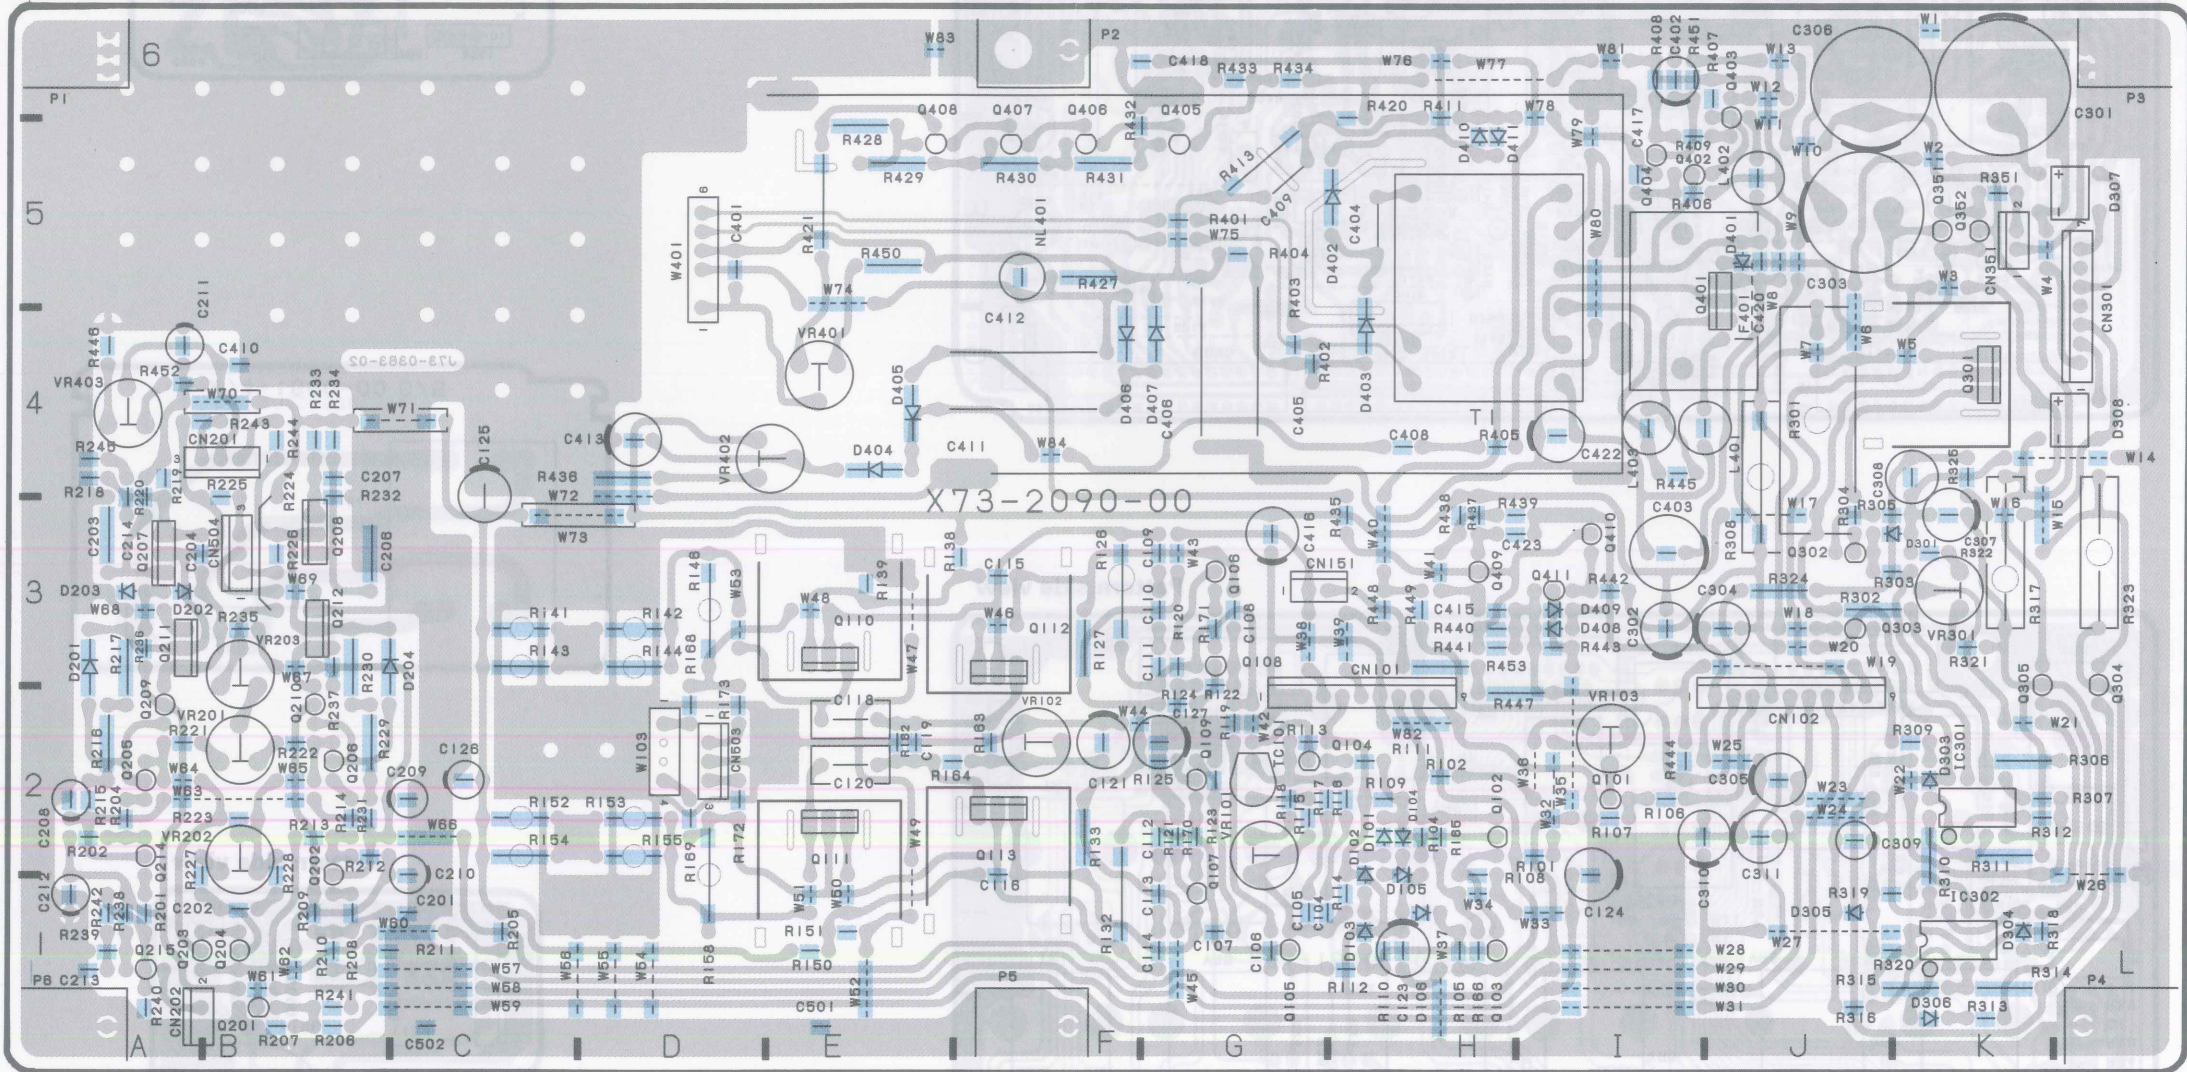



# CS-4125 (~S/NO.7121000) P.C. BOARD

## SWEEP UNIT (X74-1600-00)

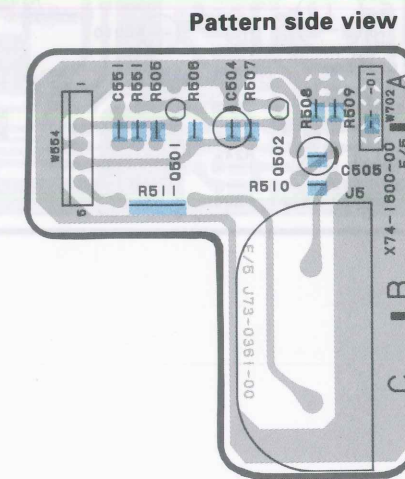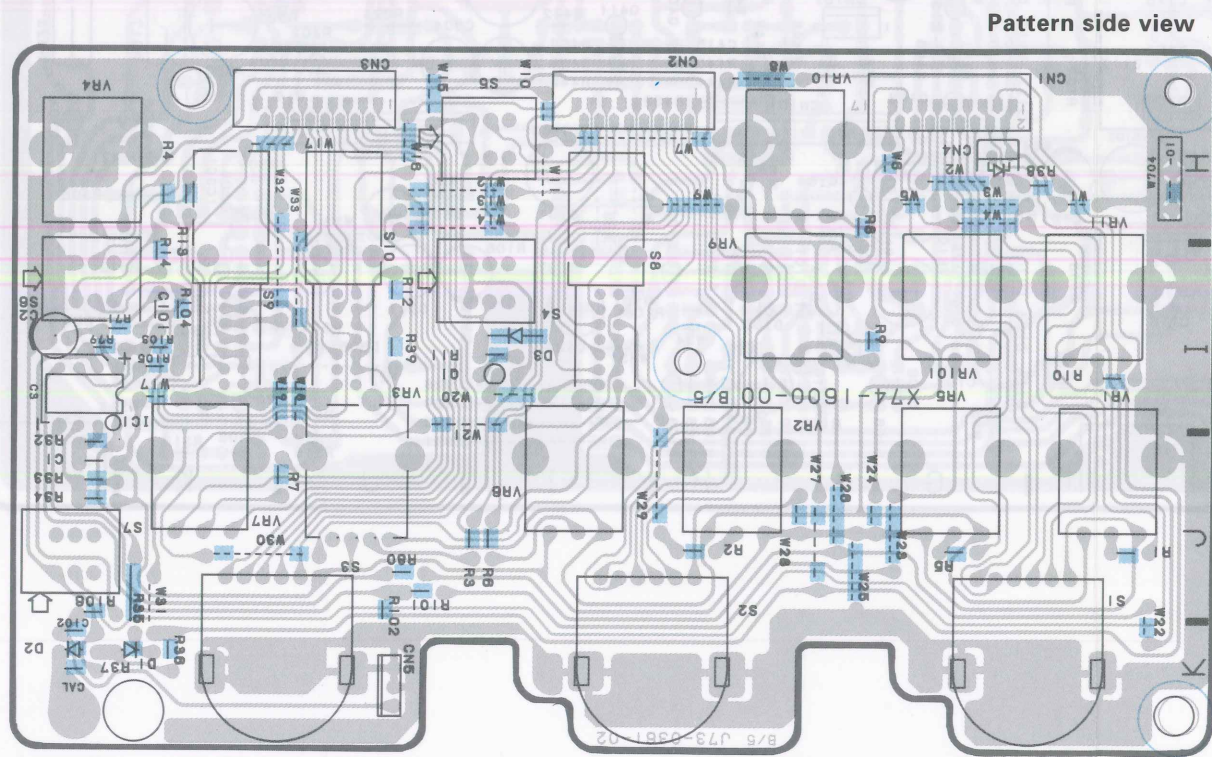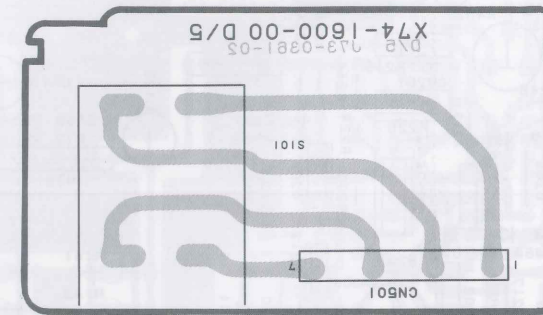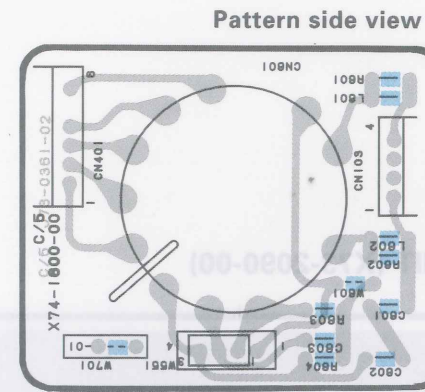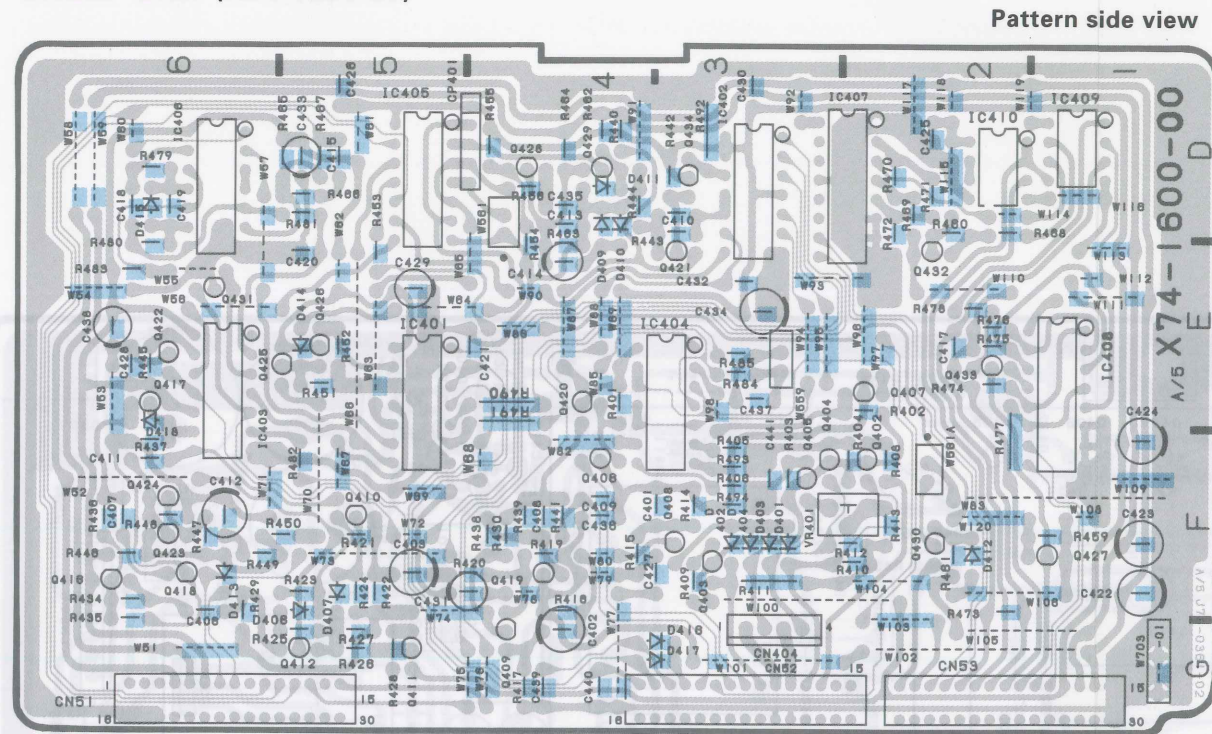




CS-4125 (~S/NO.7121000) P.C. BOARD

ATTENUATOR UNIT (X75-1220-00)


FINAL UNIT (X75-1220-00) PART

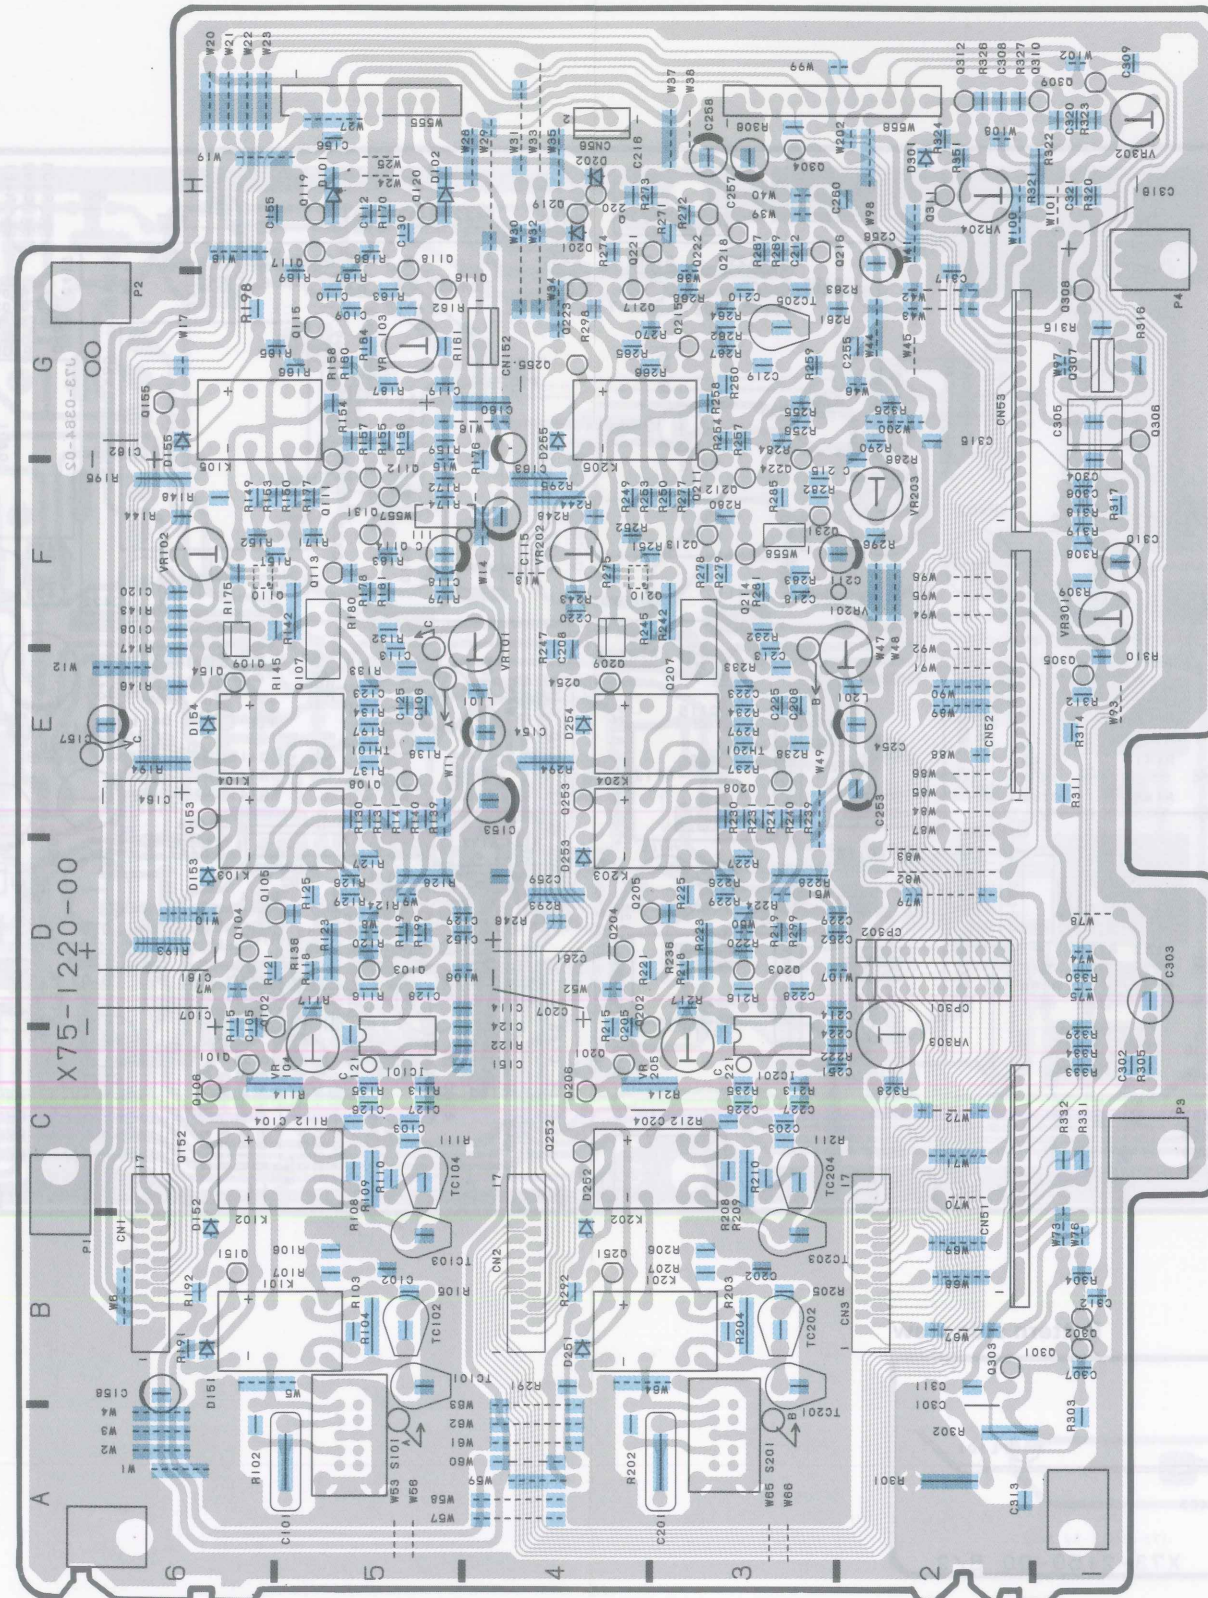




# CS-4125/CS-4135 P.C. BOARD

FINAL UNIT (X73-2150-00 A / 2)

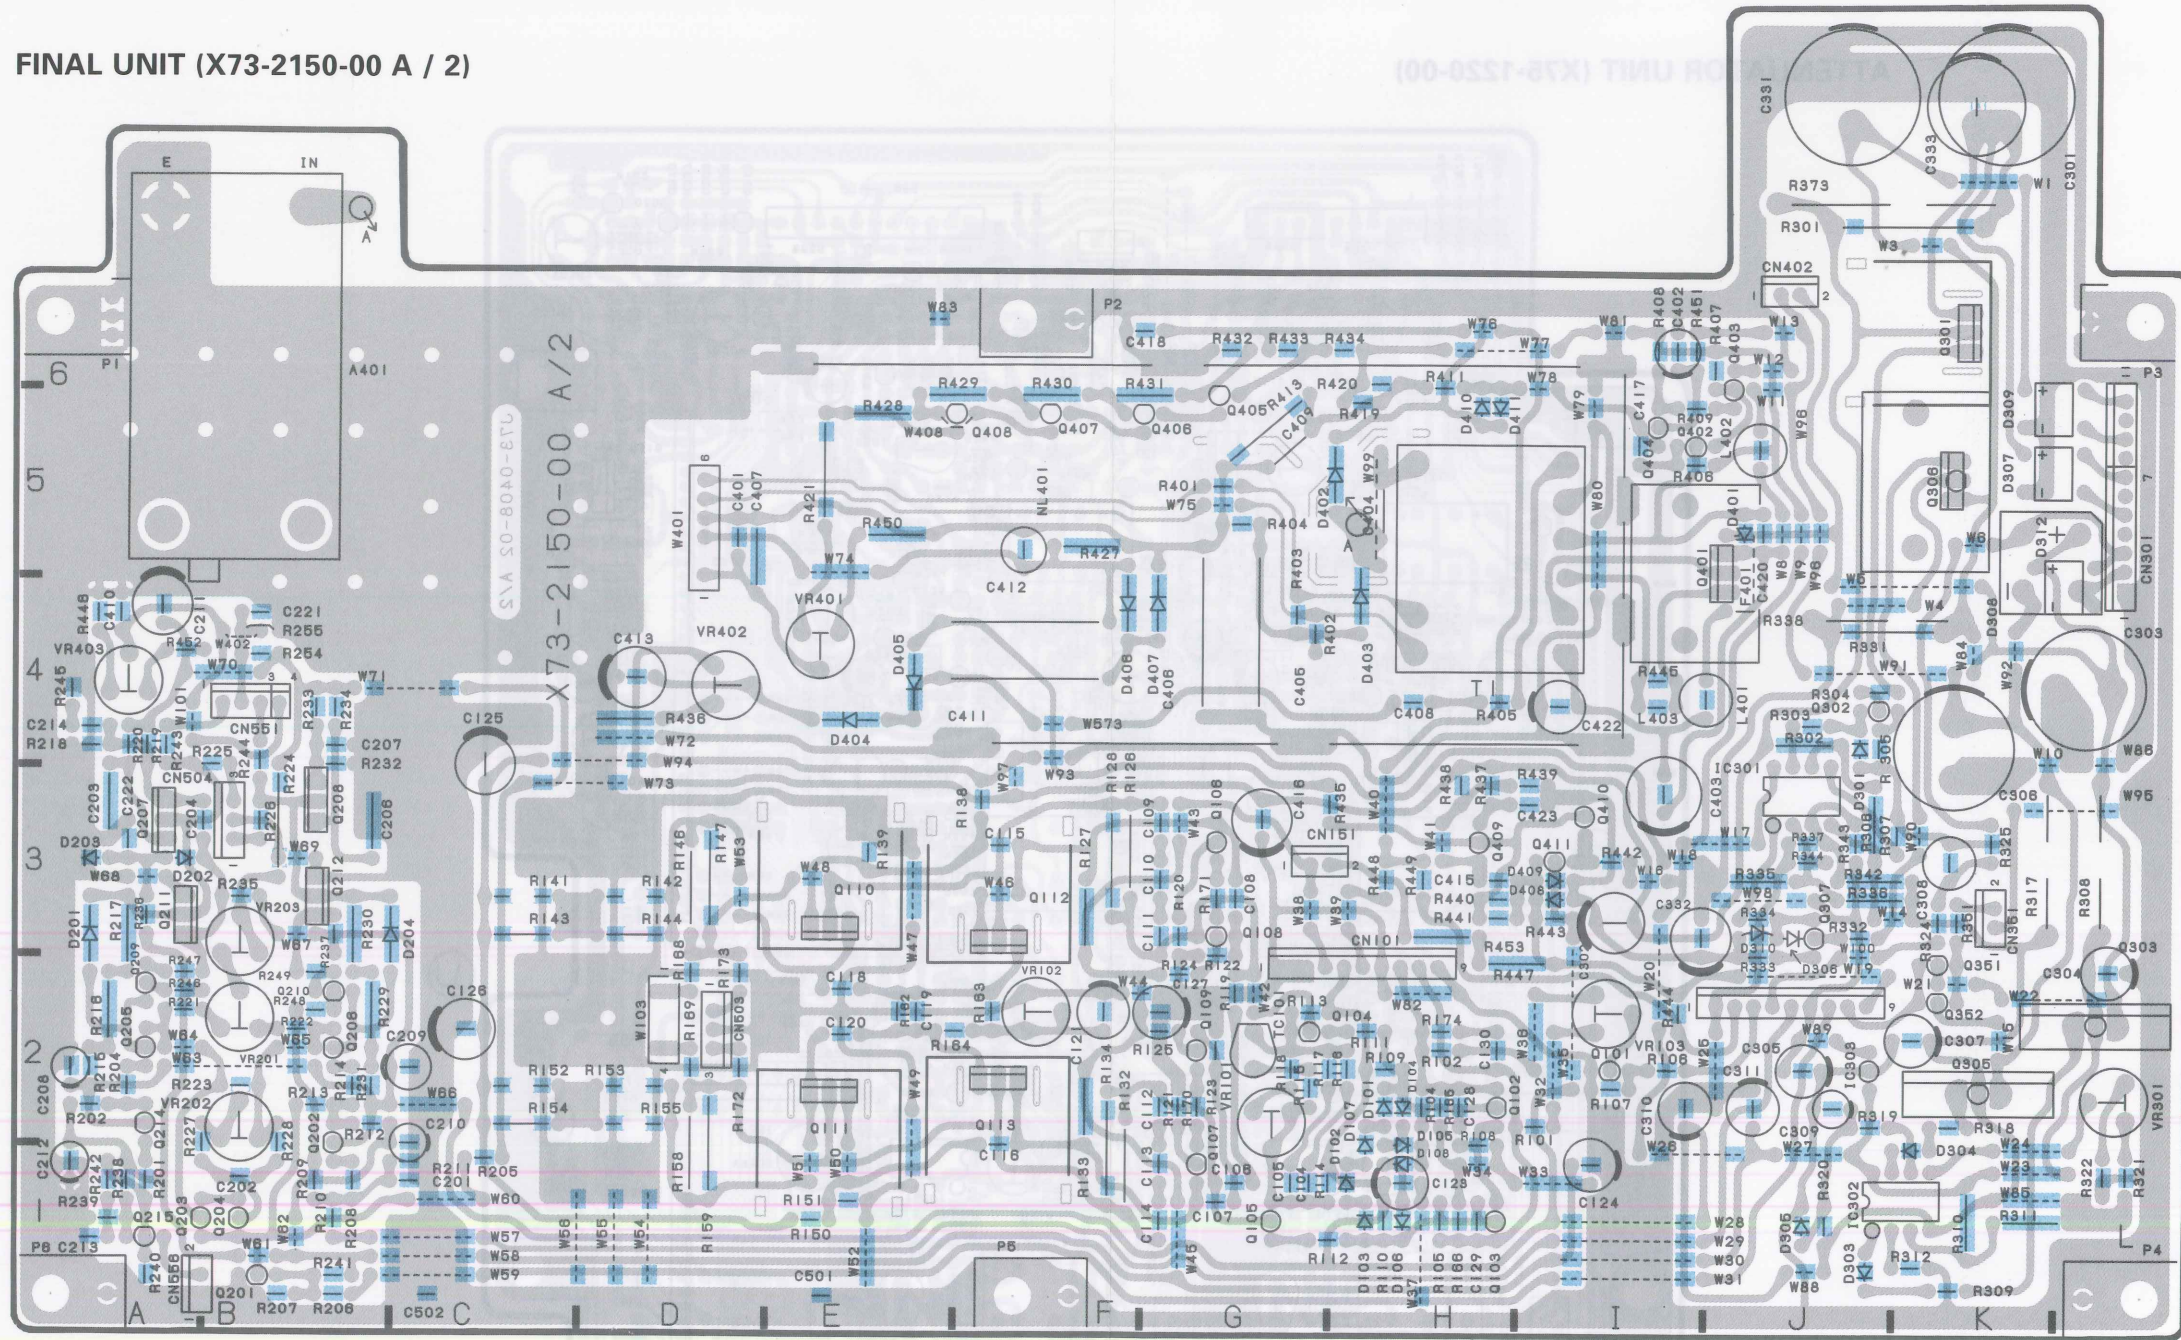



Pattern side view

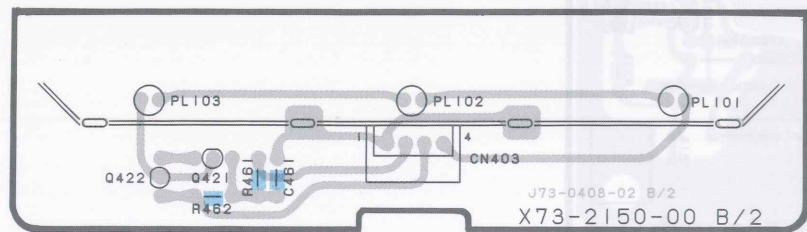






# CS-4125/CS-4135 P.C. BOARD

## SWEEP UNIT (X74-1610-0X)

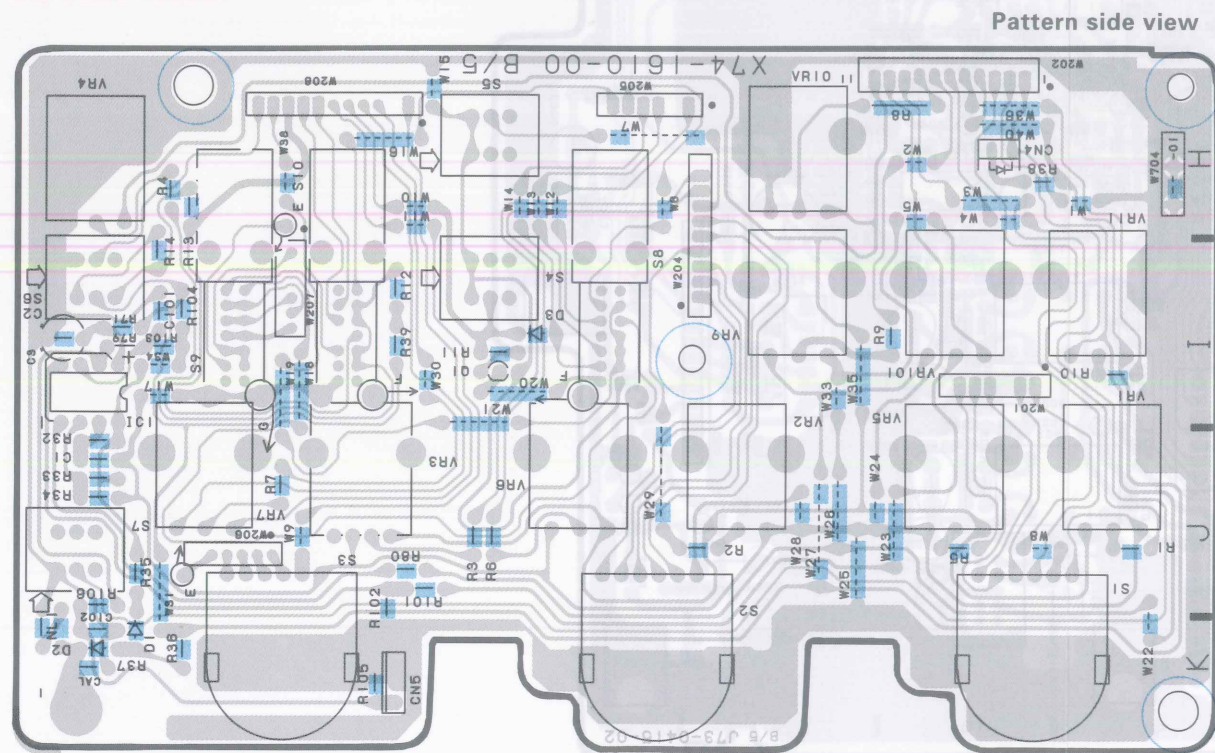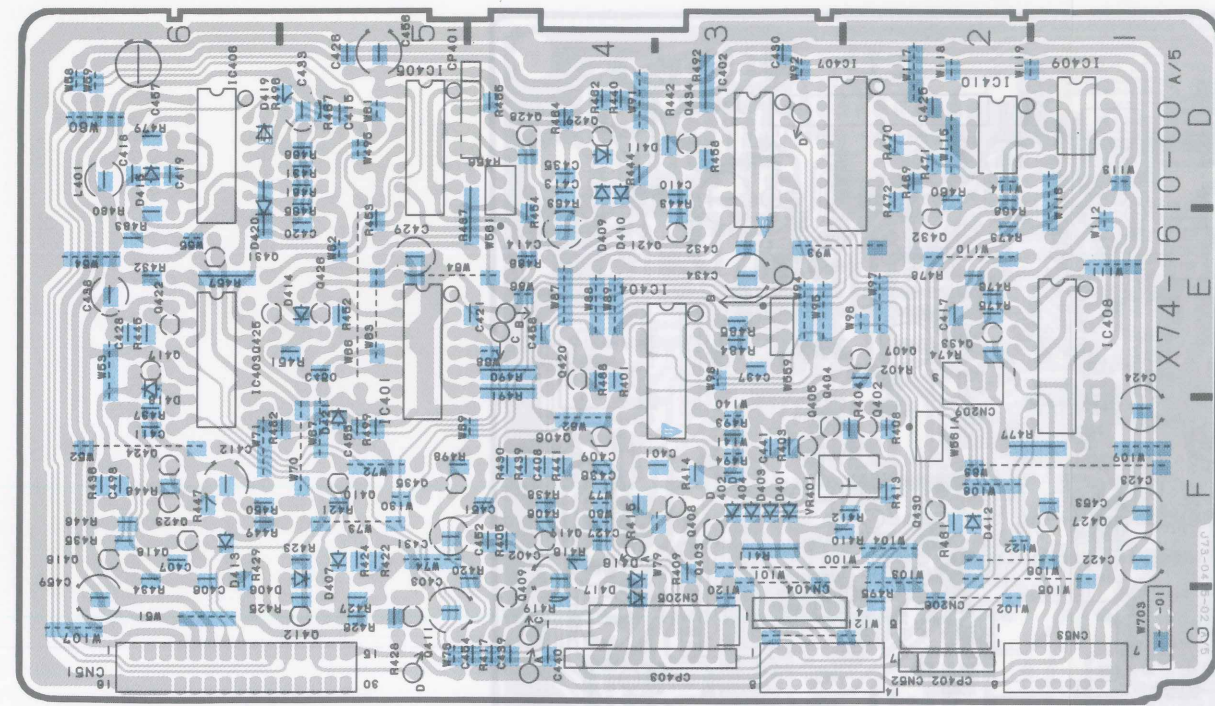


## ATTENUATOR UNIT (X75-1550-00)

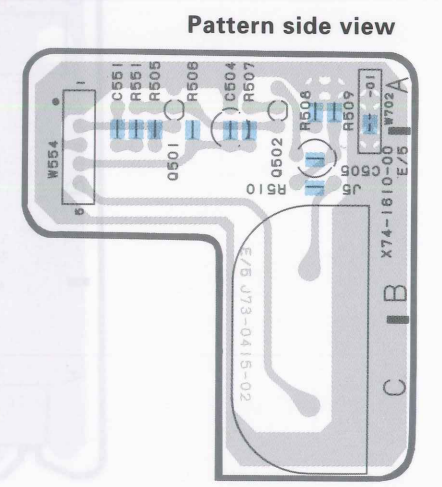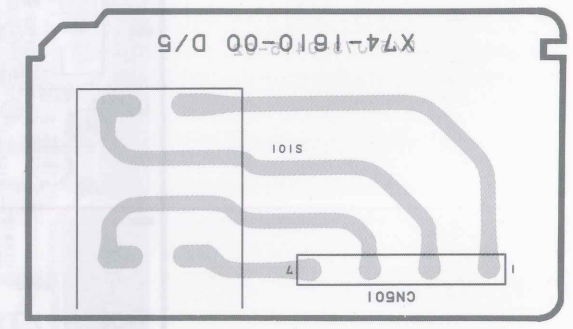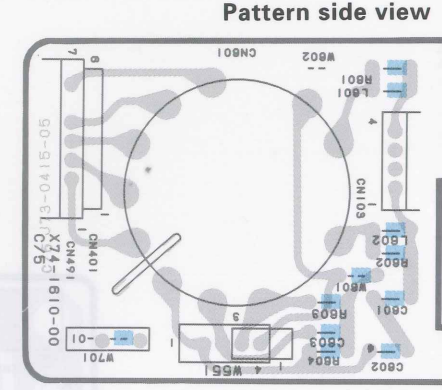




# CS-4125/CS-4135 P.C. BOARD


ATTENUATOR UNIT (X75-1250-00)

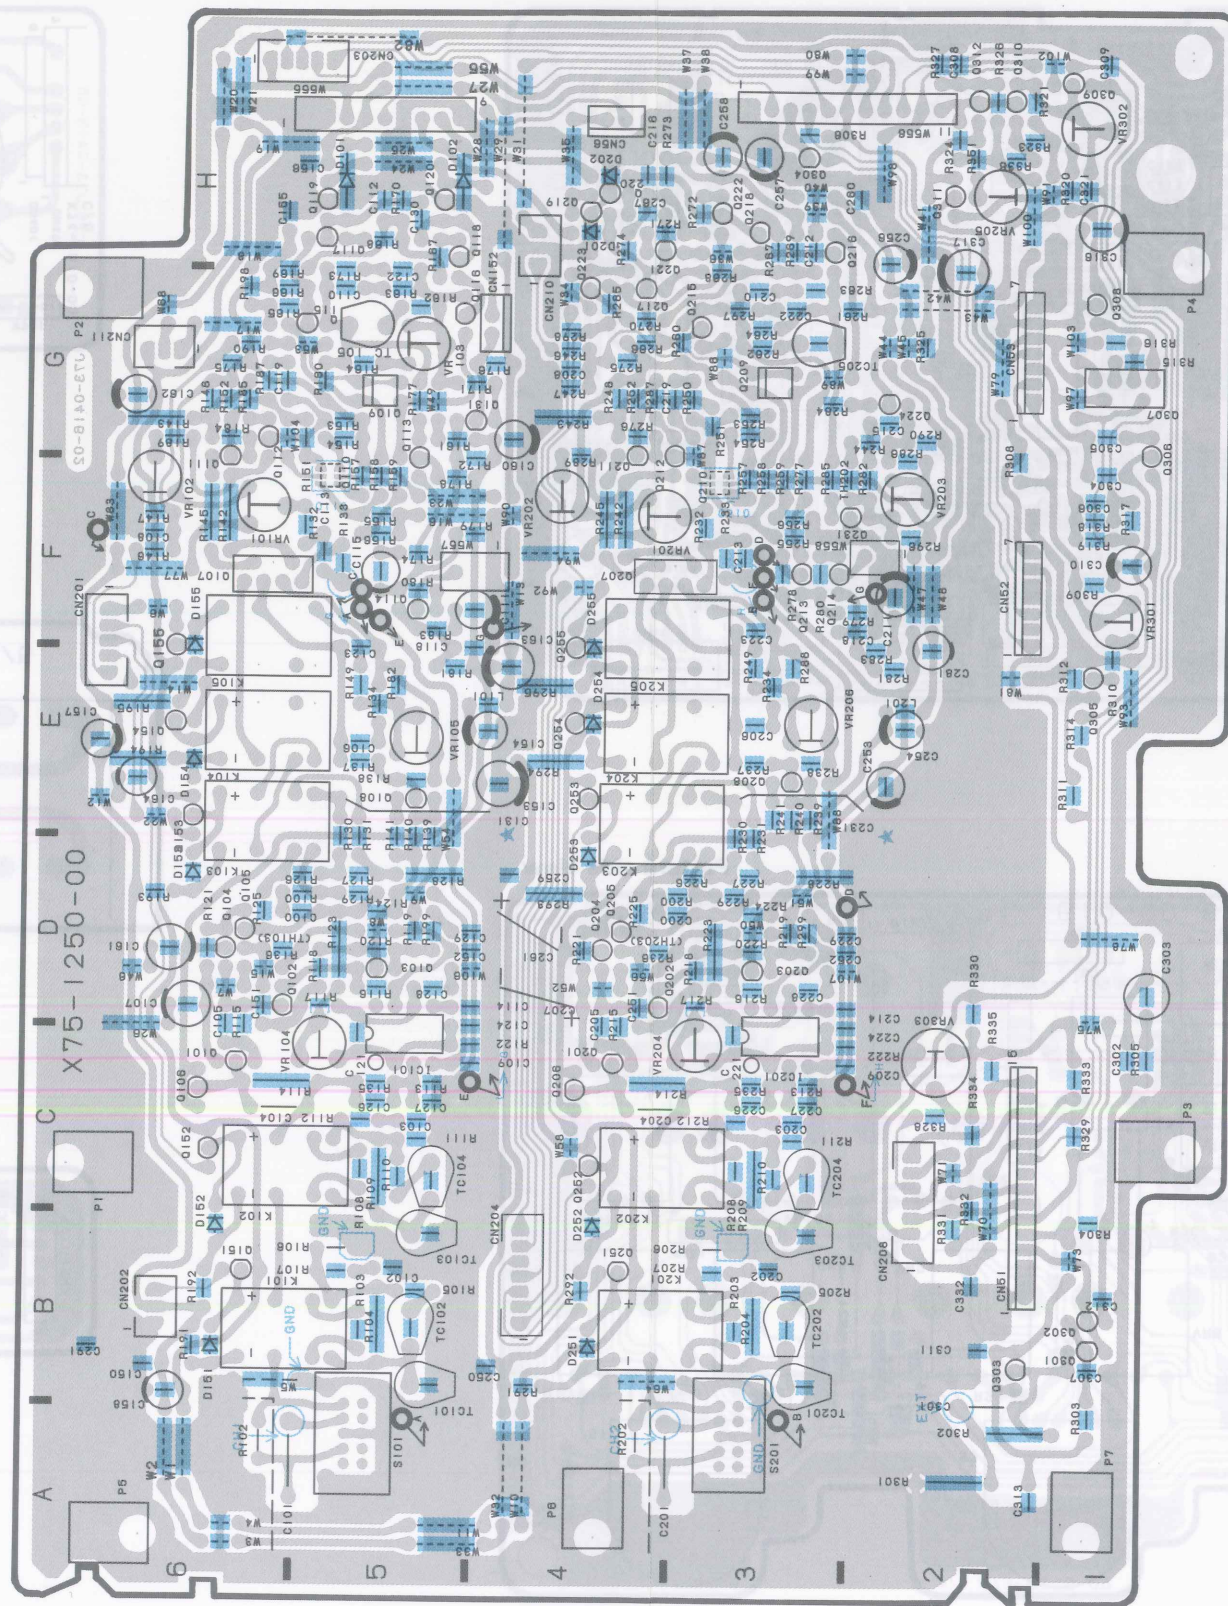


# SEMICONDUCTORS

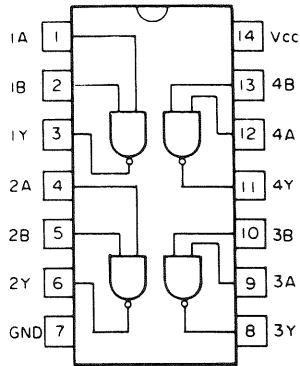

SN74LS00N




SN74LS51N

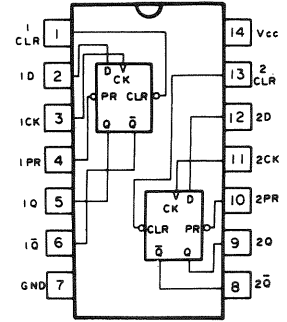


SN74AS74AN

SN74LS74AN

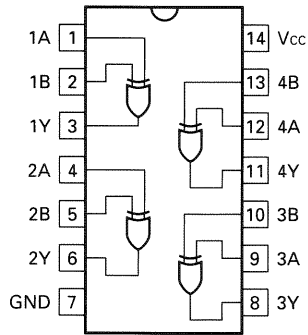


SN74ALS86N

SN774LS86AN

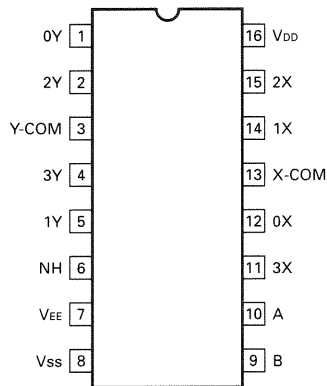


TC4052BP




- Pin name
1. A OUTPUT
  2. A (-) INPUT
  3. A (+) INPUT
  4. V<sup>-</sup>
  5. B (+) INPUT
  6. B (-) INPUT
  7. B OUTPUT
  8. V<sup>+</sup>

NJM4558




- Pin name
1. OUTPUT A
  2. INVERTING INPUT A
  3. NON-INVERTING INPUT A
  4. V<sup>-</sup>
  5. NON-INVERTING INPUT B
  6. INVERTING INPUT B
  7. OUTPUT B
  8. V<sup>+</sup>

LF412CN

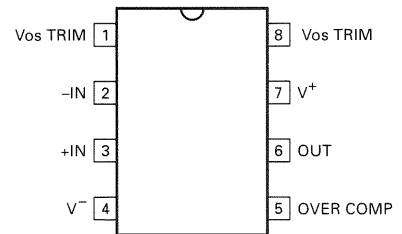


LT1097CN8


# SEMICONDUCTORS




TA78L005AP




2SA933S (R,S)  
 2SA933ASLN (R,S)  
 2SA1564  
 2SC1740S (R,S)  
 2SC2926S (R,Q)




2SA1005 (K)  
 2SA1091 (O)  
 2SA1208 (S)  
 2SA1534A (R)  
 2SC1906  
 2SC1907  
 2SC1923 (O)  
 2SC2909 (S)  
 2SC2910 (S)  
 2SC3940A (R)




2SA1174 (E,F)  
 2SA1459 (K)  
 2SA1459 (L)  
 2SC3732 (L)




2SA1209 (S)  
 2SA1381 (D)  
 2SC2911 (S)




2SA1360 (Y)




2SB1015 (Y)  
 2SD1406 (Y)




2SC3381 (GR)




2SC3779 (D)



2SC3787 (S)




2SC4049




2SD1666 (R)




# SEMICONDUCTORS




2SK161 (GR)




2SK304 (E)




2SK332 (E)




2SK389 (GR)




2SK583




3SK73




DTA114Y (S)  
DTC114Y (S)



IMX4



1G4B-42



S2VB20F

---

A product of  
**KENWOOD CORPORATION**  
14-6, Dogenzaka 1-chome, Shibuya-ku, Tokyo 150, Japan

---