



9211 SERIES TYPE **B**



Easy-to-operate Portable FFT Servo Analyzer For Waveform Analysis And Servo Analysis

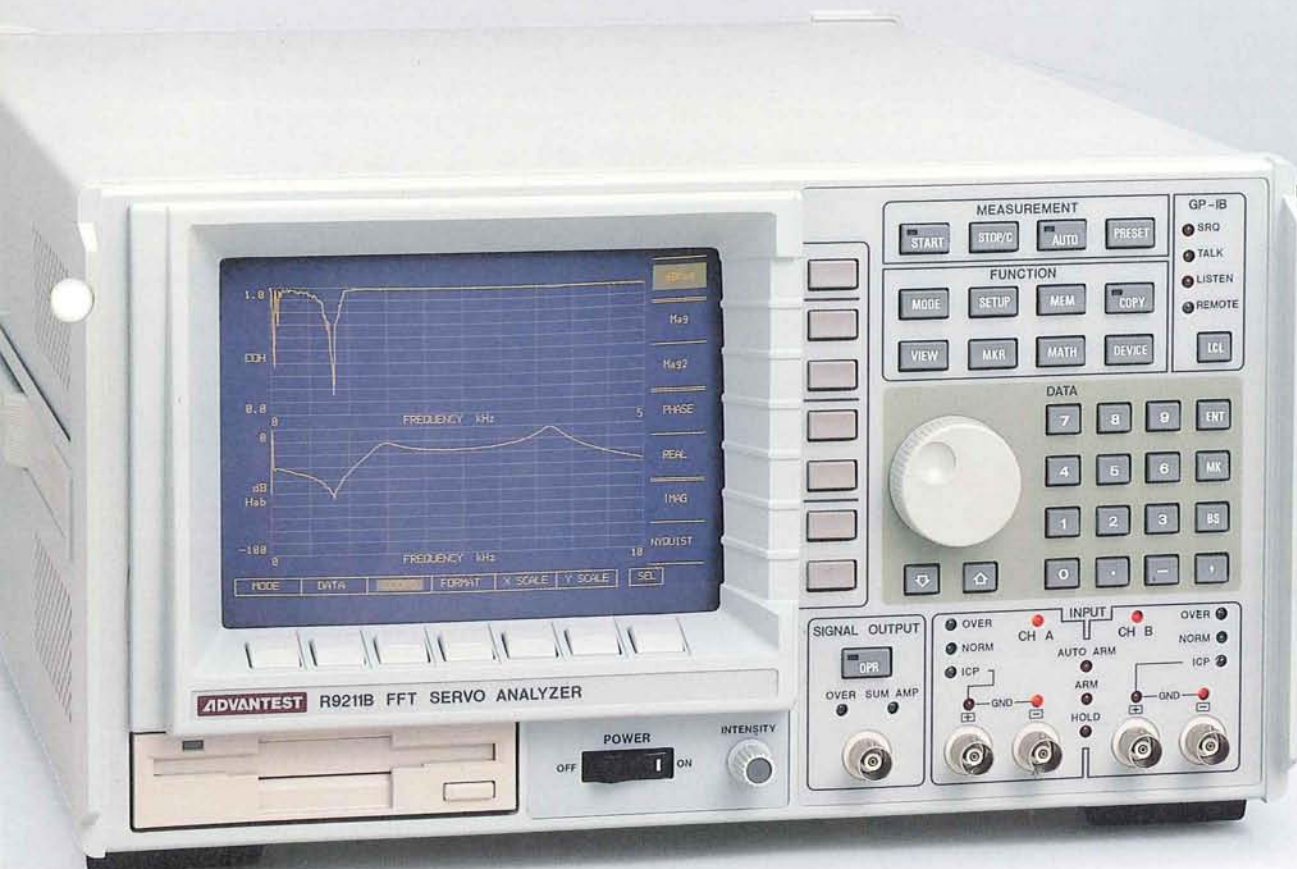

Ideal for Structure Vibration Analysis and Servo Circuit Measurement

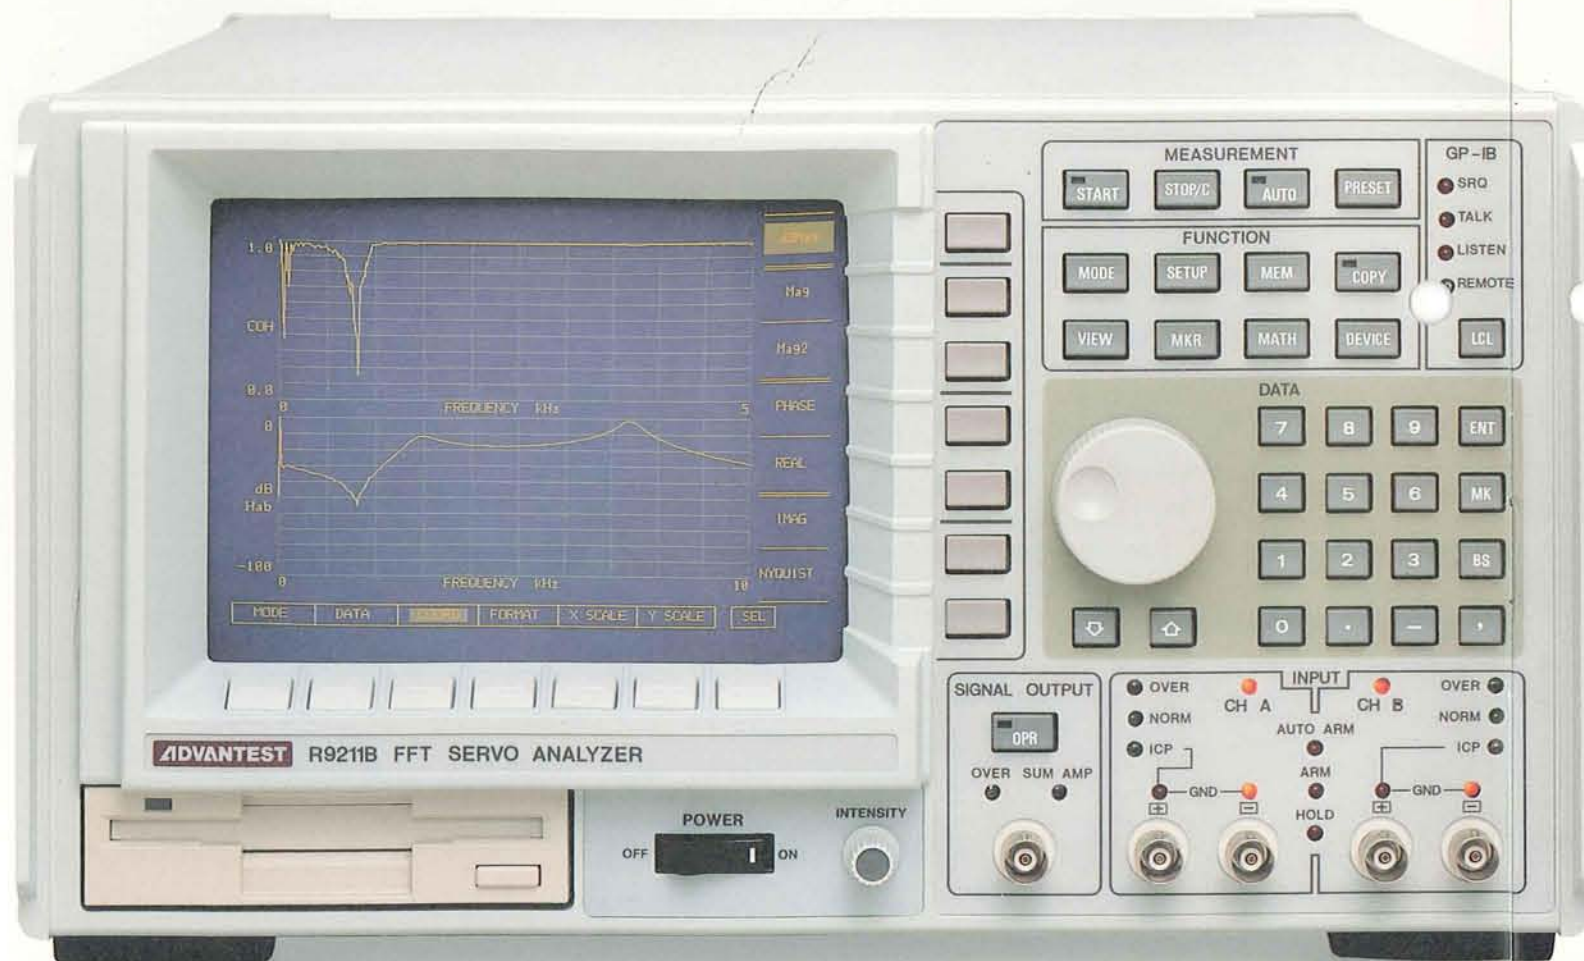

The R9211B embodies servo management technology based on ADVANTEST's unique swept sine sweep (SSS). It achieves an inter-channel amplitude difference of ± 0.1 dB or less and an inter-channel phase difference of ± 1.0 degree or less.

The measuring unit has an internal summing amplifier, a signal generator featuring low output impedance, and a servo measurement function with a frequency table. This is an ideal tool for the design and development of servo systems.

Analysis by output from the optional digital signal generator or digital input provide new applications.

In addition to many servo measurement and analysis functions, the epoch-making FFT analyzer has a unique five-domain (five measurement area modes) method, which means you select one of the five domains according to the type of analysis that you want to perform. These domains make measurement much quicker and easier.


Features of Servo Analysis Mode

- High-speed auto range function, frequency resolution variable function (25 to 800 lines), and new SSS method for fast measurement
- Internal summing amplifier useful for open-loop characteristic measurement
- Signal generator of low output impedance (1Ω or less) for high actuator drive performance
- Independent setting of DC offset amplitude and signal voltage
- New function for servo measurement by up to five decades of log sweep and point servo measurement with frequency table of only specified frequency.
- Inter-channel amplitude difference of ± 0.1 dB or less, phase difference of ± 1.0 degree or less, and dynamic range of 130 dB
- Single-touch marker functions and abundant calculation functions for gain and phase margin measurement

Full Servo Analysis by Simple Operation

Simple Operation and Many Display Functions

The R9211B incorporates the start/stop frequency setting function and signal source bandwidth automatic measurement function, so it is simple to operate. Two-screen, three-screen and four-screen simultaneous display functions are available for direct visual check measurement data from any angle.

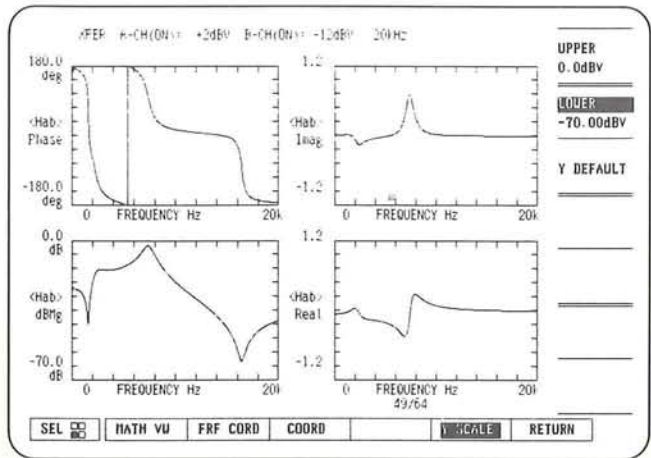

▲ Example of four-screen simultaneous display

High-speed Servo Measurement


Auto range and signal processing speeds have been made much faster, so the R9211B is ideal for

low-frequency servo analysis which requires a lot of time on conventional analyzers.


High-precision/wide-dynamic-range measurement

The channel-to-channel amplitude difference is $\pm 0.1\text{dB}$ or less and the channel-to-channel phase difference is ± 1.0 degree or less. So the servo analysis precision has been greatly improved. If the

auto range function and the easy signal sequence function are used together, 130dB or wider dynamic servo analysis is available.

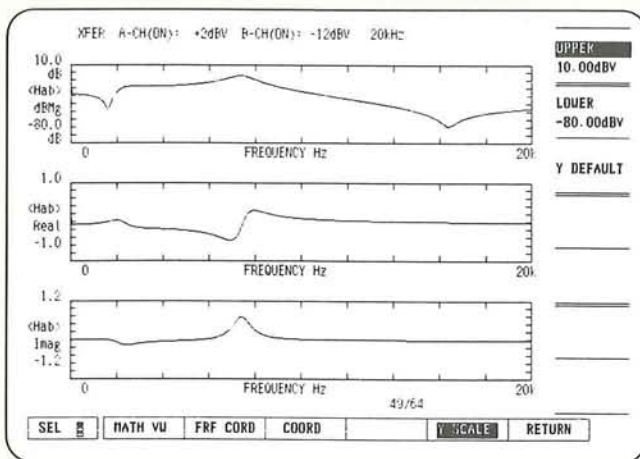

▲ Example of three-screen simultaneous display

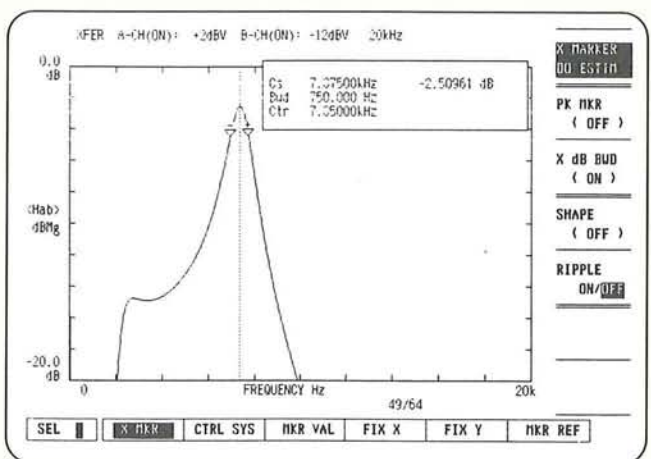


▲ Example of marker analysis function (3dB bandwidth)

Internal Summing Amplifier Optimum for Servo Analysis

The servo technology is applied to ultra-high-precision control of the drive sections in robots, VCRs, CDs, and hard disks. Because of this advantage, FFT servo analyzers are widely used for analysis of servo mechanisms. To measure an open-loop characteristic, however, an external summing circuit must be created.

The R9211B has built-in summing amplifier so that it is possible to perform an open-loop characteristic from DC to 100 kHz.

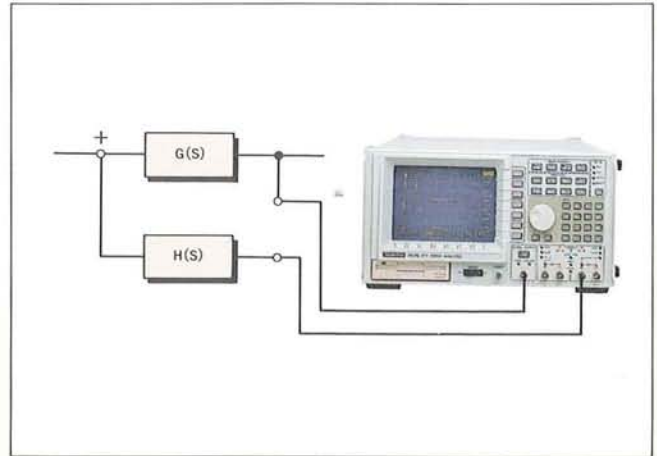


S.G. Output for Low-Impedance Drive

When the deviation characteristic of a CD actuator is measured, the S.G. output impedance lowers the drive capacity because the impedance is low near the resonance point. So the actuator cannot be driven properly.

The S.G. output from the R9211B has an output impedance of 1Ω or less and is optimum for this kind of application.

In addition, the DC offset voltage and signal output level can be set independently for an ideal mechanical servo analysis.

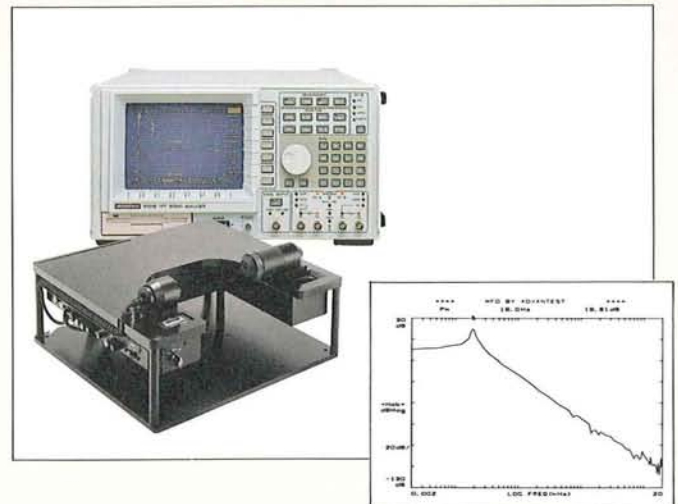

New Feature-Spot Servo Analysis by Frequency Table


The R9211B has a new function for a servo analysis only at a set frequency point as well as the servo analysis functions by linear sweep and log sweep up

to five decades. With the new function, data can be collected immediately only from the point that is under investigation.

Digital S.G. Functions for More Applications (Optional)

Optional Internal Digital S.G. Output and Digital Input


The F9211B can perform spectrum analysis through digital S.G. signal output or single-channel digital signal input. This function enables a D/A converter, AD converter, or digital amplifier to be evaluated.

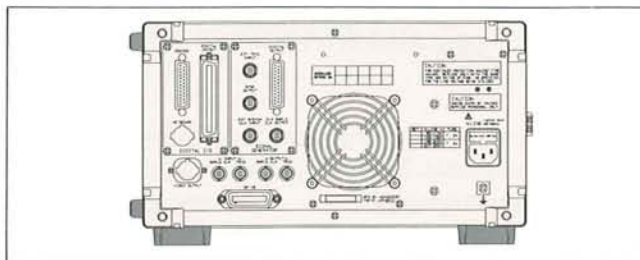

Completely Independent DC Offset and Signal Output Settings for Mechanical

Servo Analysis When the displacement characteristic of a CD actuator is measured continuously, a DC offset voltage is applied from outside and the mobile part is centered. Also, the offset voltage restricts the AC signal output amplitude even when the servo analyzer has a DC offset function. For example, when the +3 VDC offset voltage is applied, it is not possible to get a few mV signal output.

To solve this problem, the R9211B incorporates an internal DC offset function that can be set independently from signal output. The combination of the DC offset voltage and signal output level is unlimited within the range of $\pm 15V$. So the servo analyzer is ideal for a mechanical servo analysis.

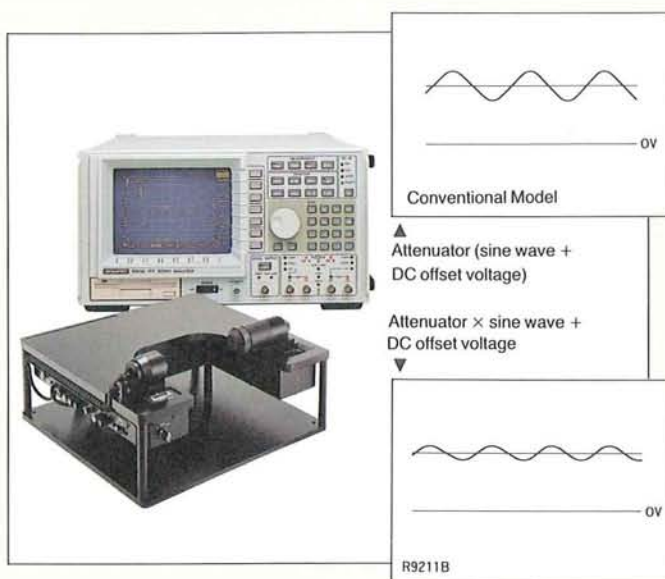


A/D or D/A Dynamic Test on DAT

The digital audio industry is producing CDs and DATs that are more and more advanced. The R9211B dynamically tests A/D and D/A converters, the main components of such audio equipment. For a linearity test on an A/D converter's static bits, converted digital data must again be converted into analog data with a D/A converter.

This method, however, measures the D/A converter performance as well and cannot evaluate the A/D converter performance properly.

The built-in digital I/O (optional) enables digital output from the A/D converter to be connected to the digital I/O of the R9211B. Then the R9211B internal digital signal function can perform spectrum analysis up to the Nyquist frequency. This enables the performance of the A/D converter alone to be evaluated.

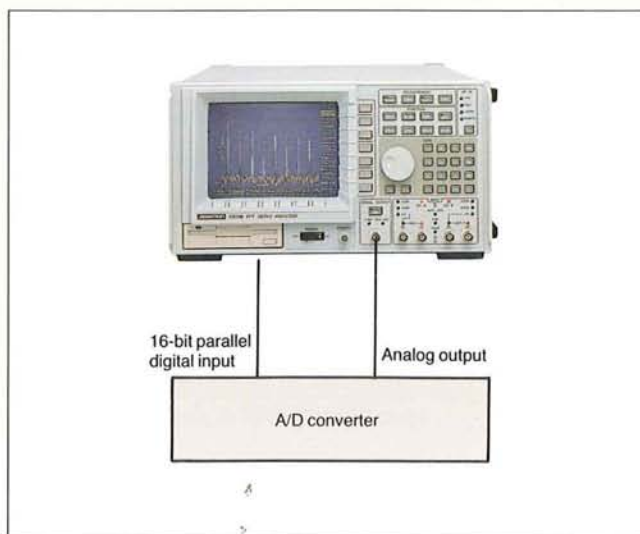

Easy Data Storage and System Improvement

Floppy Disk Drive Meeting MS-DOS Format

The 3.5-inch FDD available for both 2HD and 2DD can record data in the MS-DOS format, so data can be

collected or processed on an offline basis.

Direct Plot Output for Report Creation

The results of measurement and analysis can be plotted to any scale in 1/2 or 1/4 arbitrary position through an external plotter.

Data can also be plotted by using the automatic split function.

This function is useful for report creation.

High-speed Hard copy Function (Option 07)


If the optional video printer is built in, a hard copy of data can be made easily at high speed. The 640-dots/

line thermal printer produces very fine resolution.

System Improvement for Modal Analysis

An external desk-top computer can be connected through the standard GP-IB interface for model analysis. The 16 bits/90dB dynamic range

performance of the R9211B provides a very powerful means of measuring accurate transfer function by using an impulse hammer.

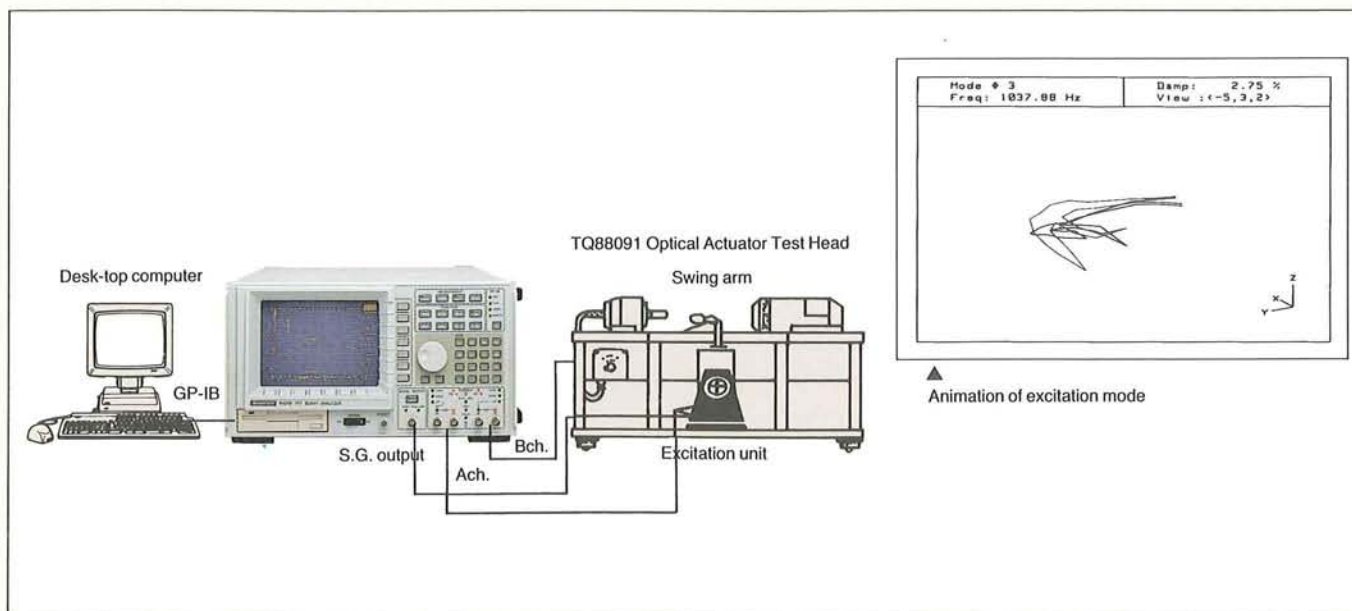

Optimum High-performance FFT Analyzer

High-performance Spectrum Analyzer

The FFT servo analyzer features 16-bit resolution, 90dB (typical value) wide dynamic range, and -140dBV (typical value) high sensitivity. It is an

effective tool for analysis of an audio signal's S/N ratio, for analysis of a transient signal, and for measurement of device noise.

Large-capacity Digital Oscilloscope


If the anti-aliasing filter is turned off, the FFT servo analyzer becomes a 16-bit, 256 kHz-sampling high-resolution digital oscilloscope. For long-time signal

collection, the large 1M-word memory can be used optionally.


Signal Analysis in New Domain

In the time-frequency analysis mode, the analyzer can evaluate the sounds of a musical instrument or the reverberant characteristic of a concert hall by analyzing the time fluctuation of a specific spectrum (level monitor function).

This mode can be used to analyze the spectrum fluctuation time characteristic of a VCR's wow and flutter component (frequency monitor function) or the jitter phase fluctuation time characteristic (phase monitor function).

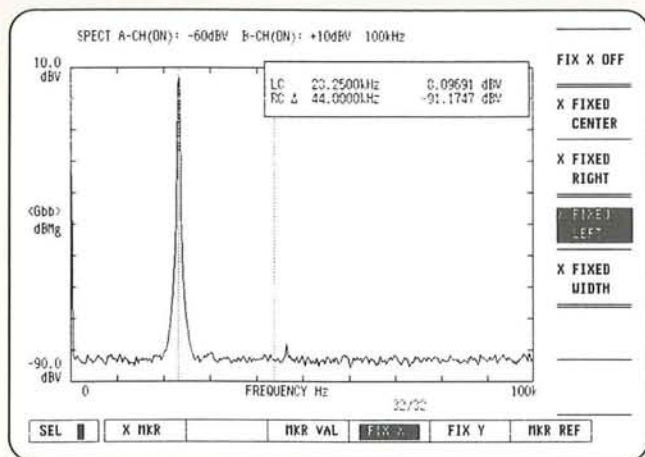

▲ 90dB (typical value) wide dynamic range

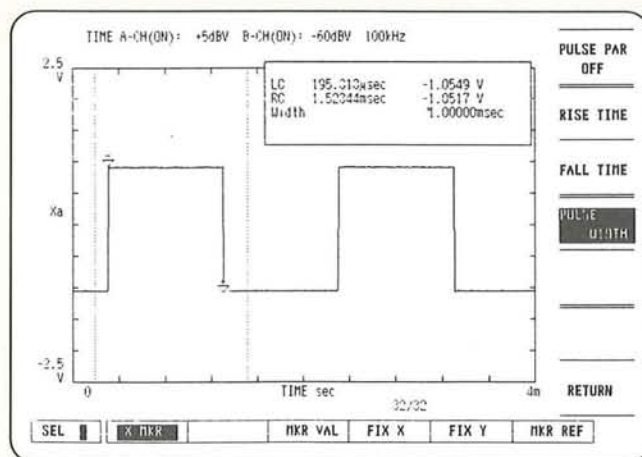

▲ Example of pulse parameter analysis function (pulse width measurement)

Specifications

Input and Analysis Characteristics

No. of input channels: 2

Input format: Differential input, single-ended input

Input impedance: Approx. 1 M Ω /100 pF (single-ended)

Input coupling: AC, DC, and GND

Common-mode rejection ratio (CMR): 50 dB or more (with DC coupling, 50/60 Hz)

Maximum differential input voltage: ± 200 V

Maximum common-mode signal voltage: ± 200 V

Input range: +30 dBV to -60 dBV (variable in 1-dB steps)

Voltage display 44.7 V to 1.41 mV

rms display 31.6 V to 1 mV

Auto range: Optimum setting in above range by signal input (in 5-dB steps)

Maximum common-mode signal voltage:

± 14 V (-60 dBV range to -6 dBV range)

± 140 V (-5 dBV range to +14 dBV range)

± 200 V (+15 dBV range to +30 dBV range)

Maximum input sensitivity: -125 dBV (approx. 0.56 μ Vrms) (typical value: -140 dBV in 2 kHz range)

Dynamic range: Range of values starting from full scale in spectrum mode; measured under the conditions of 32 times averaging, rectangular wave weighting, filter on, and 400 spectrum lines by inputting a sine wave of frequency range 0 to 90% and amplitude level -3 dB. (at 23°C $\pm 5^\circ$ C)

85 dB (+30 dBV \sim -40 dBV) (Typ. 90 dB)

75 dB (-41 dBV \sim -50 dBV)

65 dB (-51 dBV \sim -60 dBV)

Residual noise: Range of values starting from full scale in spectrum mode; measured under the conditions of 32 times averaging, rectangular wave weighting, filter on, and 400 spectrum lines by eliminating i/f noises; frequency range 0 to 90% (at 23°C $\pm 5^\circ$ C)

-85 dB (+30 dBV \sim -40 dBV)

-75 dB (-41 dBV \sim -45 dBV)

-60 dB (-46 dBV \sim -60 dBV)

Amplitude linearity: ± 0.2 dB or less (from full scale to -40 dB, 23°C $\pm 5^\circ$ C)

Frequency levelness: ± 0.3 dB or less (at 23°C $\pm 5^\circ$ C) (-3 dB point of AC coupling in frequency range from 0 to 90% is approx. 0.2 Hz)

Amplitude accuracy: Amplitude linearity + frequency levelness (at 23°C $\pm 5^\circ$ C)

Channel-to-channel amplitude difference: ± 0.1 dB or less (at 23°C $\pm 5^\circ$ C) in the same sensitivity range and frequency range from 0 to 90%

Channel-to-channel phase difference: ± 1.0 deg or less (at 23°C $\pm 5^\circ$ C) in the same sensitivity range and frequency range from 0 to 90%

Accelerometer power source: AC input only

4 mA current source Channel A/B + side

Maximum operating voltage +18 V

Open circuit voltage +24 V or less

Overload display: LED

Test signal: In display frequency range from 2 kHz to 100 kHz

Amplitude level Approx. -4 dBV

Frequency 8% rectangular wave in the range

A/D converter resolution: 16bits

Frequency range: 10 mHz to 100 kHz, 22 ranges in 1, 2, and 5 steps

Frequency accuracy: ± 50 ppm \pm measuring resolution in the frequency range (at 23°C $\pm 5^\circ$ C)

Input filter: Anti-aliasing filter (roll-off characteristic: -148 dB/octave automatically set for each frequency range)

External sampling input: Sampling from BNC connector of the rear panel by TTL-level external pulse (anti-aliasing filter on/off possible)

External sampling output: Sampling signal output to BNC connector of the rear panel

Triggering

Trigger modes: Free-run, manual, external and internal trigger, automatically repeating trigger

Trigger sources: Channel A signal, Channel B signal and external signal triggering

Trigger levels:

Internal trigger Set by numeric keys with 1/256 resolution of the amplitude range

External trigger TTL signal rising or falling edge selected (BNC connector of rear panel)

Trigger slope: +, -, \pm (input signal trigger)

Trigger position:

Single-channel mode Setting range of -128K to 1M with a resolution of 1 sampled data item

Dual-channel mode Setting range of -64K to +1M with a resolution of 1 sampled data item

Averaging

Frequency-domain averaging modes: Addition (SUM), subtraction (SUB), exponential function moving mean (EXP), and maximum detected value (PEAK)

Time-domain averaging mode: Addition (SUM)

Delay-domain averaging mode: Addition (SUM)

Amplitude-domain averaging mode: Addition (SUM)

No. of averages: 1 to 32767

Overlapping: 0%, 50%, 75%, max.

Averaging control: Start, stop, +1, continue (Erased automatically at start)

Measurement modes

- Waveform measurement mode
- Spectrum measurement mode
- Time-frequency analysis mode
- Frequency response function measurement mode
- Servo analysis mode

Waveform measurement mode

Measured items:

Time-domain instantaneous data

Time-domain average data

Auto-correlation function

Cross-correlation function

Probability density function

No. of analyzed data: 64 to 8192 points (1 channel)
64 to 4096 points (2 channels)

No. of delay-domain data: 64 to 2048 points

Averaging:

Time-domain averaging

Delay-domain averaging

Amplitude-domain averaging

Conversion function: In engineering unit

Marker analysis functions: Peak, rise time, fall time, pulse width, and effective value

Arithmetic functions: Differentiation, integration, smoothing, trend removal, addition, subtraction, multiplication, division, and pre-envelope

Display functions: Time-amplitude, amplitude-probability density, and orbit

Spectrum Measurement Mode

Measured items:

Complex spectrum

Power spectrum

Mutual spectrum

Averaging: Frequency-domain averaging

No. of analysis data: 64 to 8192 points (single-channel)
64 to 4096 points (dual-channel)

Specifications (continued)

Frequency resolution:

- Linear 25 to 3200 lines (single-channel)
25 to 1600 lines (dual-channel)
- Logarithm 3 decades max., 80 lines/decade
- Other 1/3 octave, 1/1 octave

Weighting: Rectangular, hanning, minimum, flat-pass, force/response

- * Window function fixed to minimum for the logarithm frequency resolution or octave resolution

Conversion function: A/B/C characteristic correction in engineering unit

Marker analysis functions: Peak, next peak, band, harmonic, sideband, overall power, partial power, average power, and variance

Arithmetic functions: Addition, subtraction, multiplication, division, pre-envelope, liftered, spectrum, power cepstrum, jw, 1/jw, and smoothing

Display functions: Frequency-amplitude, frequency-phase, frequency-real part, frequency-virtual part, Nyquist diagram

Time-frequency analysis mode

Basic measured items: Time waveform, complex spectrum, power spectrum

Time-frequency analysis functions: Level monitor, phase monitor, frequency monitor

Averaging: Frequency-domain averaging

Transient waveform memory: 128K words (single-channel)
64K words (dual-channel)

No. of analysis data: 64 to 2048 points

Frequency resolution:

- Linear: 25 to 800 lines
- Logarithm: 3 decades max., 80 lines/decade
- Other: 1/3 octave, 1/1 octave

Weighting: Rectangular, hanning, minimum, flat-pass, force/response

- * Window function fixed to minimum for the logarithm frequency resolution or octave resolution

Conversion function: In engineering unit

Marker analysis functions: Peak, next peak, band, harmonic, sideband, overall power, attenuation power, partial power, average power, and variance

Arithmetic: Addition, subtraction, multiplication, division, pre-envelope, liftered, spectrum, power cepstrum, jw, 1/jw, smoothing, and level monitor accumulation

Display functions: Frequency-real part, frequency-virtual part, frequency-amplitude, frequency-phases, Nyquist diagram, time-level, time-phase, and time-frequency

Frequency response function measurement mode

Measured items:

- Frequency response function
- Group delay
- Association degree function
- Power spectrum
- Mutual spectrum
- Impulse response function

Averaging: Frequency-domain averaging

No. of analysis data: 64 to 2048 points

Frequency resolution:

- Linear 25 to 800 lines

Weighting: Rectangular, hanning, minimum, flat-pass, force/response

Conversion function: In engineering unit

Marker analysis functions: Peak, next peak, band, harmonic, sideband, overall power, partial power, average power, and variance, positive peak, negative peak, XdB, shape factor, and ripple

Arithmetic functions: Addition, subtraction, multiplication, division, unwrapped phase, jw, 1/jw, inverse number, impulse response, equalizing, phase correction, coherent output power (COP)

Display functions: Frequency-amplitude, frequency-phase, frequency-real part, frequency-virtual part, frequency-group delay, frequency-association degree function, Nyquist diagram, call-call diagram, and Nicol's diagram

Servo analysis mode

Measured items:

- Frequency response function
- Group delay
- Association degree function
- Power spectrum
- Mutual spectrum

Sweep modes: Linear sweep or logarithmic sweep

Servo measurement function with a frequency table: Specified the measurement frequency of sine wave

Conversion function: In engineering unit

Marker analysis functions: Peak, next peak, band, harmonic, sideband, overall power, partial power, average power, variance, positive peak, negative peak, XdB, shape factor, ripple, open-loop diagram, and closed-loop gain

Arithmetic functions: Addition, subtraction, multiplication, division, unwrapped phase, jw, 1/jw, inverse number, impulse response, equalizing, phase correction, coherent output power (COP), and open/closed-loop conversion

Display functions: Frequency-amplitude, frequency-phase, frequency-real part, frequency-virtual part, frequency-group delay, frequency-association degree function, Nyquist diagram, cole-cole diagram, and Nichols diagram

Signal generator

Output waveforms: Sine, multiple sine, impulse, random, and arbitrary

Output characteristics:

- Frequency range 0 to 100 kHz
- Output impedance 1 Ω or 50 Ω
- DA converter resolution 16 bits
- Clock frequency 2.048MHz max. (interlocked with mainframe analysis range)
- Maximum output voltage $\pm 15V$ (with 1 Ω or less output impedance)
- Maximum input current 0.1A (with 1 Ω or less output impedance)
- Offset $\pm 10V$ with 0.1V resolution
- Waveform data length 64K words

Operation mode: Continuous, external trigger

Internal summing amplifier

Output protection function (Taper function)**Output signal:** BNC (front)**Digital output:** DSUB (16 bits + strobe signal)

External output of digital waveform (Rear connector)

External trigger input (with external gate signal input): BNC**Trigger signal input:** BNC**Sampling clock input:** BNC**Sampling clock output:** BNC

Display Specifications and Functions

Display function: 8-inch raster scan CRT**Measurement condition selection:** Interactive menu selection**Engineering unit:** Marker reading and X-axis scaling display in arbitrary physical quantity**Display modes:** One-screen, two-screen, three-screen, and four-screen displays**Overlaid display mode:** Two sets of data from the same domain and having the same analysis ranges may be displayed overlaid on the same display screen**Grid display:** Switchable on/off**3-dimensional display:** Up to 50 lines of selected data may be used to create a 3-dimensional display**Bar display:** Overall power, partial power, average power, or power variance is displayed on the right side of the CRT**Label:** Up to 40 arbitrary alphanumeric and special characters can be displayed or shifted vertically**List modes:**

Single mode Digital listing of any 20 spectrum frequencies and corresponding levels, selected from the displayed spectrum using a cursor

Harmonic mode With the fundamental frequency selected by using the cursor, digital display of this and harmonic levels is made, along with THD (total harmonic distortion), THP (total harmonic power) and the number of spectrum in harmonic.

X axis: Linear, logarithm**Y axis:** Arbitrary setting by numeric input**Auto-scaling:** Display data is automatically scaled for display**Plotter output:** Direct output to R9833 or other plotter with HP-GL**Calendar clock function:** Date (year/month/day) and time (hour/minute) display

Storage Functions

Transient waveform data memory: This is used for the time-frequency analysis mode

Standard memory 128K words

I/O + memory (option 11) 1M words

CMOS memory (option 10) 1M words (battery backup)

Panel memory: This contains the panel conditions (Battery backup, storage for about one month)

I/O functions

Video signal output: Separate, TTL level **GPIB interface:** Standard**Plotter output:** Through GPIB**External sampling clock input:** BNC type, TTL level**External trigger input:** BNC type, TTL level

Internal floppy disk function

Type 3.5-inch micro floppy disk

Media 2DD/2HD, 640K/720K/1M bytes (when formatted)

Format MS-DOS

Data file Measured data and panel conditions

Data file operation Listing, generation, erasure, and copy

General Specifications

Operating temperature range:

Ambient temperature +5°C to +35°C

Relative humidity 80% or less

Storage temperature: Ambient temperature -20°C to +60°C**Power supply:** Specify a type when ordering

Option No.	Standard	Option 32	Option 42	Option 44
Power-supply voltage	90 to 110 VAC	103 to 132 VAC	198 to 242 VAC	207 to 250 VAC

48 to 66Hz**Power consumption:** 170 VA or less (standard)**Exterior dimensions:** Approx. 330 (W) × 177 (H) × 450 (D) mm**Weight:** 14 kg or less (mainframe)**Accessories**

Item	Model	Product code	Remarks
Power cable	A01402		1 pc.
Input cable	MI-77		2 pcs.

Options

Option 07 Built-in printer

Hard copy output from CRT display

Print method Heat-sensitive line dot

Dot configuration 640 dots/line

Specified record form A09075

Form width 114mm

Option 11 I/O+memory

This optional board has the following functions:

Extension memory 1M words (2M bytes)

Digital input For digital signal input not through the internal A/D converter

(Maximum sampling rate 256 kHz)

Data format 16 bits+EOC signal (complement of 2)

Digital output For data output from internal A/D converter

Data format 16 bits+channel identification

signal+strobe signal (complement of 2)

Option 10 CMOS memory1M-word (2M-byte) battery backup memory
