

Arvin

MODEL 62R09

CODE 1. 66601

TR-1
2N212
CONVERTER


TR-2
2N94
1st I F

TR-3
2N233A
2nd I F

D-1
IN295
DIODE

TR-4
S95201
AUDIO DRIVER

TR-5
S95204
AUDIO OUTPUT

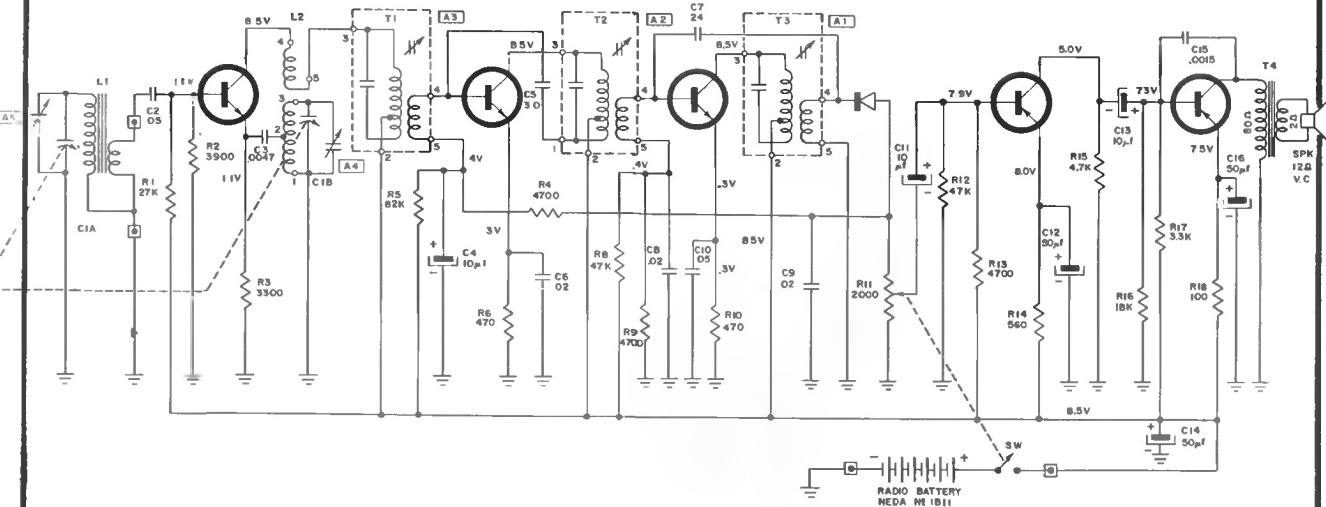

CAPACITANCE VALUES LESS THAN 1.0 ARE IN MICROFARADS (μ f), AND VALUES GREATER THAN 1.0 ARE IN MICRO-MICROFARADS ($\mu\mu$ f) EXCEPT WHERE NOTED.


VOLTAGE READINGS TO COMMON GROUND ARE MEASURED WITH VACUUM TUBE VOLTMETER UNDER NO SIGNAL CONDITIONS WITH TUNING CAPACITOR CLOSED AND VOLUME CONTROL AT MAXIMUM COUNTERCLOCKWISE ROTATION.

RESISTANCE VALUES ARE IN OHMS, K=1000

$\frac{1}{2}$ - COMMON GROUND SYMBOL


$\square$ - EXTERNAL CONNECTION TO PRINTED CIRCUIT

TOTAL BATTERY CURRENT DRAIN UNDER NO SIGNAL CONDITIONS, 10 TO 16 MA.



LF TRANSFORMER B OSCILLATOR COIL (BOTTOM VIEW)

SIGNAL TEST POINTS	TEST FREQUENCY	SERIES CAPACITOR TO GENERATOR	INPUT FOR 5 MW OUTPUT (25V ACROSS 12 Ω)
TR-3 BASE	455 KC	.05 μ f	500 μ V
TR-2 BASE	465 KC	.05 μ f	50 μ V
TR-1 BASE	455 KC	.05 μ f	2 μ V
STANDARD LOOP	1000 KC	STANDARD LOOP	200 μ V / M

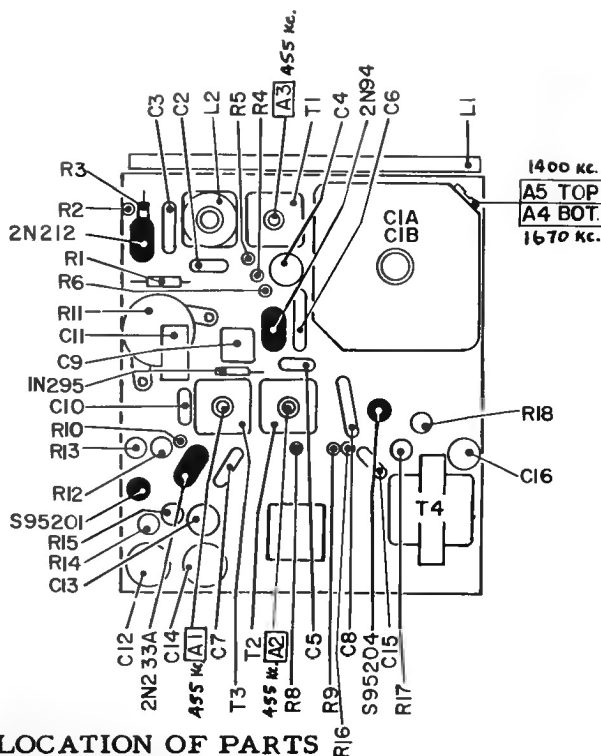

LOCATION OF PARTS

