

MODEL D-130-A

The MODEL D-130-A low frequency unit used in this system employs a heavy Alnico V magnet and an edgewise wound copper ribbon voice coil. It is designed to operate at frequencies up to 1500 cycles.

MODEL D-175 HIGH FREQUENCY UNIT


The D-175 High frequency unit used in this system is designed to operate at frequencies from 800 to 16,000 cycles. The voice coil is edgewise wound aluminum ribbon. The diaphragm is .002 inches thick aluminum alloy and employs tangential corrugations to provide freedom of motion. Used in conjunction with the H-1000 multicell horn this unit will provide the finest high frequency reproduction that it obtainable.

The frequency dividing network is designed to give an attenuation rate of 18 decibels per octave, cross-over is at 1200 cycles.

SPECIFICATIONS:

MODEL D-1000

POWER INPUT	25 watts
IMPEDANCE	15 ohms
DIMENSIONS	37 $\frac{1}{4}$ " high x 24" wide x 16" deep
FIELD	Permanent magnets
NET WEIGHT	115 lbs.
SHIPPING WEIGHT	135 lbs.
LIST PRICE	\$320.00

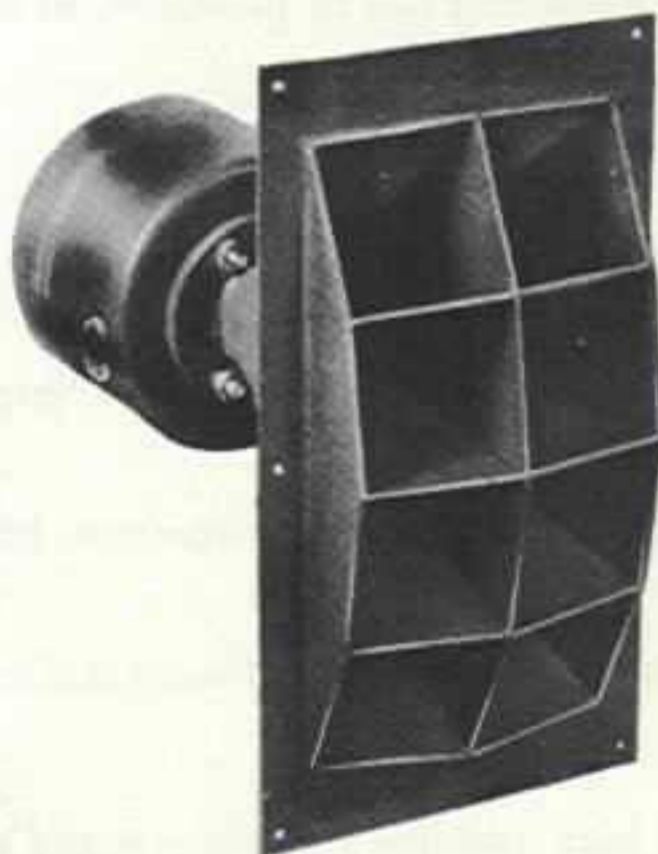

JAMES B. LANSING SOUND INC.

4221 SOUTH LINCOLN BOULEVARD

VENICE, CALIFORNIA