

MS112 Compact, Two-Way Full Range Loudspeaker System For Permanent Installation

Marquis Series

Key Features:

- ▶ 12" LF transducer
- ▶ 85 x 85° OASR™ (Optimized Aperture Symmetrical Radiator)
- ▶ Unique enclosure profile for multiple applications
- ▶ DuraFlex finish, tough, weather-resistant and paintable
- ▶ 12 Suspension points (M10 Thread) with Eye bolt suspension kit
- ▶ Dual Neutrik Speakon connectors
- ▶ Hand Locations



The model MS112 is a full range system that provides unprecedented bandwidth and maximum SPL in a single system package. With nominal 85 degree coverage pattern, systems can be splayed together for additional coverage and/or SPL requirements. The OASR (Optimized Aperture Symmetrical Radiator) provides enhanced dispersion control in both planes, while maintaining the principle of Optimized Aperture, low distortion and clear transient highs. JBL transducers combined with an optimized passive network, incorporating SonicGuard™, provide reliable performance for demanding applications.

The unique profile of the enclosure, in conjunction with the OASR, enables this system to be used in a vertical or horizontal orientation. For either a low profile ceiling installation, or permanent floor monitoring the system can be used horizontally. In the vertical orientation the side angles allow for a tight cluster arrays, or close wall mounting.

The rugged plywood construction of the enclosure, along with a textured DuraFlex finish and a heavy duty zinc treated steel, foam-backed grille and treated cones enable this Marquis Series enclosure to meet with environmental test specifications.

Designed for permanent installation, the MS112 is part of the Marquis Series, a complete range of installation loudspeaker systems.

Preliminary Specifications:

System:

Freq. Range (-10 dB):	55 Hz - 18 kHz
Freq. Response (-3 dB):	78 Hz - 14 kHz
Horz. Coverage Angle (-6 dB):	85° averaged 500 Hz to 16 kHz
Vert. Coverage Angle (-6 dB):	85° averaged 500 Hz to 16 kHz
Directivity Factor (Q):	9.9 averaged 500 Hz to 16 kHz
Directivity Index (DI):	10.0 dB averaged 500 Hz to 16 kHz
System Sensitivity ¹ :	98 dB, 1 W @ 1 m (3.3 ft)
Rated Maximum SPL:	129 dB, @ 1 m (3.3 ft)
System Nominal Impedance:	8 Ohms
System Input Power Rating ² :	300 W, IEC; 1200 W Peak
Recommended Amplifier ³ :	400 W
Crossover:	1.6 kHz

Transducers:

Low-Frequency:	M222-8, 300 mm (12 in) dia.
High-Frequency:	OASR with 2418H, 25 mm (1 in) throat, titanium diaphragm, compression driver

Physical:

Enclosure:	Asymmetric, 47° / 67° back angles, plywood
Environmental Specifications:	Mil-Std 810, IPX4 per IEC 529
Suspension Attachment:	12 points; accepts M10 threaded hardware
Finish:	Black DuraFlex coating
Grille:	Black powder coated zinc treated 18 gauge perforated steel grille with foam backing
Input Connectors:	2 x NL4 Neutrik Speakon connectors
Dimensions:	586 mm x 387 mm x 403 mm (23.05 in x 15.25 in x 15.87 in)
Net Weight:	22.7 kg (50 lbs.)

¹Measured on-axis in the far field with 1 watt (2.83 V RMS @ 8 ohms) input and referenced to 1 meter distance using the inverse square law. Listed sound pressure represents an average from 300 Hz to 16 kHz.


²IEC Spectrum for 2 hours with +6 dB crest factor.

³Recommended Amplifier is a power capability value that should be taken as a guide.


JBL continually engages in research related to product improvement. New materials, production methods, and design refinements are introduced into existing products without notice as a routine expression of that philosophy. For this reason, any current JBL product may differ in some respect from its published description, but will always equal or exceed the original design specifications unless otherwise stated.

MS112 2 way System


Frequency response is measured on-axis at a distance referenced to 1 meter at 1 watt using a recommended controller, shown as a half-space (2π) environment.

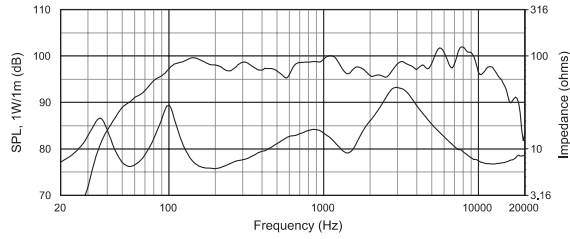


Horizontal Off-Axis Frequency Response

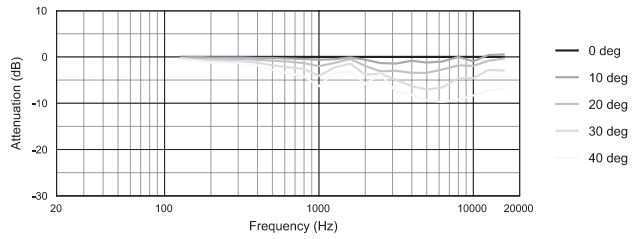


Beamwidth vs. Frequency

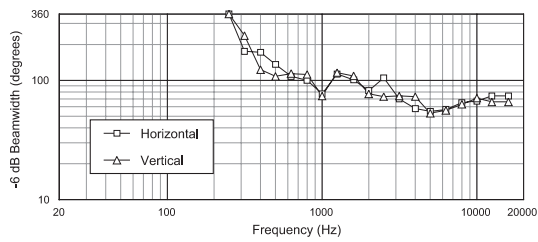



Vertical Off-Axis Frequency Response (up)

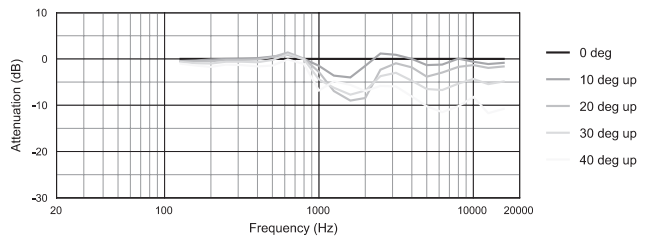


Directivity vs. Frequency

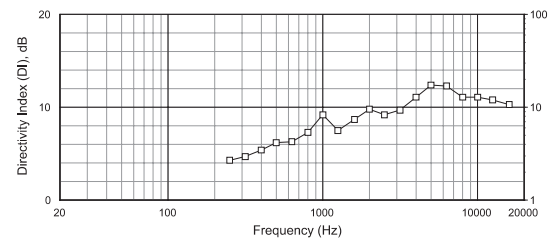


Vertical Off-Axis Frequency Response (down)

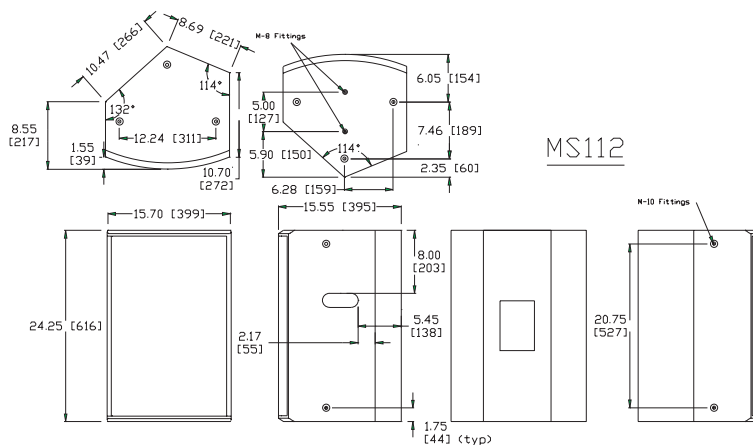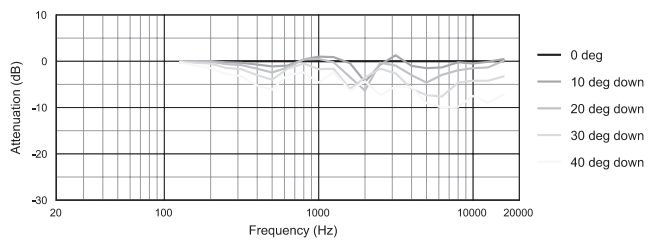


Horizontal 1/3 Octave Polars

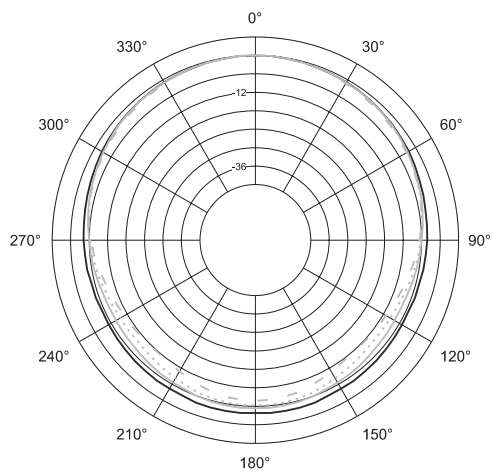


— 200Hz
— 250Hz
- - - 315Hz
- - - 400Hz

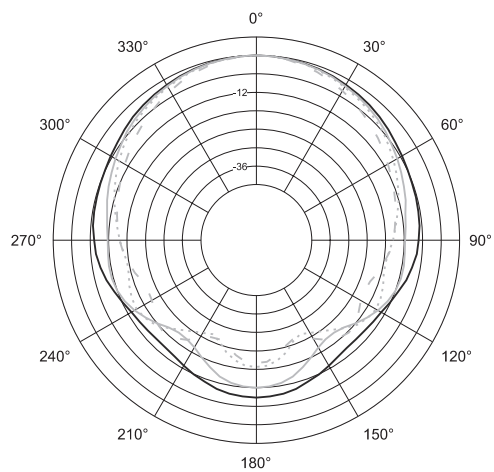


— 500Hz
— 630Hz
- - - 800Hz
- - - 1kHz

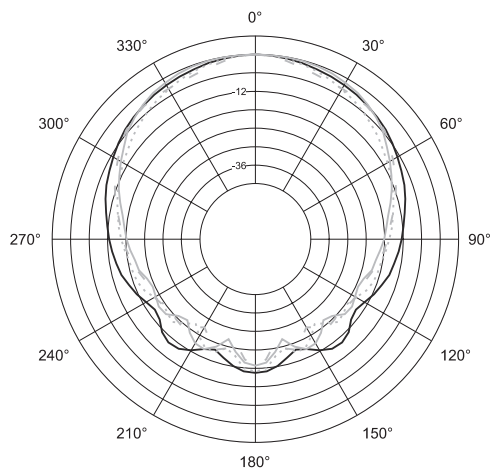

— 1.25kHz
— 1.6kHz
- - - 2kHz
- - - 2.5kHz

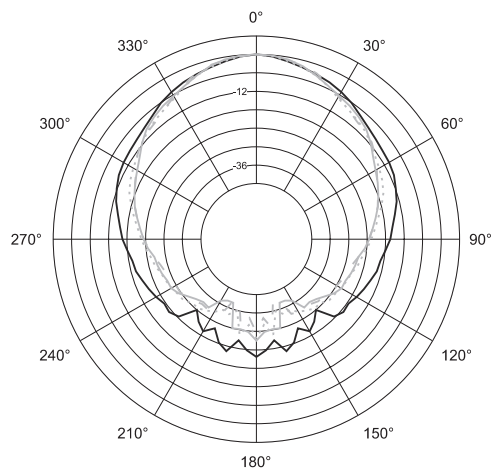


— 3.15kHz
— 4kHz
- - - 5kHz
- - - 6.3kHz

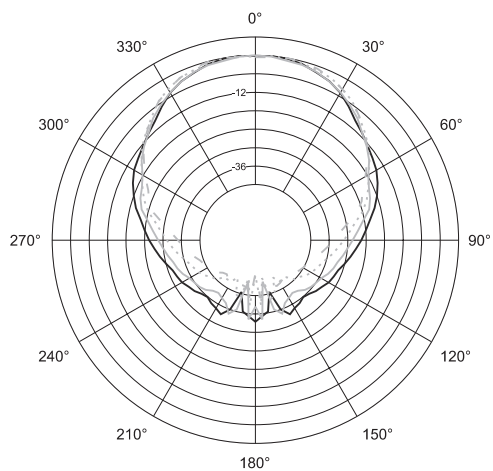


— 8kHz
— 10kHz
- - - 12.5kHz
- - - 16kHz

► MS112 2 way System


Vertical 1/3 Octave Polars

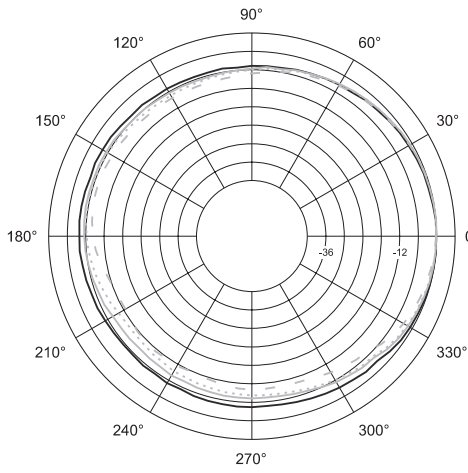


- 200Hz
- 250Hz
- 315Hz
- - - 400Hz

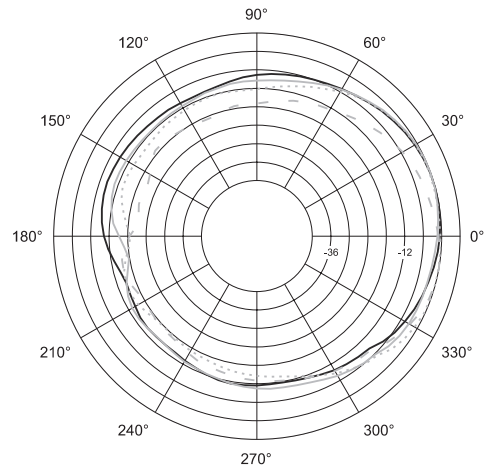


- 500Hz
- 630Hz
- 800Hz
- - - 1kHz

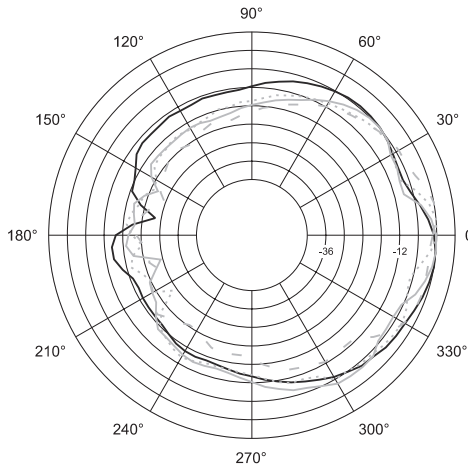

- 1.25kHz
- 1.6kHz
- 2kHz
- - - 2.5kHz

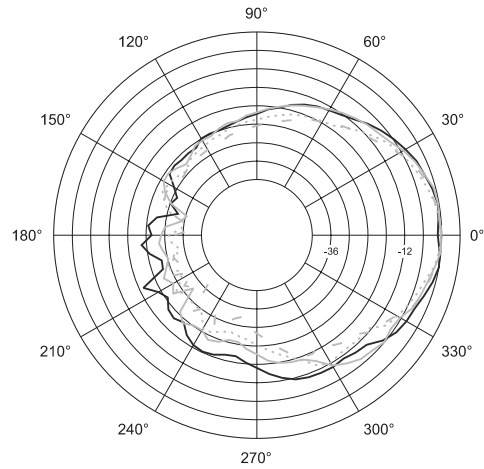

- 3.15kHz
- 4kHz
- 5kHz
- - - 6.3kHz

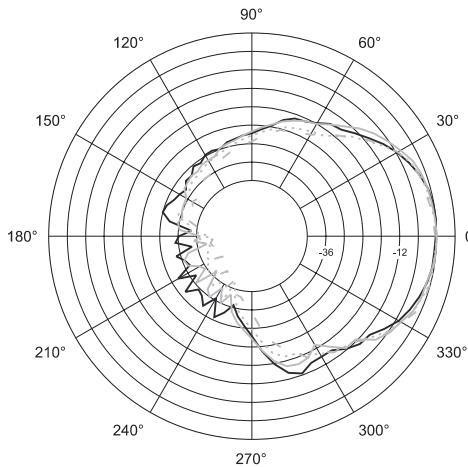

- 8kHz
- 10kHz
- 12.5kHz
- - - 16kHz



JBL Professional
 8500 Balboa Boulevard, P.O. Box 2200
 Northridge, California 91329 U.S.A.

■ A Harman International Company

SS MS112
 CRP 10M
 1/98