ALIGNMENT
SET VOL CONTROL AT MAX
CONNECT OUTPUT METER OR SCOPE
ACROSS VOICE COIL
INDUCTIVELY COUPLE SIGNAL GENERATOR
TO RECEIVER

ADJUST FOR MAX 455 KC SIGNAL

ADJUST FOR MAX 560 KC WHILE ROCKING GANG

CON MODULE - CM-4

IF MODULE - IFM-2

AUDIO MODULE - AM-1

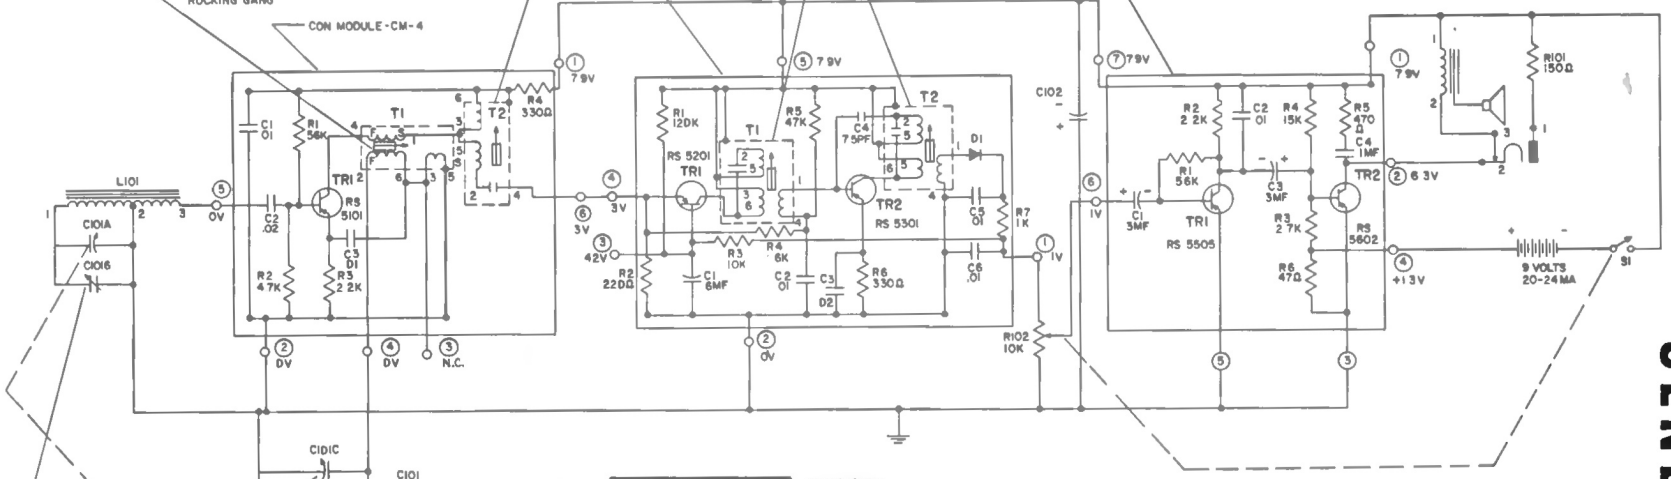

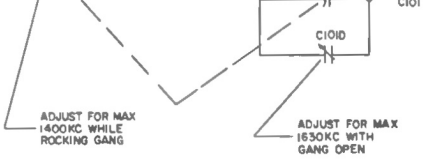

ADJUST FOR MAX 1400 KC WHILE ROCKING GANG

ADJUST FOR MAX 1630 KC WITH GANG OPEN

1 NOS IN CIRCLES REFER TO MODULE PIN CONNECTIONS

2 UNLESS OTHERWISE NOTED
CAPACITORS MORE THAN 1 = MMF
CAPACITORS LESS THAN 1 = MF
RESISTORS ARE 1/2 WATT, K = 1000

3 VOLTAGES ARE NEGATIVE WITH RESPECT TO GROUND EXCEPT WHERE NOTED UNDER NO SIGNAL CONDITIONS & VOL. CONTROL MIN

4 EACH MODULE SHOULD BE CONSIDERED AS ONE PART ANY MODULE FOUND DEFECTIVE SHOULD BE REPLACED WITH IDENTICAL MODULE

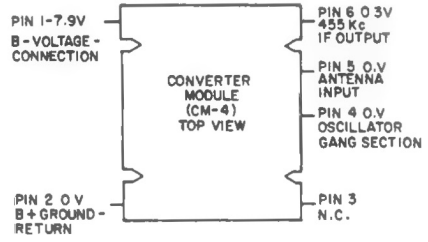

COMPONENT SIDE MODULE LAYOUT



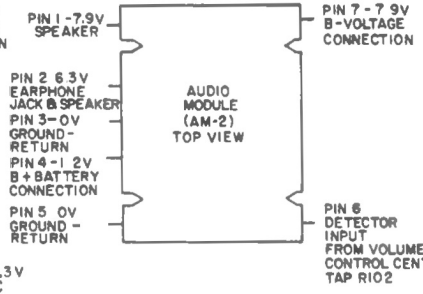

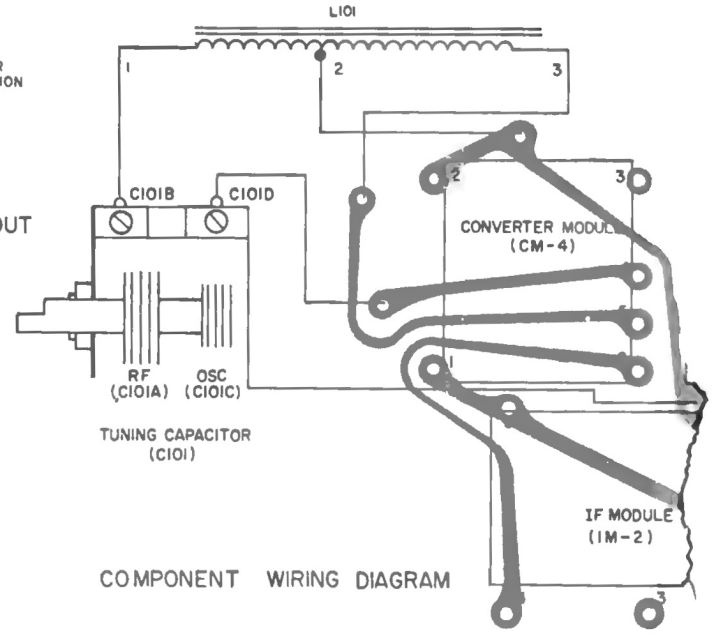

COMPONENT WIRING DIAGRAM

GENERAL ELECTRIC

MODELS
P807G,H
P807S,T
P808G,H
P808S,T