



KENWOOD

DC-1000

FM SPACE DIVERSITY

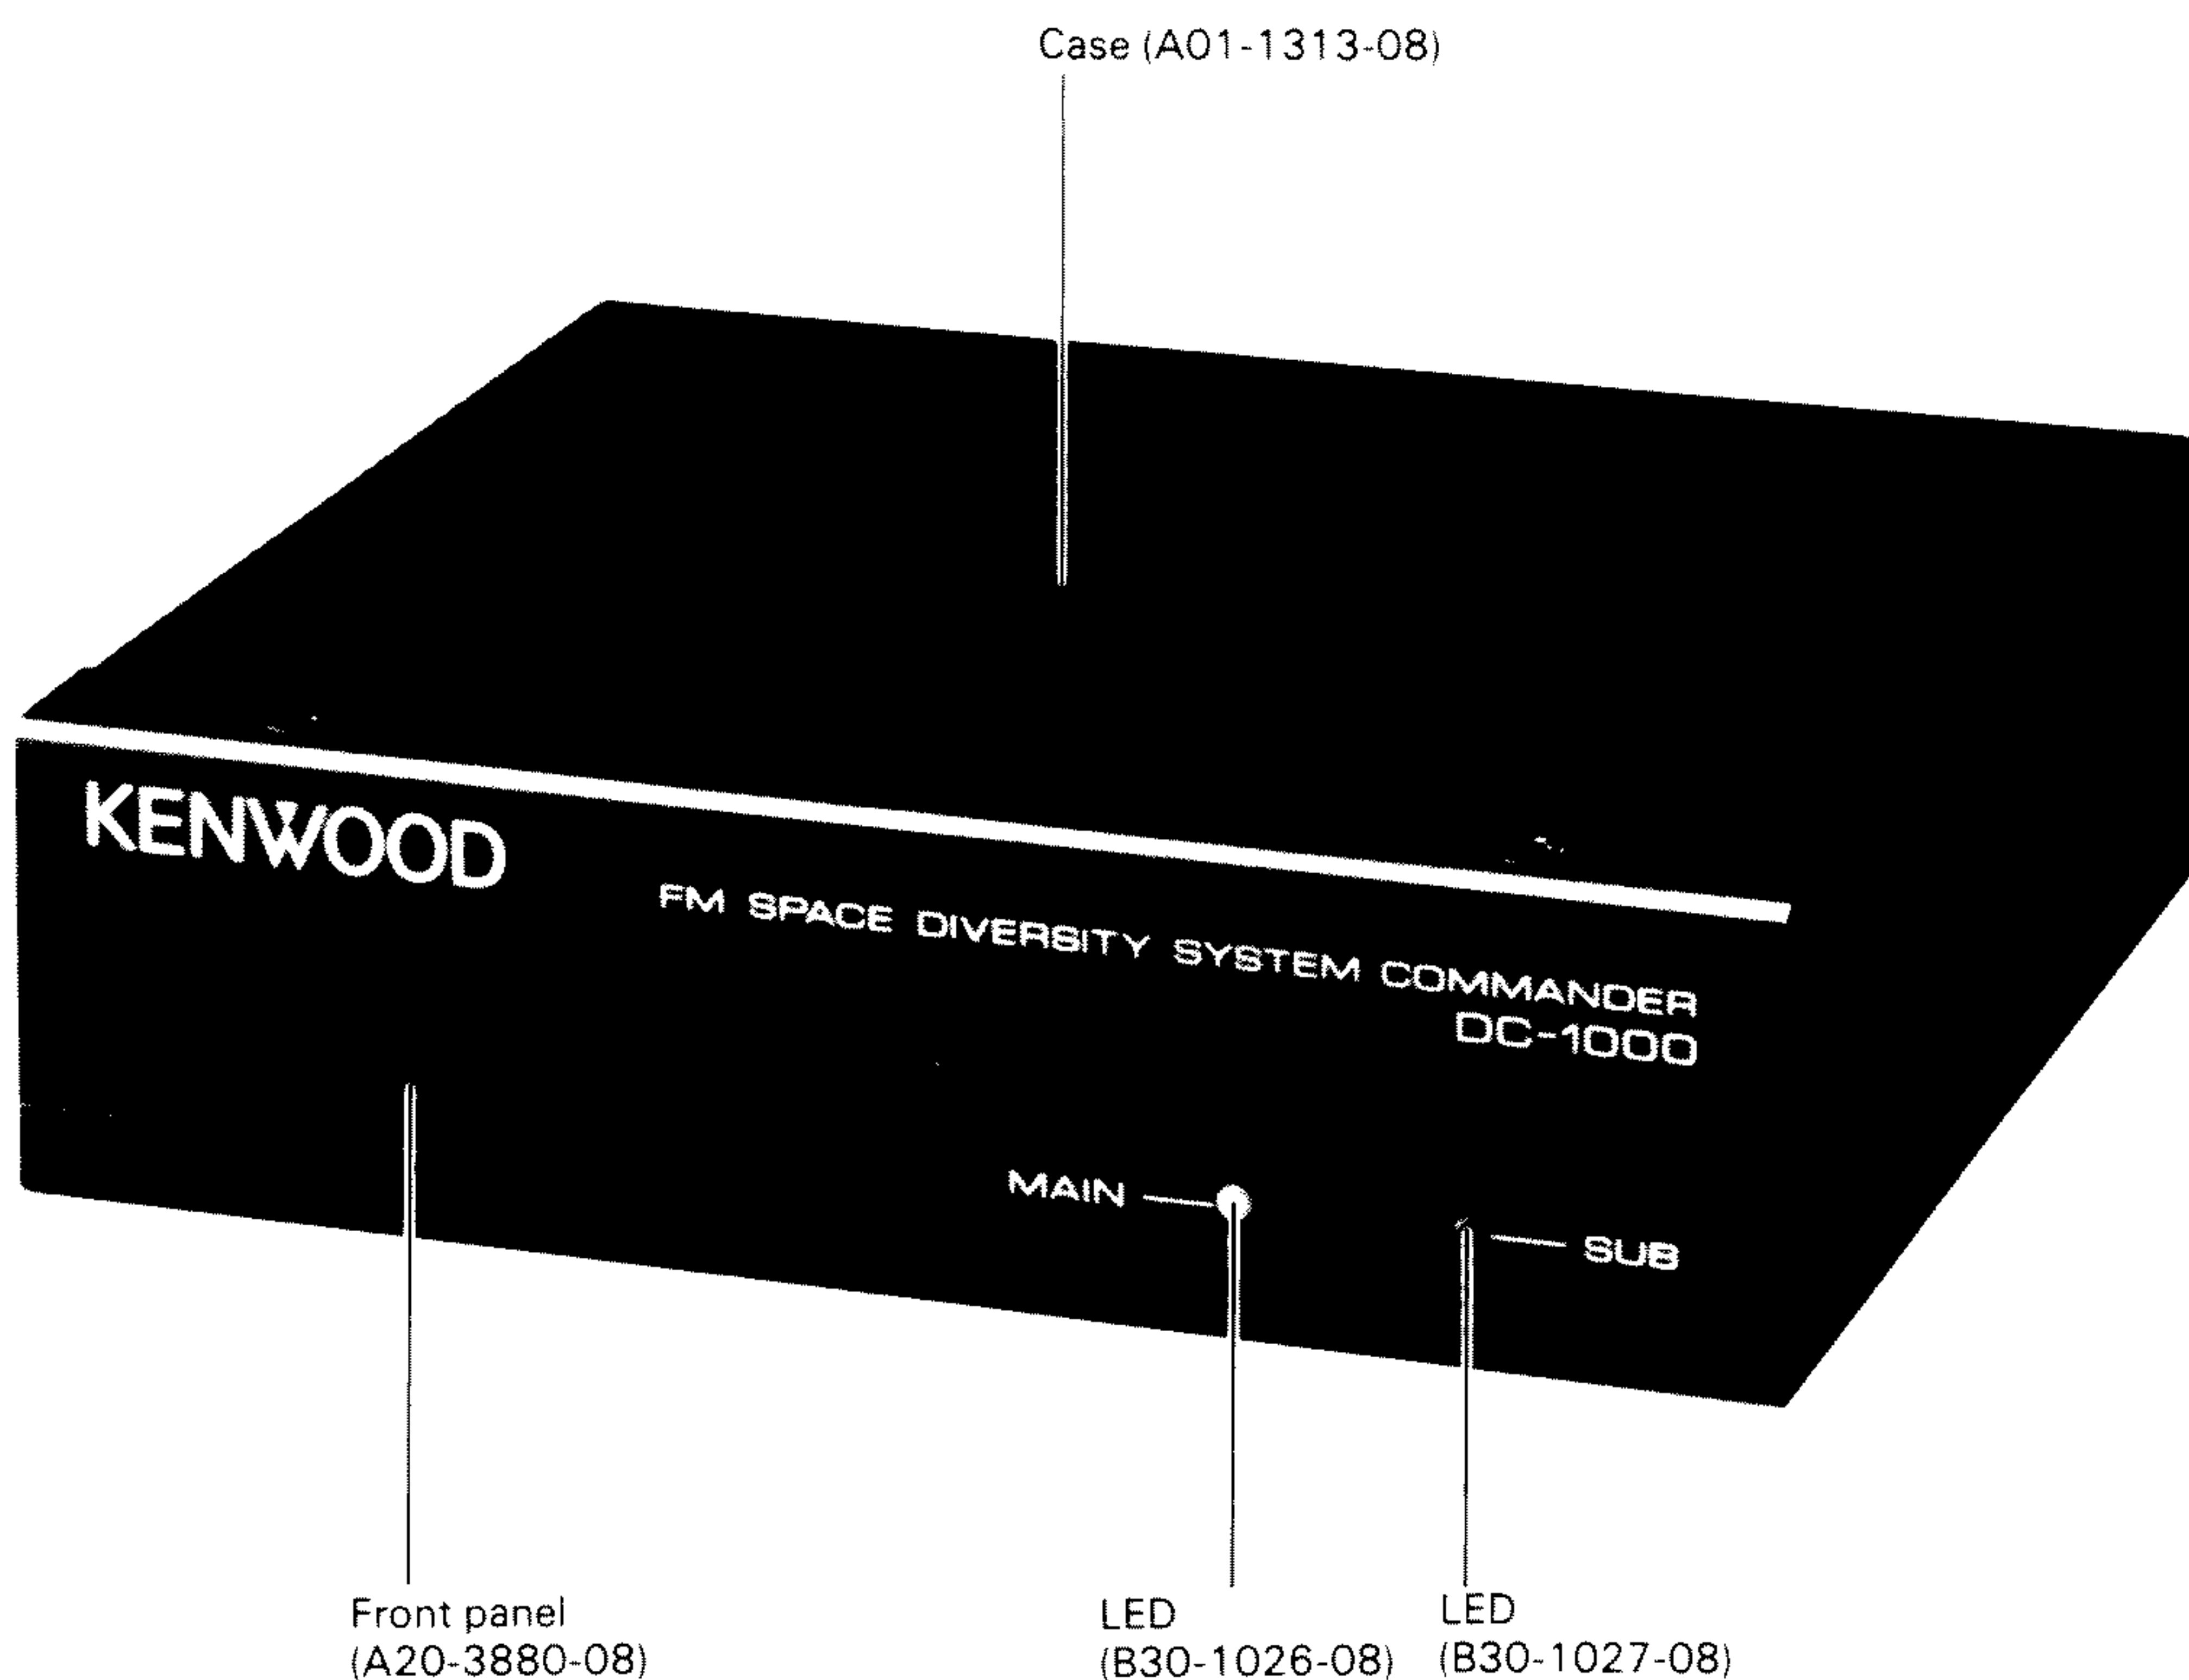


BLOCK DIAGRAM

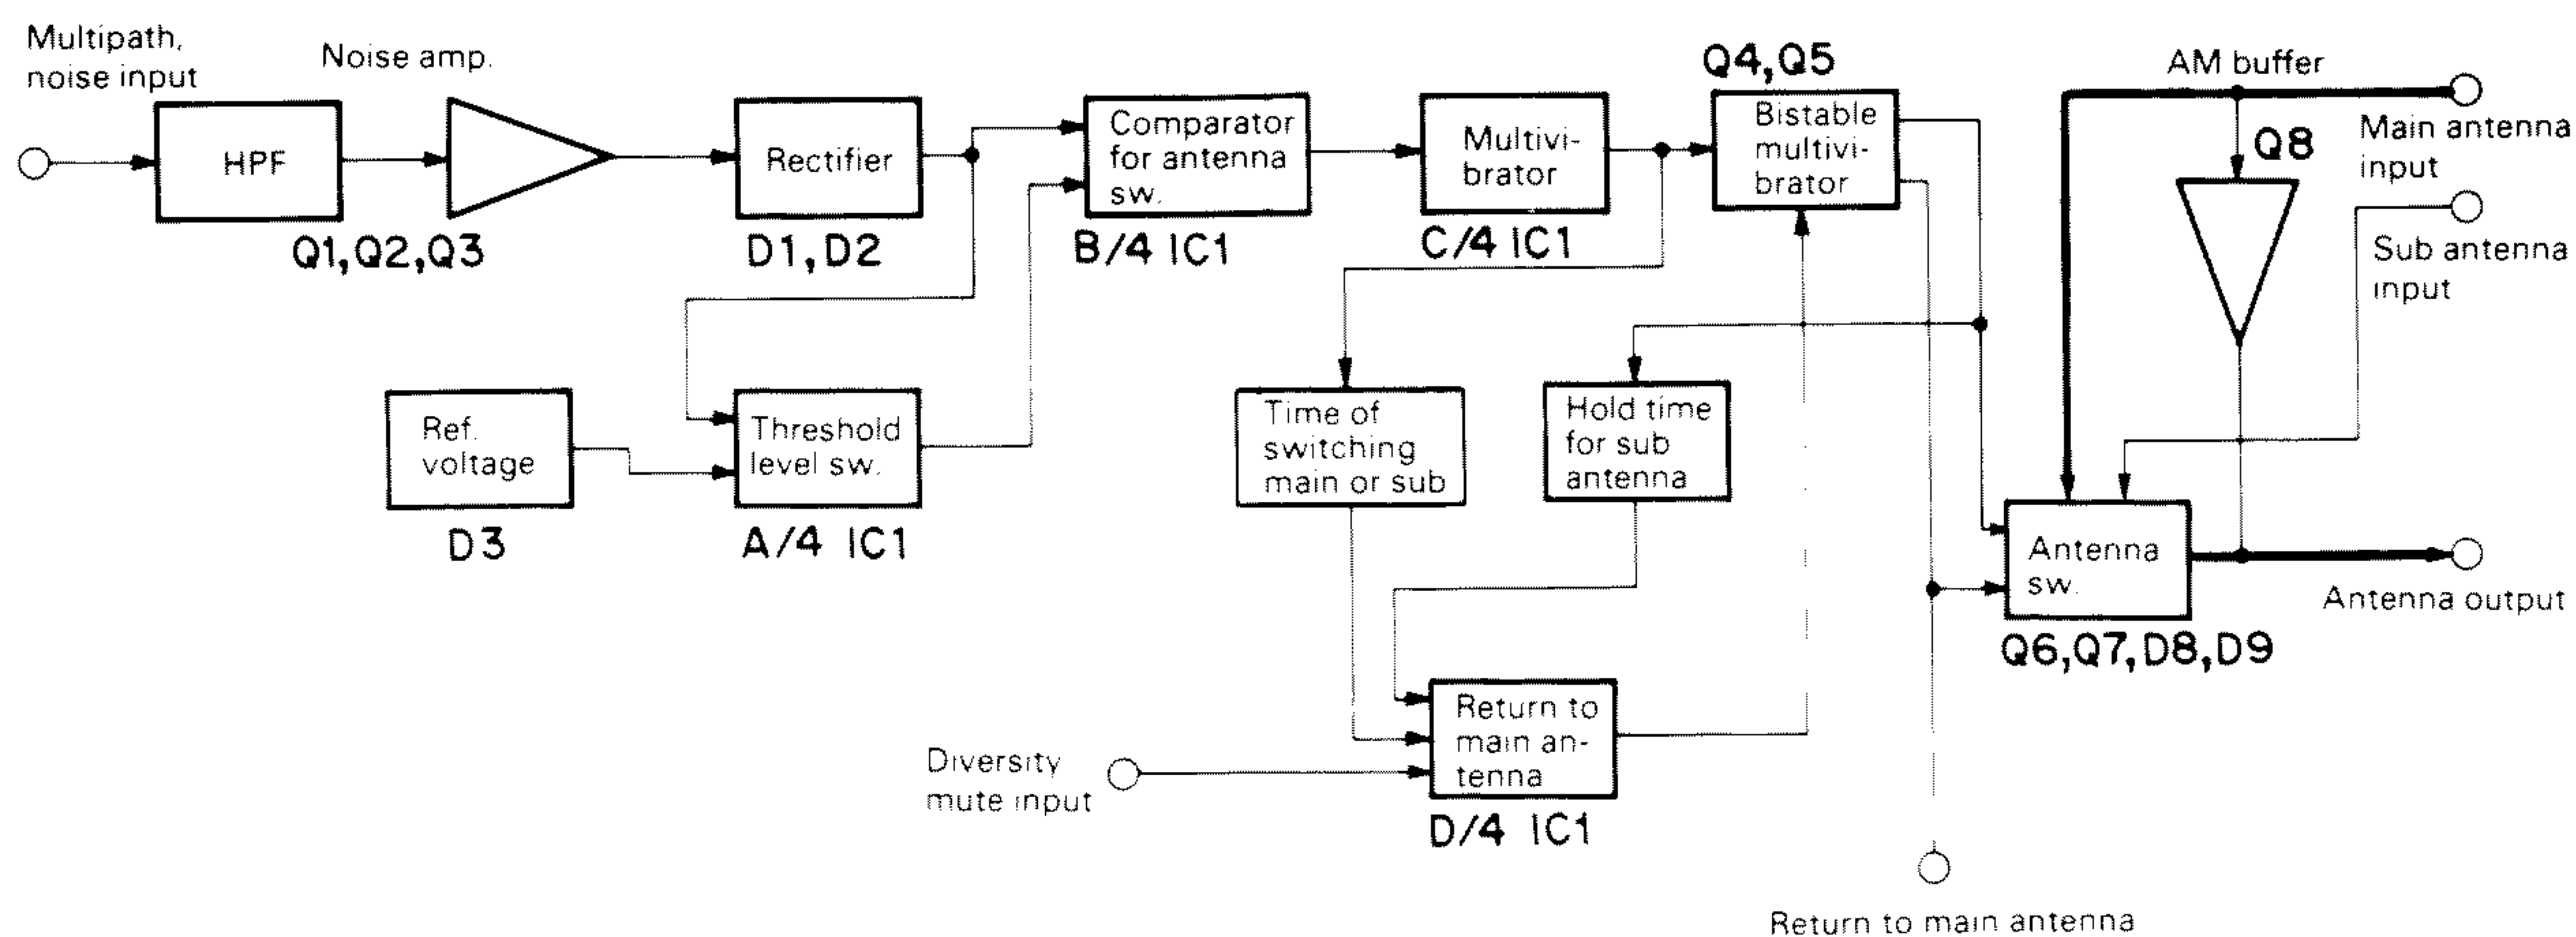

EXPLODED VIEW

Exploded view No. 701 ~ are not supplied.

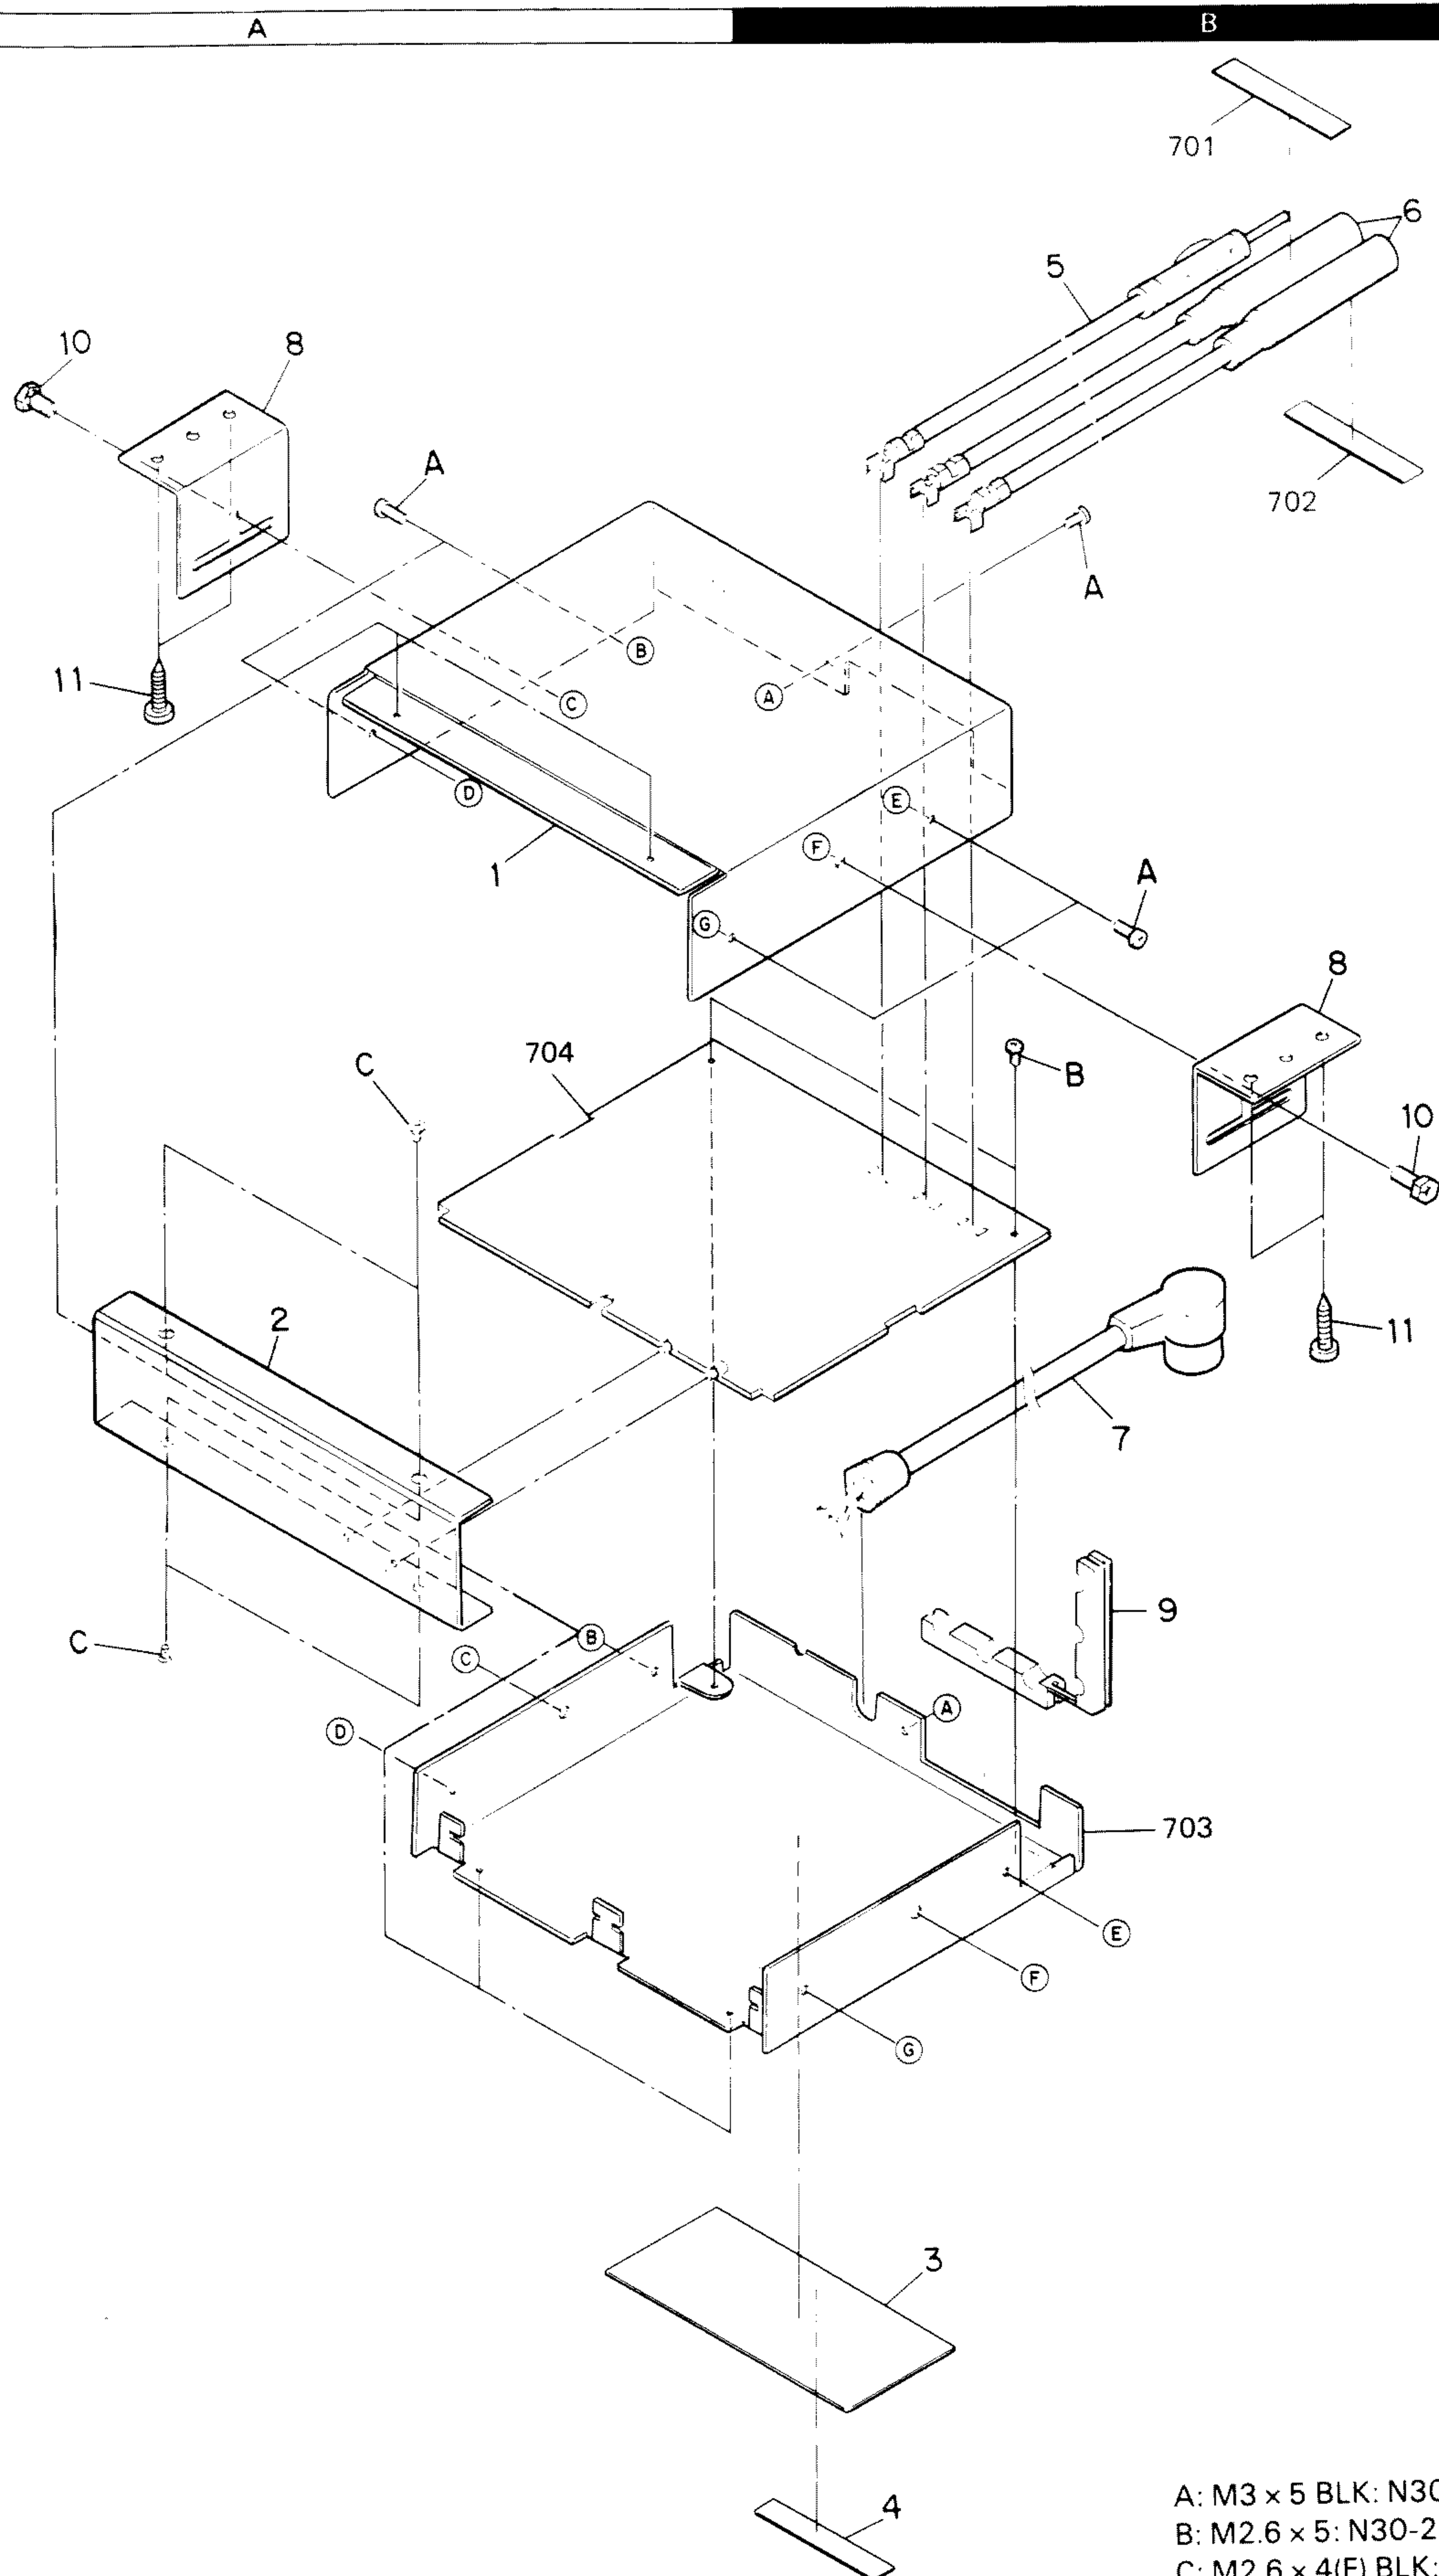

A: M3 × 5 BLK: N30-3005-45
 B: M2.6 × 5: N30-2605-46
 C: M2.6 × 4(F) BLK: N32-2604-45

ADJUSTMENT/REGLAGE/ABGLEICH

No.	ITEM	INPUT SETTING	OUTPUT SETTING	TUNER SETTING	ALIGNMENT POINT	ALIGN FOR
1	SENS	100 kHz 20 mV	SUB LED (YELLOW)	–	RV1	Turn RV1 fully counterclockwise, the gradually turn it clockwise and mark the position.

REGLAGE

Nº	ITEM	REGLAGE DE L'ENTREE	REGLAGE DE LA SORTIE	REGLAGE DE TUNER	POINT D'ALIGNEMENT	ALIGNER POUR
1	SENS	100 kHz 20 mV	SUB LED (YELLOW)	–	RV1	Faire tourner RV1 à fond dans le sens inverse des aiguilles d'une montre et marquer le position.

ABGLEICH


NR.	GEGENSTAND	EINGANGS-EINSTELLUNG	AUSGANGS-EINSTELLUNG	TUNER-EINSTELLUNG	ABGLEICH-PUNKTE	ABGLEICHEN FÜR
1	SENS	100 kHz 20 mV	SUB LED (YELLOW)	–	RV1	VR1 voll im Gegenuhrzeigersinn, dann allmählich im Uhrzeigersinn drehen und die Position markieren.

With the above adjustment, the switching sensitivity when this unit is combined with the KTC-7600 is obtained.


To change the switching sensitivity according to the user's wishes, proceed as follows.

- Turn clockwise
The sensitivity increases and switching occurs easily.
Excessive turning may result in malfunction due to music signal.
- Turn counterclockwise
The sensitivity decreases and switching does not occur even when distortion is noted.

One-shot-burst signal

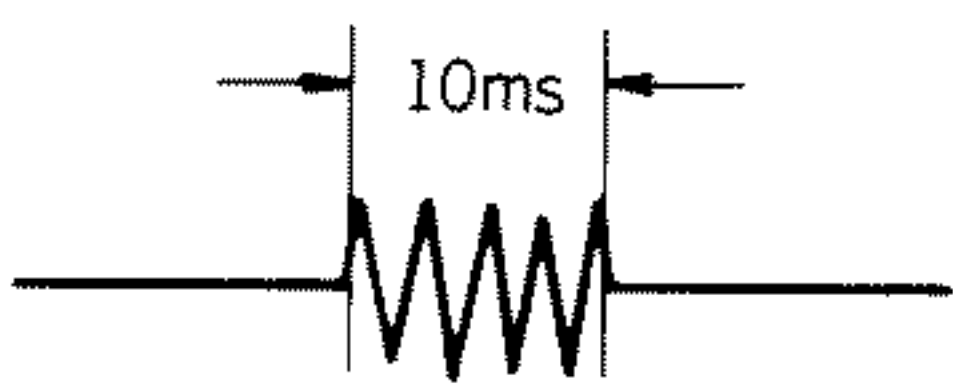


Set up for adjustment

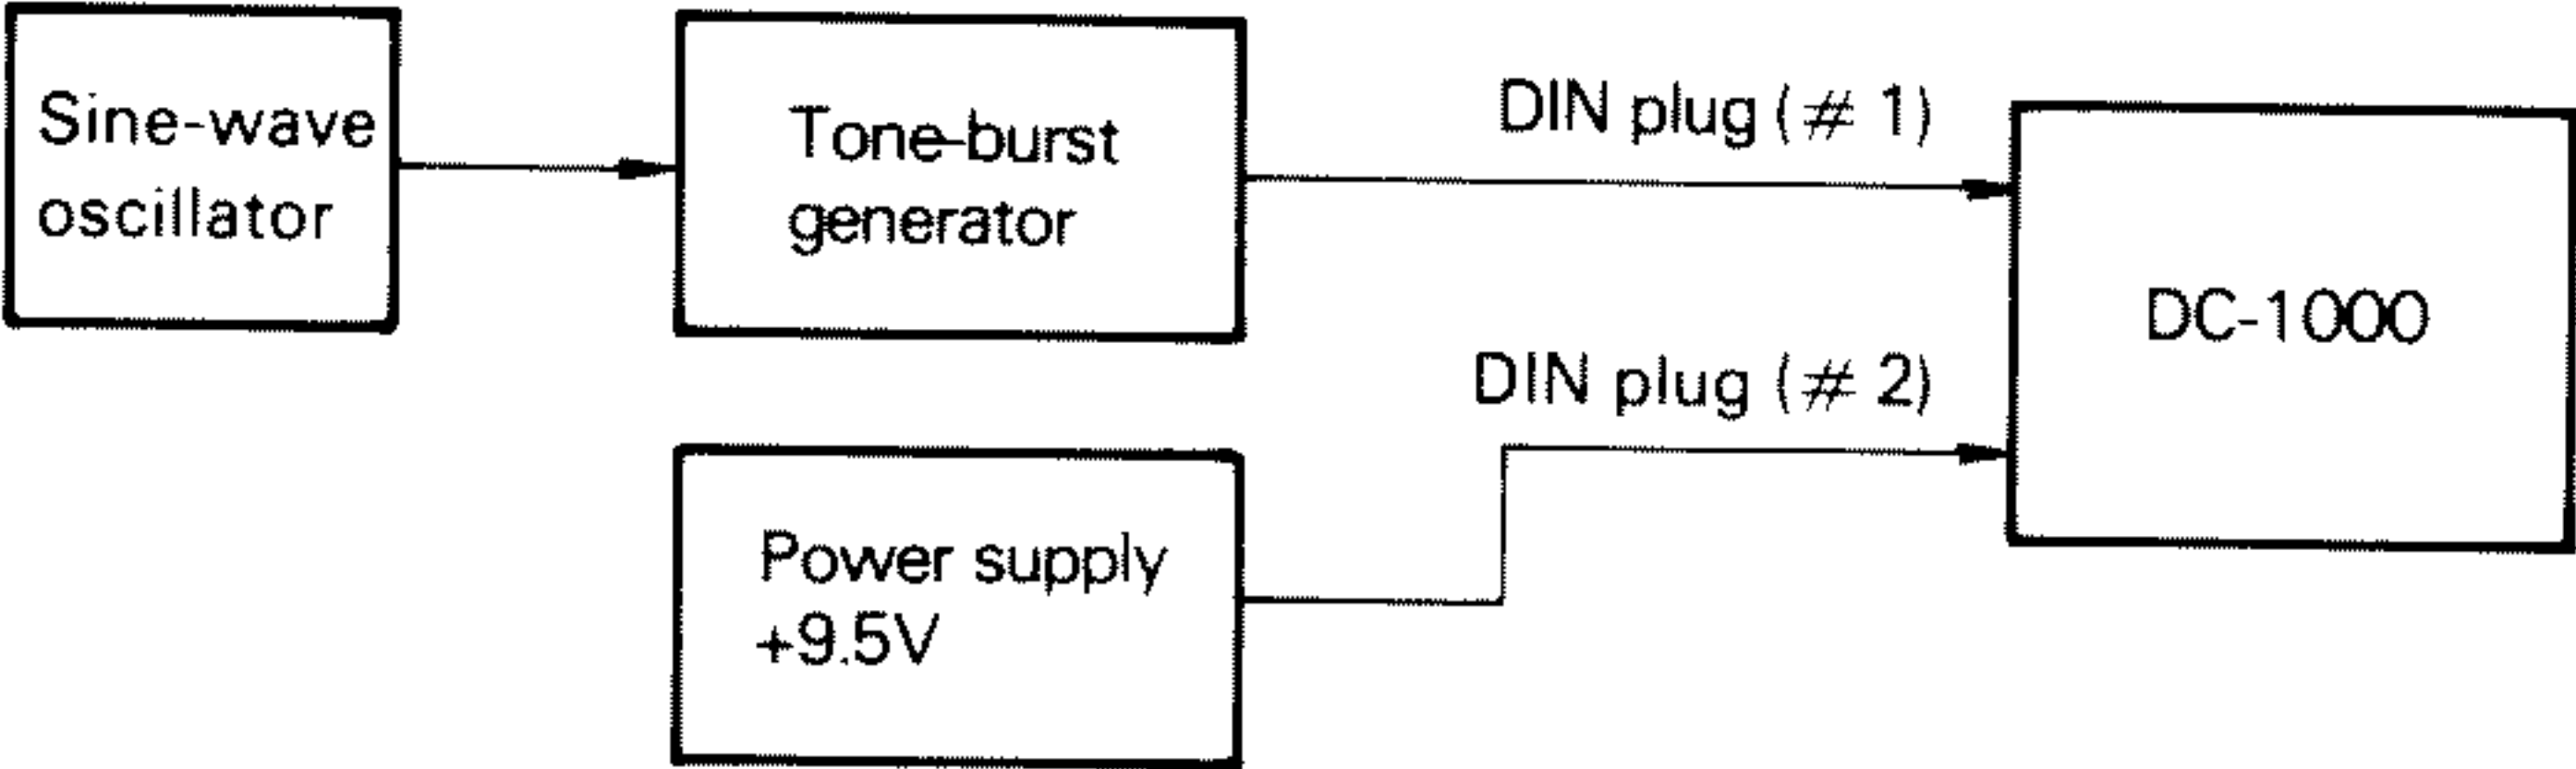


PC BOARD

Component side view (W02-0580-08)

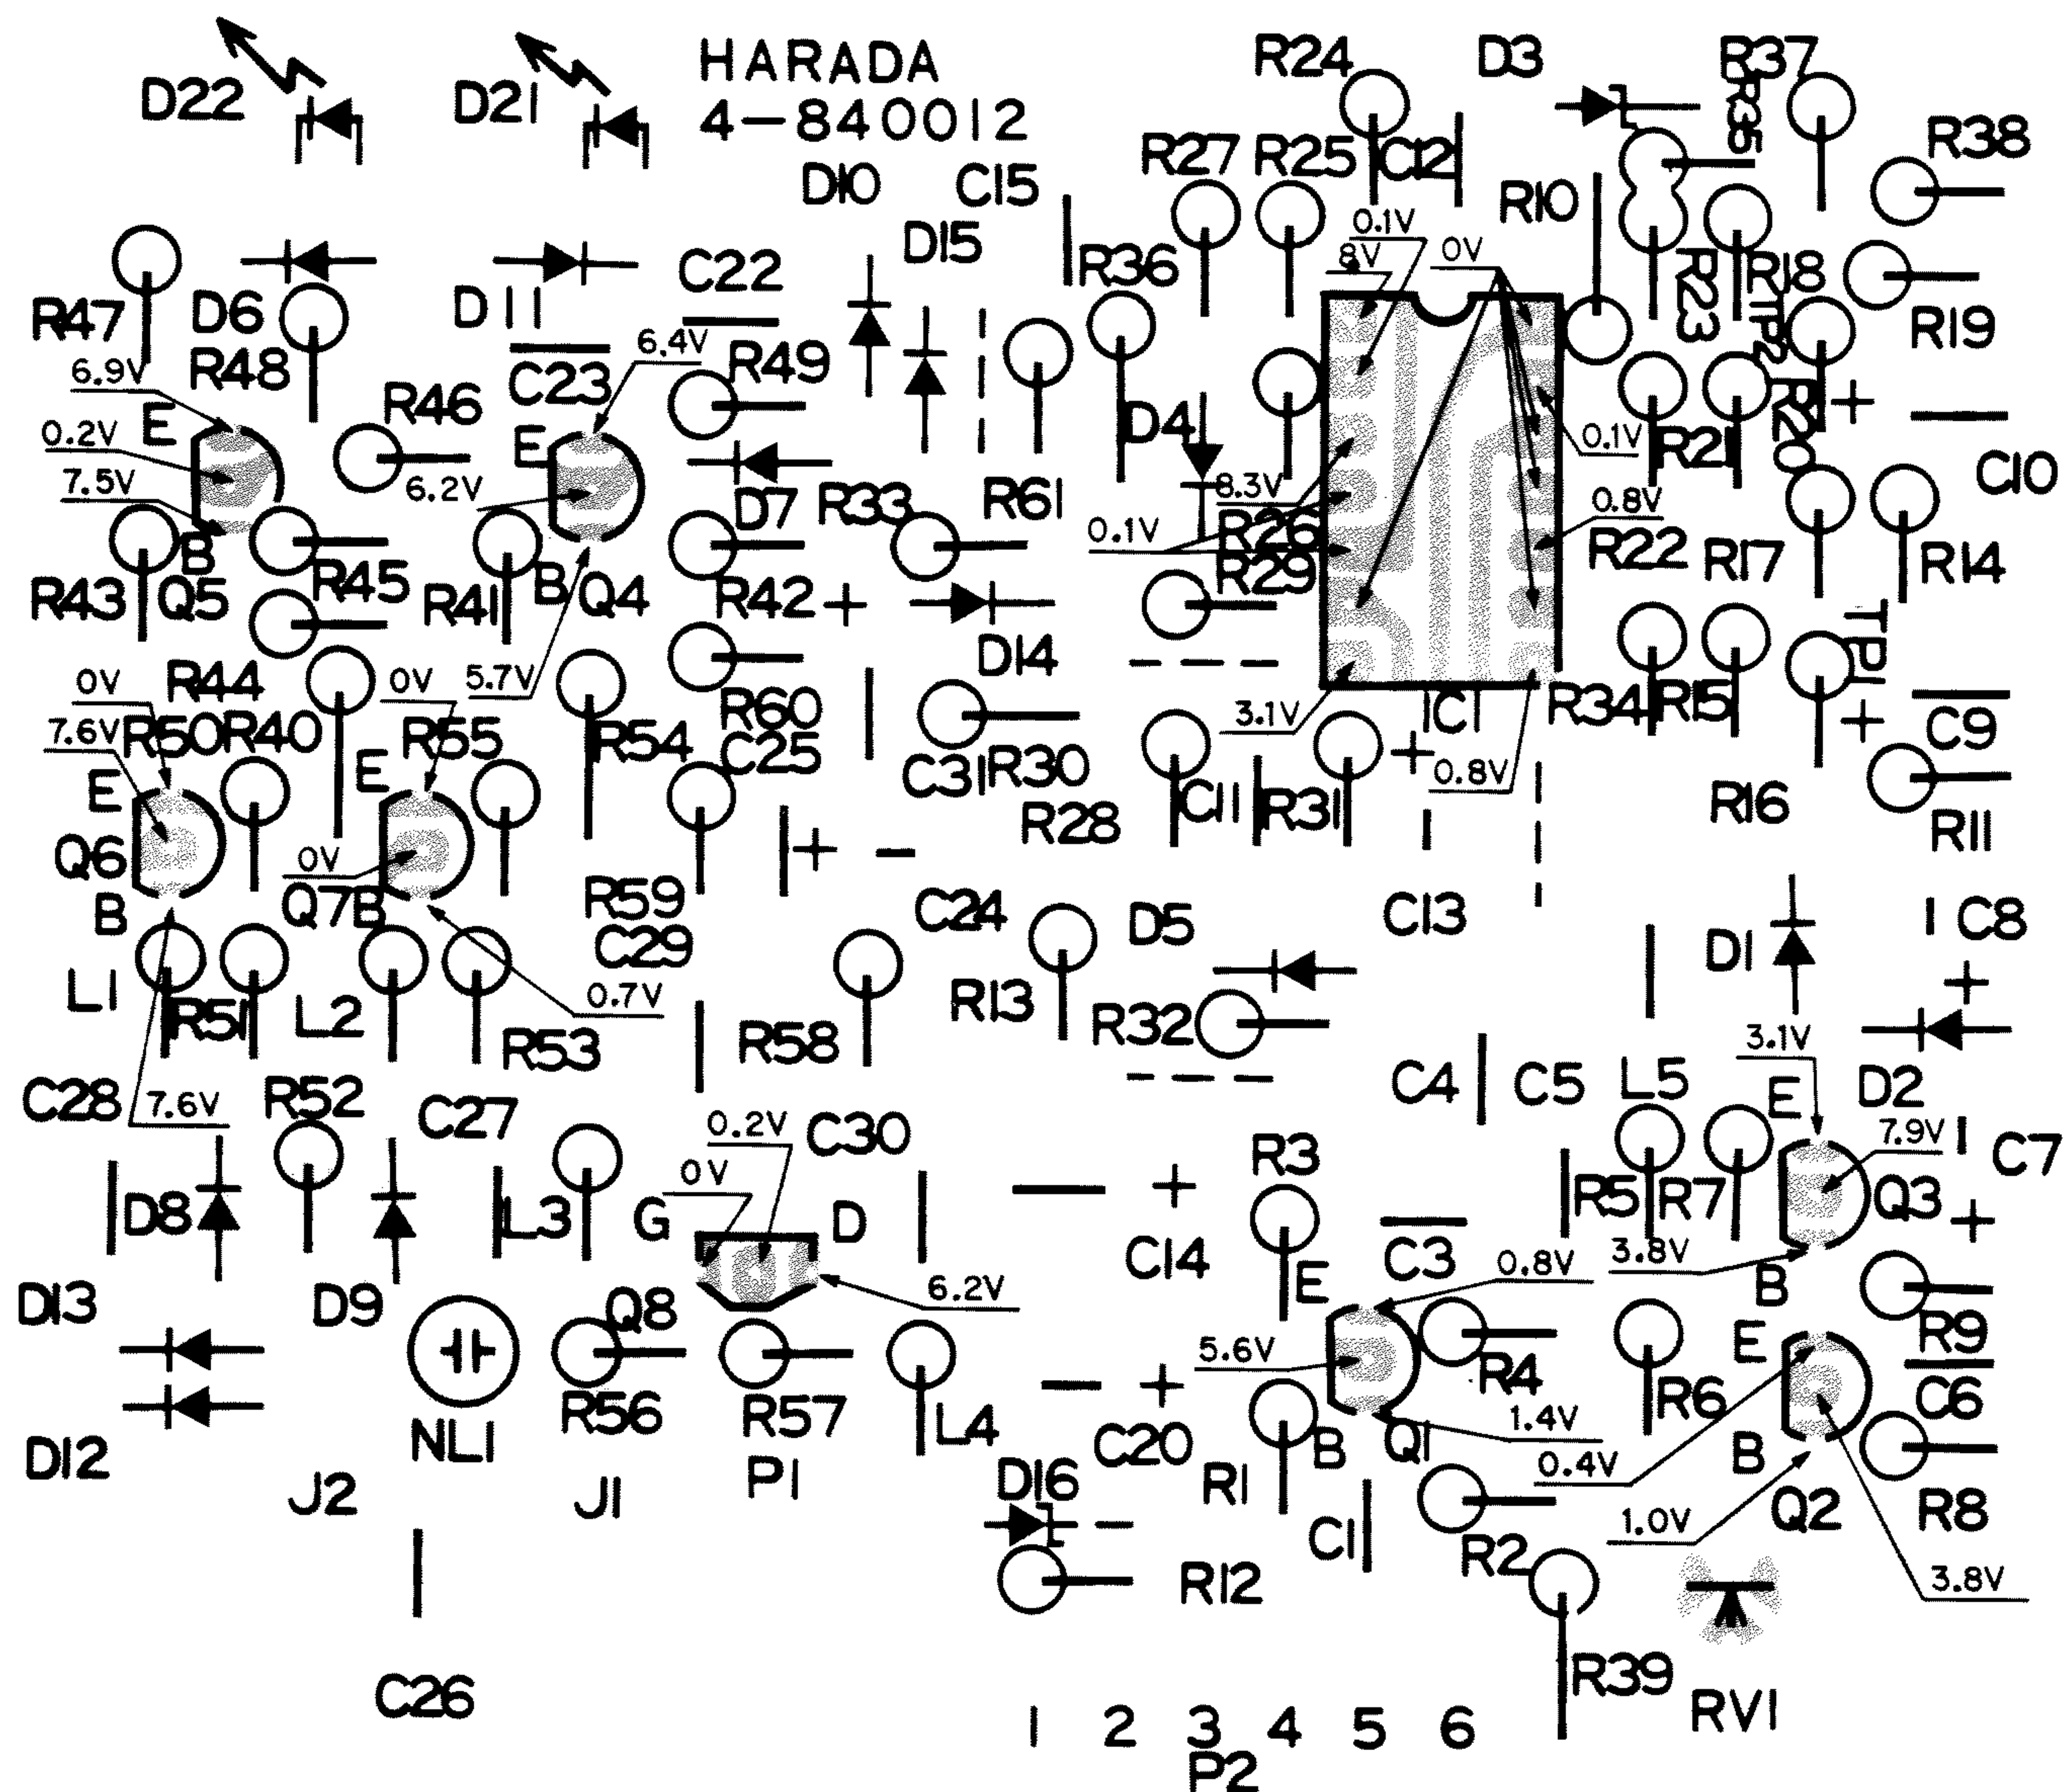


Refer to the schematic diagram for the values of resistors and capacitors.
The PC board drawing is viewing from the side easy to check.

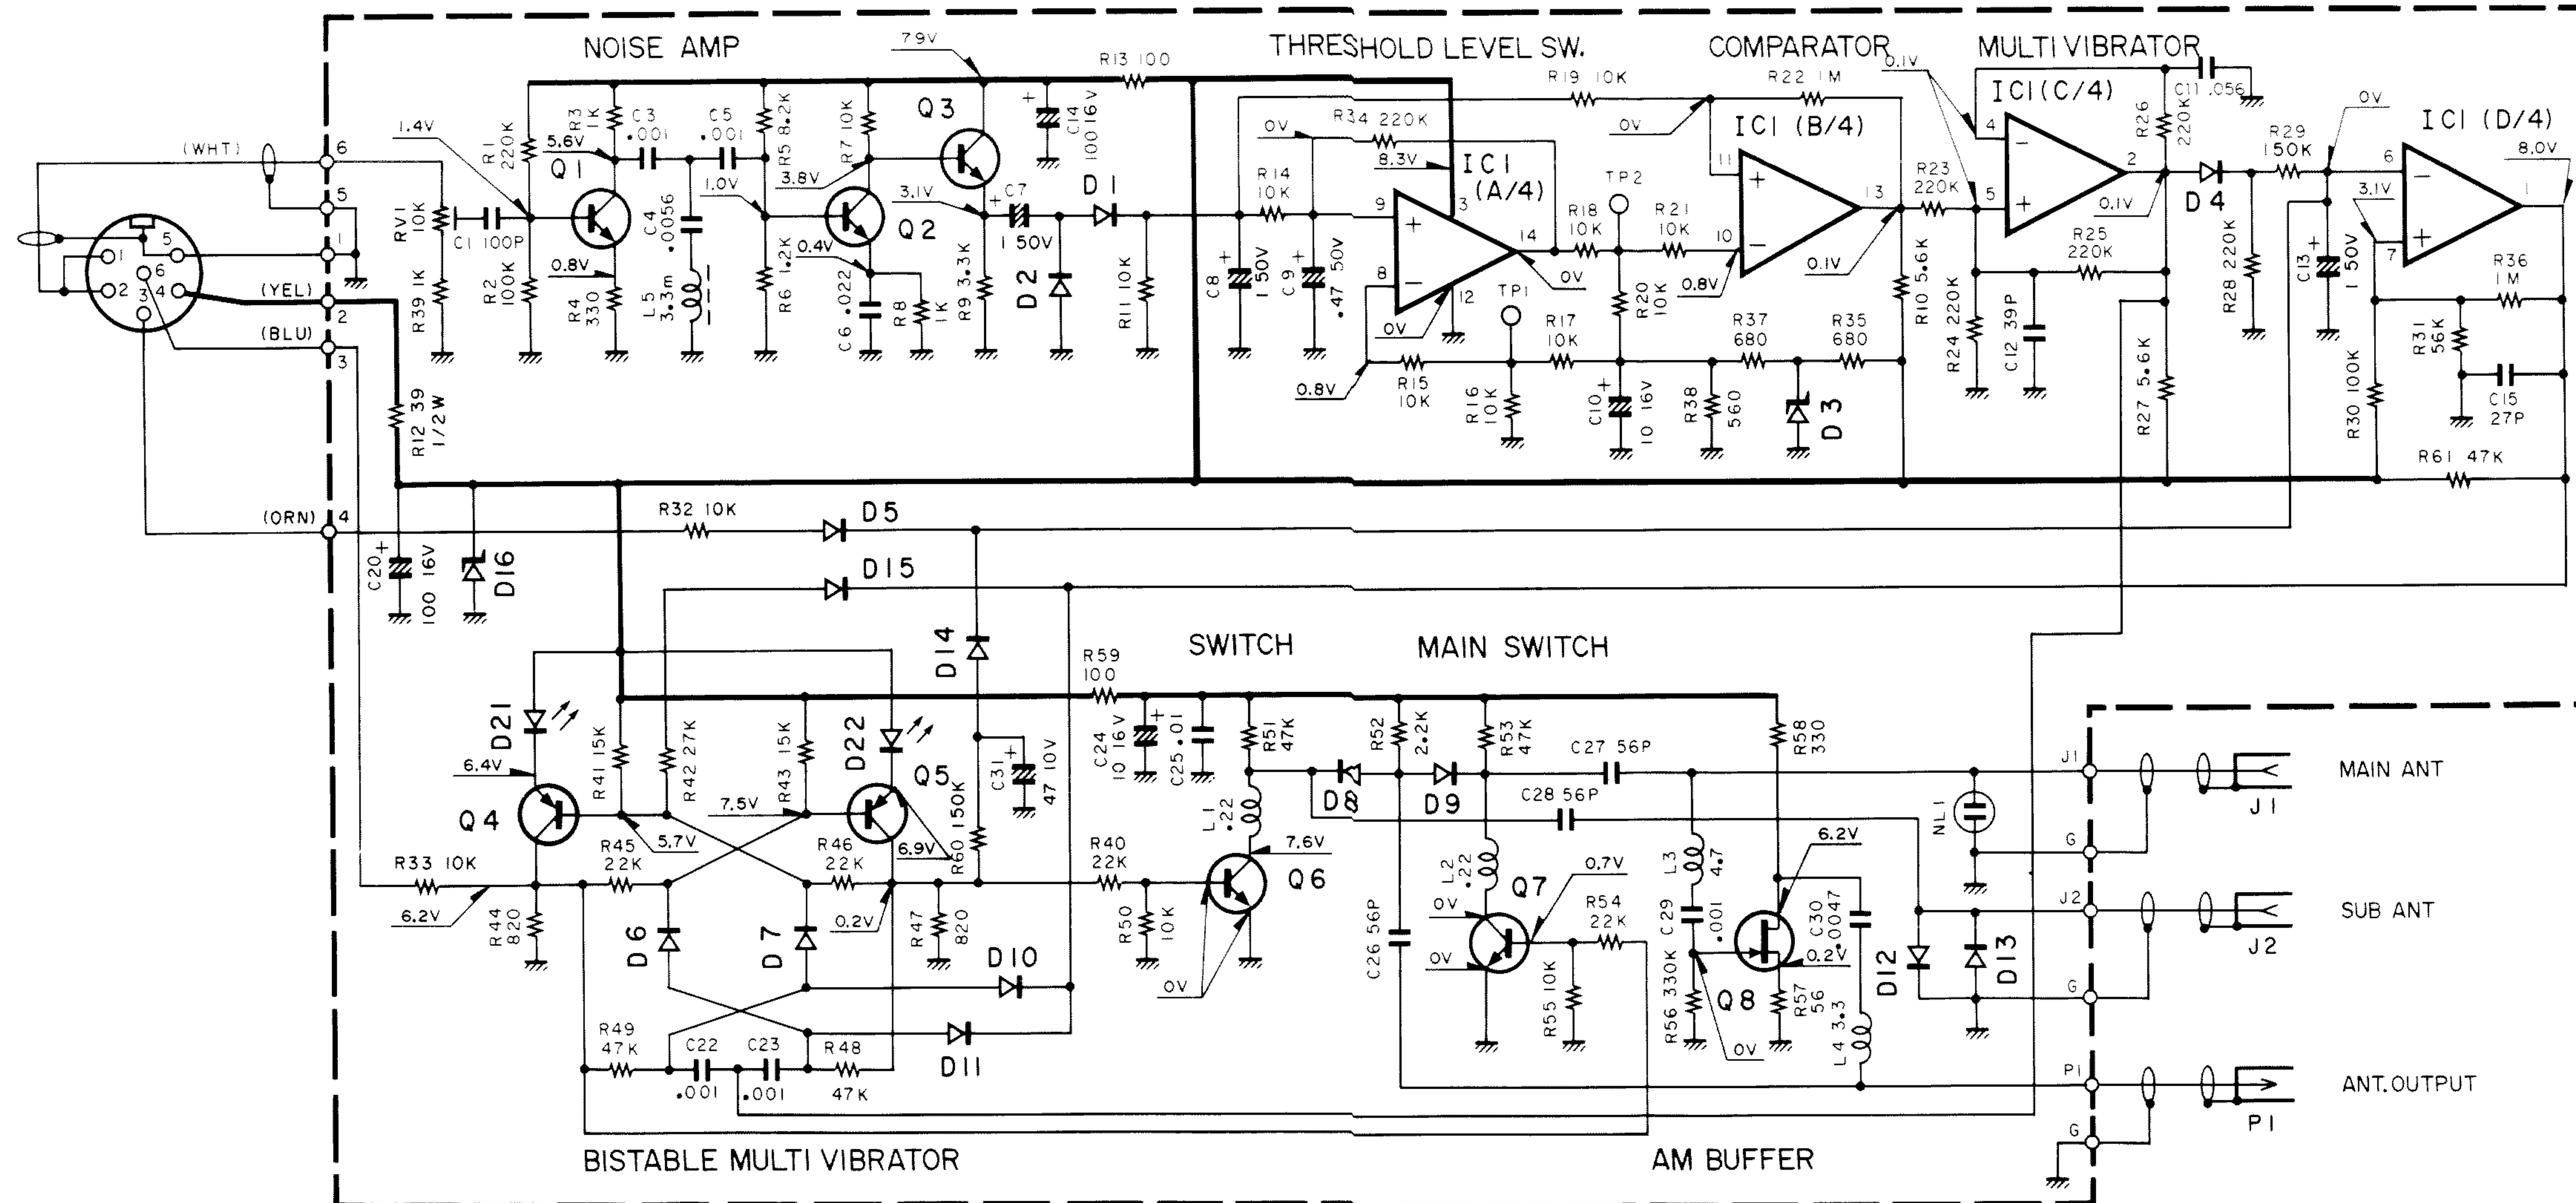

IC 1	: NJM2901	D 1, 2, 4 ~ 7, 10 ~ 15	: 1S 1555
Q 1 ~ 3, 6, 7	: 2SC1815 (Y)	D 3	: 05Z4.3 (Y)
Q 4, 5	: 2SA1015 (Y)	D 8, 9	: 1SS238 or 1SS155
Q 8	: 2SK192A (Y)	D 16	: 1Z11
		D 21	: TLG226
		D 22	: TLY226

SPECIFICATIONS

FM SECTION	
Frequency range	76.0 ~ 108.0 MHz
Gain	-1.2 dB
AM SECTION	
Frequency range	520 ~ 1,630 kHz
Gain	+1.5 dB
POWER SUPPLY	
Power source	9.5V
Current consumption	30 μ A
Dimension (W x H x D)	100 x 27 x 90 mm
Net weight	0.41 kg

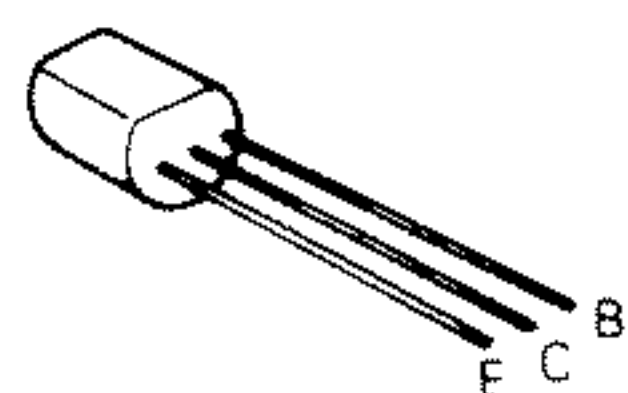


PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis
Teile ohne **Parts No.** werden nicht geliefert

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
DC-1000						
1	1A	*	A01-1313-08	CASE		
2	2A	*	A20-3880-08	FRONT PANEL		
3	3A	*	B40-3340-08	MODEL NAME PLATE		
4	3B	*	B42-0473-24	NAME PLATE		
-		*	B50-5077-00	INSTRUCTION MANUAL		
5	1B	*	E30-0881-08	OUTPUT FEEDER ASSY		
6	1B	*	E30-0880-08	INPUT FEEDER ASSY		
7	2B	*	E30-0864-05	DIN CORD ASSY		
-		*	H01-5003-08	CARTON BOX		
8	1A,2B	*	J21-3406-08	MOUNTING HARDWARE		
9	2B	*	J11-0063-08	CORD CRAMPER		
10	1A,2B	*	N09-1341-08	HEX. BOLT (M4X8)		
11	1A,2B	*	N09-1342-08	TAPING SCREW (M4X12)		
PC BOARD						
D21			B30-1026-08	LED TLG226 GREEN		
D22			B30-1027-08	LED TLY226 YELLOW		
NL1		*	B30-1028-08	LAMP (NE2B8H)		
C1			CC45SL1H101J	CERAMIC 100PF J		
C3			CK45B1H102K	CERAMIC 0.001UF K		
C4			CQ92M1H562K	MYLAR 5600PF K		
C5			CK45B1H102K	CERAMIC 0.001UF K		
C6			CQ92M1H223K	MYLAR 0.022UF K		
C7 ,8			CE04W1H010M	ELECTR0 1UF 50WV		
C9			CE04W1HR47M	ELECTR0 0.47UF 50WV		
C10			CE04W1C100M	ELECTR0 10UF 16WV		
C11			CQ92M1H563K	MYLAR 0.056UF K		
C12			CC45SL1H390J	CERAMIC 39PF J		
C13			CE04W1H010M	ELECTR0 1UF 50WV		
C14			CE04W1C101M	ELECTR0 100UF 16WV		
C15			CC45SL1H270J	CERAMIC 27PF J		
C20			CE04W1C101M	ELECTR0 100UF 16WV		
C22 ,23			CK45B1H102K	CERAMIC 0.001UF K		
C24			CE04W1C100M	ELECTR0 10UF 16WV		
C25			CK45F1H103Z	CERAMIC 0.01UF Z		
C26 -28			CC45SL1H560J	CERAMIC 56PF J		
C29			CK45B1H102K	CERAMIC 0.001UF K		
C30			CK45B1H472K	CERAMIC 0.0047UF K		
C31			CE04W1A470M	ELECTR0 47UF 10WV		
L1 ,2			L31-0503-08	INDUCT0R 0.14UH		
L3			L40-4701-14	INDUCT0R 4.7UH		
L4			L40-3301-14	INDUCT0R 3.3UH		
L5			L40-3325-04	INDUCT0R 3.3MH		
RV1			R12-3088-08	TRIMMING P0T. 10K(SENS)		
D1 ,2			1S1555	DI0DE		
D3			0.5Z4.3(Y)	ZENER DI0DE		
D4 -7			1S1555	DI0DE		
D8 ,9		*	1SS155	DI0DE		
D8 ,9		*	1SS238	DI0DE		
D10 -15			1S1555	DI0DE		
D16			1Z11	ZENER DI0DE		
IC1		*	NJM2901	IC		
Q1 -3			2SD1815(Y)	TRANSIST0R (NOISE AMP)		
Q4 ,5			2SA1015(Y)	TRANSIST0R (MULTIVIBRAT0R)		
Q6 ,7			2SD1815(Y)	TRANSIST0R (SWITCH)		
Q8			2SK192A(Y)	FET (AM BUFFER)		

PACKING

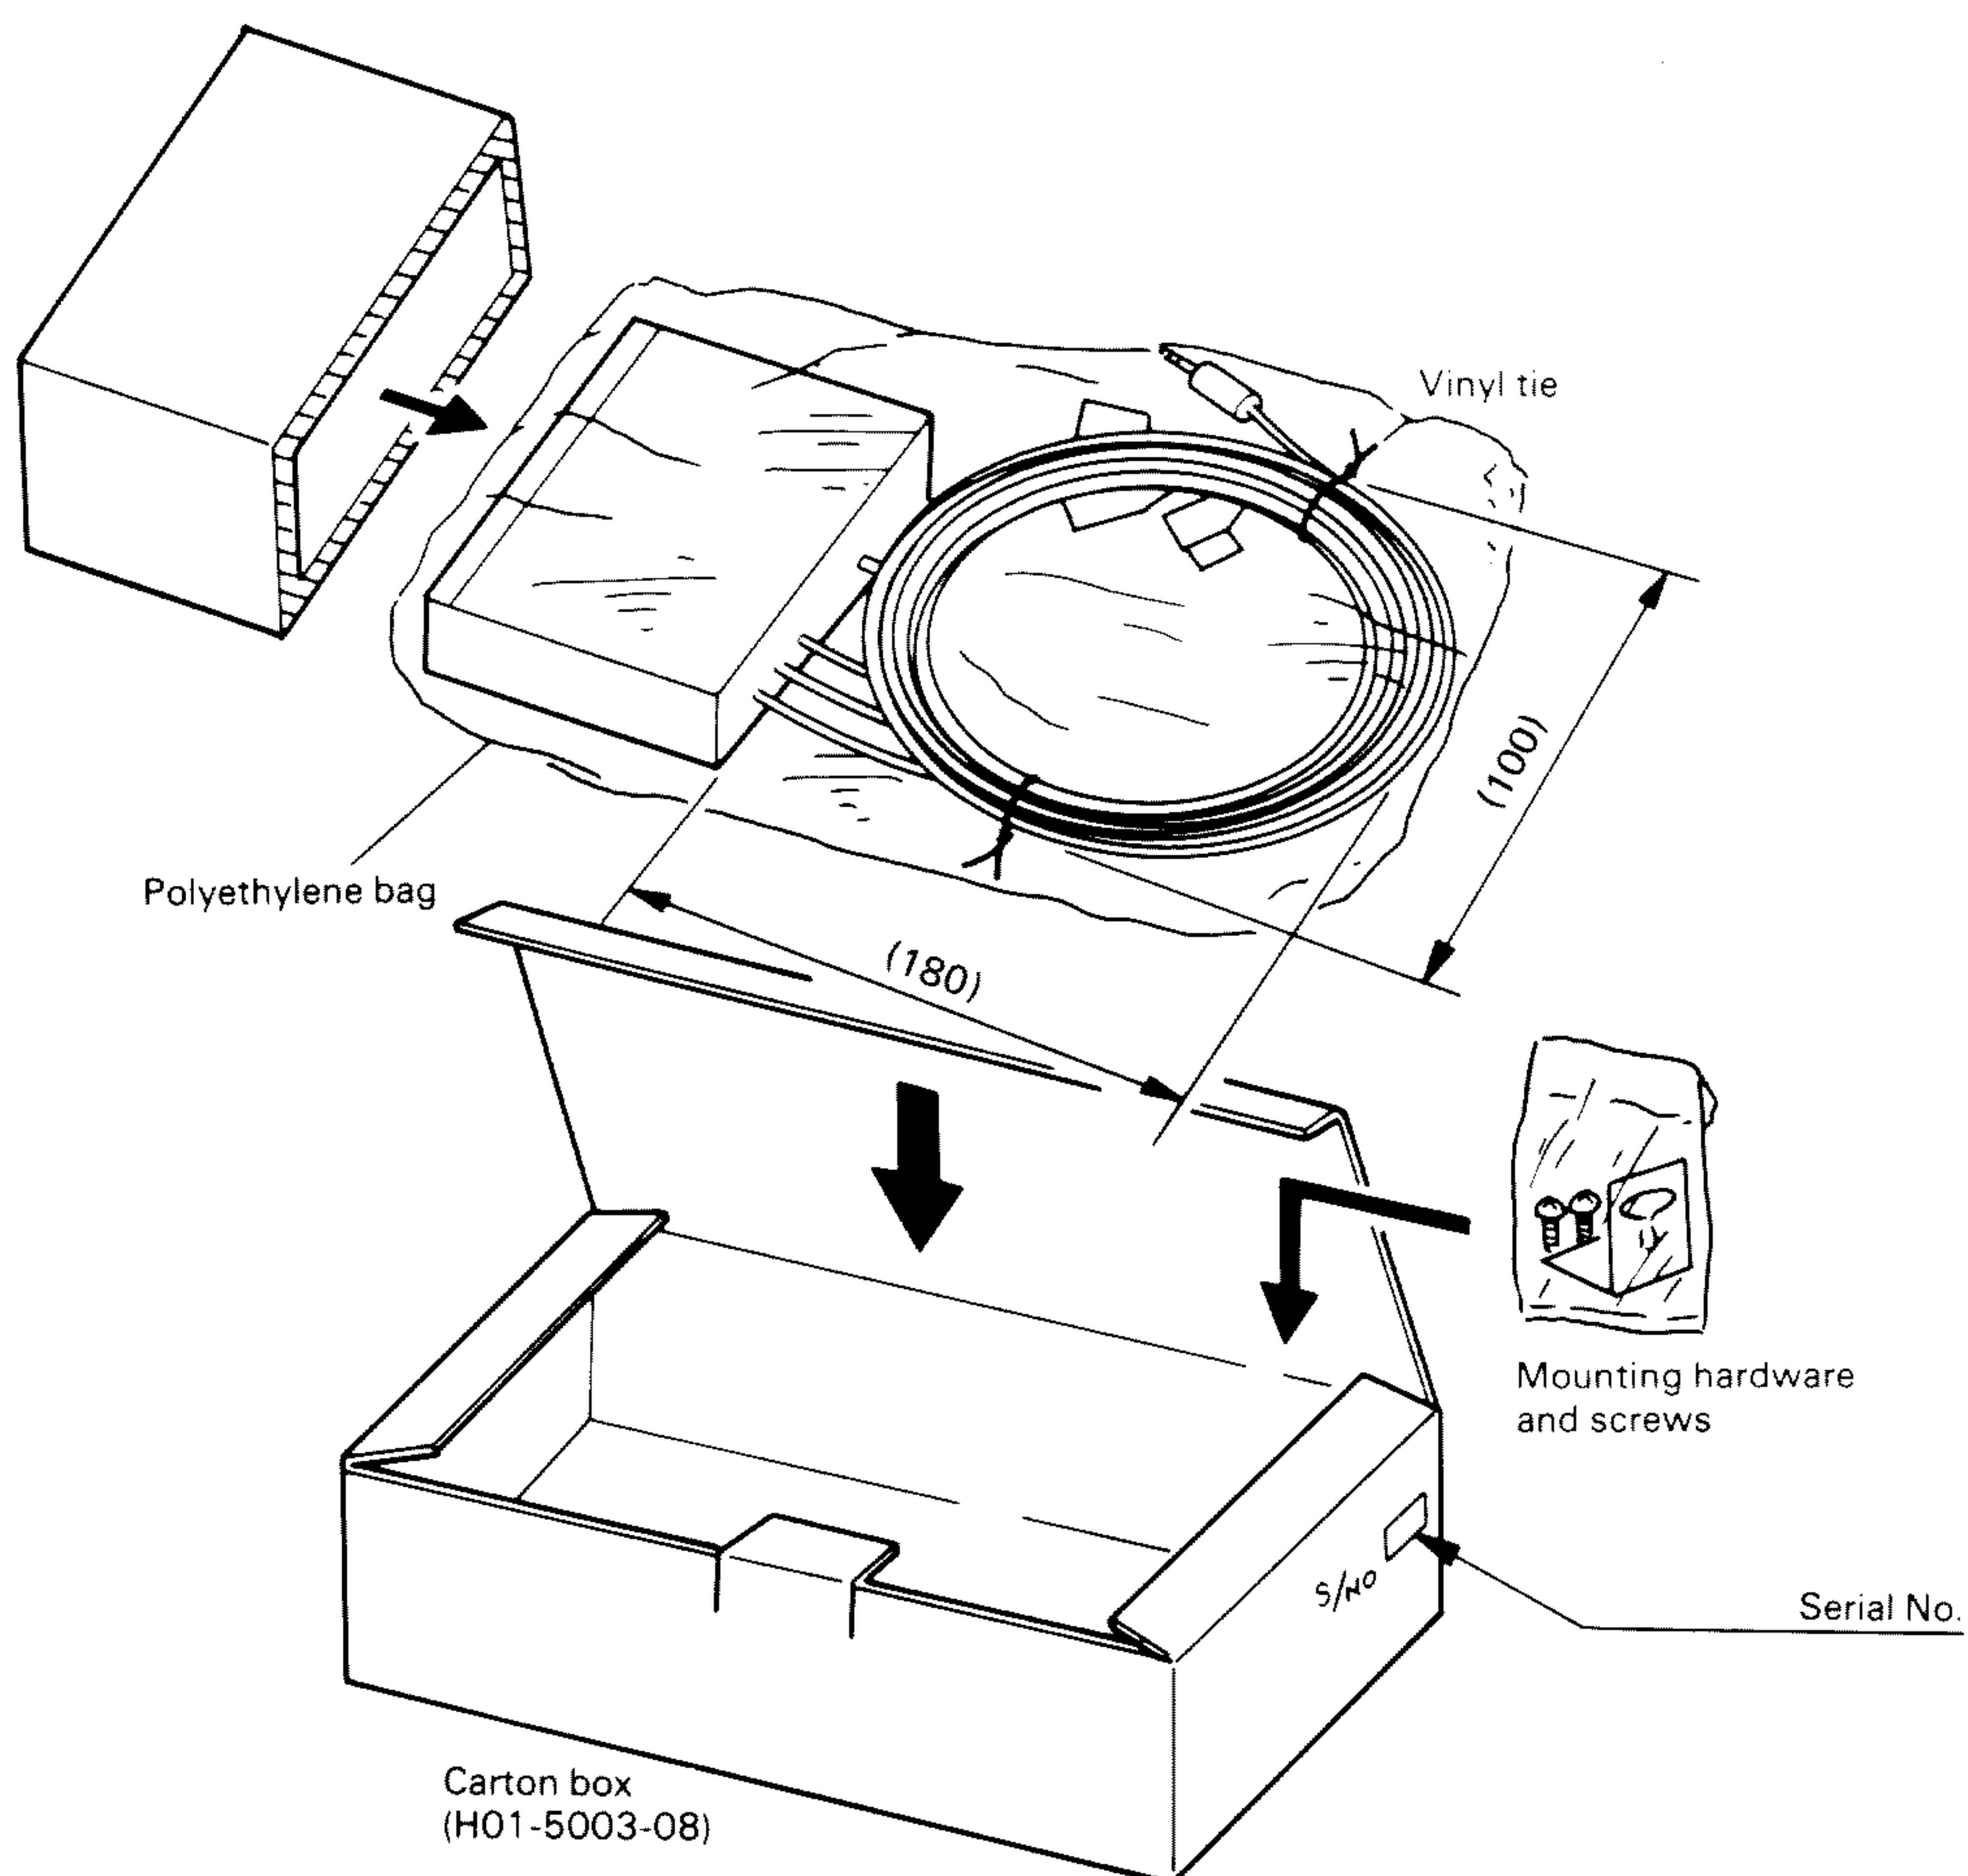

TRIO-KENWOOD CORPORATION

Shionogi Shibuya Building, 17-5, 2-chome Shibuya, Shibuya-ku, Tokyo 150, Japan

KENWOOD ELECTRONICS

1315 E. Watsoncenter Rd. Carson, California 90745, U.S.A.
75 Seaview Drive, Secaucus, New Jersey 07094, U.S.A.

TRIO-KENWOOD CANADA INC.

1070 Jayson Court, Mississauga, Ontario, Canada L4W 2V5

TRIO-KENWOOD ELECTRONICS, N.V.

Leuvensesteenweg 504 B-1930 Zaventem, Belgium

TRIO-KENWOOD ELECTRONICS GmbH

Rudolf-Brass-Str. 20, 6056 Heusenstamm, West Germany

TRIO-KENWOOD FRANCE S.A.

5, Boulevard Ney, 75018 Paris, France

TRIO-KENWOOD (AUSTRALIA) PTY LTD (INCORPORATED IN N.S.W.)

4E Woodcock Place, Lane Cove, N.S.W. 2066, Australia

KENWOOD & LEE ELECTRONICS, LTD

Wang Kee Building, 5th Floor, 34-37, Connaught Road, Central, Hong Kong