


OLYMPIC RADIO & TELEVISION INC.

AM-PHONO 3-SPEED CHANGER COMBINATION MODEL HF 500

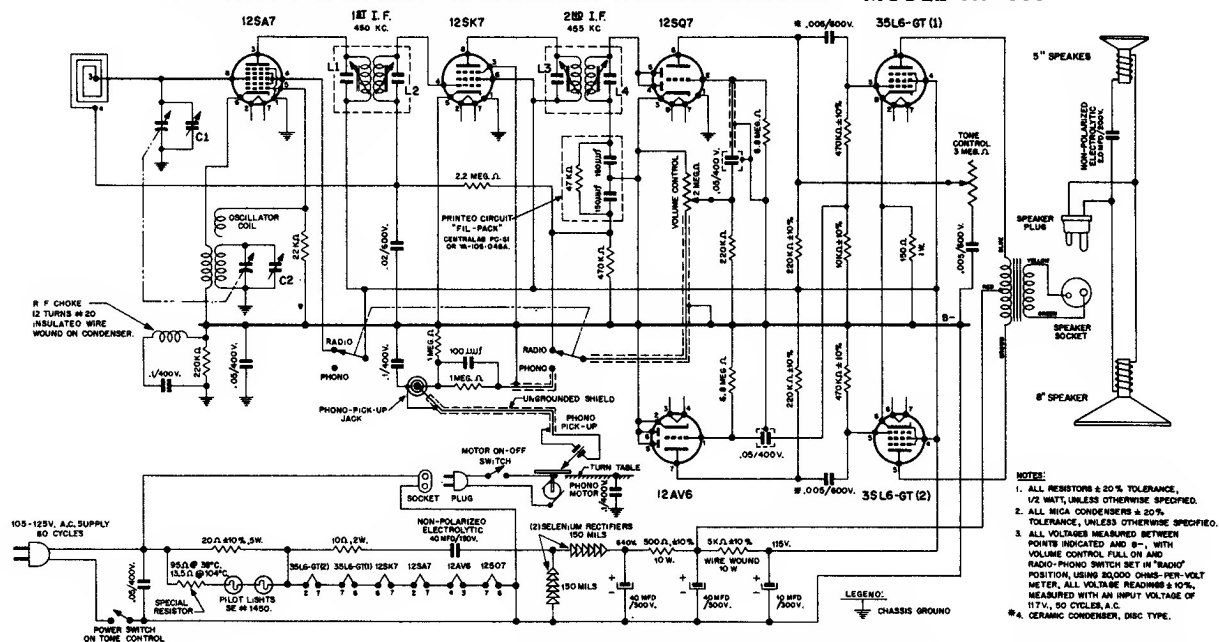

ALIGNMENT PROCEDURE CHART

STEP	CONNECT HIGH SIDE OF SIGNAL GENERATOR TO -	SET SIGNAL GENERATOR TO -	TURN RECEIVER DIAL TO -	ADJUST THE FOLLOWING FOR MAXIMUM OUTPUT. (KEEP SIGNAL FROM SIGNAL GENERATOR AS LOW AS POSSIBLE)
1	ANTENNA SECTION TUNING CONDENSER IN SERIES WITH 1 MFD. COND.	455 KC.	FULL CLOCKWISE POSITION (CONDENSER PLATES FULLY OPEN)	L4, L3, L2, L1 AND REPEAT IN SAME ORDER (1st. AND 2nd. I.F. TRANSFORMERS)
2	USE RADIATED SIGNAL	1500 KC.	1500 KC. (150 ON DIAL)	C2 (OSCILLATOR)
3		1500 KC.	MAXIMUM SIGNAL (APPROX. 150 ON DIAL)	C1 (ANTENNA)
4	REPEAT STEPS 2 AND 3			

This alignment procedure chart applies to all models listed on this page.

OLYMPIC AM-Phono Combination, Models 571 and 573

