


SPECIFICATIONS: NOTE ①

LOAD Z	LOW PASS	CROSS OVER	HIGH PASS	ATTENUATION
8	100 Hz LF 0			
8	1 kHz LF -2 HF -18	1.7 kHz LF -8 HF -8	7 kHz LF -19 HF +1	7 kHz HF VAR.

CIRCUIT:

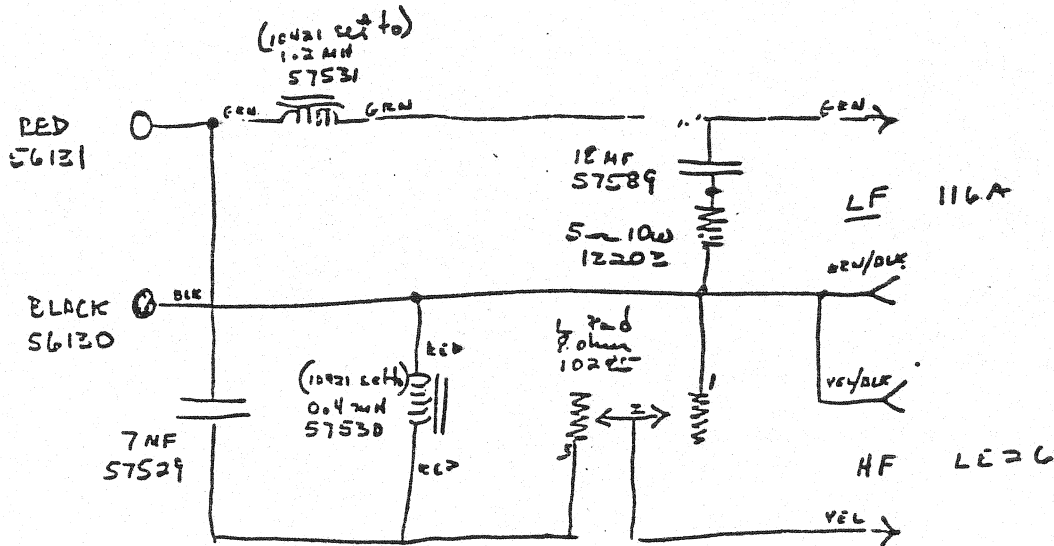

NOTES:

- ① USE STANDARD TEST FIXTURE