



ENGINEERING STANDARD	DATE EFFECTIVE 10/16/84.	NUMBER EST 1289
ENGINEERING DESIGN SPECIFICATION	DATE REVISED 10/23/84	PAGE 1 of 3

MODEL No. 240Ti

ACOUSTIC & ELECTRICAL SPECIFICATION

Power Test:	30 v I.E.C. Shaped Noise, 2 hours
Rated Impedance:	8 ohm
Minimum Impedance:	6 ohm
Impedance Curve:	See attached curve, page 2
Frequency Response (-6dB) Sine Wave on Axis:	30 Hz to 27 kHz
Distortion:	See attached curve, page 3
Sensitivity:	88dB for 2.83 v @ 1m.
Crossover Frequencies:	900Hz

PHYSICAL SPECIFICATIONS

Enclosure Volume:	3.5 cubic feet
Mid-Range Enclosure:	80 cubic inches
Enclosure Dimensions:	36.5 in. x 18 in x 12 in. Deep

SYSTEM COMPONENTS

Cabinet:	L240Ti (L & R)
Grille:	G240Ti
Bass Transducer:	LE14H-1
Midrange Transducer	104H
High Frequency Transducer:	044Ti
Crossover Network:	N240Ti

Design Engineer

Greg Timbers
Greg Timbers

Model No. 240Ti


JBL

ENGINEERING STANDARD
ENGINEERING DESIGN
SPECIFICATION

DATE EFFECTIVE
10/16/84
DATE REVISED
10/23/84

PAGE
2 of 3
NUMBER
EST 1289

Brüel & Kjær

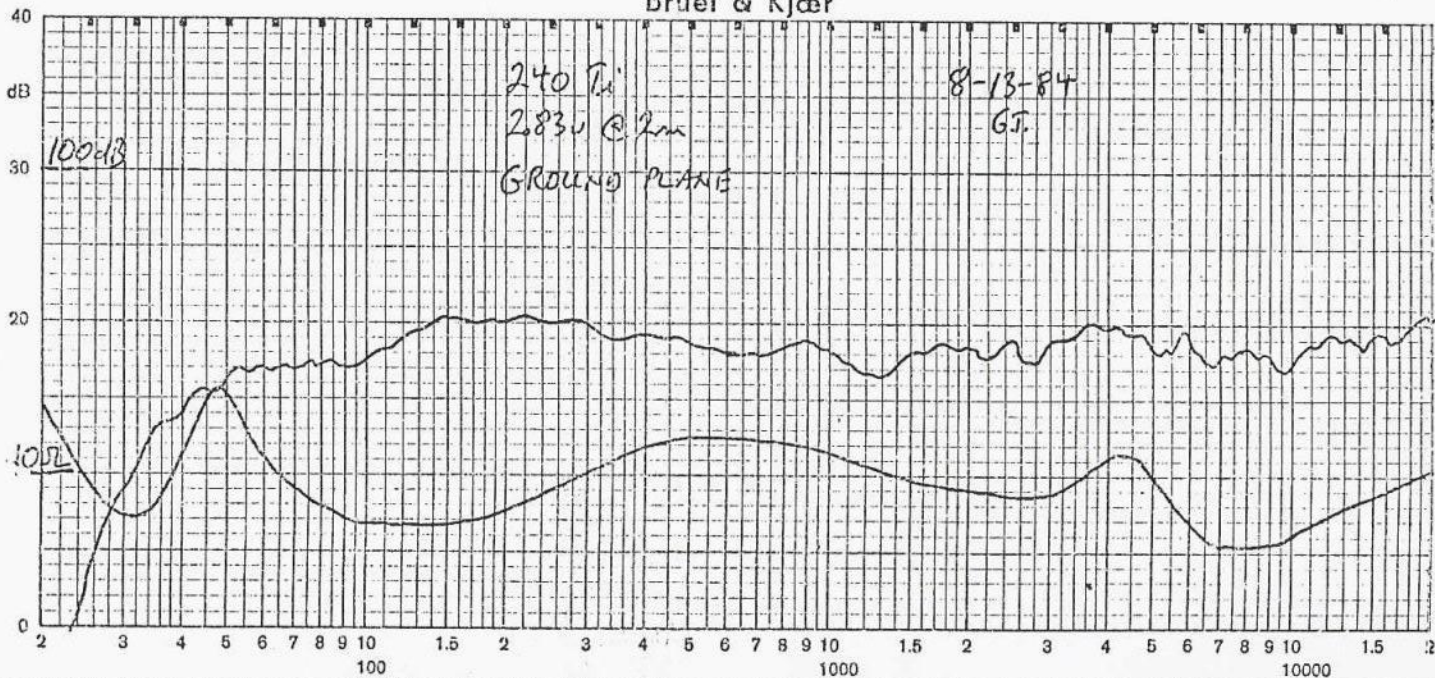

Model No. 240Ti

JBL

ENGINEERING STANDARD
ENGINEERING DESIGN
SPECIFICATION

DATE SPECIFIC
10/16/84
DATE REVISED
10/23/84

NUMBER
EST 1289
PAGE
3 of 3

