


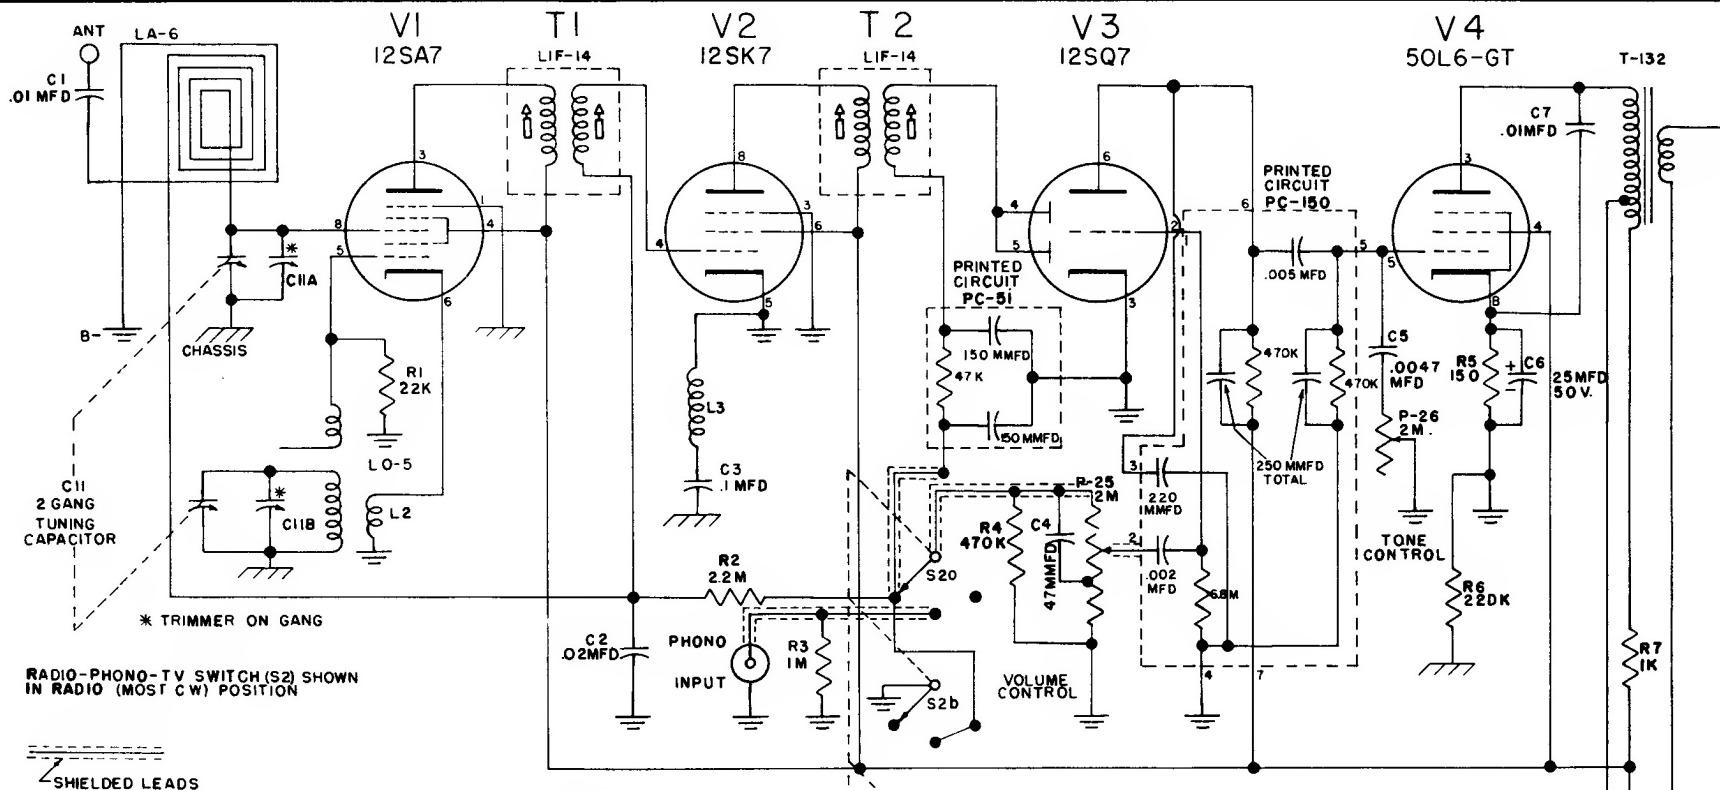


INTERMEDIATE FREQUENCY 455 K.C.

BOTTOM VIEWS OF ALL SOCKET CONNECTIONS

5 TUBE AM RADIO MODEL RE-2A USED IN COMBINATIONS

Schematic Symbol No.	Description	Teleking Part Reference No.
C1, C-7	01 Mfd 400V	CP 411
C2	02 Mfd 400V	CP 412
C3	1 Mfd 600V	CP 601
C-4	47 Mfd 500V	CM 447
C-5	0047 Mfd 500V	CT 17
C-6	25 Mfd 50V Electrolytic	CP 4427
C8	05 Mfd 600V	CP 615
C9, C10	40 Mfd 150V Electrolytic	CM 19
C-11	2-Gang Variable Cond w Drum	CV 5
C-11a, C-11b	Trimmer Condenser on Gang	C-11a, C-11b
L1	8 Cast Loop Antenna	LA 6
L-2	8 Cast Oscillator Coil	LO 5
PC-51	Printed Circuit	CRP 6
PC-150	Printed Circuit	CRP 5
P-3	Pilot Lamp GE 1490	P-3
P-25	Volume Control 2 Megohms	P-25
P-26	Tone Control w Switch 2 Megohms	P-26
R1	22K ohms 1/2W	RC 222
R2	2.2 Megohms 1/2W	RC 2251
R3	1 Megohm 1/2W	RC 1052
R4	470K ohms 1/2W	RC 4742
R5	150 ohms 1/2W	RC 1511
R6	220K ohms 1/2W	RC 2242
R7	1000 ohms 2W	RC 1027
R8	330 ohms 1W	RC 3314
T-1, T-2	I.F. Transformer	LIF-14
T-132	Audio Output Transformer	T-132

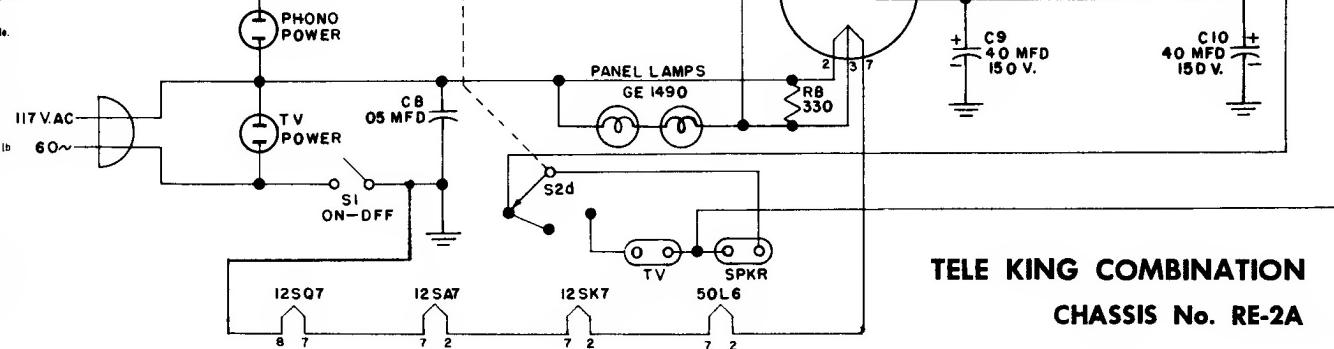

TELE KING COMBINATION
CHASSIS No. RE-2A