


TRAV-LER RADIO MODEL 5220

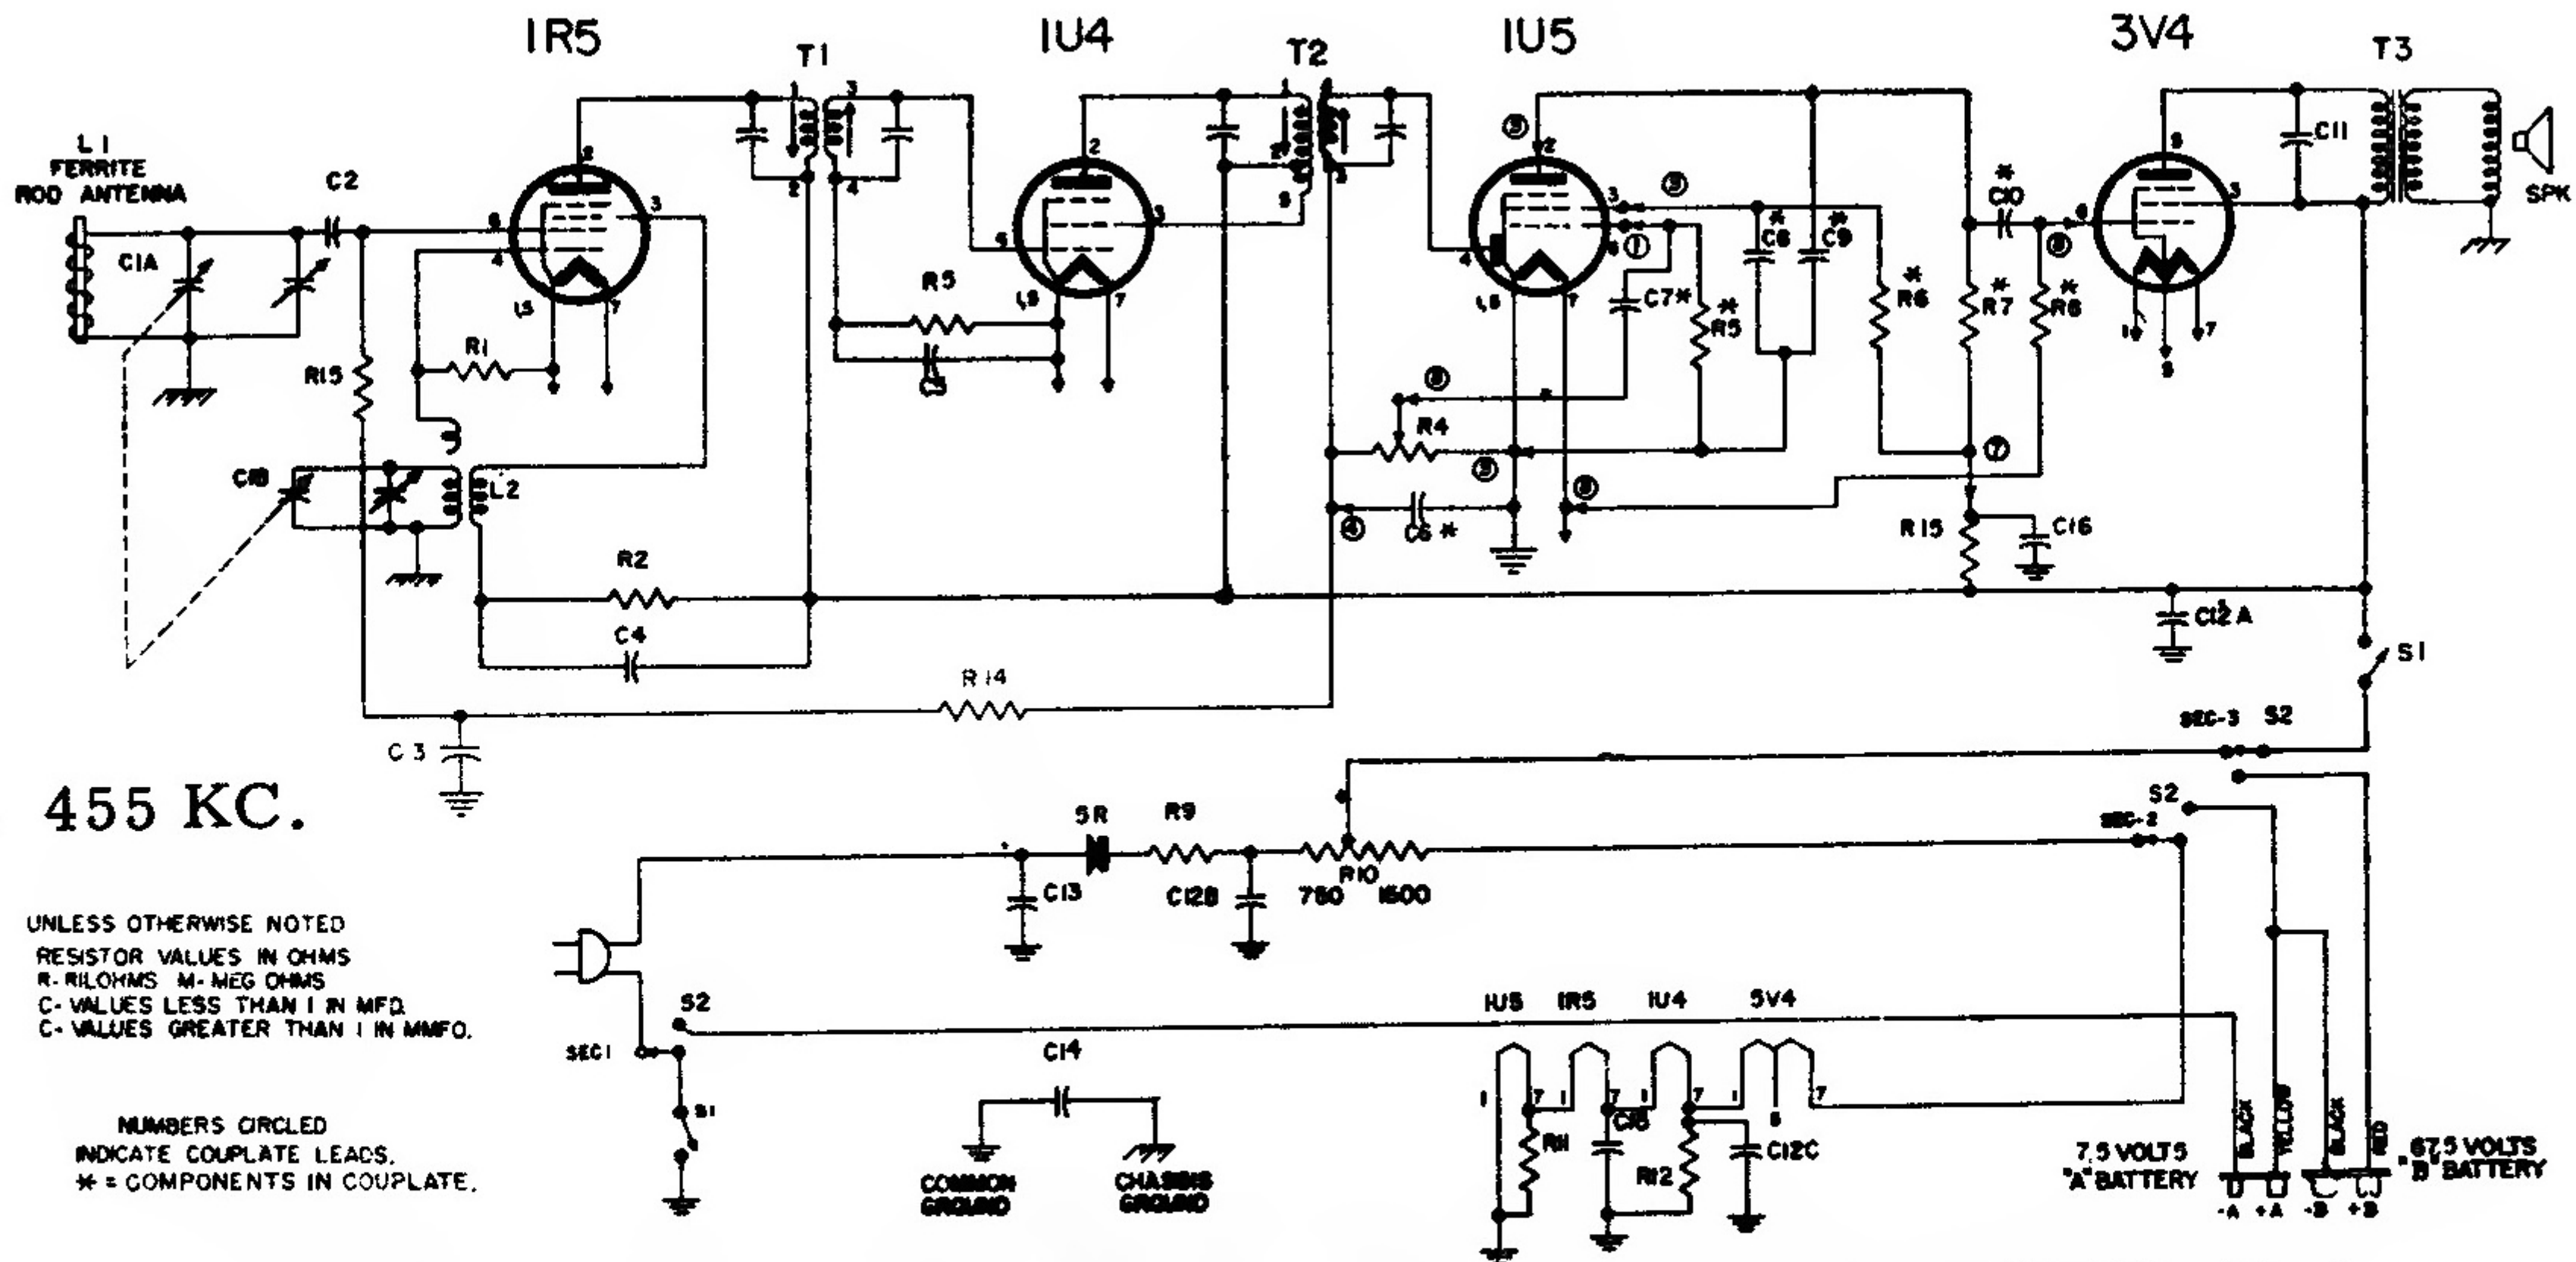

PART NO	SYMBOL	DESCRIPTION	PART NO	SYMBOL	DESCRIPTION	PART NO	SYMBOL	DESCRIPTION
GC-21	C1A	TUNING CAPACITOR	PC-8	C16	1MFD PAPER CONDENSER 400V	LI-15	T1	1ST IF COIL
	C1B		1R-43	R1	100K Ω 1/2W. 10% CARBON RESISTOR	LI-16	T2	2ND IF COIL
CC-57	C2	220 MMFD CERAMIC CONDENSER 500V.	1R-48	R2	47K Ω 1/2W 10% "	AT-21	T3	OUTPUT TRANSFORMER
PC-2	C3	.047MFD PAPER CONDENSER 200V.	1R-131	R3	10 MEGOHM 1/2W 10% CARBON RESISTOR		S1	SWITCH ON VOLUME CONTROL D.P.S.T.
CC-58	C4	.01 MFD. CERAMIC CONDENSER 500V.	VC-67	R4	2 MEGOHM VOLUME CONTROL	SW-23	S2	POWER CHANGEOVER, 3 POLE, 2 POSITION
CC-57	C5	.001MFD. CERAMIC CONDENSER 500V		*R5	10 MEGOHM	SR-2	SR	75MM. SELENIUM RECTIFIER
	*C6	150MMFD	MC-18	*R6	4.7 " RESISTORS IN COUPLATE	SPK-51	SPK	4" P.M. SPEAKER
	*C7	.002MFD.		*R7	1 "			
MC-18	*C8	.01 MFD.		*R8	3.3 MEGOHM			
	*C9	150MMFD.	WR-30	R9	75 OHM 2 WATT FLEXIBLE WIREWOUND RESISTOR			
	*C10	.005 MFD.	WR-29	R10	3550 OHMS TAPPED AT 750 OHMS - CANDOHM			
CC-58	C11	.002 MFD. CERAMIC CONDENSER 500V.	1R-148	R11	150 OHMS 1/2W. 5% CARBON RESISTOR			
	C12A	50MFD. @150V. ELECTROLYTIC CONDENSER	1R-149	R12	680 OHMS 1/2W. 5% CARBON RESISTOR			
EC-58	C12B	" " " " " "	1R-105	R13	1 MEGOHM 1/2W. 10% CARBON RESISTOR			
	C12C	100MFD. @25V. " " " " " "	1R-106	R14	3.3 MEGOHMS 1/2W. 10% CARBON RESISTOR			
PC-51	C13	.047MFD. MOLDED PAPER CONDENSER 400V.	1R-150	R15	270R OHM 1/2W. 10% CARBON RESISTOR			
PC-5	C14	1MFD. PAPER CONDENSER 400V.	LL-45	L1	IRON ROD ANTENNA			
PC-3	C15	1MFD. " " " " " " 300V.	LO-24	L2	OSCILLATOR COIL			