


TRAVLER


Models 55-37, 55-38, 55-39.

Schematic diagram below is exact for Model 55-37. Filter circuit with tapped output transformer used in Models 55-38 and 55-39 is shown in part at the right.

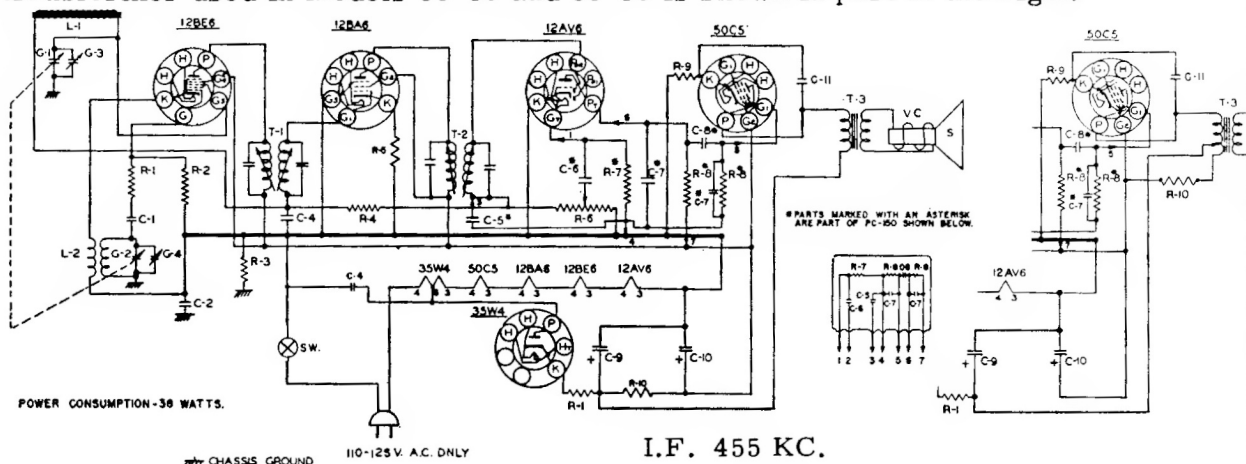

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
IR-17	R-1 33 $\sim$ RESISTOR 1/2W. 20%	GC-12	C-1 47 MMFD CERAMIC CONDENSER	5PK-37	S 4"PM. SPEAKER
IR-9	R-2 22M $\sim$ RESISTOR 1/2W. 20%	PC-8	C-2 1MFD. CONDENSER 400 V.	T-3	V.C. VOICE COIL
IR-20	R-3 220M $\sim$ RESISTOR 1/2W. 20%			T-3	OUTPUT TRANSFORMER
IR-23	R-4 3.3MEG. RESISTOR 1/2W. 20%	PC-5	C-4 .05MFD. CONDENSER 400 V.	LL-58	L-1 FERRAMIC ROD ANTENNA
IR-97	R-5 47 Δ RESISTOR 1/2W. 10%			L-21	L-2 OSC. COIL
	R-6 1 MEG. VOLUME CONTROL	MC-19	C-5* 220 MMFD.		
MC-15	R-7 66 MEG.		C-6* .002 MFD.		
IR-114	R-8 470M $\sim$		C-7* 250 MMFD.		
IR-25	R-9 220 Δ RESISTOR 1/2W. 20%	EC-55	C-8* .005 MFD.		
	R-10 2200 Δ RESISTOR 1W. 10%		C-9 50 MFD.		
			C-10 50 MFD.		
			C-11 .005 MFD. CONDENSER		
LI-13	T-1 INPUT I.F. TRANSFORMER	GC-15	G-1 TUNING CONDENSER		
	T-2 OUTPUT I.F. TRANSFORMER		G-2		

Models 521R90 - 521R91 - 5510

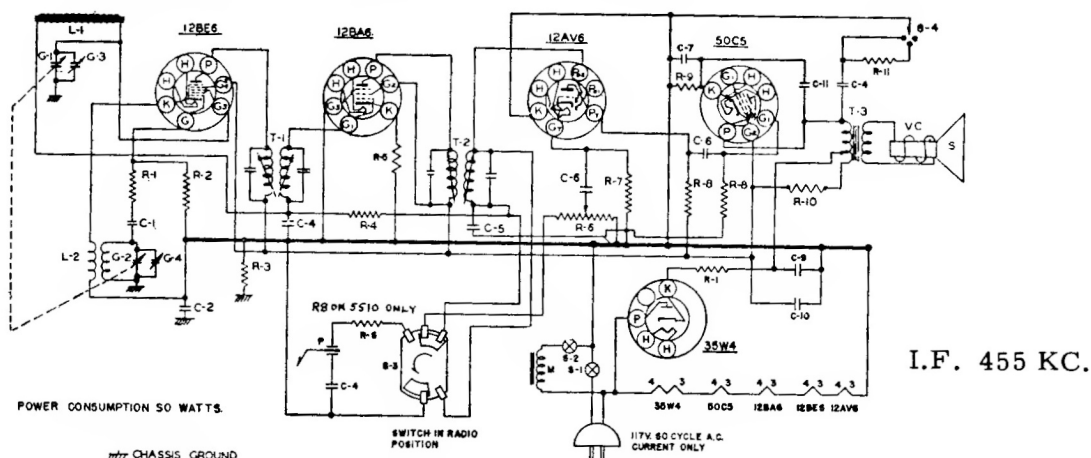

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
IR-17	R-1 33 $\sim$ RESISTOR 1/2W. 20%	GC-12	C-1 47 MMFD CERAMIC CONDENSER	8PK-38	S 4"PM. SPEAKER
IR-9	R-2 22M $\sim$ RESISTOR 1/2W. 20%	PC-8	C-2 1MFD. CONDENSER 400 V.	AT-14	V.C. VOICE COIL
IR-20	R-3 220M $\sim$ RESISTOR 1/2W. 20%			T-3	OUTPUT TRANSFORMER
IR-23	R-4 3.3MEG. RESISTOR 1/2W. 20%	PC-5	C-4 .05MFD. CONDENSER 400 V.	LL-58	L-1 FERRAMIC ROD ANTENNA
IR-11	R-5 220 Δ RESISTOR 1/2W. 0%	GC-5	C-5 100 MMFD CERAMIC CONDENSER	L-21	L-2 OSC. COIL
IR-13	R-6 2.2MEG. RESISTOR 1/2W. 20%	EC-54	C-6 .01 MFD. CONDENSER 400V.	S-1	SWITCH ON VOLUME CONTROL
IR-11	R-7 470M $\sim$ RESISTOR 1/2W. 20%		C-7 5 MFD. @ 25 V.D.C. ELECTROLYTIC	S-2	SWITCH ON RECORD CHANGER
IR-114	R-8 220 Δ RESISTOR 1/2W. 20%	EC-55	C-9 80 MFD.	P	PICKUP CARTRIDGE
IR-42	R-9 1000 Δ RESISTOR 1W. 10%	GC-5	C-10 50 MFD.	M	CHANGER MOTOR
IR-18	R-11 4700 Δ RESISTOR 1/2W. 20%		C-11 .005 MFD. CONDENSER	S-3	RADIO-PHONO SWITCH
				S-4	TONE CONTROL SWITCH
LI-13	T-1 INPUT I.F. TRANSFORMER	GC-16	G-1 TUNING CONDENSER		
	T-2 OUTPUT I.F. TRANSFORMER		G-2		