


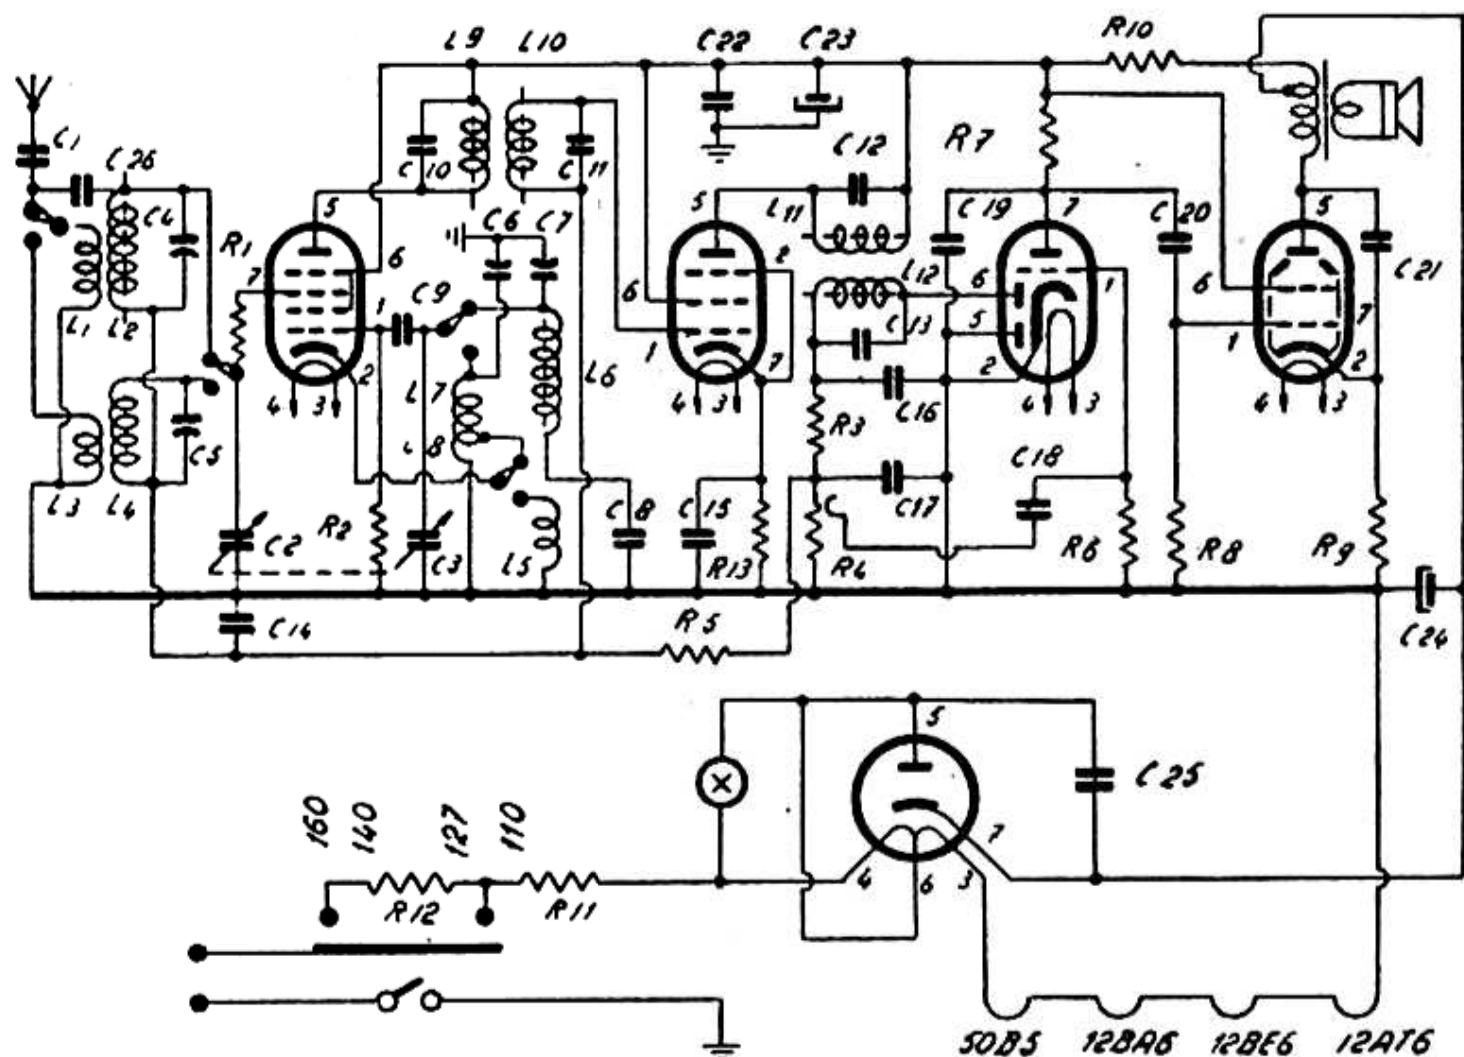


WATT - Mod. Piccolo Anie

CONDIZIONI DI LAVORO DELLE VALVOLE

	V1	V2	V3	V4	V5	V6	V7	V8	V9	V10	VALORI DIVERSI
TIPO	12BE6	12BA6	12AT6	50B5	35W4						Impedenza bobina mobile 25 Ω
USO											
V. fil.	126	126	126	50	32						
V. gr.	95	95	45	110							
V. pl.											
V. sch.	95	95		95							
V. gr.											
V. cal.		95		7	116						

R	VALORE	RESISTENZE			C	VALORE	CAPACITÀ			
1	40 Ω 1/8	11	35 Ω	2	1	1000 p.f.	11	150 p.f.	21	10000 p.f.
2	20 KΩ 1/8	12	165 Ω	10	2	450 p.f.	12	150 p.f.	22	50000 p.f.
3	30 KΩ 1/8	13	40 Ω	1/8	3	450 p.f.	13	250 p.f.	23	40 μf.
4	0.5 pof.				4	30 comp.	14	50000 p.f.	24	40 μf.
5	2 MΩ 1/4				5	30	15	50000 p.f.	25	50000 p.f.
6	10 MΩ 1/2				6	30	16	100 p.f.	26	5 p.f.
7	0.5 MΩ 1/2				7	30	17	100 p.f.		
8	0.5 MΩ 1/4				8	450 p.f.	18	2000 p.f.		
9	125 Ω 1/2				9	50 p.f.	19	150 p.f.		
10	1 KΩ 1				10	150	20	10000 p.f.		

WATT RADIO - Mod. PICCOLO serie ANIE - Onde medie e corte. Media frequenza 470 kc. Valvole 12BE6, 12BA6, 12AT6, 50B5, e 35W4.

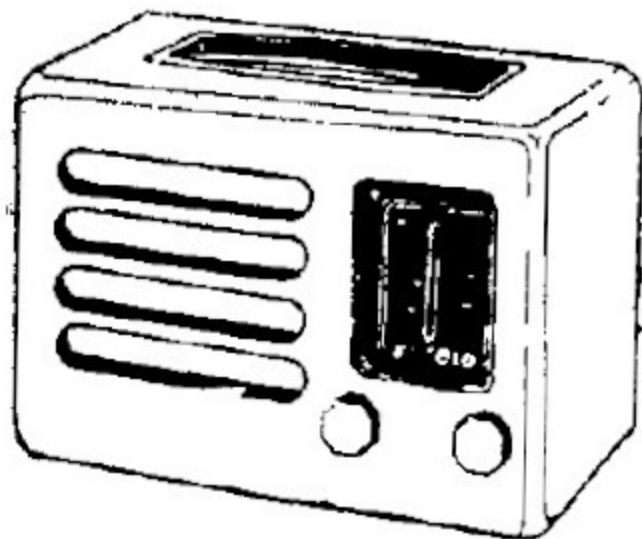

WATT RADIO - MOD. « PICCOLO »

