

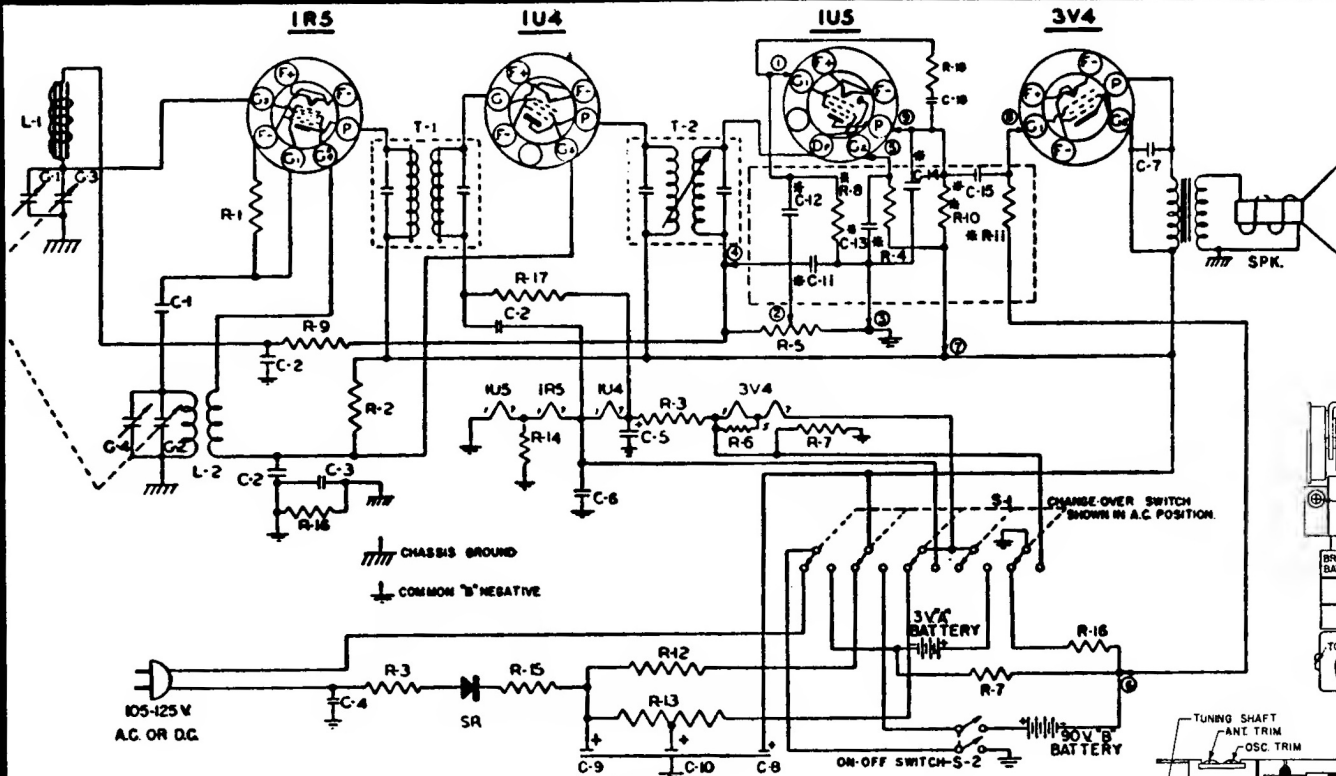
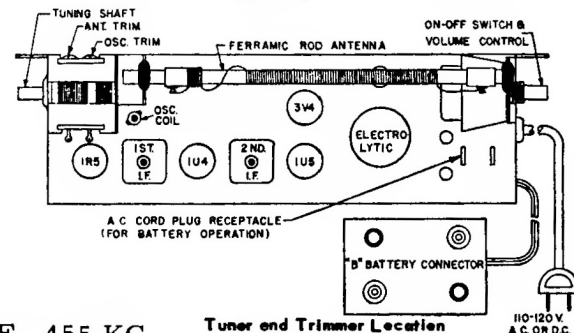


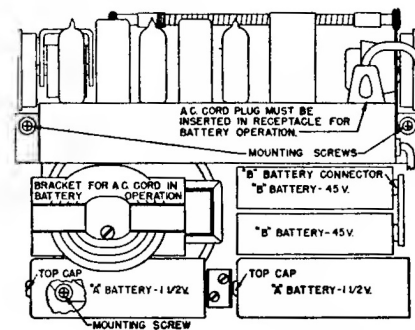

IS PART OF PRINTED CIRCUIT PC-168
TRANSFORMER PART NO. MC-18, SHOWN BELOW

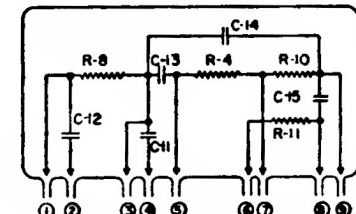

I.F. 455 KC.

Tuner and Trimmer Location

PART NO.	SYMBOL	DESCRIPTION	PART NO.	SYMBOL	DESCRIPTION
IR-43	R-1	100 K 1/2 W. 10% Resistor	EC-32	(C-8)	40 MFD
IR-63	R-2	15 K 1/2 W. 10% Resistor		(C-9)	40 MFD 150 V. Electrolytic Condenser
IR-17	R-3	33 1/2 W. 20% Resistor		(C-10)	20 MFD
VC-47	R-5	1 MEGOHM Volume Control	LO-18	L-2	Oscillator Coil
IR-33	R-6	270 1/2 W. 10% Resistor	LL-30	L-1	Ferramic Rod Antenna
IR-39	R-7	620 1/2 W. 5% Resistor	LI-10	T-1	Input I.F. Transformer
IR-3	R-17	10 MEGOHM 1/2 W. 20% Resistor	LI-11	T-2	Output I.F. Transformer
IR-25	R-12	2200 1 W. 10% Resistor	GC-12	(G-1)	Antenna Section
WR-7	R-13	2100 10 W. 5% Wirewound Resistor		(G-2)	Oscillator Section
IR-41	R-14	470 1/2 W. 20% Resistor	GC-12	(G-3)	Antenna Trimmer
IR-23	R-15	47 1 W. 10% Resistor		(G-4)	Oscillator Trimmer
IR-20	R-16	220 K 1/2 W. 20% Resistor	SW-18	(S-1)	6 Pole, 2 Position Switch
CC-5	C-1	100 MMFD Condenser, 500 V.		(S-2)	2 Pole, 1 Position Switch on Volume Control
CC-4	C-2	.01 MFD Ceramic Condenser, 500 V.	SR-2	SR	75 MIL Selenium Rectifier
PC-8	C-3	.1 MFD Paper Condenser, 400 V.	SPK-29	SPK	4" P.M. Speaker with Output Transformer
PC-5	C-4	.05 MFD x 400 V. Paper Condenser	IR-13	R-18	2.2 MEGOHM 1/2 W. 20% Resistor
EC-6	C-5	70 MFD @ 10 W.V. Electrolytic Condenser	CC-33	C-16	220 MMFD 500 V. 20% Ceramic Condenser
PC-3	C-6	.1 MFD x 200 V. Paper Condenser	CA-155		Cabinet - Complete
CC-20	C-7	1500 MMFD x 500 V. Ceramic Condenser	K-153		Volume Knob
			K-154		Tunnel Knob

Western Auto Supply
MODEL NOS. D3503A, D3504A