


Westinghouse Electric Corporation

CHASSIS V-2237-1

Models H-504P4, H-505P4, H-506P4, H-507P4

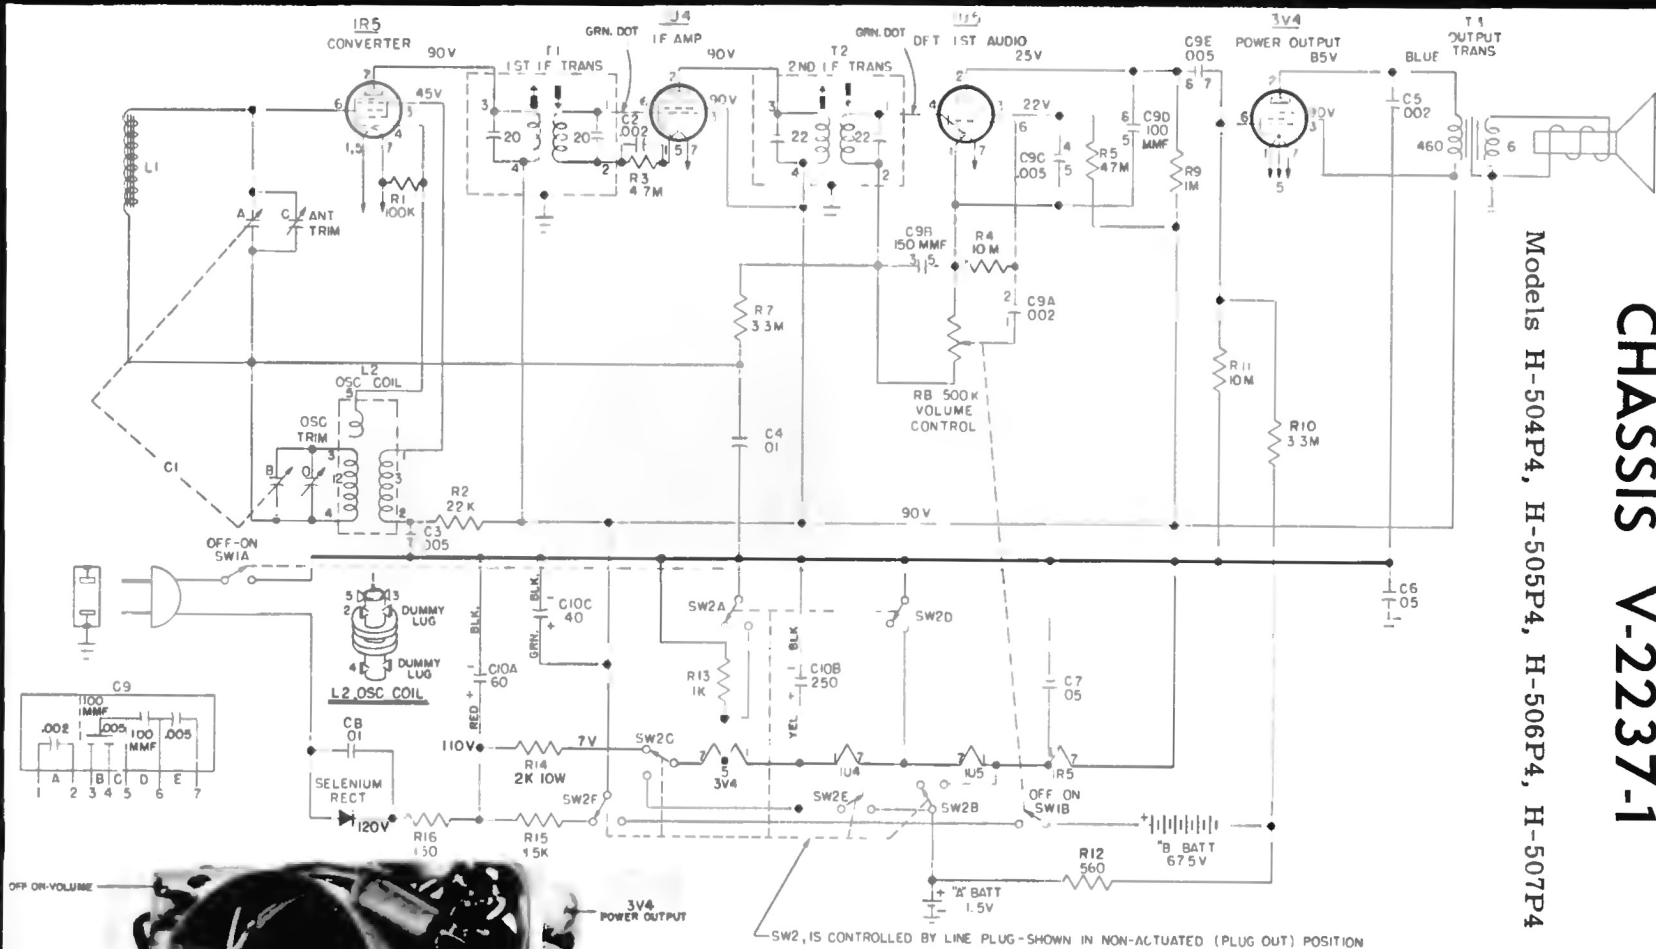

ALIGNMENT

Step	Connect Signal Generator -	Signal Generator Frequency	Radio Dial	Adjust for Maximum Output
1	Between Stator of R-F tuning capacitor (A), and (B), through a 0.1 mfd. capacitor	455 kc.	minimum capacity	Top and bottom slugs in 2nd and 1st I-F trans. in order given
2	Radiated Signal	1625 kc.	minimum capacity	Osc. trimmer (D)
3	Radiated Signal	1400 kc.	1400 kc.	Ant. trimmer (C)

