



# Westinghouse Chassis V-2393-1

Models H-655P5, H-656P5, H-657P5


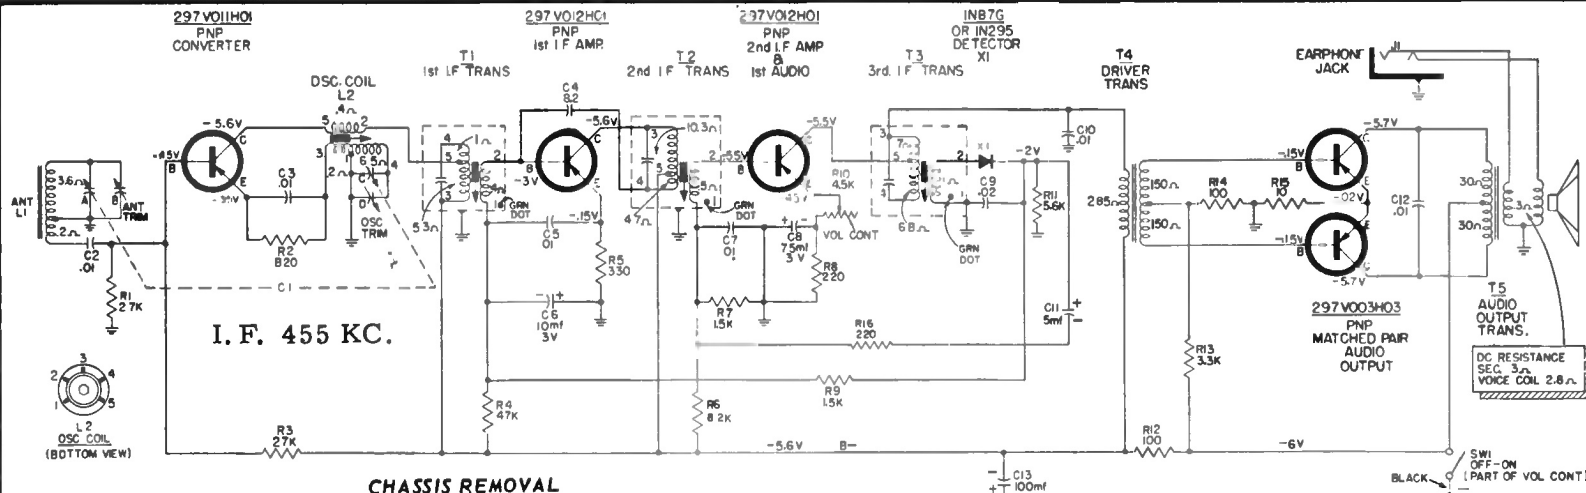


## CHASSIS REMOVAL





1. Remove the tuning knob as follows. Insert a loop of string under the tuning knob and pull the knob up and out of the cabinet front.
2. Remove the carrying handle. Grasp the handle on both sides and carefully spread it apart until it clears the holes in the cabinet sides.

3. Remove the back of the cabinet by loosening the two coin-slot screws on the back.
4. Remove the two 1" long hex head screws securing the chassis to the cabinet front.
5. Remove the printed circuit chassis, battery case, speaker spacers, rubber grommet and speaker.
6. To insert the printed circuit chassis back into the cabinet use the reverse procedure. *The tuning knob and cabinet back screws must be the same or identical to the original dimensions to prevent possible damage to the tuning gang.*




## POWER SUPPLY

EVEREADY 915 OR 1015  
RAY-O-VAC 7LP OR 7R  
BURGESS 2  
MALLORY M15

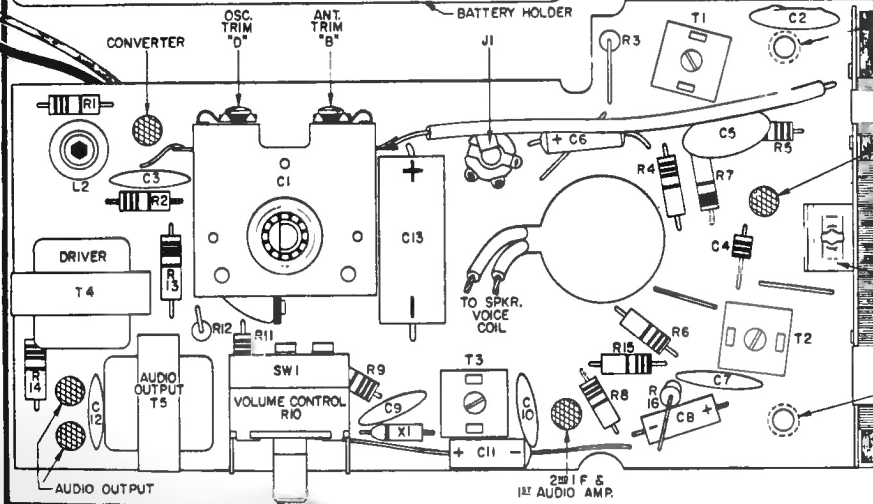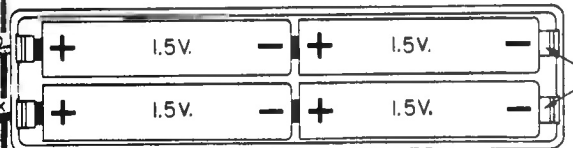

TOP VIEW OF PRINTED CIRCUIT CHASSIS

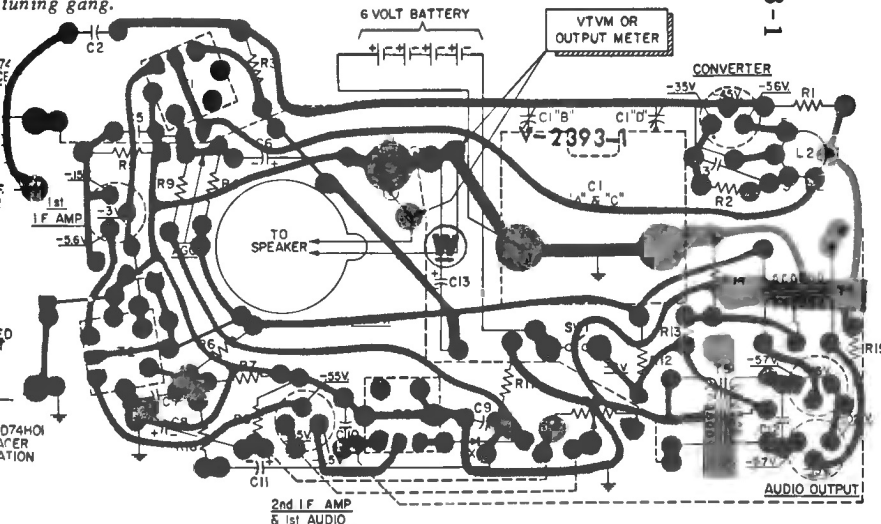

BOTTOM VIEW OF PRINTED CIRCUIT CHASSIS SHOWING COMPONENTS SYMBOLICALLY