

**XPL 200****ACOUSTIC & ELECTRICAL SPECIFICATIONS**

Power Test:	34.6 V IEC shaped noise, 2 hours
Rated Impedance:	6 ohm
Minimum Impedance:	5.5 ohm
Impedance Curve:	See page 2
Frequency Response (-6 dB):	35 Hz to 25 kHz (half space)
Network Voltage Drive:	See page 3
Sensitivity:	90 dB for 2.83 V @ 1m
Crossover Frequency:	300 Hz, 1.1 kHz & 4.5 kHz


**PHYSICAL SPECIFICATIONS**


Enclosure Volume:	3.5 cu. ft.
Enclosure Dimensions:	39.62 x 18 x 14 D (Inch)

**SYSTEM COMPONENTS**

Bass Transducer:	127H-1
Mid Bass Transducer:	115H-1
Mid Frequency Transducer:	095Ti
High Frequency Transducer:	046Ti
Crossover Network:	70333-0060

Design Engineer



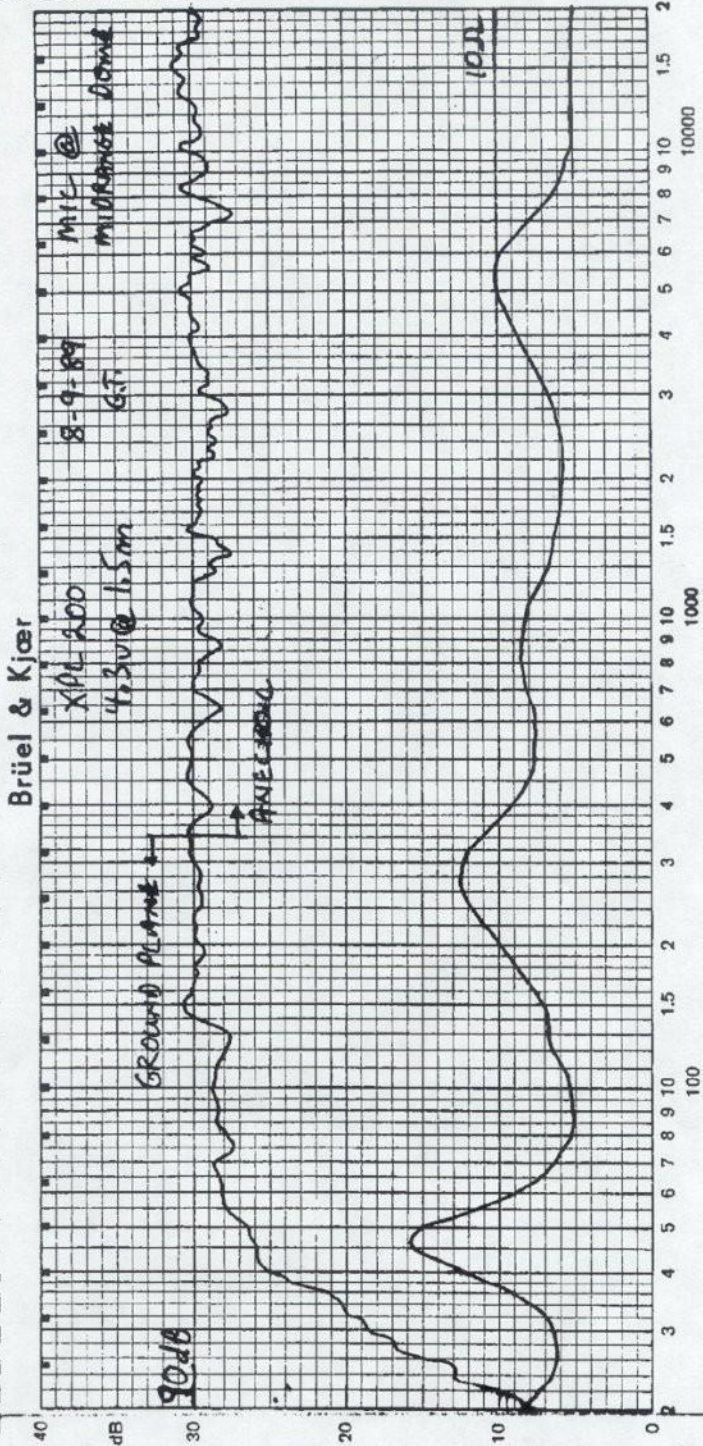



Brüel & Kjaer

