


OPERATIONAL AMPLIFIERS

- SHORT CIRCUIT PROTECTION
- OFFSET VOLTAGE NULL CAPABILITY
- LARGE COMMON MODE AND DIFFERENTIAL VOLTAGE RANGE
- NO LATCH-UP
- SLEW-RATE = $5.5V/\mu s$ ($G_V = 10$, $C_c = 3.3pF$)

The LM748 series consists of general purpose operational amplifiers, intended for a wide range of analog applications where tailoring of frequency characteristics is desirable. High common mode voltage range and absence of "Latch-up" tendencies make the LM748 series ideal for use as a

voltage follower. The high gain and wide range of operating voltage provide superior performance in integrators, summing amplifiers and general feedback applications. Unity gain frequency compensation is achieved by means of a single $30pF$ capacitors.

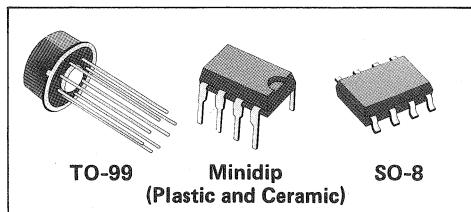


ABSOLUTE MAXIMUM RATINGS

		LM748/A	LM748I	LM748C
V_s	Supply voltage	$\pm 22V$	$\pm 22V$	$\pm 22V$
$V_i(1)$	Input voltage	$\pm 15V$	$\pm 15V$	$\pm 15V$
ΔV_i	Differential input voltage	$\pm 30V$	$\pm 30V$	$\pm 30V$
T_{op}	Operating temperature	-55 to 125°C indefinite	-25 to 85°C indefinite	0 to 70°C indefinite
	Output short circuit duration (2)			
T_j	Junction temperature	150°C	150°C	150°C
T_{stg}	Storage temperature	-65 to 150°C	-65 to 150°C	-65 to 150°C

(1) For supply voltages less than $\pm 15V$, input voltage is equal to the supply voltage

(2) The short circuit duration is limited by thermal dissipation

SCHEMATIC DIAGRAM


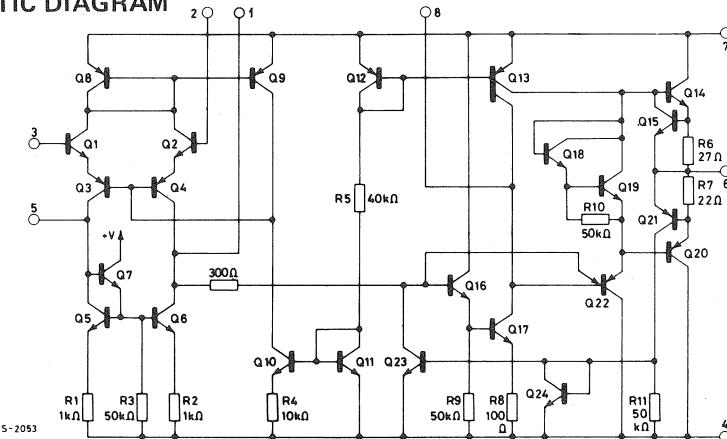


SSS

LM748

CONNECTION DIAGRAMS

(top views)



ORDERING NUMBERS

Type	TO-99	Ceramic Minidip	Plastic Minidip	SO-8
LM748	LM748 H	LM748J	—	—
LM748C	LM748 CH	LM748 CJ	LM748 CN	LM748 CD
LM748A	LM748 AH	—	—	—
LM748I	—	—	—	LM748ID

THERMAL DATA

		Plastic Minidip	Ceramic Minidip	TO-99	SO-8
$R_{th\ j-amb}$	Thermal resistance junction-ambient	max.	120°C/W	150°C/W	155°C/W



ELECTRICAL CHARACTERISTICS (see note)

Parameter	Test conditions	LM748/748I			LM748A			LM748C			Unit	
		Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.		
V_{os}	Input offset voltage $T_{amb} = 25^\circ C$ $R_g \leq 10 k\Omega$ $R_g \leq 50\Omega$		1	5		0.5	2		2	6	mV mV	
	$T_{amb} = T_{min} \text{ to } T_{max}$ $R_g \leq 10 k\Omega$ $R_g \leq 50\Omega$		1	6		0.5	3			7.5	mV mV	
ΔV_{os}	Input offset voltage adjust. range	$T_{amb} = 25^\circ C$	± 15			± 25		± 15			mV	
$\frac{\Delta V_{os}}{\Delta T}$	Average input offset voltage drift	$R_g \leq 50\Omega$				2.5	15				μV $^\circ C$	
I_{os}	Input offset current	$T_{amb} = 25^\circ C$ $T_{amb} = T_{min} \text{ to } T_{max}$	20 50	200 500		2	10 25		20	200 300	nA nA	
$\frac{\Delta I_{os}}{\Delta T}$	Average input offset current drift						0.15				nA $^\circ C$	
I_b	Input bias current	$T_{amb} = 25^\circ C$ $T_{amb} = T_{min} \text{ to } T_{max}$	80	500 1.5		20	75 0.1		80	500 0.8	nA μA	
R_i	Input resistance	$T_{amb} = 25^\circ C$	0.3	2		2	10		0.3	2	M Ω	
V_i	Input voltage range		± 12	± 13		± 12	± 13		± 12	± 13	V	
G_v	Large signal voltage gain	$T_{amb} = 25^\circ C$ $R_L \geq 2 k\Omega$ $V_s = \pm 15V$ $V_o = \pm 10V$	94	104		94	108		86	104	dB	
		$T_{amb} = T_{min} \text{ to } T_{max}$ $R_L \geq 2 k\Omega$ $V_s = \pm 15V$ $V_o = \pm 10V$	88			88			84		dB	
V_o	Output voltage swing	$V_s = \pm 15V$ $R_L \geq 10 k\Omega$ $R_L \geq 2 k\Omega$	± 12 ± 10	± 14 ± 13		± 12 ± 10	± 14 ± 13		± 12 ± 10	± 14 ± 13	V V	
I_{sc}	Output short circuit current			25			25			25		mA
CMR	Common mode rejection	$R_g \leq 10 k\Omega$ $V_{CM} = \pm 12V$	70	90		80	95		70	90		dB
SVR	Supply voltage rejection	$V_s = \pm 5$ to $\pm 20V$ $R_g \leq 10 k\Omega$	76	90		80	97		76	90		dB
SR	Slew rate	$T_{amb} = 25^\circ C$	$G_v = 1$		0.5		0.5		0.5		$V/\mu s$	
		$R_L \geq 2 k\Omega$	$G_v = 10^*$		5.5		5.5		5.5		$V/\mu s$	

* $C_C = 3.5 \text{ pF}$

ELECTRICAL CHARACTERISTICS (continued)

Parameter	Test conditions	LM748/748I			LM748A			LM748C			Unit
		Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
Transient respn. (unity gain)	$T_{amb} = 25^\circ C$ $V_i = 20 mV$ $C_c = 30 pF$ $R_L = 2 k\Omega$ $C_L \leq 100 pF$										
Rise time Overshoot		0.2 5			0.2 5			0.2 5			μs %
I_s	Supply current	$T_{amb} = 25^\circ C$		1.9	2.8		1.9	2.8		1.9	2.8 mA
P_s	Power consumption	$T_{amb} = 25^\circ C$ $V_s = \pm 20V$ $V_s = \pm 15V$		60	85		60	85		60	85 mW
		$V_s = \pm 15V$ $T_{amb} = T_{min}$ $T_{amb} = T_{max}$		60 45	100 75		60 40	100 75		60	100 mW mW

Note. These specifications, unless otherwise specified, apply for $V_s = \pm 15V$ and $T_{amb} = -55$ to $125^\circ C$ for LM748 and LM748A. For LM748C and LM748I these specifications apply for $T_{amb} = 0$ to $70^\circ C$ ($C_c = 30pF$).

Fig. 1 – Voltage offset null circuit





Fig. 2 – Gain test circuit

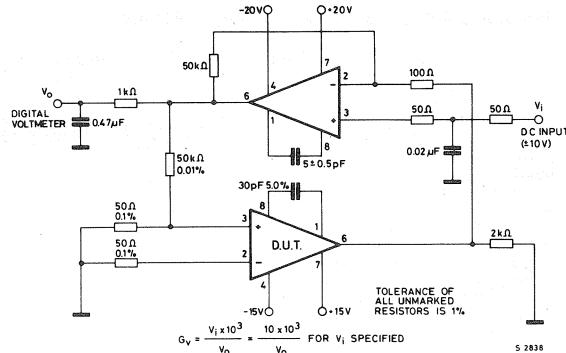

Typical performance curves for LM748

Fig. 3 - Input bias current vs. ambient temperature




Fig. 4 - Input resistance vs. ambient temperature




Fig. 5 - Output short-circuit current vs. ambient temperature




Fig. 6 - Input offset current vs. ambient temperature




Fig. 7 - Power consumption vs. ambient temperature





Fig. 8 - Frequency characteristics vs. ambient temperature



Typical performance curves for LM748C

Fig. 9 - Input bias current vs. ambient temperature




Fig. 10 - Input resistance vs. ambient temperature




Fig. 11 - Output short-circuit current vs. ambient temperature




Fig. 12 - Input offset current vs. ambient temperature




Fig. 13 - Power consumption vs. ambient temperature





Fig. 14 - Frequency characteristics vs. ambient temperature



Typical performance curves for LM748 and LM748C

Fig. 15 - Open loop voltage gain vs. supply voltage




Fig. 16 - Output voltage swing vs. supply voltage




Fig. 17 - Power consumption vs. supply voltage




Fig. 18 - Output voltage swing vs. load resistance




Fig. 19 - Input offset current vs. supply voltage





Fig. 20 - Input common mode voltage range vs. supply voltage



SSS

LM748

Fig. 21 – Input noise voltage vs. frequency




Fig. 24 – Open loop frequency and phase response vs. frequency




Fig. 27 – Compensation capacitance vs. closed loop voltage gain




Fig. 22 – Input noise current vs. frequency




Fig. 23 – Broadband noise for various bandwidths




Fig. 25 – Output voltage swing vs. frequency




Fig. 26 – Slew-rate




Fig. 28 – Input resistance and input capacitance vs. frequency





Fig. 29 – Output resistance vs. frequency



SSS

LM748

Fig. 30 - Frequency characteristics vs. supply voltage
G-2215/2




Fig. 31 - Voltage follower transient response (unity gain)
G-2201/2




Fig. 32 - Transient response test circuit
G-2201/2




Fig. 33 - Voltage follower large-signal pulse response
G-2214/2




Fig. 34 - Feed forward compensation



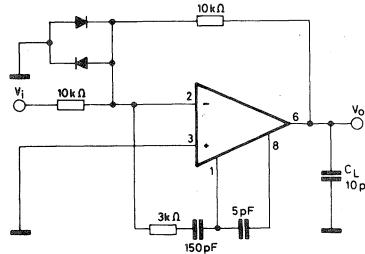


Fig. 35 - Large signal feed forward transient response
G-2201/2



TYPICAL APPLICATIONS

Fig. 36 - Pulse width modulator

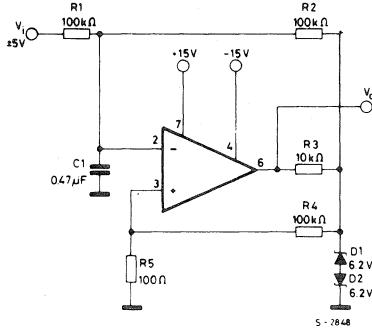

$$f_C = \frac{1}{2\pi R2 C1}$$

$$f_H = \frac{1}{2\pi R1 C1}$$

$$= \frac{1}{2\pi R2 C2}$$


$f_C < f_H < f_{\text{unity gain}}$




LM748

MECHANICAL DATA (Dimensions in mm)


TO-99

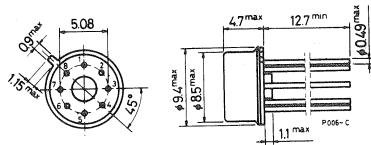

Ceramic Minidip



Plastic Minidip



SO-8

