

# LINEAR INTEGRATED CIRCUITS



## OPERATIONAL AMPLIFIERS

The LS 709 series features low offset, high input impedance, large input common mode range, high output voltage swing. The amplifier is intended for use in D.C. servosystems, high impedance analog computer, low level instrumentation applications, and for the generation of special linear and non linear transfer functions.


### ABSOLUTE MAXIMUM RATINGS

ABSOLUTE MAXIMUM RATINGS		TO-99	DIP
$V_s$	Supply voltage	$\pm 18$ V	
$V_i$ (1)	Input voltage	$\pm 10$ V	
$\Delta V_i$	Differential input voltage	$\pm 5$ V	
$T_{op}$	Operating temperature for <b>LS 709/LS 709A</b> for <b>LS 709C</b>	-55 to 125 °C 0 to 70 °C	
$P_{tot}$	Power dissipation at $T_{amb} = 70$ °C	520 mW	400 mW
$T_{stg}$	Storage temperature	-65 to 150 °C	-55 to 150 °C

1) For supply voltages less than  $\pm 10$  V maximum input voltage is equal to the supply voltage.

### MECHANICAL DATA

Dimensions in mm

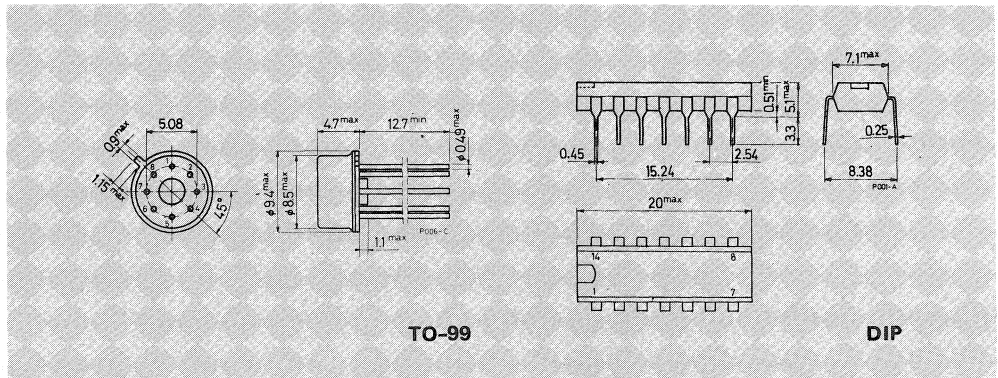

TO-99



DIP



**LS 709**  
**LS 709A**  
**LS 709C**


## CONNECTION DIAGRAMS AND ORDERING NUMBERS

(top views)



Type	TO-99	DIP
LS 709	LS 709 TB	—
LS 709A	LS 709 ATB	—
LS 709C	LS 709 CTB	LS 709 CB

## SCHEMATIC DIAGRAM (pin numbers are referred to the TO-99 version)

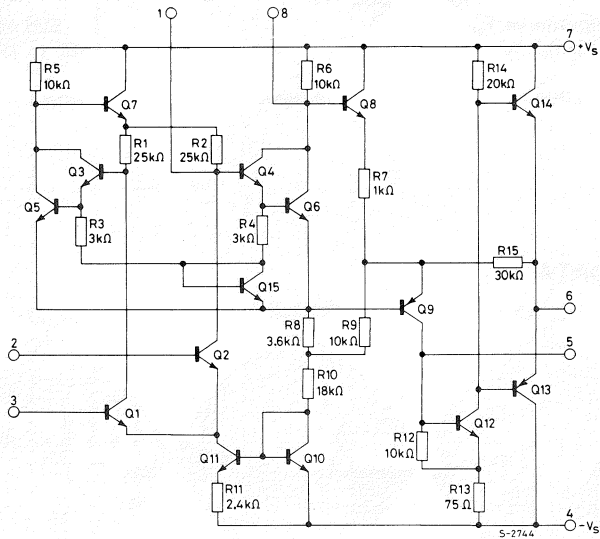

## THERMAL DATA

		TO-99	DIP
$R_{th j-amb}$	Thermal resistance junction-ambient	max	max
		155 °C/W	200 °C/W



**LS709  
LS709A  
LS709C**

**ELECTRICAL CHARACTERISTICS** (see note)


Parameter	Test conditions	LS 709A			LS 709			LS 709C			Unit
		Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
V <sub>os</sub> Input offset voltage	R <sub>g</sub> ≤ 10 kΩ R <sub>g</sub> ≤ 10 kΩ T <sub>amb</sub> = 25°C		0.6	3 2		1	6 5		2	10 7.5	mV mV
I <sub>b</sub> Input bias current	T <sub>amb</sub> = T <sub>min</sub> T <sub>amb</sub> = 25°C		0.3 100	0.6 200		0.5 200	1.5 500		0.36 300	2 1500	μA nA
I <sub>os</sub> Input offset current	T <sub>amb</sub> = T <sub>max</sub> T <sub>amb</sub> = T <sub>min</sub> T <sub>amb</sub> = 25°C		3.5 40 10	50 250 50		20 100 50	200 500 200		75 125 100	400 750 500	nA nA nA
R <sub>i</sub> Input resistance	T <sub>amb</sub> = T <sub>min</sub> T <sub>amb</sub> = 25°C	85 350	170 700		40 150	100 400		50 50	250 250		kΩ kΩ
R <sub>o</sub> Output resistance	T <sub>amb</sub> = 25°C		150			150			150		Ω
I <sub>s</sub> Supply current	V <sub>s</sub> = ±15V T <sub>amb</sub> = 25°C		2.5	3.6		2.6	5.5		2.6	6.6	mA
Transient response Risetime Overshoot	V <sub>i</sub> = 20 mV C <sub>L</sub> ≤ 100 pF T <sub>amb</sub> = 25°C			1.5 30		0.3 10	1 30		0.3 10	1 30	μs %
SR Slew rate	T <sub>amb</sub> = 25°C		0.25			0.25			0.25		V/μs
$\frac{\Delta V_{os}}{\Delta T}$ Average temperature coefficient of input offset voltage	R <sub>g</sub> = 50Ω T <sub>amb</sub> = 25°C to T <sub>max</sub> T <sub>amb</sub> = 25°C to T <sub>min</sub> R <sub>g</sub> = 10 kΩ T <sub>amb</sub> = 25°C to T <sub>max</sub> T <sub>amb</sub> = 25°C to T <sub>min</sub>		1.8 1.8 2 4.8	10 10 15 25		3 6			6 12		μV/°C μV/°C μV/°C μV/°C
G <sub>v</sub> Large signal voltage gain	V <sub>s</sub> = ±15V R <sub>L</sub> ≥ 2 kΩ V <sub>o</sub> = ±10V	88	93	97	88	93	97	83	93		dB
V <sub>o</sub> Output voltage swing	V <sub>s</sub> = ±15V R <sub>L</sub> = 10 kΩ V <sub>s</sub> = ±15V R <sub>L</sub> = 2 kΩ	±12 ±10	±14 ±13		±12 ±10	±14 ±13		±12 ±10	±14 ±13		V V
V <sub>i</sub> Input voltage range	V <sub>s</sub> = ±15V	±8			±8	±10		±8	±10		V
CMR Common mode rejection	R <sub>g</sub> ≤ 10 kΩ	80	110		70	90		65	90		dB
SVR Supply voltage rejection	R <sub>g</sub> ≤ 10 kΩ	80	88		76	92		74	92		dB

Note: These specifications, unless otherwise specified, apply for T<sub>amb</sub> = -55 to 125°C for LS 709/LS 709A and T<sub>amb</sub> = 0 to 70°C for LS 709C with the following conditions: V<sub>s</sub> = ± 9V to ± 15V, C<sub>1</sub> = 5000 pF, R<sub>1</sub> = 1.5 kΩ, C<sub>2</sub> = 200 pF and R<sub>2</sub> = 51Ω. (See fig. 8 and fig. 17).




**LS 709  
LS 709A  
LS 709C**


**Fig. 1 - Voltage gain vs. supply voltage (for 709A)**




**Fig. 2 - Output voltage swing vs. supply voltage (for 709A)**




**Fig. 3 - Input common mode voltage range vs. supply voltage (for 709A)**




**Fig. 4 - Power consumption vs. supply voltage (for 709A)**




**Fig. 5 - Output voltage swing vs. load resistance (for 709A)**




**Fig. 6 - Input bias current vs. ambient temperature (for 709A)**




**Fig. 7 - Input offset current vs. ambient temperature (for 709A)**




**Fig. 8 - Transient response test circuit**




**Fig. 9 - Transient response (for 709A)**




**Fig. 10 - Slew rate vs. closed loop gain using recommended compensation networks (for 709A)**




**Fig. 11 - Voltage gain vs. supply voltage (for 709)**




**Fig. 12 - Output voltage swing vs. supply voltage (for 709 and 709C)**




**Fig. 13 - Voltage gain vs. supply voltage (for 709C)**



**Fig. 14 - Input bias current vs. ambient temperature (for 709C)**




**Fig. 15 - Input offset current vs. ambient temperature (for 709C)**




**Frequency compensation for all types**

**Fig. 16 - Open loop frequency response for various values of compensation**



**Fig. 17 - Frequency compensation circuit**



**Fig. 18 - Frequency response for various closed loop gains**

