


PHILCO UNIVERSAL STEREO AMPLIFIER—MODEL SA-1005

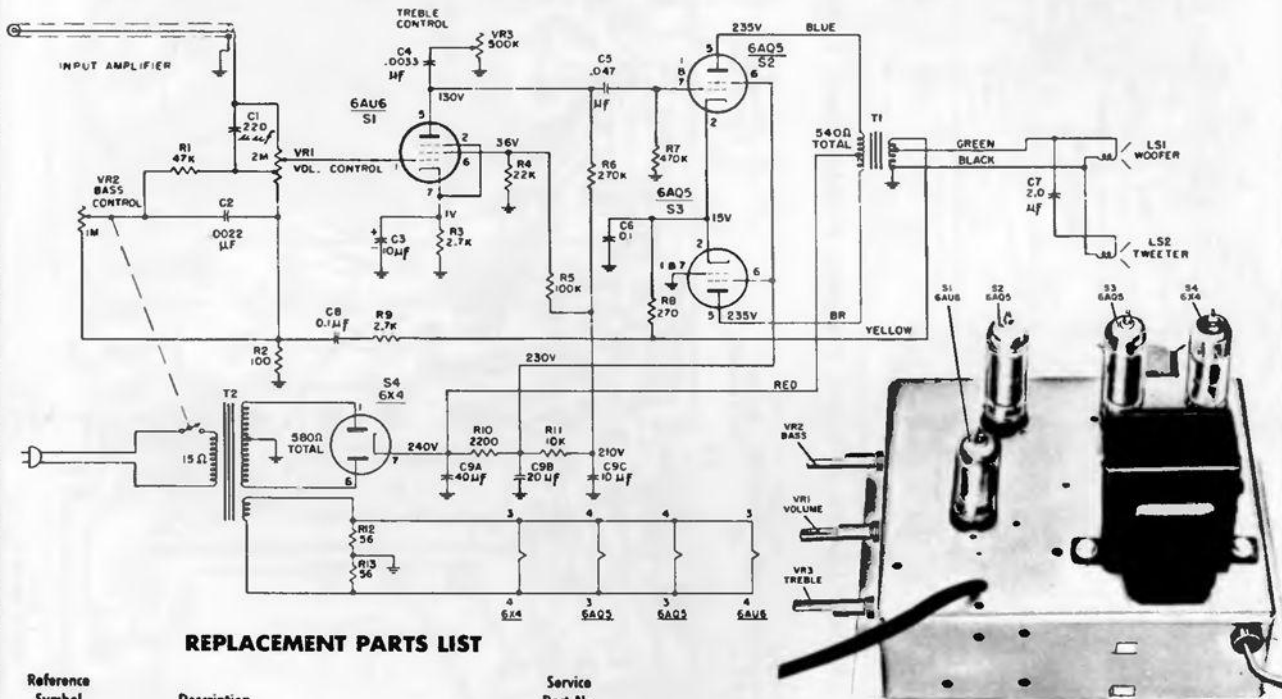

REPLACEMENT PARTS LIST

| Reference Symbol | Description | Service Part No. |
|------------------|---|------------------|
| C1 | Capacitor, 220 μ f, hi comp. | 30-1225-11 |
| C2 | Capacitor, .0022 mfd, bass cut. | 30-4671-20 |
| C3 | Capacitor, elect., 10 mfd, 25V, cathode by-pass | 30-2417-49 |
| C4 | Capacitor, .0033 mfd, treble control. | 30-4650-38 |
| C5 | Capacitor, .047 mfd, coupling | 30-4650-62 |
| C6 | Capacitor, .1 mfd, cathode by-pass | 30-4650-47 |
| C7 | Capacitor, 2 mfd, crossover | 30-4681-7 |
| C8 | Capacitor, .1 mfd, feedback | 30-4650-30 |
| C9 | Capacitor, elect., 40/20/10 at 350WV | 30-2575-47 |
| LS1 | Speaker, 6" PM, 8 ohm V.C. | 36-1680-8 |
| LS2 | Speaker, 4" PM, 16 ohm V.C. | 36-1673-11 |
| T1 | Transformer, audio output | 32-8939-1 |
| T2 | Transformer, power | 32-8890-1 |
| VR1 | Volume control, 2 meg, tapped | 33-5535-46 |
| VR2 | Bass control, 1 meg. | 33-5588-12 |
| VR3 | Treble control, 500,000 ohms | 33-5587-31 |

The SA-1005 is a single-channel amplifier primarily designed as a companion amplifier for the G-line Hi-Fidelity Stereo Phonographs. A 12-ft. audio cable and an a-c line cord are attached to the SA-1005.