


# STEREO AMPLIFIER Model SA-400

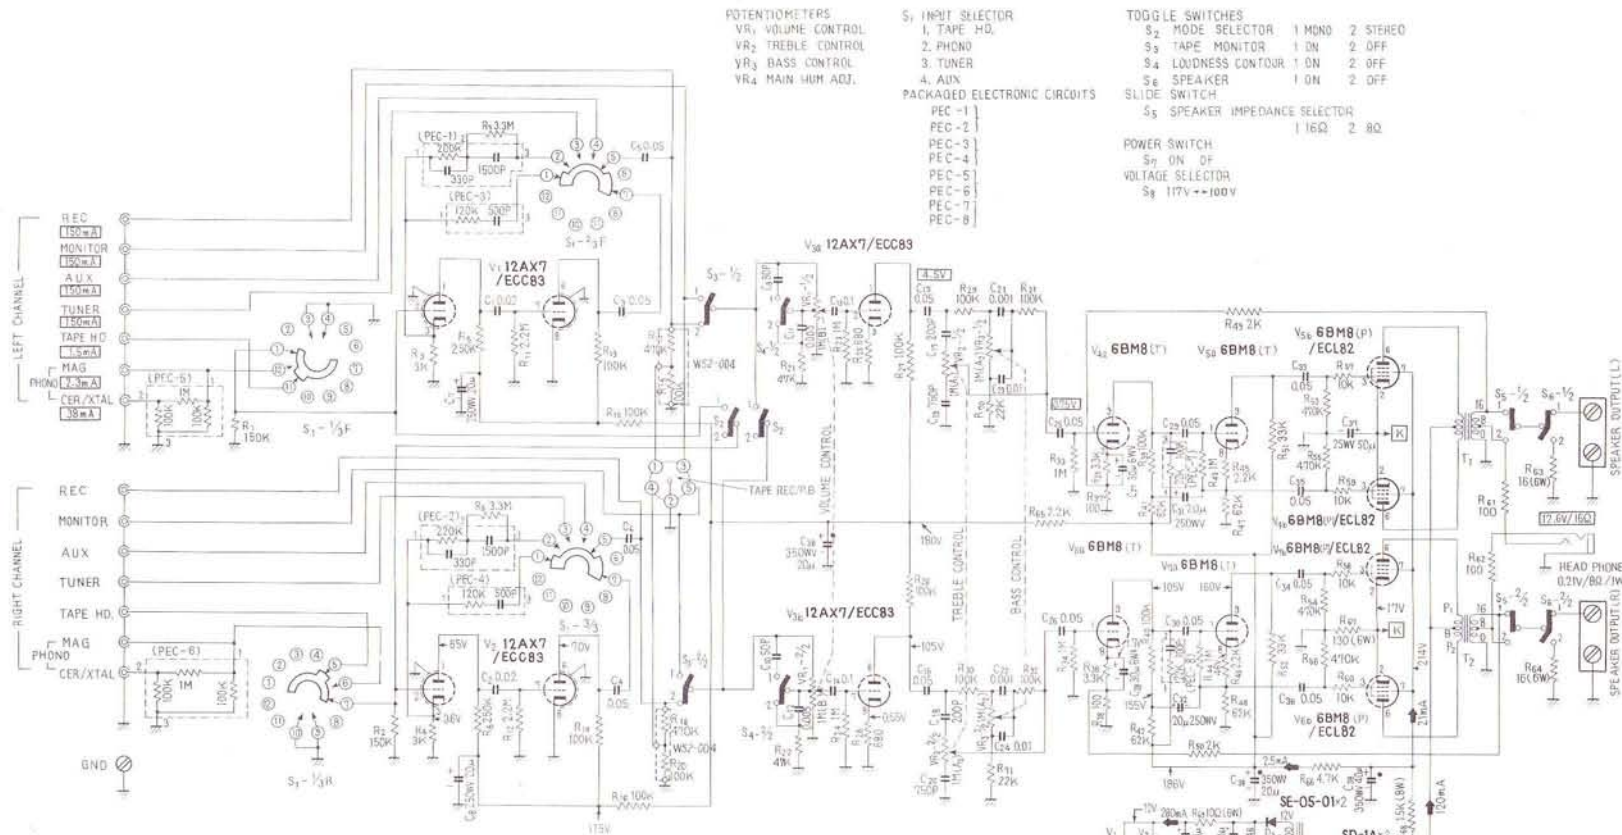

POTENTIOMETERS  
 VR<sub>1</sub> VOLUME CONTROL  
 VR<sub>2</sub> TREBLE CONTROL  
 VR<sub>3</sub> BASS CONTROL  
 VR<sub>4</sub> MAIN HUM ADJ.

S<sub>1</sub> INPUT SELECTOR  
 1. TAPE HD.  
 2. PHONO  
 3. TUNER  
 4. AUX  
 PACKAGED ELECTRONIC CIRCUITS  
 PEC-1  
 PEC-2  
 PEC-3  
 PEC-4  
 PEC-5  
 PEC-6  
 PEC-7  
 PEC-8

TOGGLE SWITCHES  
 S<sub>2</sub> MODE SELECTOR 1 MONO 2 STEREO  
 S<sub>3</sub> TAPE MONITOR 1 ON 2 OFF  
 S<sub>4</sub> LOUDNESS CONTOUR 1 ON 2 OFF  
 S<sub>5</sub> SPEAKER 1 ON 2 OFF  
 SLIDE SWITCH  
 S<sub>6</sub> SPEAKER IMPEDANCE SELECTOR  
 1 16Ω 2 8Ω  
 POWER SWITCH  
 S<sub>7</sub> ON OFF  
 VOLTAGE SELECTOR  
 S<sub>8</sub> 117V ↔ 100V

◀ (NO INPUT SIGNAL) DC CURRENT  
 ▲ (NO INPUT SIGNAL) DC VOLTAGE  
 \* ALL VOLTAGE ARE MEASURED WITH V.T.V.M  
 \* ALL CURRENTS ARE MEASURED WITH PRECISION CURRENT METER  
 CAPACITORS  
 IN μF UNLESS OTHERWISE NOTED  
 P = μPF

RESISTORS  
 1/2 WATT UNLESS OTHERWISE NOTED  
 K = KILOHM M = MEGOHM  
 W = WATT NONMARK = OHM

ITEM NO.	VACANT
R <sub>1</sub> - R <sub>11</sub>	R <sub>3</sub> , R <sub>16</sub>
C <sub>1</sub> - C <sub>10</sub>	C <sub>10</sub>

