


SM-83 (SM-500)

S ₁ SELECTOR	S ₂ MODE
(1) MIC	(1) STEREO REV
(2) TAPE - HEAD	(2) STEREO NORM
(3) PHONO	(3) MONO A
(4) TUNER	(4) MONO B
(5) AUX.	(5) MONO A+B

CAPACITORS
 M--- MICA CAPACITORS
 CL--- CERAMIC CAPACITORS
 E--- ELECTROLYTIC CAPACITORS
 NON MARK--- OIL PAPER CAPACITORS

RESISTORS
 LN--- LOW NOISE L-TYPE CARBON RESISTORS
 L--- L-TYPE CARBON RESISTORS
 NON MARK--- 1/2 WATTS COMPOSITION RESISTORS

▲--- RESISTANCE ERROR LESS THAN 5%
 △--- RESISTANCE ERROR LESS THAN 10%
 NON MARK--- RESISTANCE ERROR LESS THAN 20%

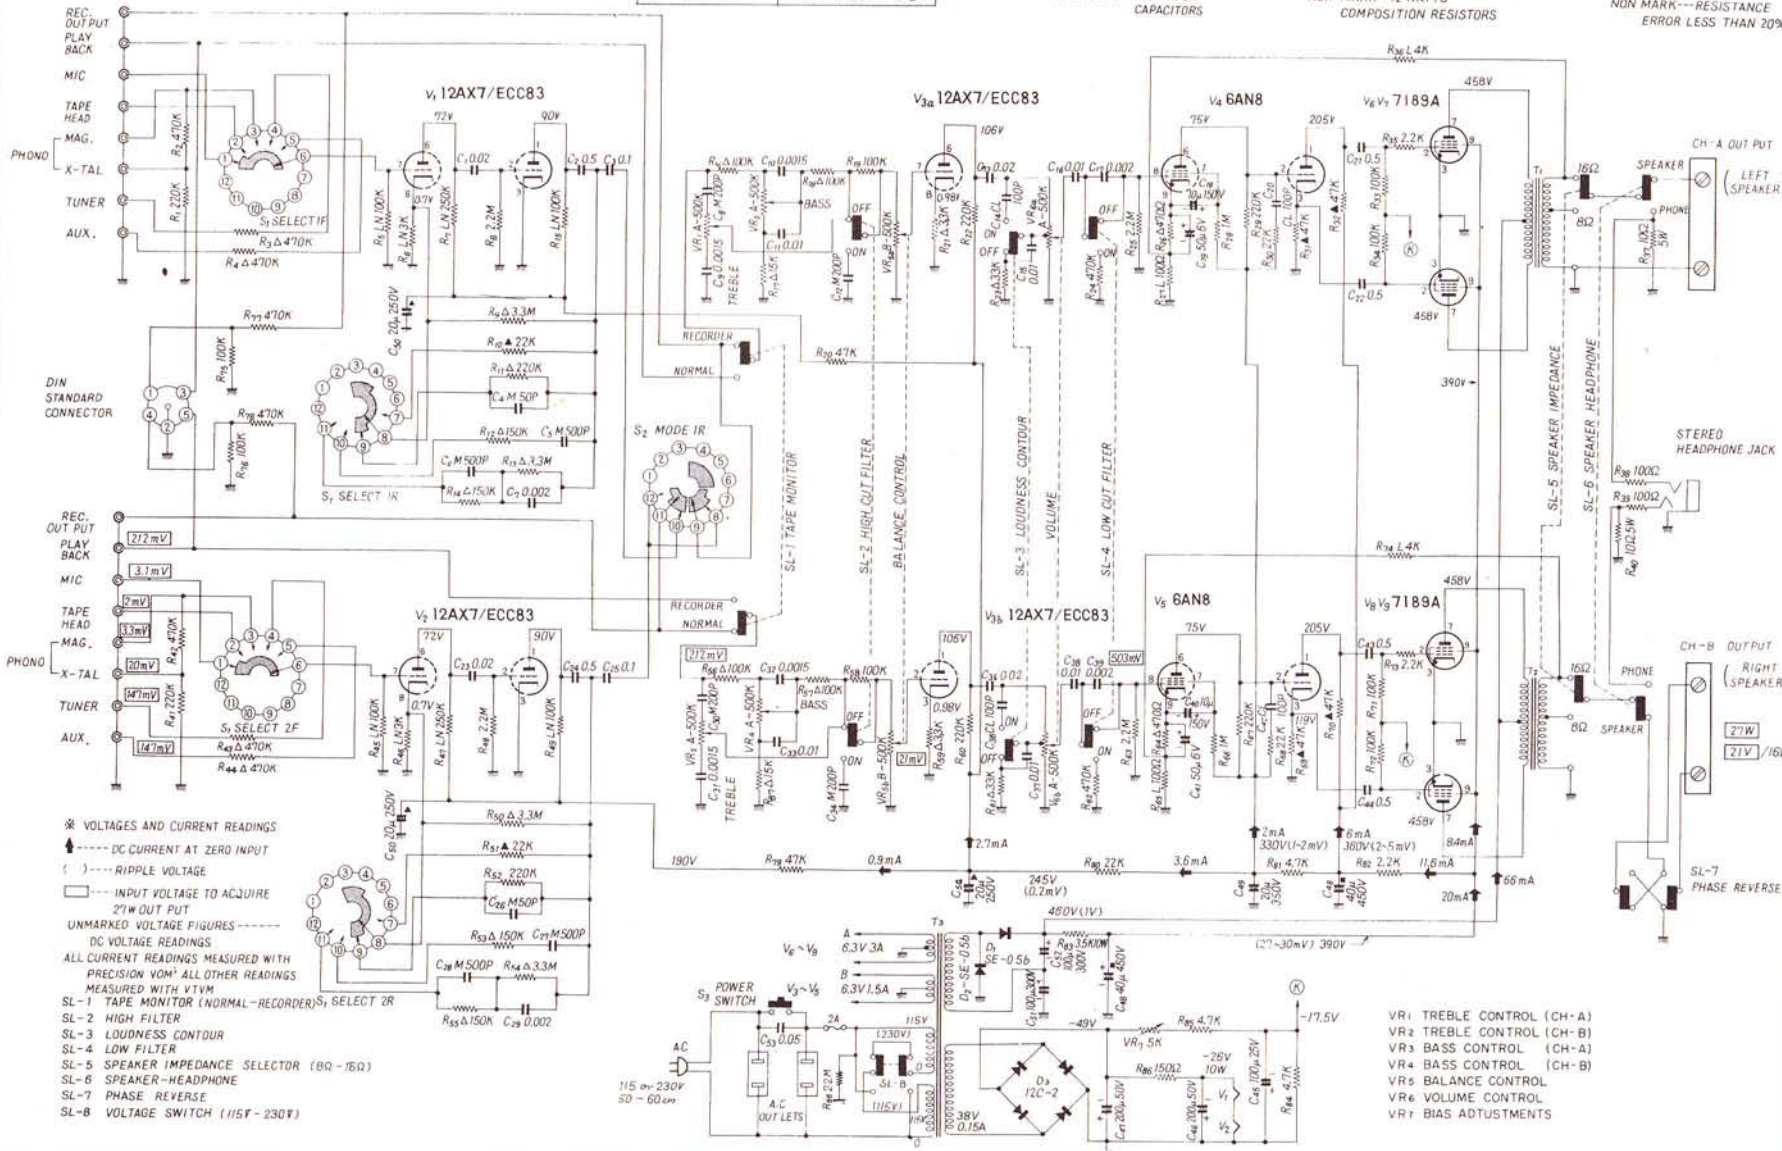

* VOLTAGES AND CURRENT READINGS
 ↑--- DC CURRENT AT ZERO INPUT
 ()--- RIPPLE VOLTAGE
 ()--- INPUT VOLTAGE TO ACQUIRE 27mV OUT PUT
 UNMARKED VOLTAGE FIGURES--- DC VOLTAGE READINGS
 ALL CURRENT READINGS MEASURED WITH PRECISION VOM! ALL OTHER READINGS MEASURED WITH VTVM
 SL-1 TAPE MONITOR (NORMAL-RECORDER); S₁ SELECT 2R
 SL-2 HIGH FILTER
 SL-3 LOUDNESS CONTOUR
 SL-4 LOW FILTER
 SL-5 SPEAKER IMPEDANCE SELECTOR (8Ω - 16Ω)
 SL-6 SPEAKER-HEADPHONE
 SL-7 PHASE REVERSE
 SL-8 VOLTAGE SWITCH (115V - 230V)

VR₁ TREBLE CONTROL (CH-A)
 VR₂ TREBLE CONTROL (CH-B)
 VR₃ BASS CONTROL (CH-A)
 VR₄ BASS CONTROL (CH-B)
 VR₅ BALANCE CONTROL
 VR₆ VOLUME CONTROL
 VR₇ BIAS ADJUSTMENTS