


RCA Models VME 11, 12

Amplifier Chassis RS-256A

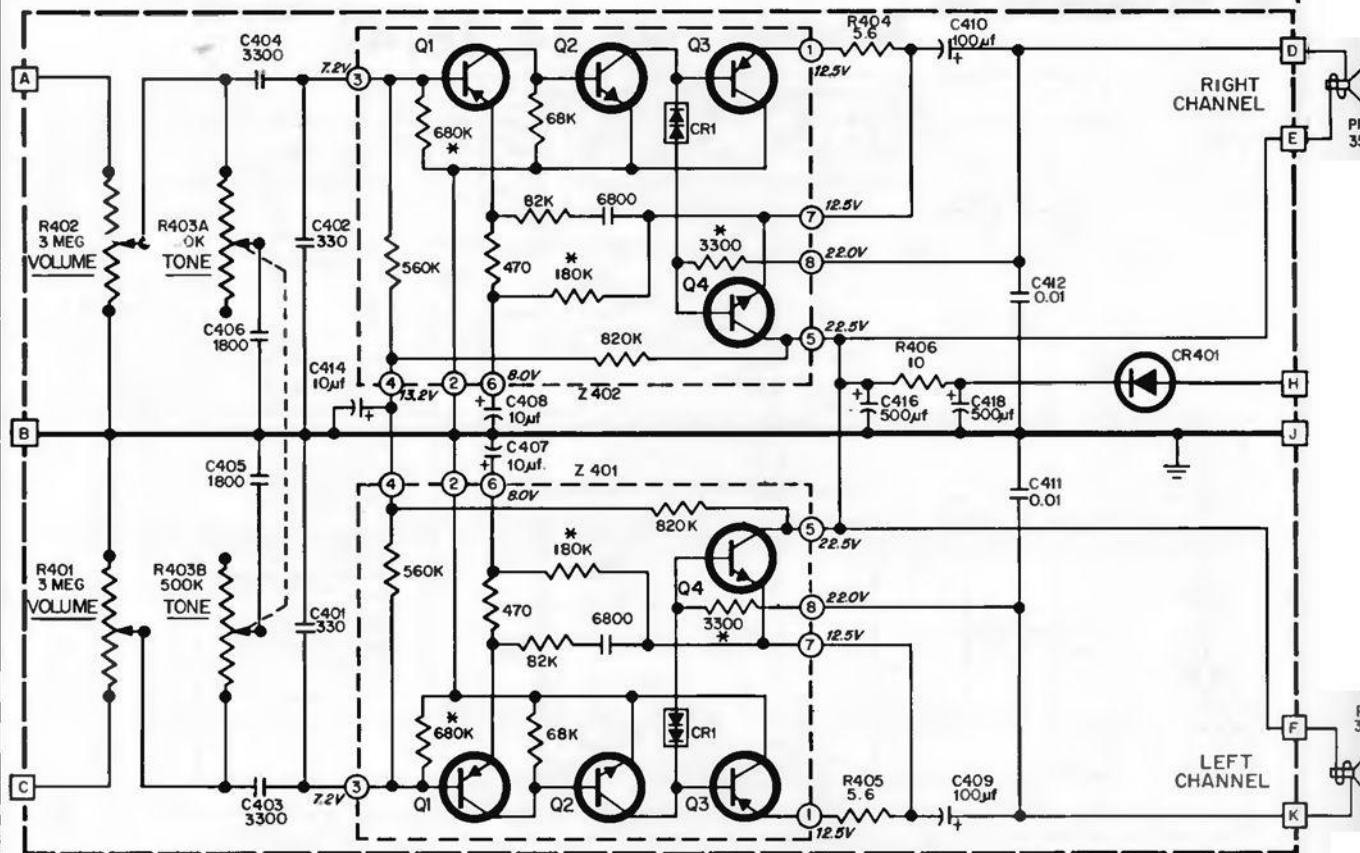

NOTES:

1. ALL RESISTOR VALUES ARE IN OHMS AND ARE $\pm 10\%$, 1/2 WATT UNLESS OTHERWISE SPECIFIED. K=1000
 2. ALL CAPACITOR VALUES LESS THAN 1.0 ARE μ , THOSE 1.0 AND GREATER ARE μ F UNLESS OTHERWISE SPECIFIED.
 3. VOLTAGES ARE MEASURED WITH A "VOLTOHMYST" TO CHASSIS GROUND (-) WITH NO SIGNAL AND SHOULD HOLD WITHIN $\pm 20\%$ AT RATED LINE VOLTAGE.
- PEC'S BEARING THE SAME NUMBER MUST BE USED IN BOTH CHANNELS

