




Models VMT 1, 2 Series

Radio Chassis RC-1227K

MODEL TO CHASSIS CROSS REFERENCE

MODEL	TUNER, AMPLIFIER	RECORD CHANGER	Speakers
VMT 10	RC1227K	RP-232-5	2— 9" x 6", 2—3½" Tweeters
VMT 13	RC1227K	RP-232-5	2— 9" x 6", 2—3½" Tweeters
VMT 14	RC1227K	RP-232-5	2— 9" x 6", 2—3½" Tweeters
VMT 15	RC1227K	RP-232-5	2— 9" x 6", 2—3½" Tweeters
VMT 25	RC1227K	RP-232-9	2—12" x 8", 2—3½" Middlers, 2—3½" Tweeters
VMT 27	RC1227K	RP-232-9	2—12" x 8", 2—3½" Middlers, 2—3½" Tweeters

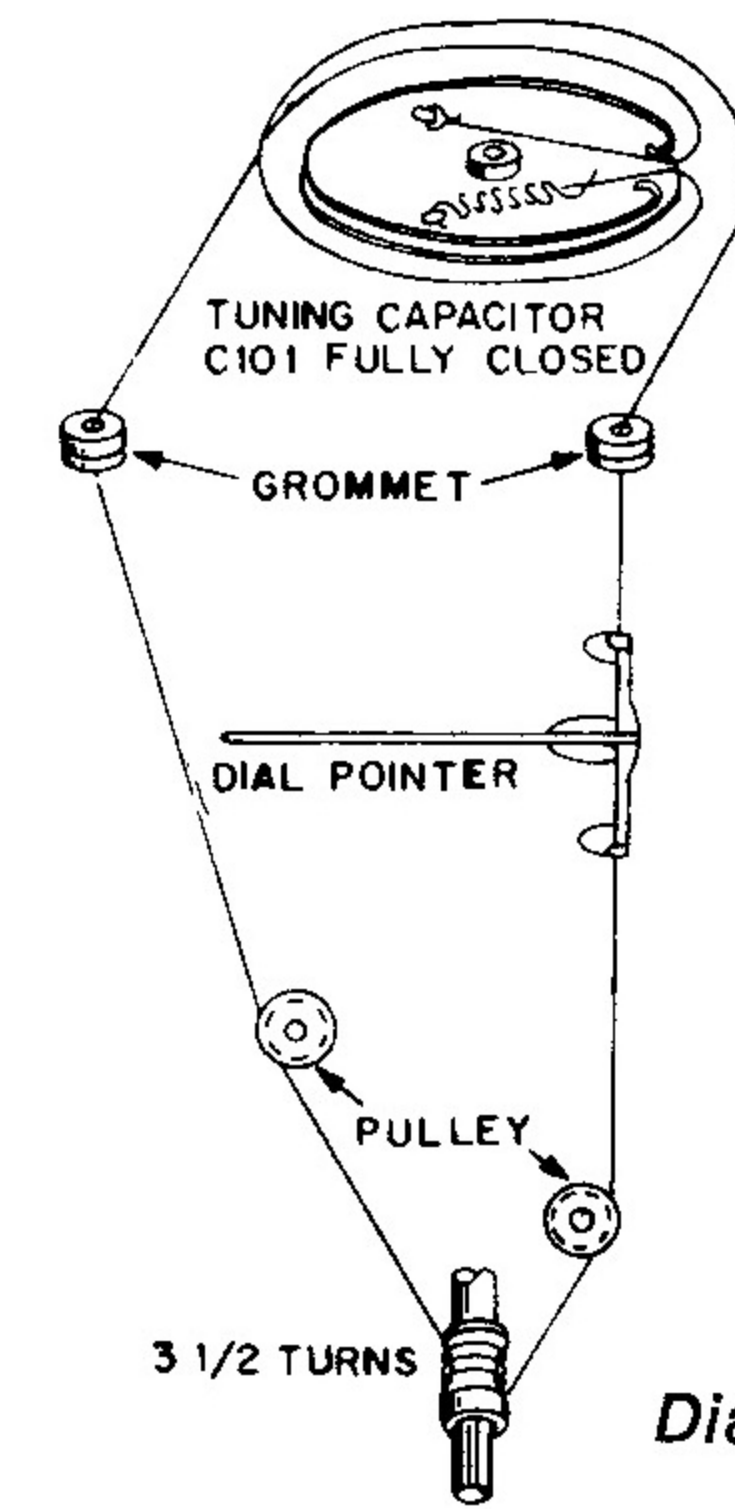

AUDIO FREQUENCY RESPONSE

VMT 10, 13, 14, 1560-20,000 cycles/sec
VMT 25, 2750-20,000 cycles/sec

POWER SUPPLY RATING

VMT 10, 13, 14, 15, 25, 2712 volts, 60 cycles
Power Consumption55 watts

FREQUENCIES

	Tuning	IF
AM	540-1620 kc/s	455 kc/s
FM	88-108 mc/s	10.7 mc/s

Dial Cord Arrangement

