WEBCOR

MODEL 1153

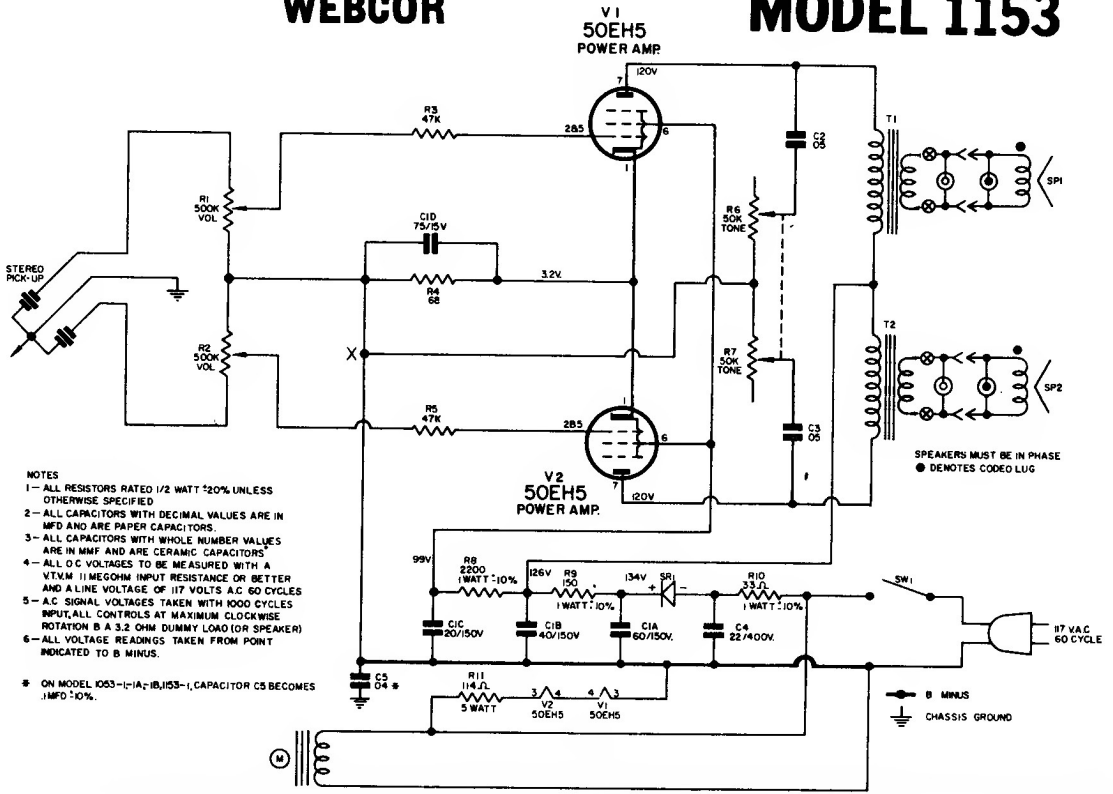

NOTES

1— ALL RESISTORS RATED 1/2 WATT ±20% UNLESS OTHERWISE SPECIFIED

2— ALL CAPACITORS WITH DECIMAL VALUES ARE IN MFD AND ARE PAPER CAPACITORS.

3— ALL CAPACITORS WITH WHOLE NUMBER VALUES ARE IN MMF AND ARE CERAMIC CAPACITORS.

4— ALL D.C. VOLTAGES TO BE MEASURED WITH A V.T.V.M. 11 MEGOHM INPUT RESISTANCE OR BETTER AND A LINE VOLTAGE OF 117 VOLTS A.C. 60 CYCLES

5— A.C. SIGNAL VOLTAGES TAKEN WITH 1000 CYCLES INPUT, ALL CONTROLS AT MAXIMUM CLOCKWISE ROTATION & A 3.2 OHM DUMMY LOAD (OR SPEAKER)

6— ALL VOLTAGE READINGS TAKEN FROM POINT INDICATED TO B MINUS.

* ON MODEL 1053-1-1A-1B, 1153-1, CAPACITOR C5 BECOMES .1 MFD ±10%.