


ARVIN MODELS

60R63 & 60R69
60R73 & 60R79

CHASSIS 1.50101

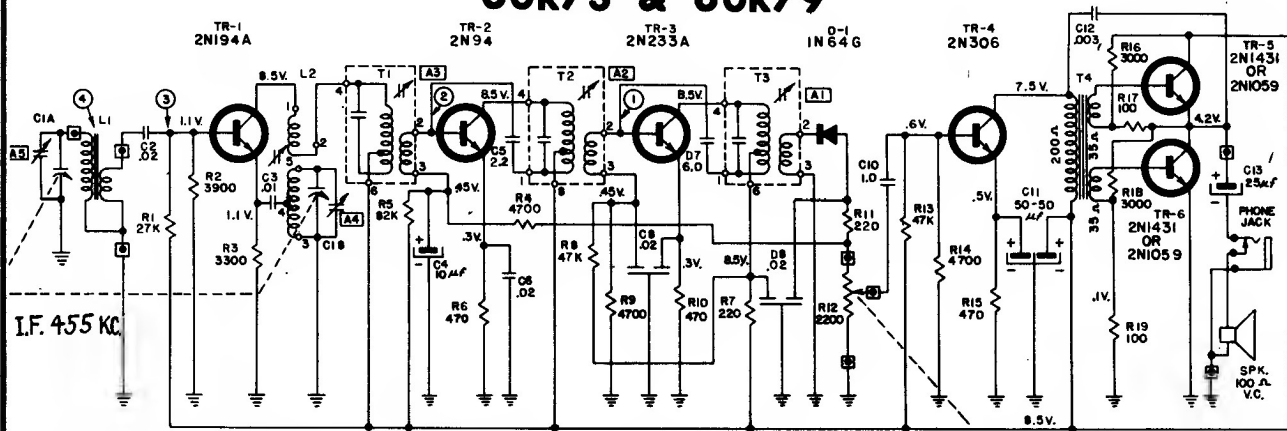

I.F. 455 KC.

CAPACITANCE VALUES LESS THAN 1.0 ARE IN MICROFARADS (μf), AND VALUES GREATER THAN 1.0 ARE IN MICRO-MICROFARADS ($\mu\mu f$) EXCEPT WHERE NOTED.

VOLTAGE READINGS TO COMMON GROUND ARE MEASURED WITH VACUUM TUBE VOLTMETER UNDER NO SIGNAL CONDITIONS WITH TUNING CAPACITOR CLOSED AND VOLUME CONTROL AT MAXIMUM CLOCKWISE ROTATION.

RESISTANCE VALUES ARE IN OHMS; K=1000.

* COMMON GROUND SYMBOL.

SIGNAL TEST POINTS	TEST FREQUENCY	SERIES CAPACITOR TO GENERATOR	INPUT FOR 9 MW OUTPUT (7 V ACROSS 100 Ω)
①	455 KC	.05 μf	500 μV
②	455 KC	.05 μf	50 μV
③	455 KC	.05 μf	2 μV
④	1000 KC	STANDARD LOOP	200 $\mu V/M$

