



Admiral Chassis 5F4

Models 292, 296, 298, 299

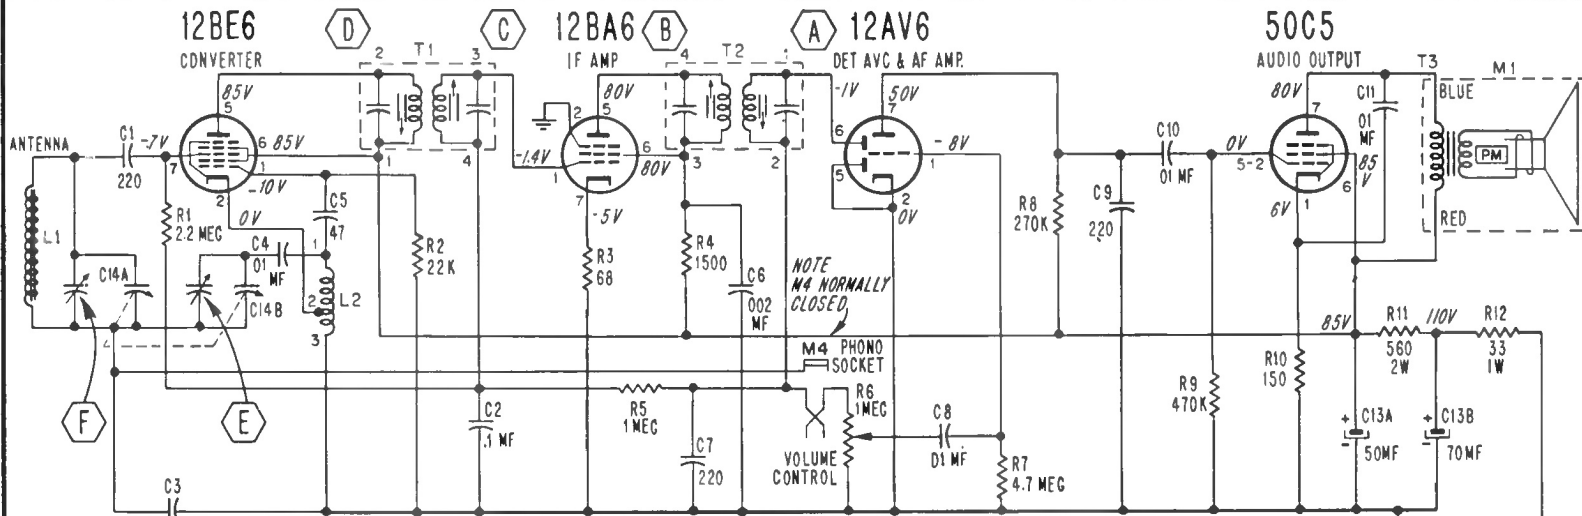


STEP 3 REMOVE TWO 7/8" MOUNTING SCREWS



STEP 1 REMOVE THREE 1/2" MOUNTING SCREWS


STEP 2 REMOVE TWO 2 1/2" MOUNTING SCREWS

STEP 4 WORK LEFT SIDE OF FRONT PANEL OUT FIRST






STEP 6

PLACE CHASSIS IN CABINET AS SHOWN. PRESS RIGHT SIDE TO "LOCK". FRONT PANEL IN CABINET. PRESS LEFT SIDE FLUSH WITH CABINET.



- 1 ALL READINGS TAKEN WITH A VACUUM TUBE VOLTMETER.
- 2 ALL CAPACITOR VALUES IN MMF UNLESS OTHERWISE SPECIFIED

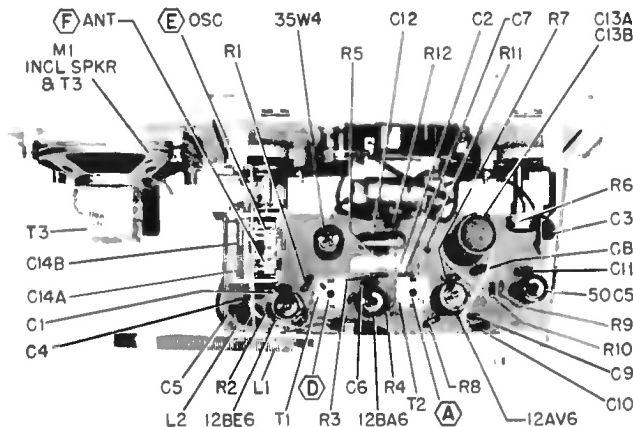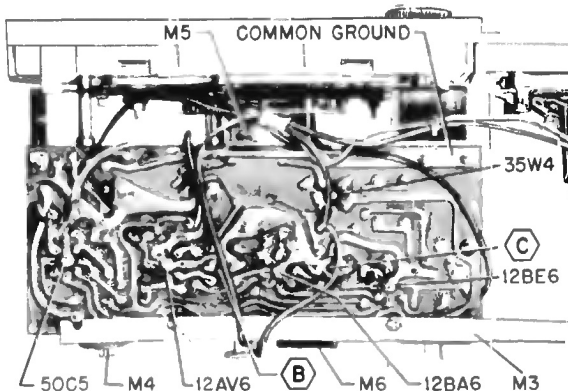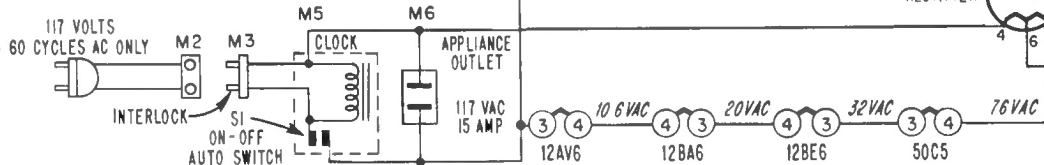

Removing and Installing Chassis.