


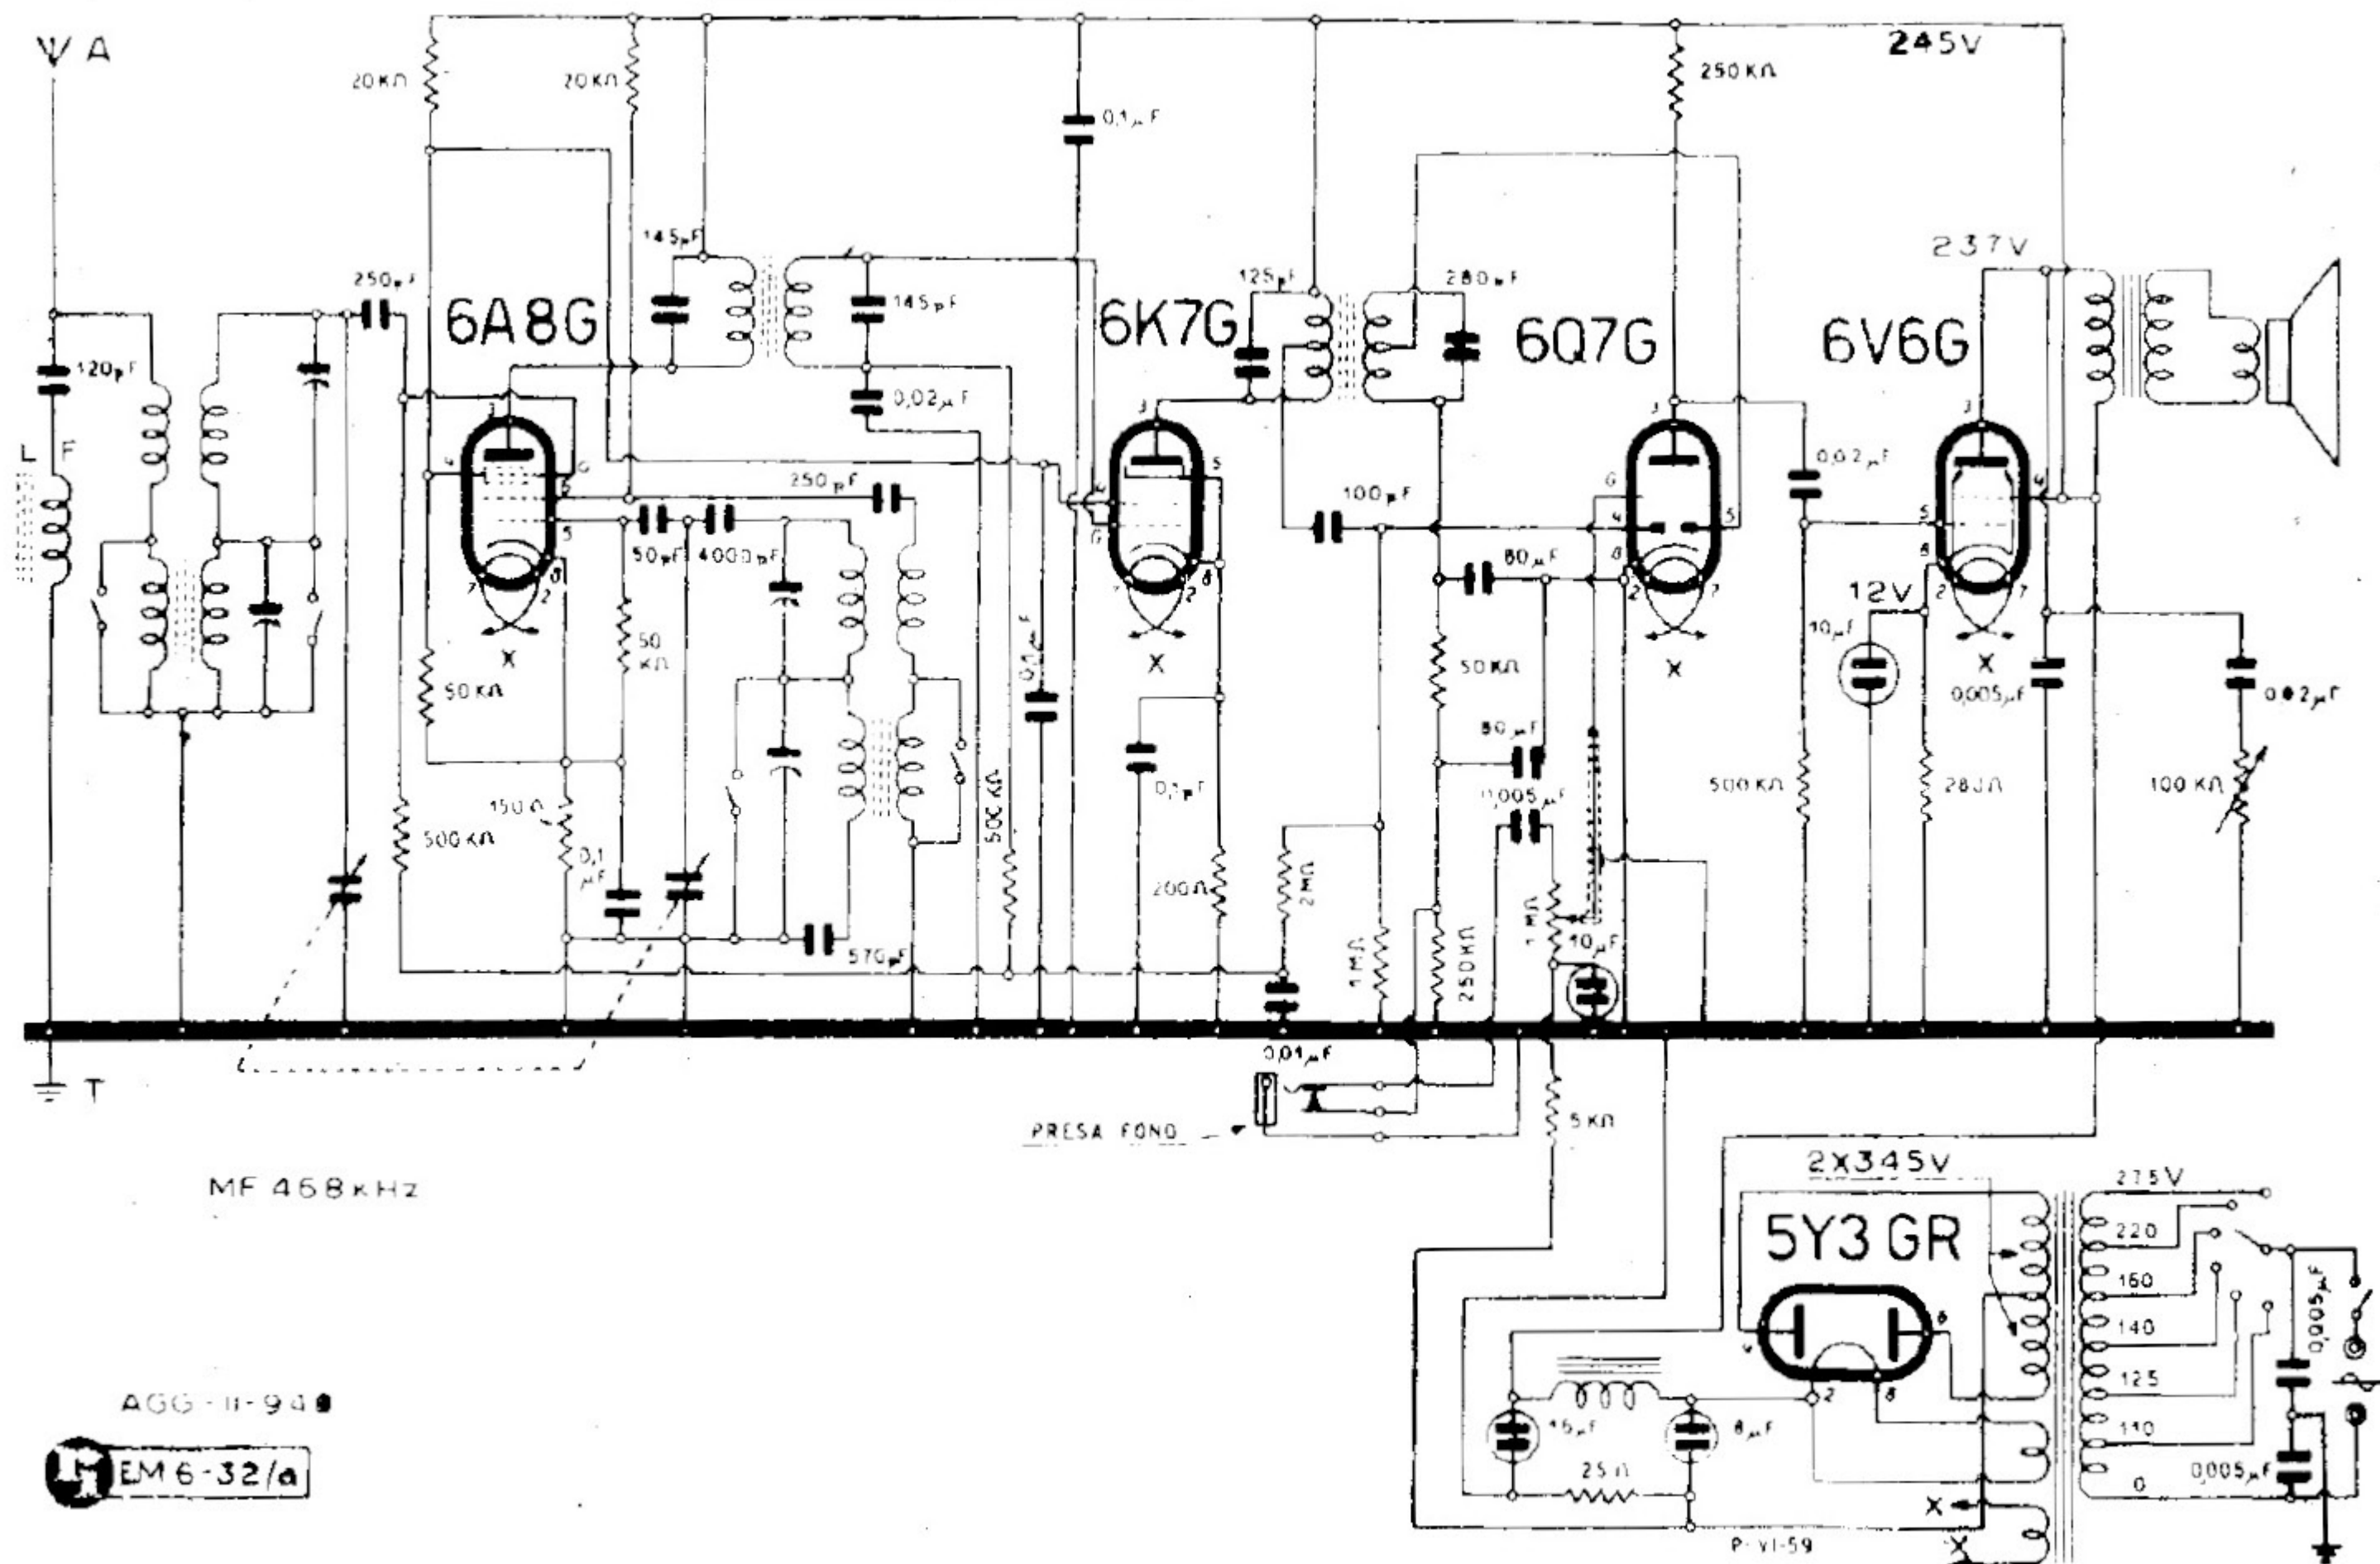


MF 468 kHz

AGG-II-948

EM 6-32/a

COMPAGNIA GENERALE DI ELETTRICITA' - MOD. « 115 »

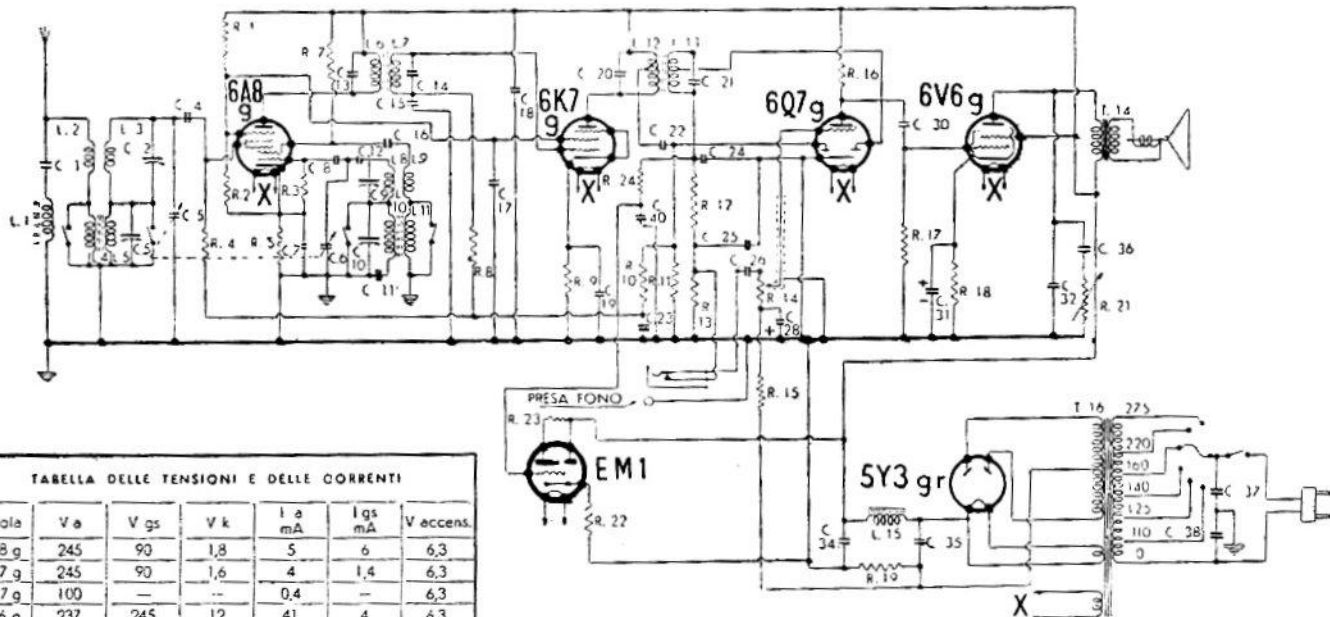

I trasformatori di MF sono tarati su 468 kHz.

COMPAGNIA GENERALE DI ELETTRICITÀ. — Mod. 115 e 215. — V. Tabella. — Media frequenza: 468 kHz. — Gamme: da 16,5 a 50 m e da 195 a 580 m.

CGE 115 e 215

RESISTENZE

R1	20 kΩ	R8	500 kΩ	R14	1 MΩ	R21	100 kΩ
R2	50 kΩ	R9	250 Ω	R15	6 kΩ	R22	2 kΩ
R3	50 kΩ	R10	2 MΩ	R16	250 kΩ	R23	2 MΩ
R4	500 kΩ	R11	1 MΩ	R17	500 kΩ	R24	2 MΩ
R5	150 Ω	R12	50 kΩ	R18	250 Ω		
R7	20 kΩ	R13	250 kΩ	R19	25 Ω		

CAPACITÀ

C1	120 pF	C10	15 - 45 pF	C19	0.1 pF	C30	0.02 μF
C2	3 - 20 pF	C11	670 pF	C20	125 pF	C31	10 μF
C3	3 - 20 pF	C12	4000 pF	C21	260 pF	C32	0.005 μF
C4	250 pF	C13	145 pF	C22	100 pF	C34	10 μF
C5	1 Condensatore	C14	145 pF	C23	0.01 μF	C35	8 μF
C6	1 core variabile	C15	0.02 μF	C24	80 μF	C36	0.02 μF
C7	0.1 μF	C16	250 pF	C25	80 μF	C37	0.005 μF
C8	50 pF	C17	0.1 μF	C26	0.005 μF	C38	0.005 μF
C9	3 - 20 pF	C18	0.1 μF	C28	10 μF	C40	0.01 μF