
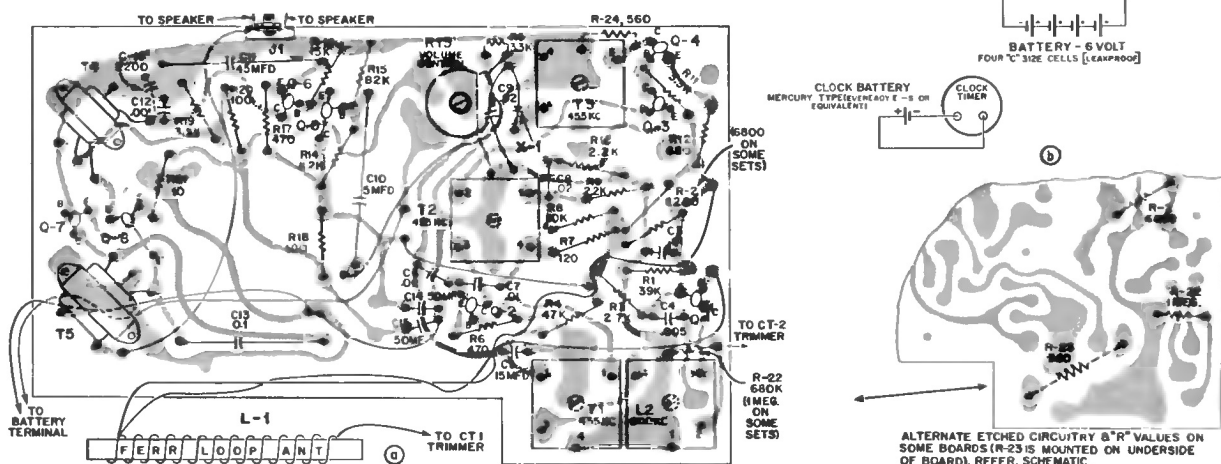


# Emerson Radio

MODEL 888  
"TRANSTIMER"  
CHASSIS 120416

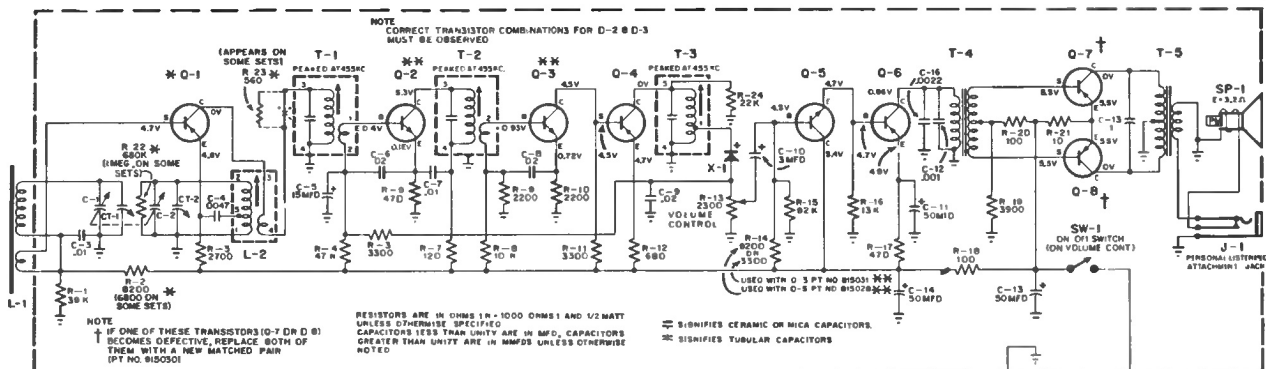

It will be seen from the schematic drawing of the 888 that certain transistors are used in pairs and are associated with specified resistors. Some individual transistors must likewise be used with specific resistors. Because of the small physical size of the transistors, the 1st three digits, "815", have been replaced by the letter, "E"

| TRANSISTOR PAIRS |         | ASSOCIATED<br>P12 | TRANSISTOR PAIRS |         | ASSOCIATED<br>R12 | TRANSISTOR<br>Q5 | ASSOCIATED<br>R14 | TRANSISTDR<br>Q5 | ASSOCIATED<br>R14 |
|------------------|---------|-------------------|------------------|---------|-------------------|------------------|-------------------|------------------|-------------------|
| Q2               | Q3      |                   | Q2               | Q3      |                   |                  |                   |                  |                   |
| 815026C          | 815026A | 680               | 815026C          | 815026E | 680               | 815031           | 3800              | 815033           | 6800              |
| 815026B          | 815026B | 680               | 815026D          | 815026D | 680               | 815028           | 8200              | 815034           | 8200              |
| 815026B          | 815026D | 680               | 815026C          | 815026F | 330               | 815032           | 4700              | 815035           | 10.000            |

| TRANSISTOR SUBSTITUTES |           | TRANSISTOR NOS. | TRANSISTOR SUBSTITUTES |            | TRANSISTOR NOS. | TRANSISTOR SUBSTITUTES |        | TRANSISTOR NOS. |
|------------------------|-----------|-----------------|------------------------|------------|-----------------|------------------------|--------|-----------------|
| FDR                    | USE       |                 | FOR                    | USE        |                 | FOR                    | USE    |                 |
| 815026B                | 815026D   | Q2/Q3           | 815026F                | No. Subst. | Q2/Q3           | 815033                 | 815032 | Q5              |
| 815026A                | 815026E   | Q2/Q3           | 815028                 | 815032     | Q5              | 815034                 | 815032 | Q5              |
| 815026C                | No Subst. | Q2/Q3           | 815031                 | 815032     | Q5              | 815035                 | 815032 | Q5              |

