


LOCATION OF PARTS



NOTES
 RESISTANCE VALUES ARE IN OHMS, K=1,000, MEG=1,000,000
 □ EXTERNAL CONNECTIONS TO PRINTED CIRCUIT
 CAPACITANCE VALUES LESS THAN 10 ARE IN MICROFARADS (μF) AND VALUES GREATER THAN 10 ARE IN MICRO-MICROFARADS (μμF) EXCEPT WHERE NOTED
 VOLTAGE READINGS TO COMMON GROUND (-) ARE MEASURED WITH VACUUM TUBE VOLTMETER UNDER NO SIGNAL CONDITIONS
 ARROW INDICATES CLOCKWISE CONTROL ROTATION VIEWED FROM FRONT

Red-Yellow Lead

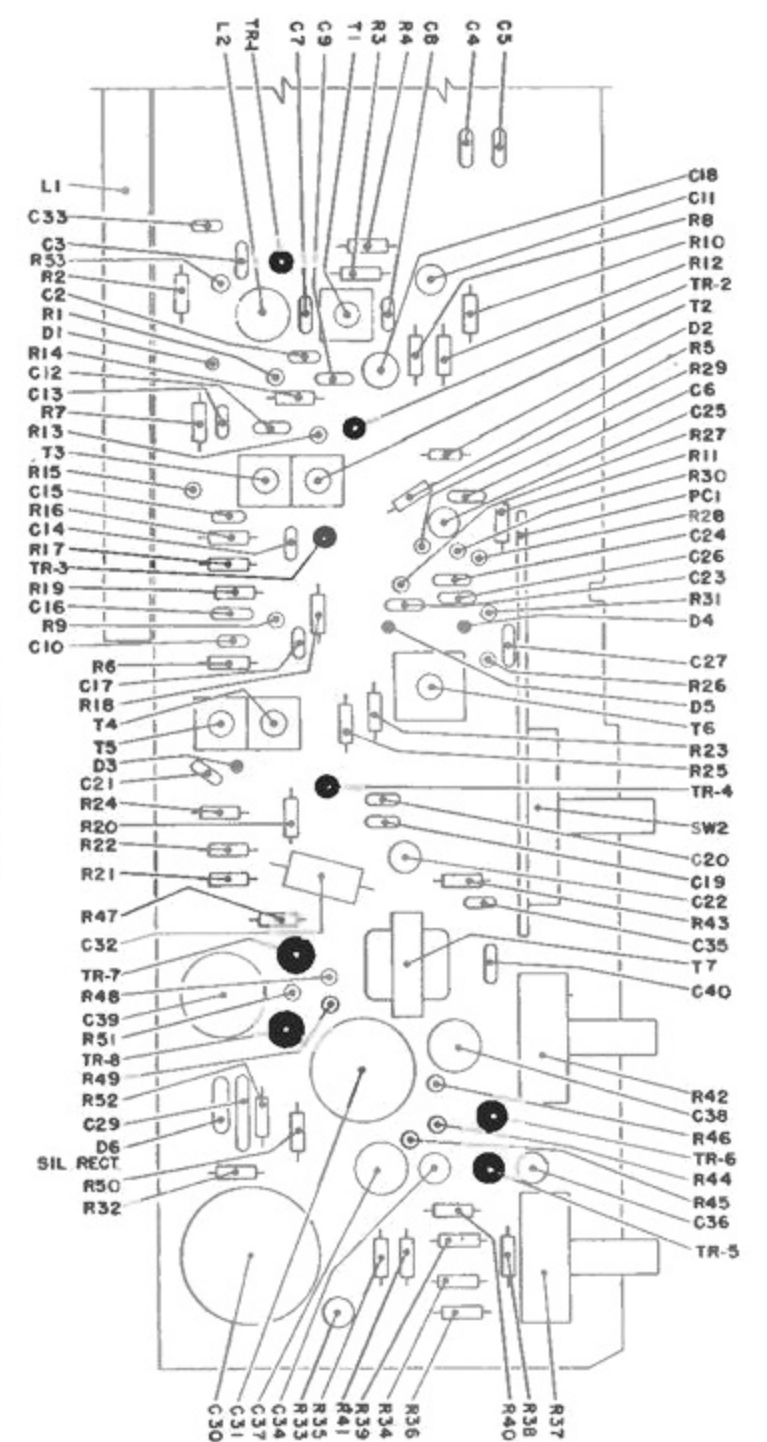