EMERSON Models G-1700, G-1709, using Chassis 120685, and Model G-1713 using Chassis 120700

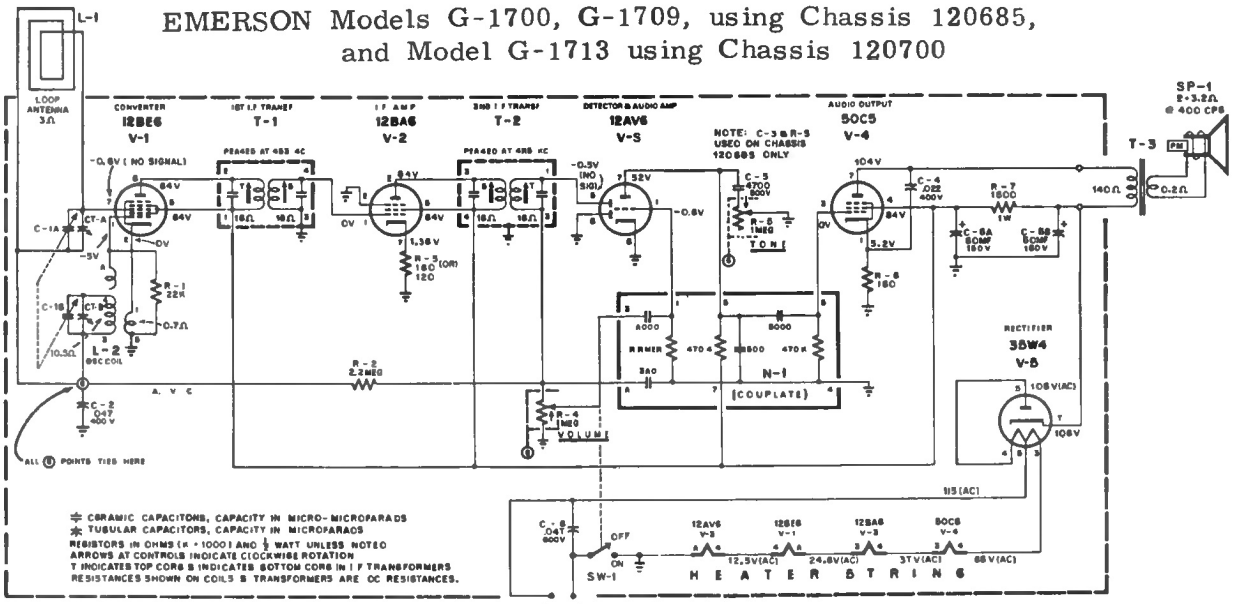

CONDITIONS FOR VOLTAGE AND RESISTANCE READINGS

1. Voltages indicated are positive D.C., resistances in ohms unless otherwise indicated.
2. Measurements taken with Voltohmyst or equivalent VTVM.
3. All measurement taken between points indicated and B minus (low side of volume control), unless otherwise indicated.
4. Voltage readings indicated on schematic were taken with:
   (A) Line voltage set at 115 volts AC,
   (B) Volume control set for minimum volume,
   (C) Tuning capacitor fully closed and no signal applied.

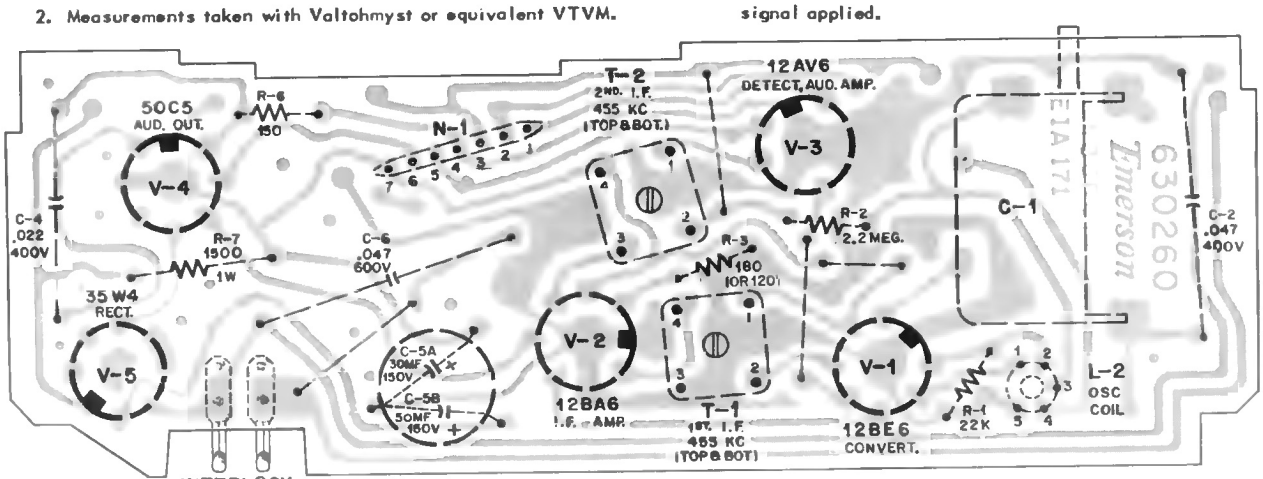

INTERLOCK
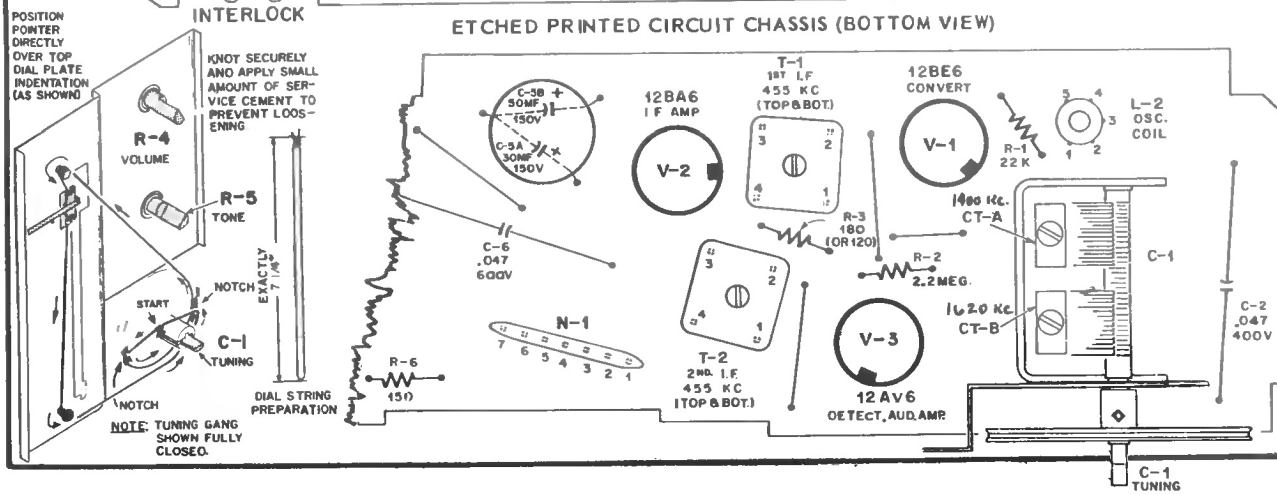
ETCHED PRINTED CIRCUIT CHASSIS (BOTTOM VIEW)