


GAMBLE-SKOGMO INC.

MODEL RA 48-8342A

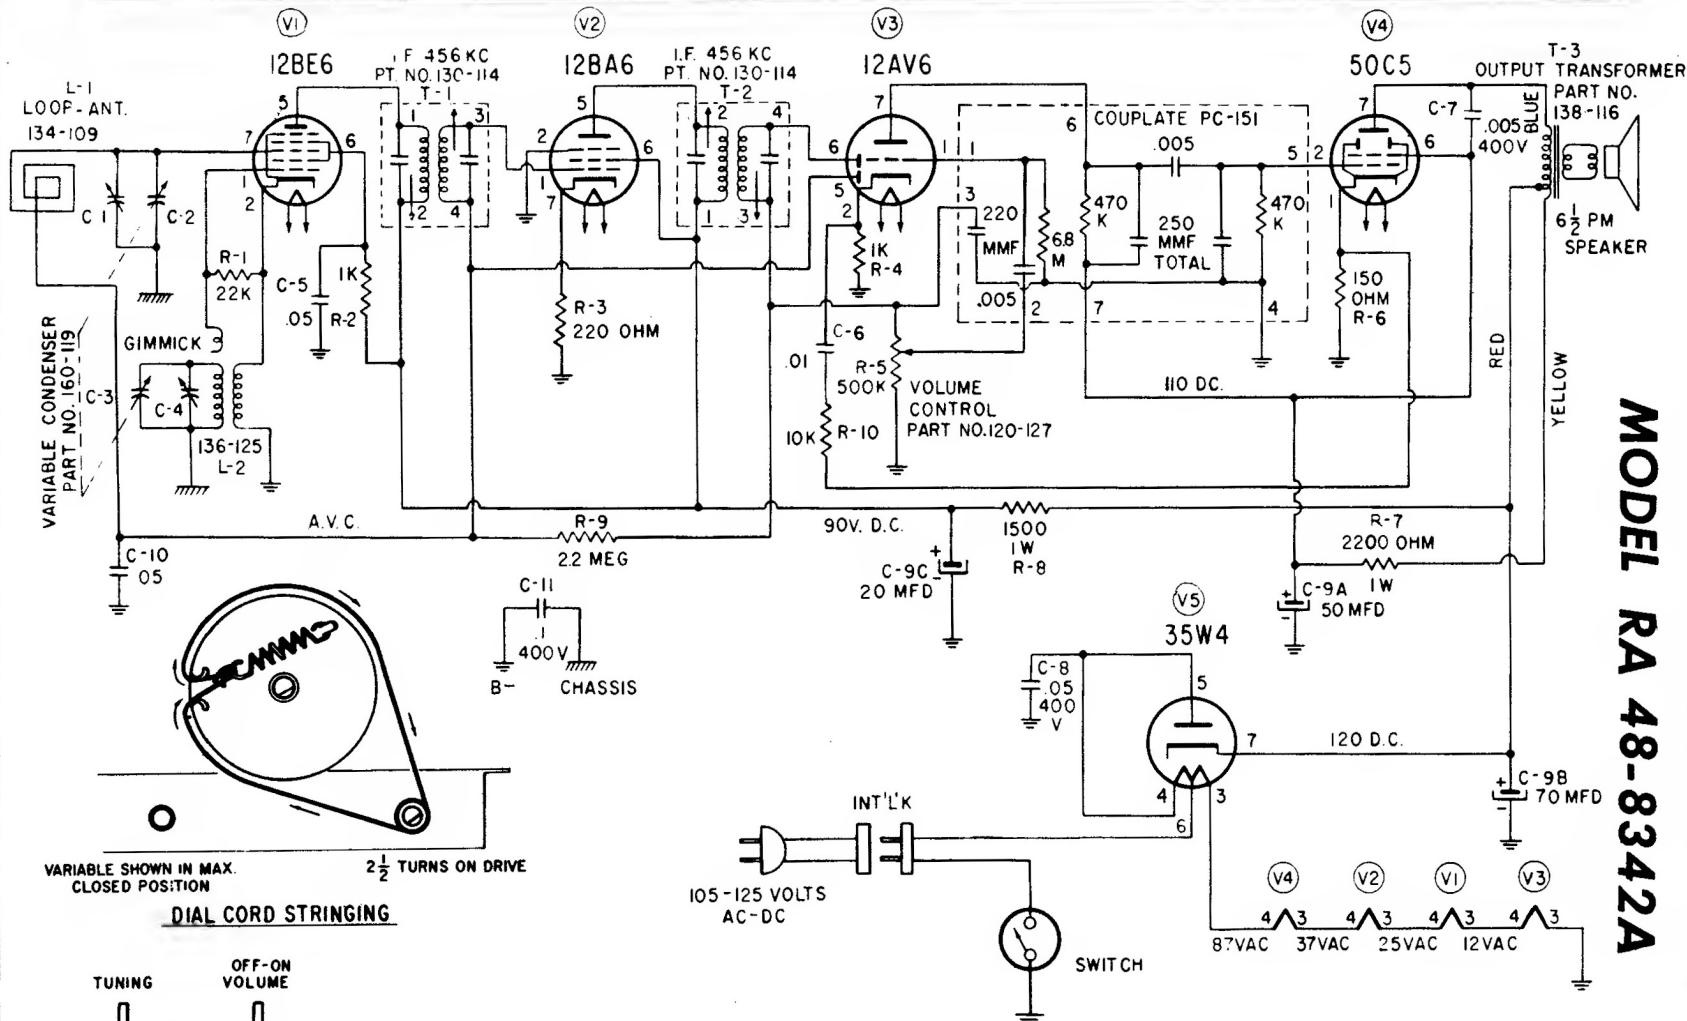

ELECTRICAL SPECIFICATIONS

Power Supply 105-120 Volts AC-DC
 Frequency Range 540-1650 KC
 Intermediate Frequency 456 KC
 Sensitivity 60 microvolts on loop for 50 MW output
 Selectivity 8 KC 2X - 20 KC 10X at 456 KC
 Tuning 2 Gang Capacitor
 Power Consumption 30 Watts
 Power Output 1.9 Watt, undistorted

NOTES:

K=1000 OHMS
 M=MEG OHMS
 ALL VALUES OF "C" ARE IN MICROFARADS UNLESS OTHERWISE NOTED
 ⊕ DENOTES B-
 ⏏ DENOTES CHASSIS GROUND