


MOTOROLA INC.

MODELS
MoPar 910
MoPar 911

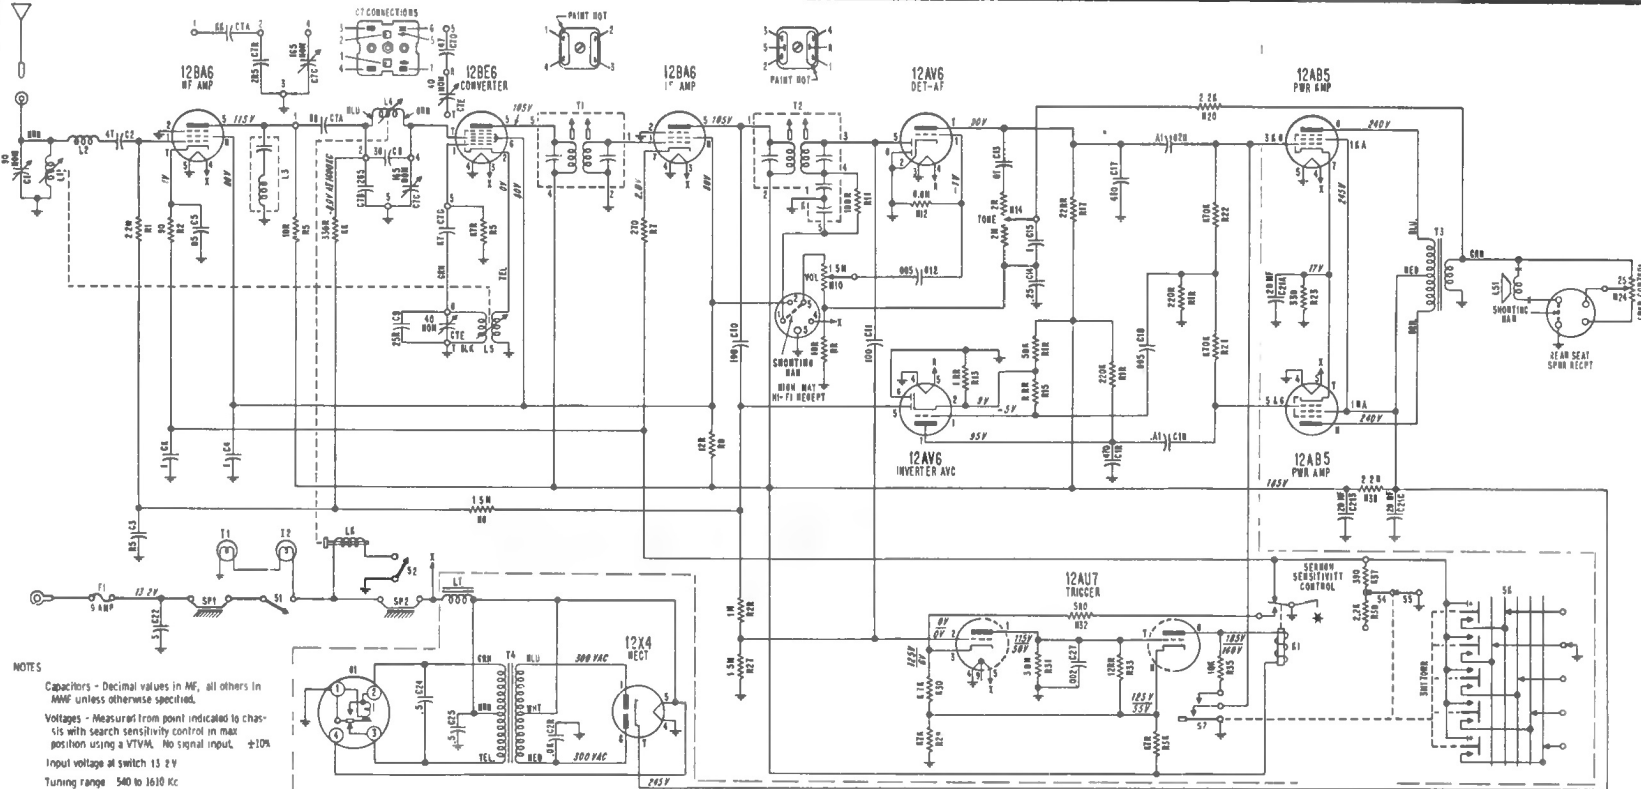

NOTES

Capacitors - Decimal values in MF, all others in MMF unless otherwise specified.

Voltages - Measured from point indicated to chassis with search sensitivity control in max position using a VTVM. No signal input. $\pm 10\%$

Input voltage at switch 13.2 V

Tuning range 540 to 1610 Kc

IF - 262 Kc

TYPE - Automotive type superheterodyne receiver incorporating a search tuner. These receivers are custom designed for installation in the following cars:

MoPar 910 - Dodge D62, D63


MoPar 911 - DeSoto S23, S24

TUNING RANGE - 540 to 1610 Kc IF - 262 Kc

TO SET PUSHBUTTONS

1. Turn receiver on and allow to operate for fifteen minutes. Antenna should be fully extended.
2. Open the hinged tab cover below the dial scale, exposing the five red pushbutton setting tabs.
3. Starting at left end of dial, tune in manually first desired station and move the first pushbutton setting tab until it lines up with the dial pointer tip.
4. Repeat step 3 for the remaining pushbutton setting tabs.
5. Check the settings of each pushbutton setting tab by depressing the corresponding station selector button. If the station is not tuned in exactly, readjust the tab.
6. Pushbutton setting should be done in sequence from left to right, using the pushbutton setting tabs in the same sequence.

TRIGGER TUBE VOLTAGES
V1 NORMAL OPERATION, RELAY R1 OPEN
V2 WHEN SEARCHING, RELAY R1 CLOSED

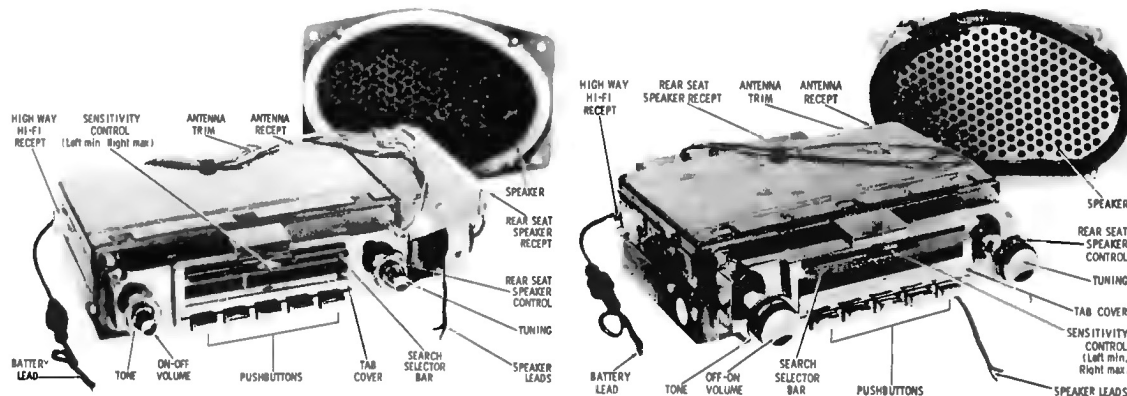

MODEL 910

MODEL 911