


GENERAL ELECTRIC

MODELS 635, 636 AND 637

CABINET: (Plastic)	Model 635-Green; Model 636-Red; Model 637-Gray;	LOUDSPEAKER:	Size 4 inches Type Alnico PM Voice Coil Impedance @ 400 cycles 3.2 ohms
ELECTRICAL RATING: (Batteries only)	"A" Batteries-2 Eveready #964 or Burgess #21R, or equivalent "B" Battery-1 Eveready #437 or Burgess #XX-50, or equivalent.	OPERATING FREQUENCIES:	Tuning Range 540-1600 KC I-F Amplifier 455 KC

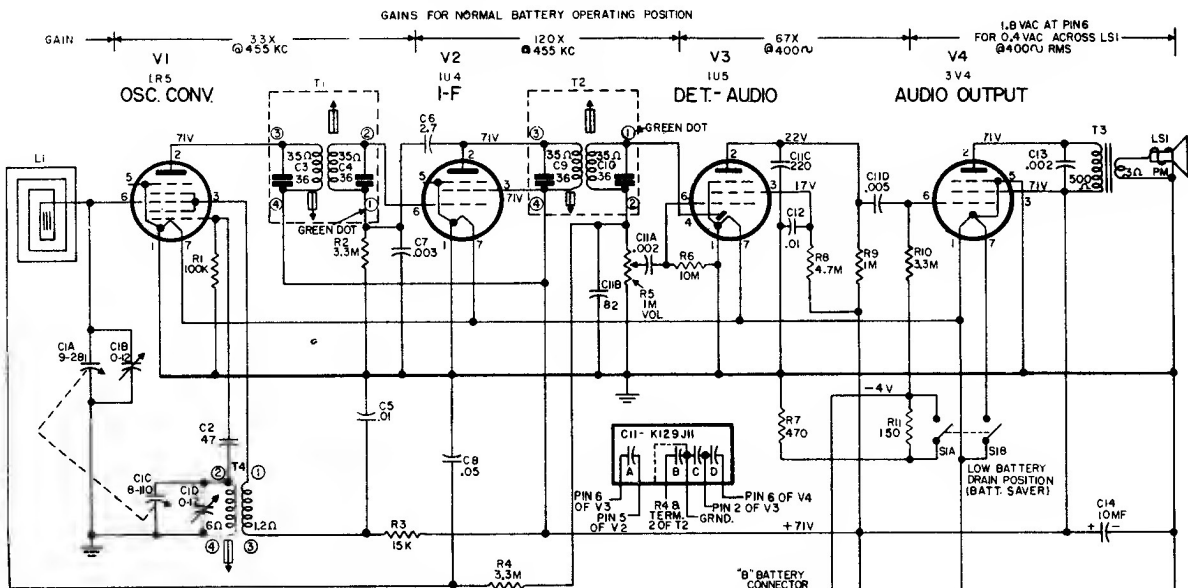

UNLESS OTHERWISE NOTED, CAPACITOR VALUES LESS THAN THE UNIT ARE MF, VALUES MORE THAN 1 ARE MMF.

RESISTANCE VALUES ARE OHMS K=1000 M=1,000,000.

VOLTAGES ARE DC TO CHASSIS GROUND, METER SENSITIVITY 20,000 OHMS/VOLT.

ALIGNMENT

I-F- PEAK T1 T2 @ 455 KC

R-F 1. PEAK CID @ 1620 KC GANG OPEN.

2. PEAK CIB @ 1500 KC ROCK GANG.

3. PEAK IRON CORE T4 @ 600 KC ROCK GANG.

4. REPEAT AS NECESSARY.

