


GENERAL ELECTRIC

MODELS

665

666

667

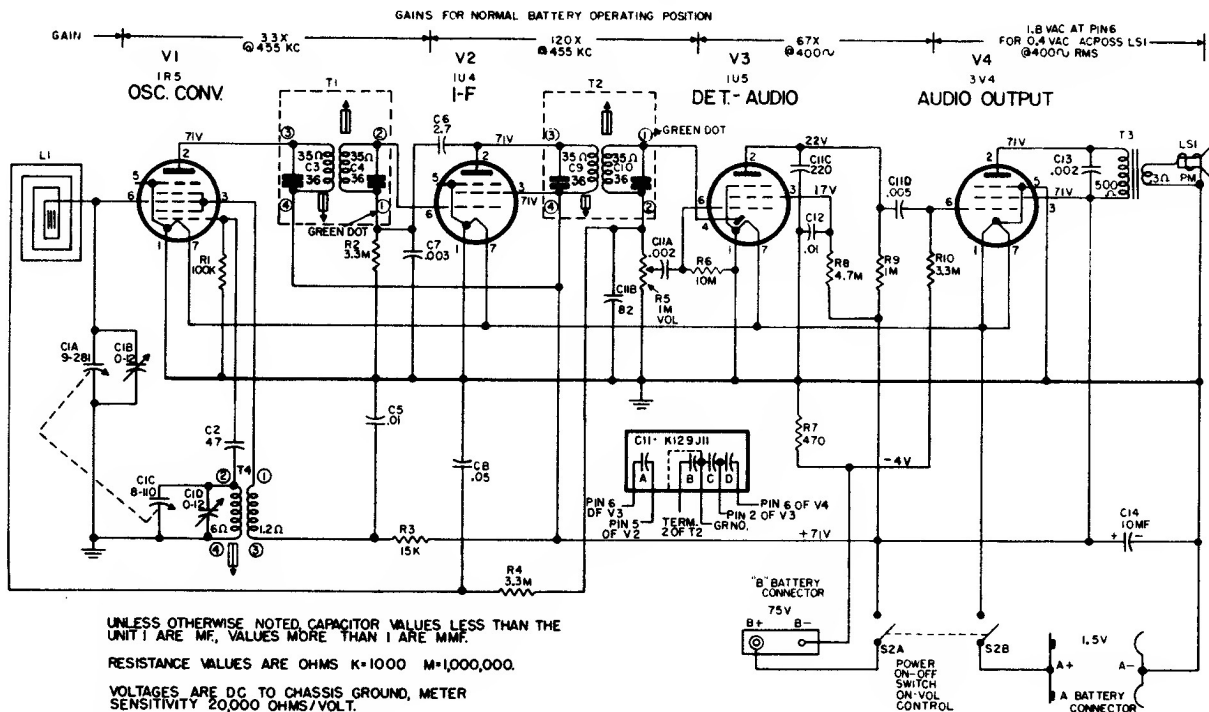

CHASSIS REMOVAL:

1. Remove the two control knobs.
2. Remove the four hex head screws in cabinet bosses.
3. Remove complete chassis.

BATTERY INSTALLATION:

The back of the radio is removed by inserting and twisting a coin in the slots provided at the top just under the handle. Place the batteries in the same position as shown in the rear view illustration, making sure the "B" battery connections are well seated. The "A" battery contacts are automatically made when the batteries are slipped into position. The two "A" batteries will wear out together; therefore, always replace both "A" batteries at the same time.

