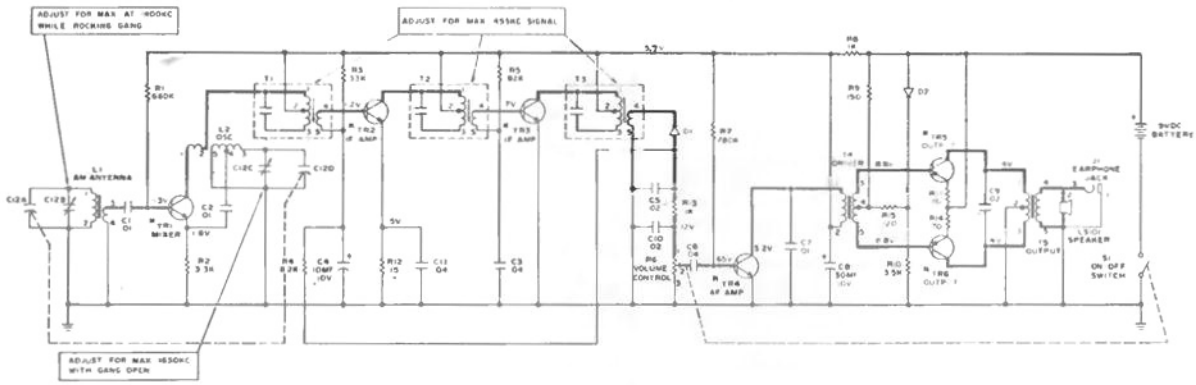
ADJUST FOR MAX AT 1000KC WHILE ROCKING GANG
ADJUST FOR MAX 455KC SIGNAL
ADJUST FOR MAX 1650KC WITH GANG OPEN
L1 AM ANTENNA
L2 OSC
TR1 MIXER
TR2 IF AMP
TR3 IF AMP
TR4 AF AMP
TR5 OUTP
TR6 OUTP
R6 VOLUME CONTROL
9VDC BATTERY
EARPHONE JACK
LS101 SPEAKER
S1 ON OFF SWITCH
T5 OUTPUT

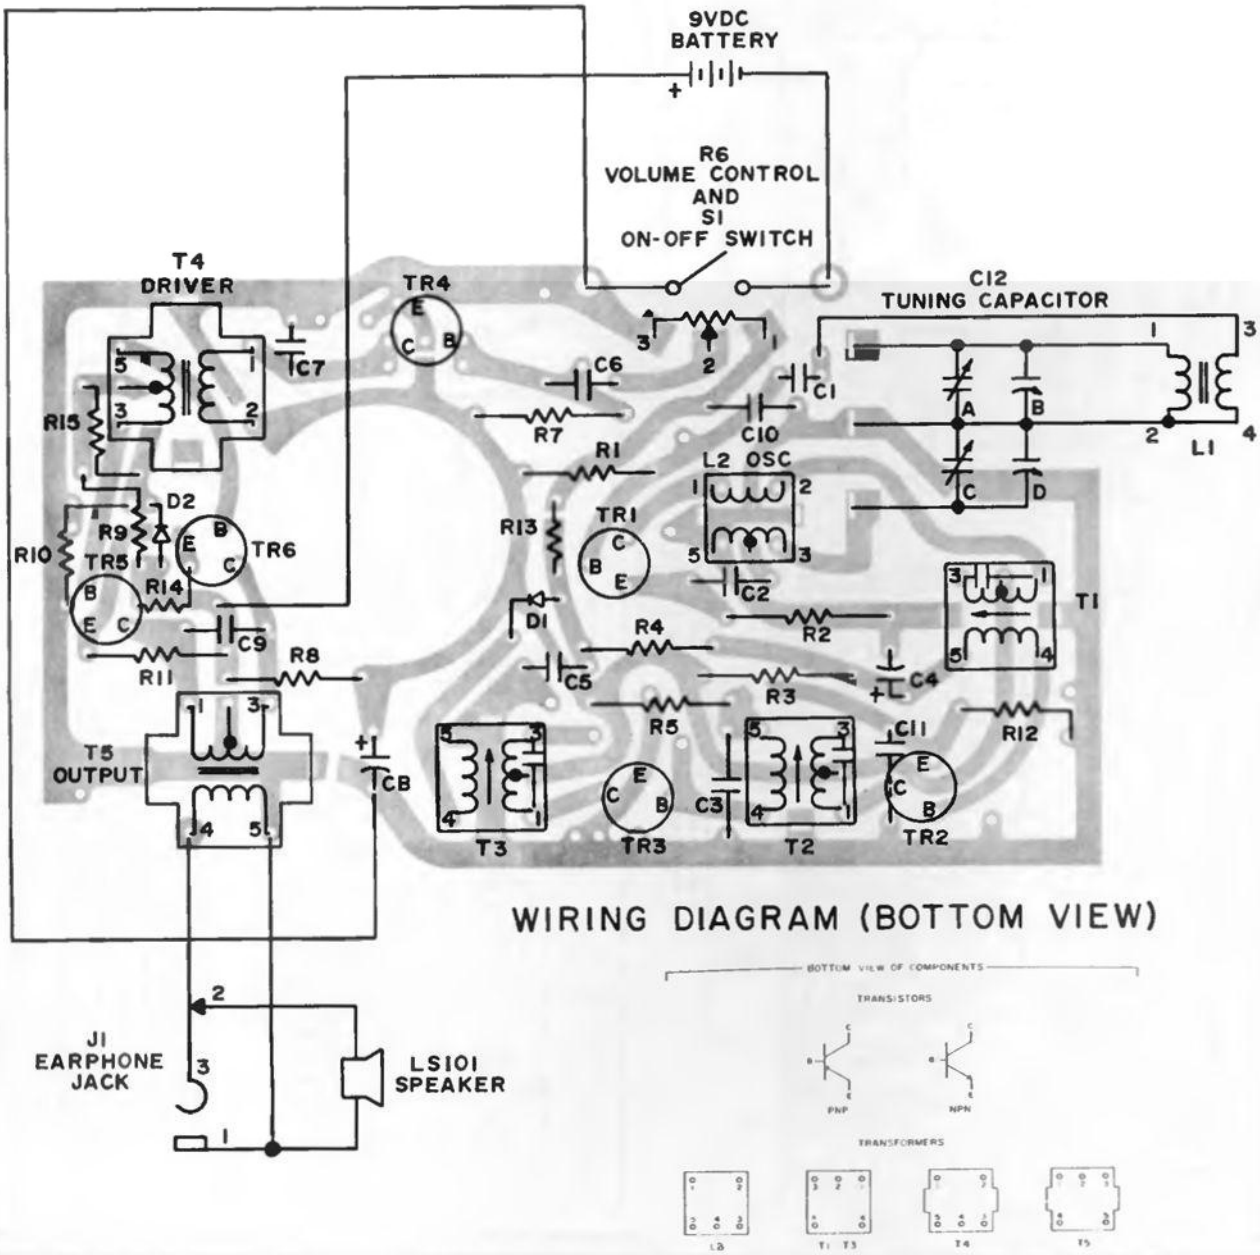
9VDC BATTERY
+
R6 VOLUME CONTROL AND S1 ON-OFF SWITCH
T4 DRIVER
TR4
C12 TUNING CAPACITOR
C7
C6
C1
R15
R7
C10
L1
R1
L2 OSC
D2
R9
TR6
TR5
R10
R14
TR1
R13
C2
T1
D1
C9
R11
R8
R4
R2
C5
C4
R3
R5
R12
C11
T5 OUTPUT
C8
T3
TR3
T2
TR2
C3
WIRING DIAGRAM (BOTTOM VIEW)
J1 EARPHONE JACK
LS101 SPEAKER
BOTTOM VIEW OF COMPONENTS
TRANSISTORS
PNP
NPN
TRANSFORMERS
L2
T1 T3
T4
T5