
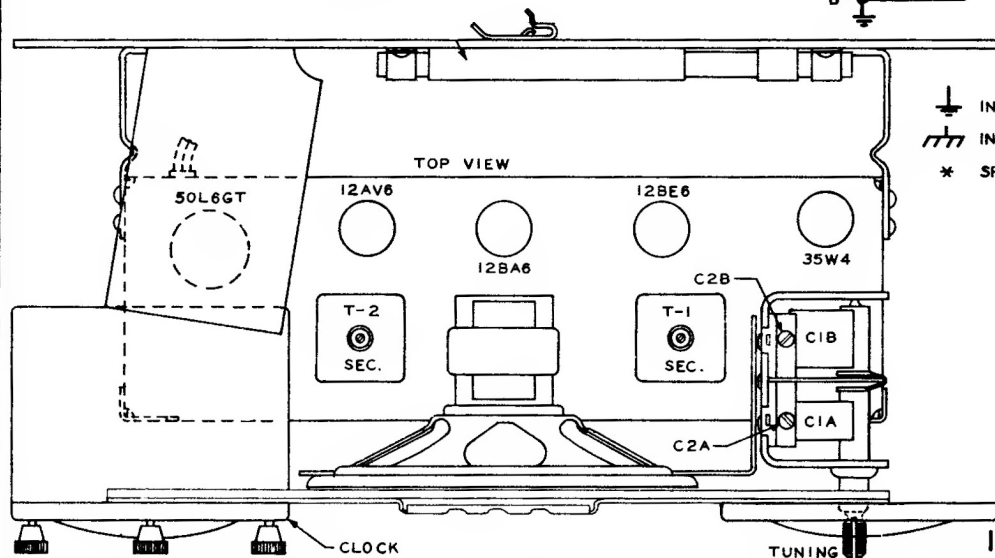


# SPARTON MODEL 5A3 & 5A3C

Chassis types 5A3 and 5A3C are used in Models 311C, 312C, 315C, and 319C. Chassis 5A10 used in Models 230, 232, 239, use practically the identical circuit, but do not employ a clock.

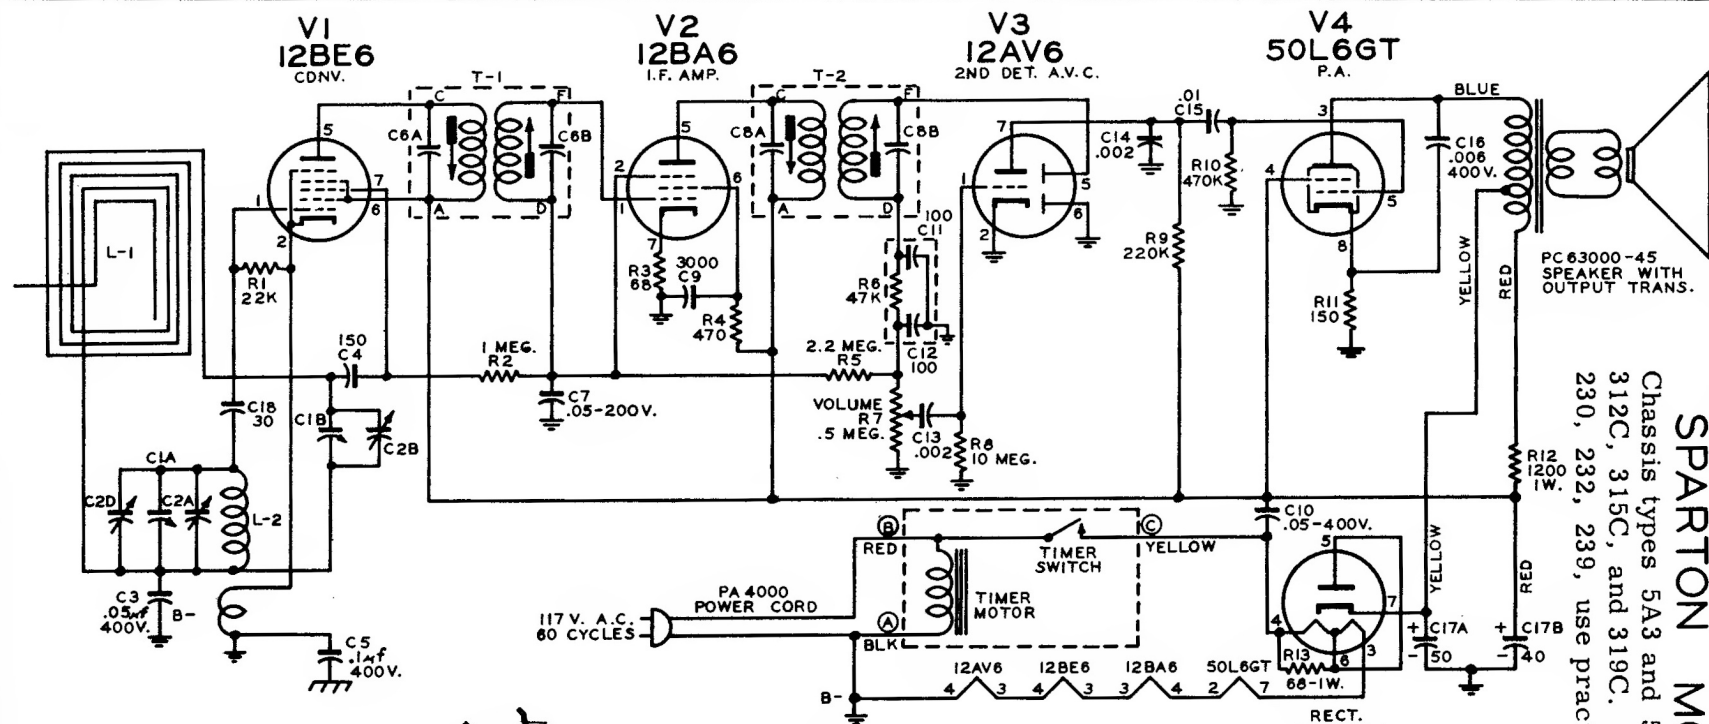

⏏ INDICATES CONNECTION TO B- BUSS, NOT CHASSIS.  
 ⏏ INDICATES CHASSIS CONNECTION.

\* SPECIAL SERVICE NOTE: THESE TRANSFORMERS SUPPLIED IN COMPLETE ASSEMBLIES ONLY.

| DESCRIPTION                    | PART NO.   |
|--------------------------------|------------|
| C1A,B GANG CONDENSER           | PB40414    |
| C2A,B,D TRIMMERS ON GANG       | PC40GL-503 |
| C3 .05 MFD. 400V. TUBULAR      | CC30G-151F |
| C4 150 MMF. CERAMIC            | PC40FL-104 |
| C5 .1 MFD. 400V. TUBULAR       | *          |
| C6A,B I.F. CAPACITORS          | PC40GK-503 |
| C7 .05 MFD. 200V. TUBULAR      | *          |
| C8A,B I.F. CAPACITORS          | HK35F-302  |
| C9 3000 MMF. CERAMIC           | PC40HL-503 |
| C10 .05 MFD. 400V. TUBULAR     | PA4329-1   |
| C11 100 MMF. C & R UNIT        | HK35E-202  |
| C12 100 MMF. C & R UNIT        | HK35E-202  |
| C13 2K MMF. CERAMIC            | PC40GK-103 |
| C14 2K MMF. CERAMIC            | PC40HL-602 |
| C15 .01 MFD. 200V. TUBULAR     | PA4310     |
| C16 .006 MFD. 400V. TUBULAR    | CC30H-300K |
| C17A,B 40-50 MFD. ELECTROLYTIC |            |
| C18 30 MMF. CERAMIC            |            |

INTERMEDIATE FREQUENCY 456KC.