


SYLVANIA

MODELS: AK55, AK60, AK70, AT50

Chassis U50-3, 4, 6

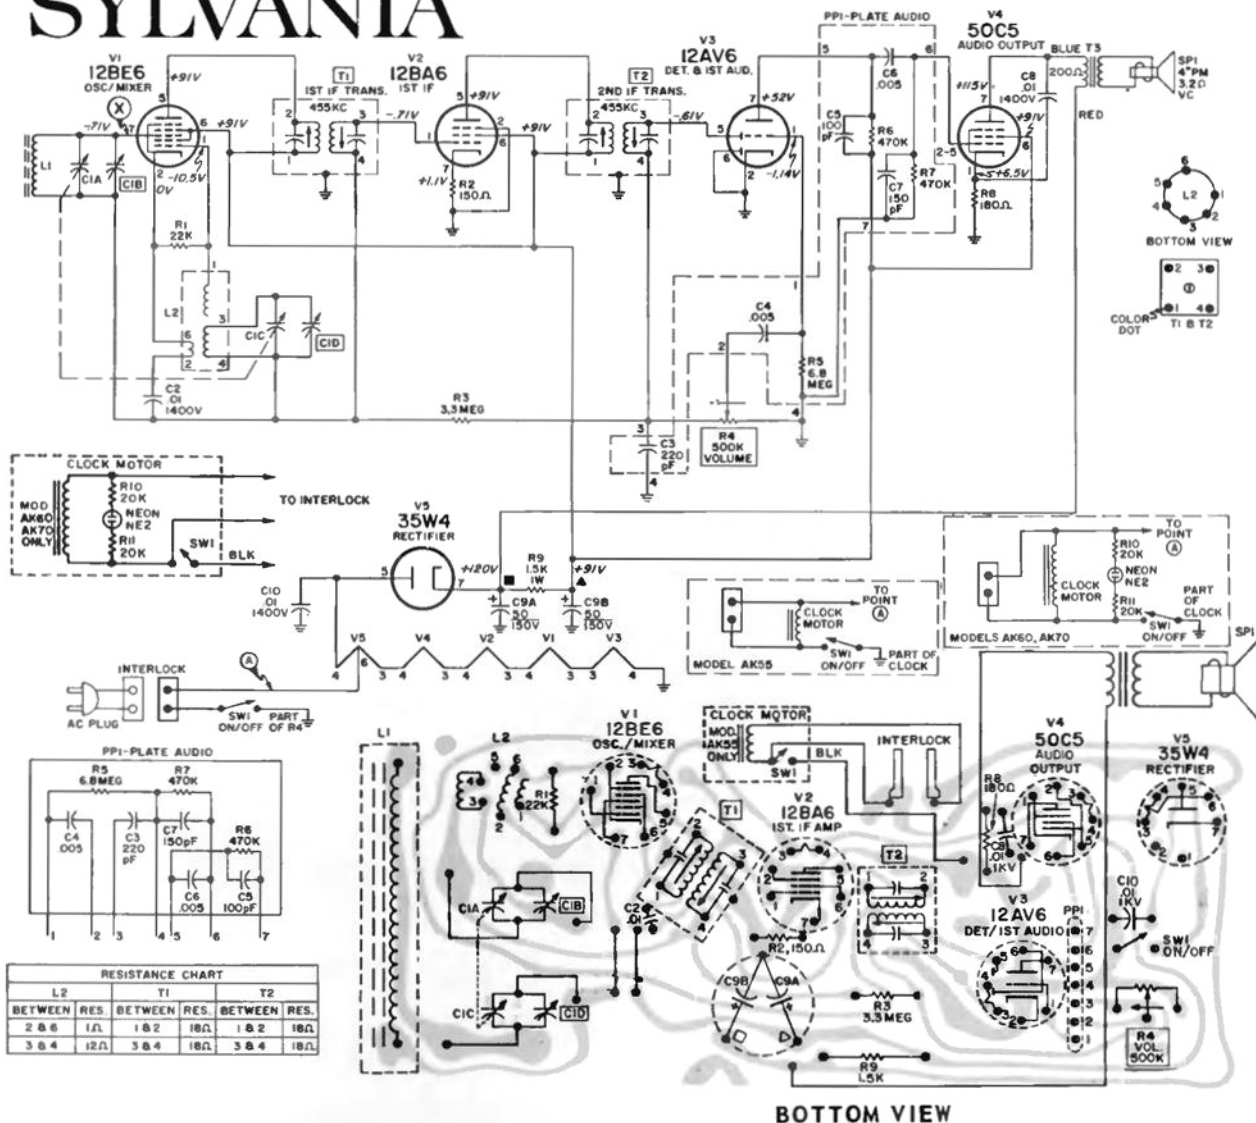

STEP	TUNING CAPACITOR SETTING	TEST EQUIPMENT HOOK-UP	GENERATOR FREQUENCY	ADJUSTMENT POINT	ADJUST FOR
1	Fully open	SIGNAL GENERATOR - "Hot" lead thru a 200pF capacitor to test point (X). Ground lead to chassis AC VOLTMETER - Across speaker voice coil.	455 KC 400 CPS 30% MOD.	T2 Bottom Core T2 Top Core T1 Bottom Core T1 Top Core	Maximum Meter Reading
2	Same as Step 1	SIGNAL GENERATOR - Radiate signal to receiver thru a loop of several turns of wire. AC VOLTMETER - Same as Step 1.	1625 KC 400 CPS. 30% MOD.	CID Trimmer	Maximum Meter Reading
3	1400 KC	Same as Step 2	Set generator to a frequency corresponding to receiver tuning capacitor setting (until signal is heard thru receiver speaker).	CIB Trimmer	Maximum Meter Reading