

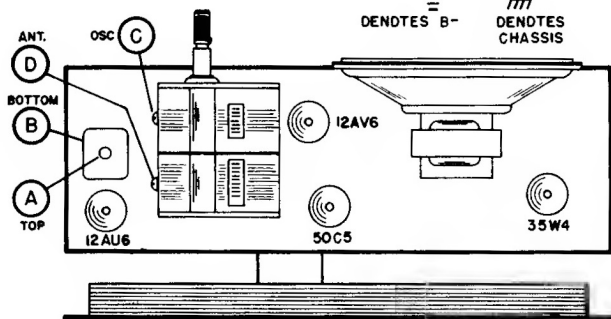


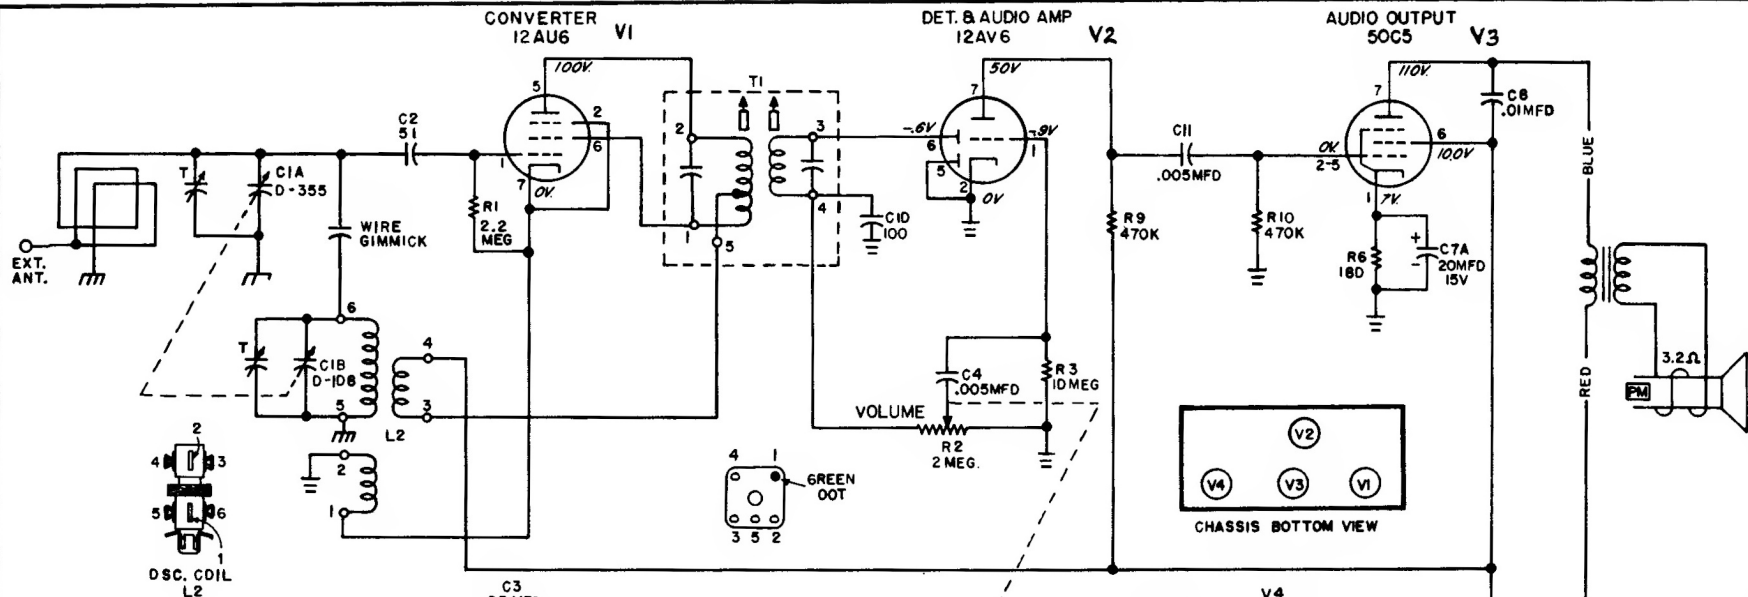

Frequency Coverage 535 - 1620 KC
Intermediate Frequency 455 KC

1. RESISTANCE INDICATED IN OHMS AND CAPACITANCE IN MMF UNLESS OTHERWISE SPECIFIED.
2. RESISTORS HAVE 1/2 WATT RATING UNLESS OTHERWISE SPECIFIED.
3. INTERMEDIATE FREQUENCY = 455 KC.
4. LINE VOLTAGE - 117 VOLTS AC/DC
5. ALL VOLTAGES ARE MEASURED WITH A VACUUM TUBE VOLTMETER (VTVM) AND ARE DC AND POSITIVE UNLESS OTHERWISE SPECIFIED.
6. ALL VOLTAGES ARE MEASURED BETWEEN TUBE SOCKET TERMINALS AND B- (P/N 3 OF 12AV6) WITH ANTENNA SHORTED AND TUNING GANG FULLY MESSED
7. K=1000

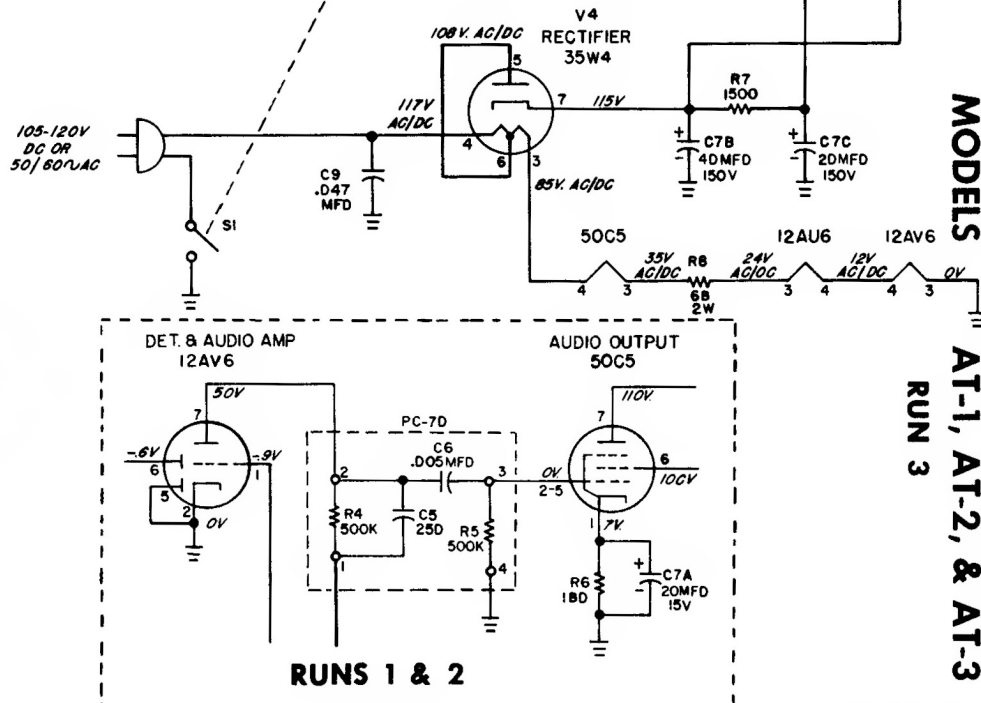

the hallicrafters co.
MODELS AT-1, AT-2, & AT-3
RUN 3