


TRAVLER

Model 5091

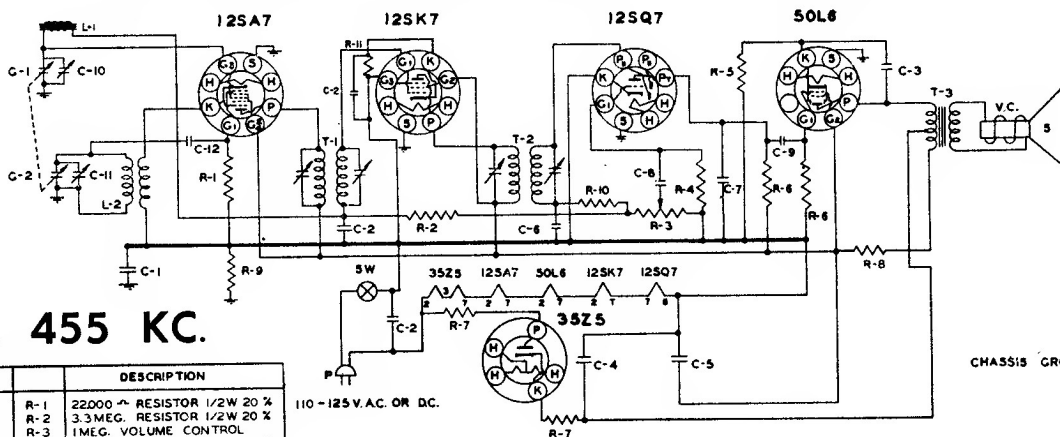


I.F. 455 KC.

PART NO.	DESCRIPTION
IR-9	R-1 22000 $\sim$ RESISTOR 1/2W 20%
IR-23	R-2 3.3MEG. RESISTOR 1/2W 20%
VC-48	R-3 1MEG. VOLUME CONTROL
IR-13	R-4 2.2MEG. RESISTOR 1/2W 20%
IR-14	R-5 150 $\sim$ RESISTOR 1/2W 20%
IR-11	R-6 470M $\sim$ RESISTOR 1/2W 20%
IR-17	R-7 33 $\sim$ RESISTOR 1/2W 20%
IR-42	R-8 1000 $\sim$ RESISTOR 1W 10%
IR-20	R-9 220M $\sim$ RESISTOR 1/2W 20%
IR-10	R-10 47000 $\sim$ RESISTOR 1/2W 20%
IR-6	R-11 470 $\sim$ RESISTOR 1/2W 10%
PC-8	C-1 .1MFD. CONDENSER 400V.
PC-5	C-2 .05MFD. CONDENSER 400V.
PC-7	C-3 .01MFD. CONDENSER 400V.
EC-24	C-4 50MFD. 150V. ELECTROLYTIC
	C-5 50MFD.
MC-6	C-6 220MMFD.
	C-7 220MMFD.
	C-8 .002MFD.
	C-9 .005MFD.
MC-4	C-10 ANT. TRIMMER.
	C-11 OSC. TRIMMER
GC-5E	C-12 50MMFD. MICA CONDENSER
LL-34	G-1 GANG CONDENSEP
LO-13	G-2
LI-6	L-1 FERRAMIC ROD ANTENNA
LI-7	L-2 OSC. COIL
SPK-32	T-1 INPUT I.F. TRANSFORMER
	T-2 OUTPUT I.F. TRANSFORMER
	T-3 SPEAKER OUTPUT TRANSFORMER
CO-1	V.C. VOICE COIL
	S P.M. SPEAKER
	SW A.C. SWITCH ON VOLUME CONTROL
	P LINE CORD


110-125 V.A.C. OR D.C.

CHASSIS GROUND

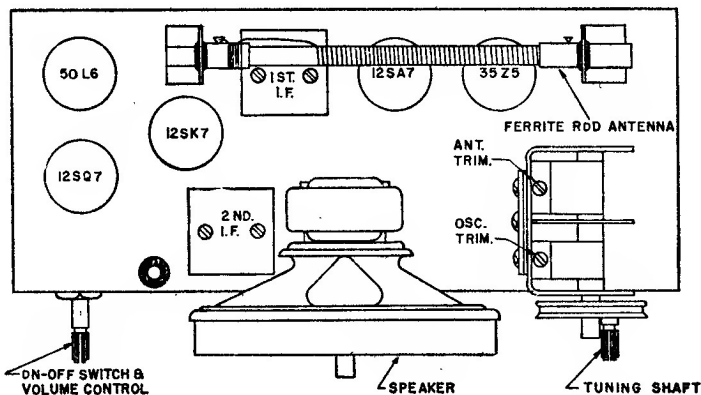

TRAV-LER Models 5180A, 5180B, 5180M


TUBE & TRIMMER LOCATION
MODEL-5180A

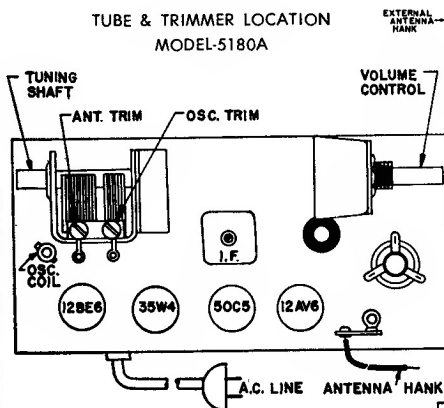

I.F. 455 KC.

Models 5180A, -B, -M

MODEL-5180A

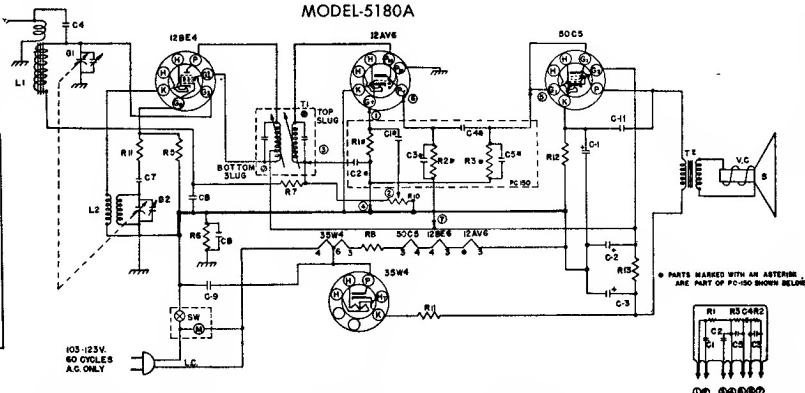

* PARTS MARKED WITH AN ANTENNA ARE PART OF PC-150 SHOWN BELOW.



PART NO.	SYMBOL	DESCRIPTION	PART NO.	SYMBOL	DESCRIPTION
CG-21	G6	10MFD CERAMIC CONDENSER	IR-4	R-12	150 OHM 1/2W 20% CARBON RESISTOR
CG-12	G7	47MFD CERAMIC CONDENSER	IR-25	R-13	2200 OHM 1W 10% CARBON RESISTOR
PG-2	G8	.05MFD. PAPER CONDENSER	C-1	C-1	25WVDC ELECTROLYTIC
PG-3	G9	.05MFD. PAPER CONDENSER 400V.	EC-28A	C-2	20MFD-150WVDC CONDENSER
OK-2	M	ELECTRIC CLOCK ASSEMBLY	G-3	G-3	40MFD-150WVDC CONDENSER
GO-3	C11	.005 MFD. CONDENSER	GO-4	L-1	A.C. LINE CORD
MC-19	PC-50	COUPLATE	GO-1	G1	ANT. SECTION-WITH TRIMMER
IR-9	R-5	22K OHM 1/2W 20% CARBON RESISTOR	GO-12	G2	OSC. SECTION-WITH TRIMMER
IR-20	R-6	10K OHM 1/2W 20% CARBON RESISTOR	LA-4	L1	ANTENNA COIL
IR-25	R-7	5.3M OHM 1/2W 20% CARBON RESISTOR	LO-20	L2	OSCILLATOR COIL
IR-41	R-8	47K OHM 1W 10% CARBON RESISTOR	LI-12	T1	455 KC TAPPED PRIMARY-IF COIL
VC-49	R-10	1MEG OHM VOLUME CONTROL	SW	SW	SWITCH(PART OF CLOCK ASSEMBLY)
IR-17	R-11	33OHM 1/2W 20% CARBON RESISTOR	22B	T2	OUTPUT TRANSFORMER
			SPK-OR	VC	VOICE COIL WINDING
			35	S	SPEAKER

COMPONENTS & VALUES OF PC-150

C1-2500MFD.
C2-500MFD.
C3-2500MFD.
C4-5000MFD.
R1-5000OHM
R2-5000OHM
R3-5000OHM