


TRAV-LER RADIO CORPORATION

Model No. 5301

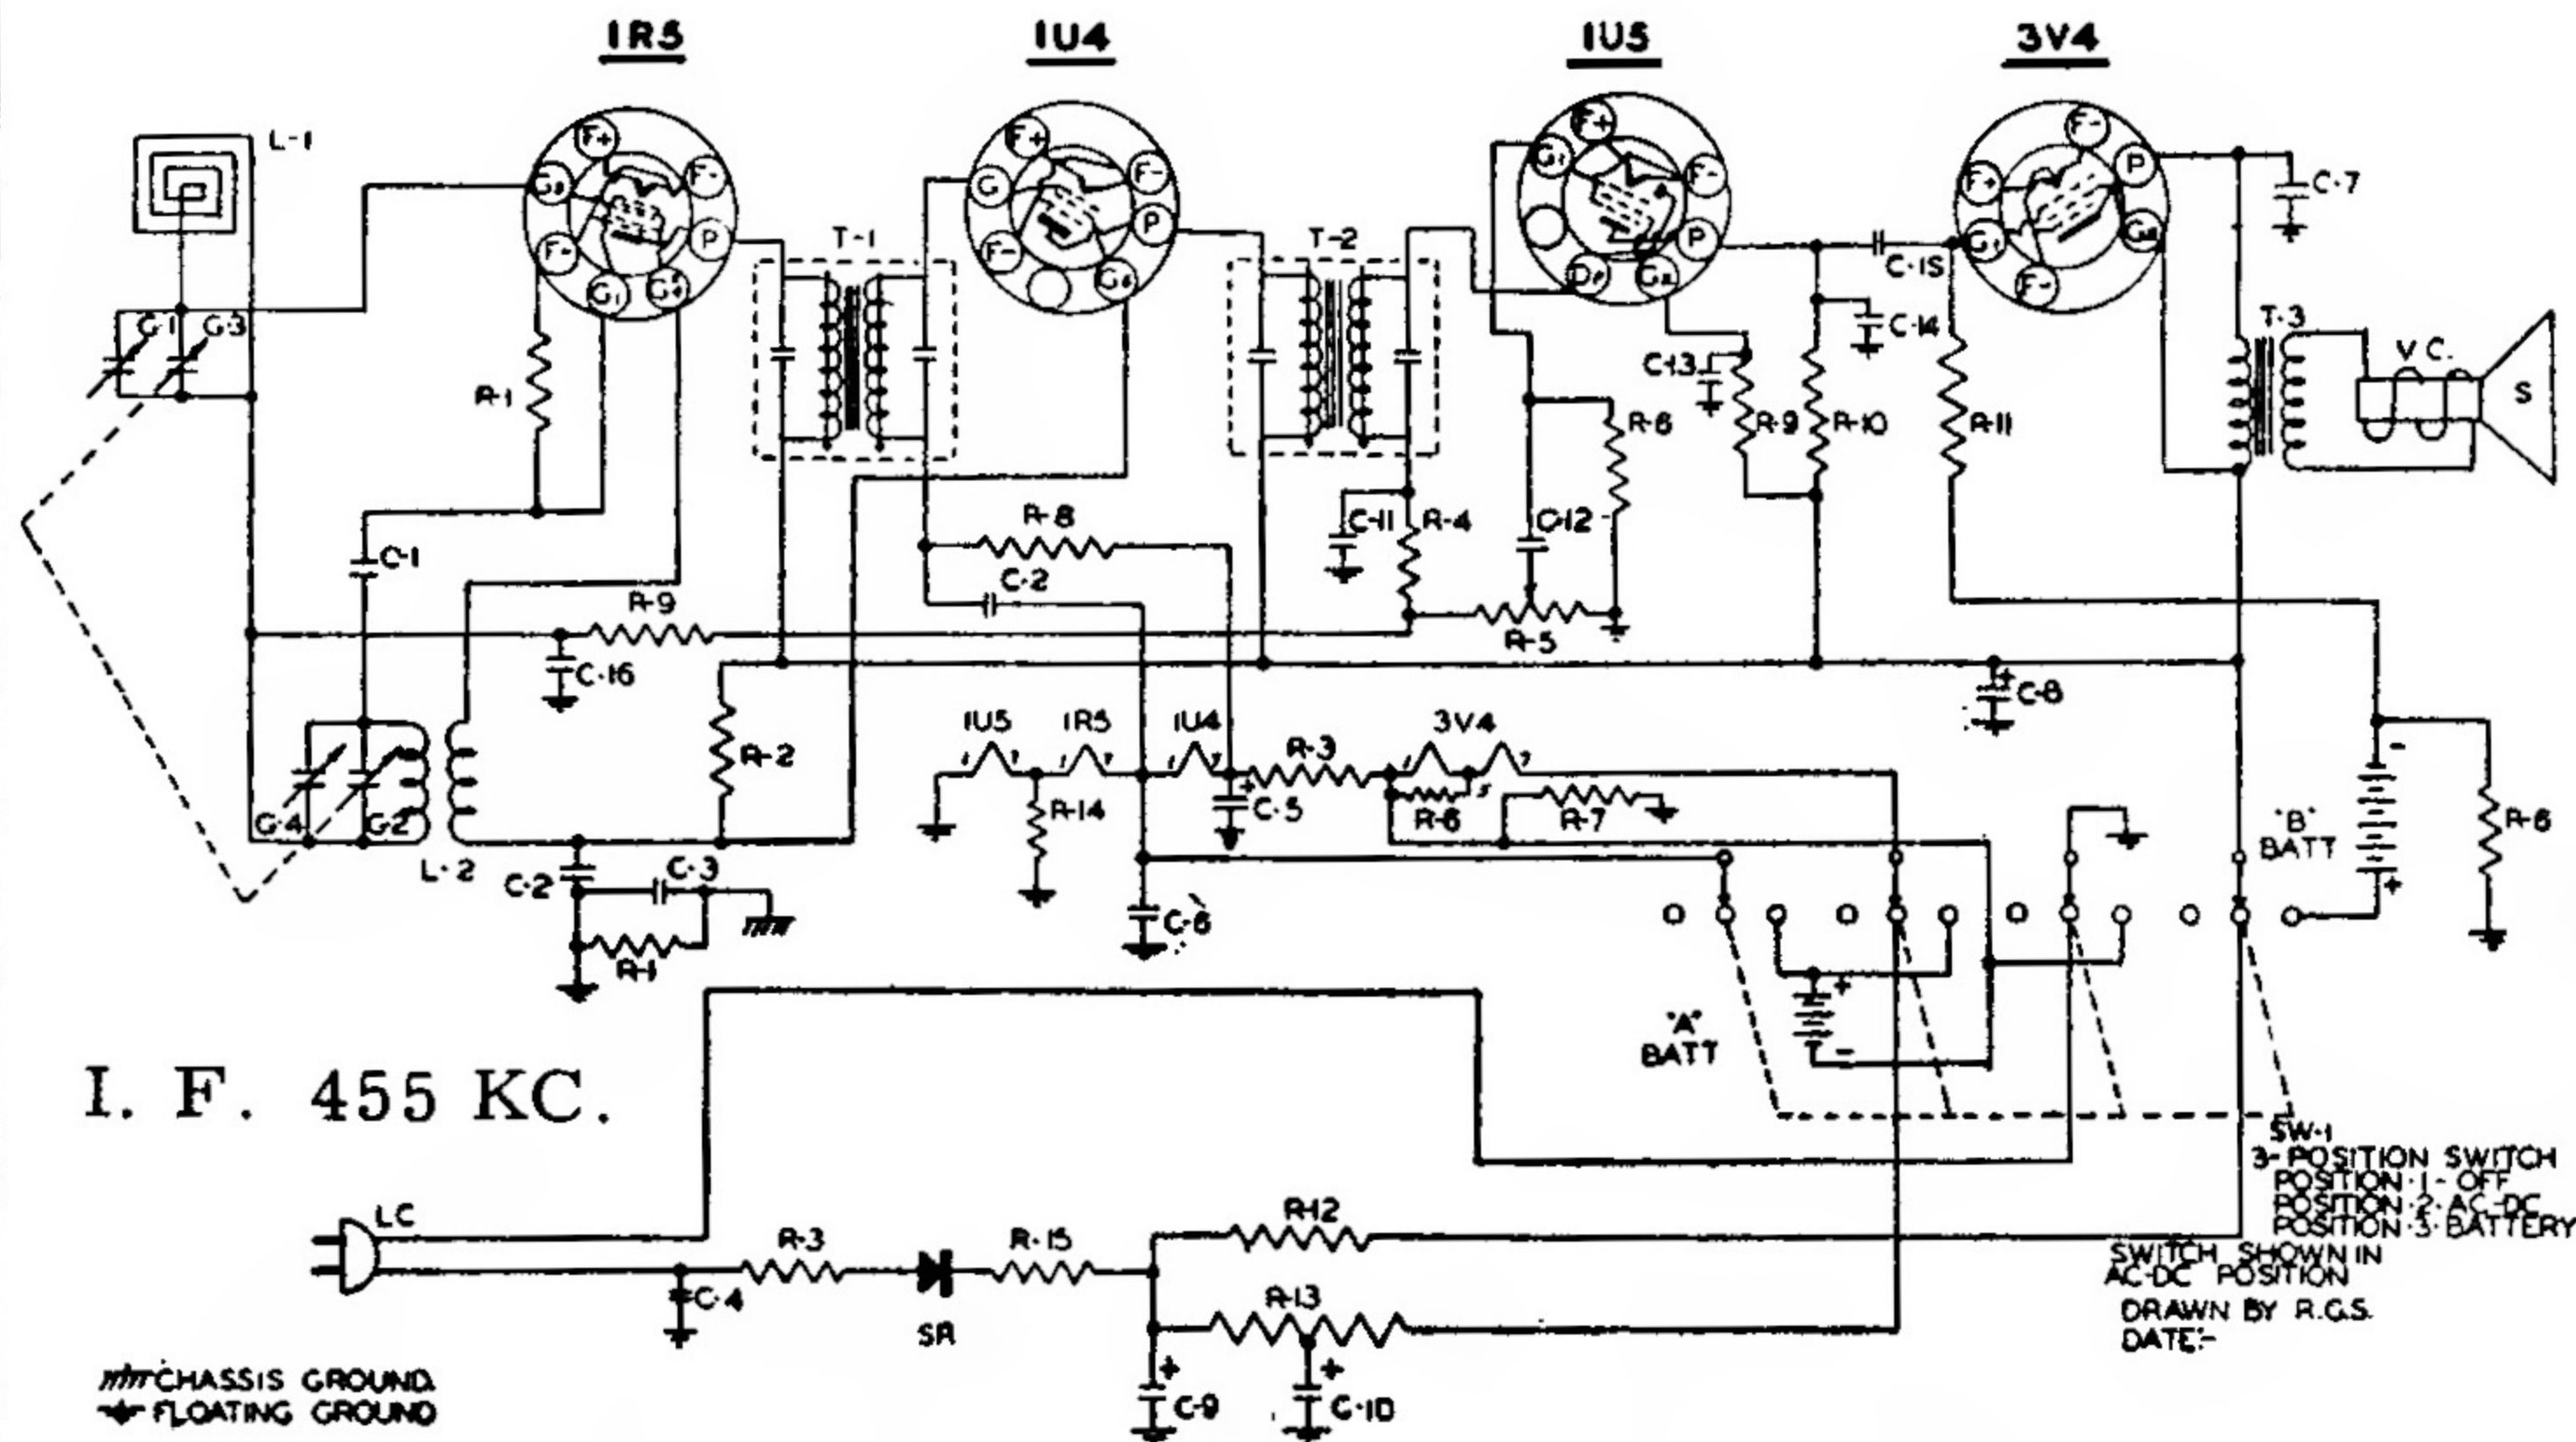

PART NO.	DESCRIPTION
R-20	220M RESISTOR 1/2W 20%
IR-37	10M RESISTOR 1/2W 20%
IR-17	33M RESISTOR 1/2W 20%
IR-31	82M RESISTOR 1/2W 10%
VC-11	1MEG VOLUME CONTROL
IR-33	270M RESISTOR 1/2W 10%
IR-36	620M RESISTOR 1/2W 5%
IR-3	10MEG RESISTOR 1/2W 20%
IR-23	33MEG RESISTOR 1/2W 20%
IR-12	1MEG RESISTOR 1/2W 20%
IR-13	2.2MEG RESISTOR 1/2W 20%
IR-40	3000M RESISTOR 1W 10%
WR-7	1050-1050 CANDOHM RESISTOR 5W.5%
IR-1	470M RESISTOR 1/2W 20%
IR-41	47M RESISTOR 1W 10%
MC-2	C-1 100MMFD. MICA CONDENSER
PC-7	C-2 .01MFD. CONDENSER 400W.V.
PC-8	C-3 .1MFD. CONDENSER 400W.V.
PC-5	C-4 .05MFD. CONDENSER 400W.V.
EC-8	C-5 70MMFD. 10W.V. ELECTROLYTIC
PC-3	C-6 .1MFD. CONDENSER 200W.V.
PC-6	C-7 .005MFD. CONDENSER 600W.V.
EC-14	C-8 40MFD. 150W.V. ELECTROLYTIC
	C-9 20MFD. 150W.V. ELECTROLYTIC
	C-10 150MMFD.
	C-11 .002MFD.
MC-7	C-12 .005MFD.
	C-13 .005MFD.
	C-14 100MFD.
PC-2	C-15 .005MFD.
	C-16 .05MFD. CONDENSER 200W.V.
SA-2	SR SELENIUM RECTIFIER
CO-1	LC LINE COIL
SW-8	SW-1 3-POSITION SWITCH
	2-D SIZE FLASHLITE CELLS, 1 1/2 VOLTS
	1-67 1/2 VOLT BATTERY
U-5	T-1 INPUT IF TRANSFORMER
LI-3	T-2 OUTPUT IF TRANSFORMER
SPH-5	T-3 SPEAKER OUTPUT TRANSFORMER
	V.C. VOICE COIL
	S 3 1/2 PM. SPEAKER
	C-4 OSC. TRIMMER
TU-39	IR5-1U4-1U5-3V4
GC-12	G-1 GANG CONDENSER
GC-14	G-2 GANG CONDENSER
LL-29	LL-29 FOR GC-12
LL-31	LL-31 FOR GC-14
LO-17	LO-17 FOR GC-12
LO-19	LO-19 FOR GC-14

Eveready 67 1/2 vlt. #467

Burgess 67 1/2 vlt. #XX45

RCA 67 1/2 vlt. #VS016

Ray-O-Vac 67 1/2 vlt. #4367

