

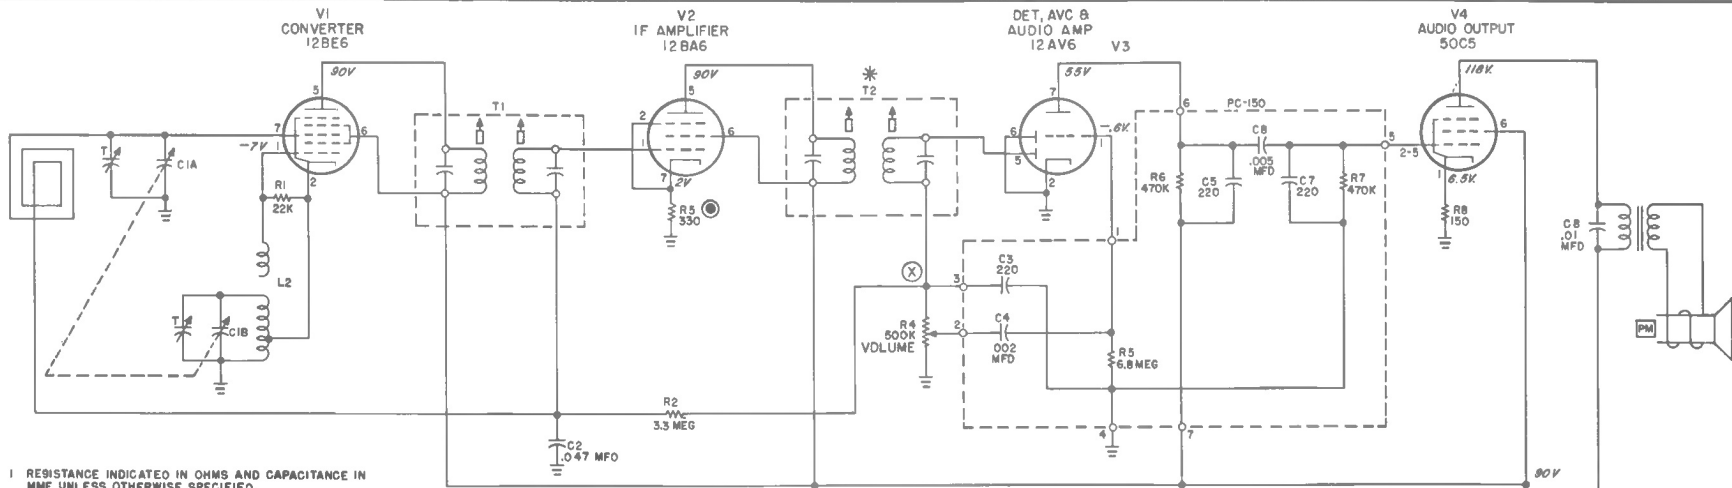
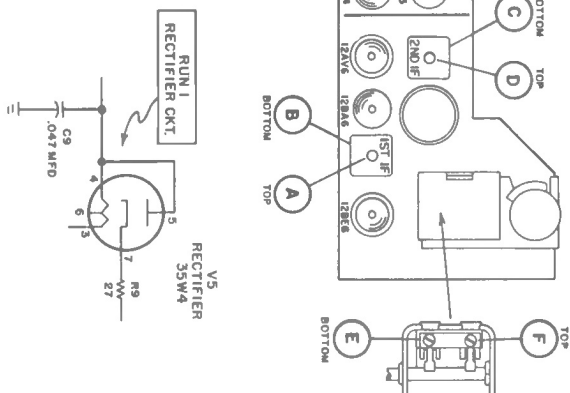


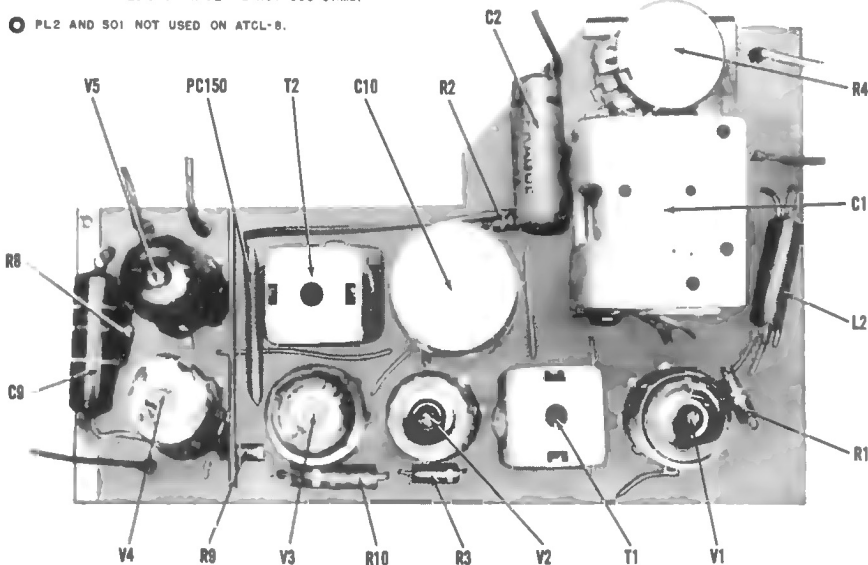

1. RESISTANCE INDICATED IN OHMS AND CAPACITANCE IN MMF UNLESS OTHERWISE SPECIFIED.
2. RESISTORS HAVE 1/2 WATT RATING UNLESS OTHERWISE SPECIFIED.
3. INTERMEDIATE FREQUENCY - 455 KC
4. LINE VOLTAGE - 117 VOLTS 60~AC
5. ALL VOLTAGES ARE MEASURED WITH A VACUUM TUBE VOLTMETER (VTVM) AND ARE DC AND POSITIVE UNLESS OTHERWISE SPECIFIED.
6. ALL VOLTAGES ARE MEASURED BETWEEN TUBE SOCKET TERMINALS AND B - ($\frac{1}{2}$).
7. K = 1000
8. (X) INDICATES LOCATION OF HIGH SIDE OF VOLUME CONTROL
9. ON SOME SETS, VALUE OF R-3 IS 180, 220, OR 390. WHEN MAKING REPLACEMENT, USE VALUE FOUND IN SET.
10. WHEN MAKING REPLACEMENT OF T-2, REPLACE R-5 WITH 330-OHMS RESISTOR IF RESISTOR IN SET IS NOT 330-OHMS.
11. PL2 AND 501 NOT USED ON ATCL-8.

Frequency Coverage . . . 535 - 1620 KC
Intermediate Frequency 455 KC

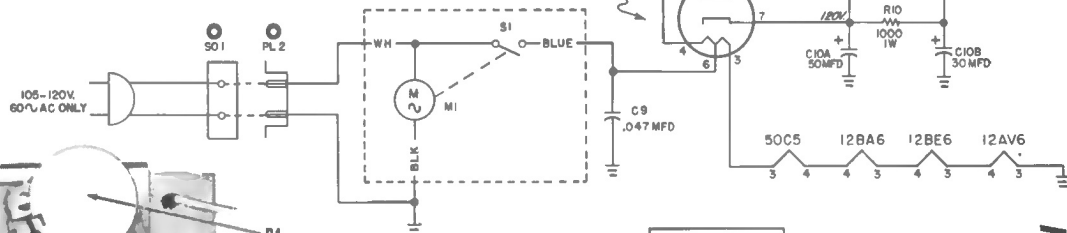

the hallicrafters co.
MODELS ATCL-5, 6 and 7
(RUNS 1 & 2)
and ATCL-8 (Run 1)