




UNITED MOTORS BUICK MODEL 981707

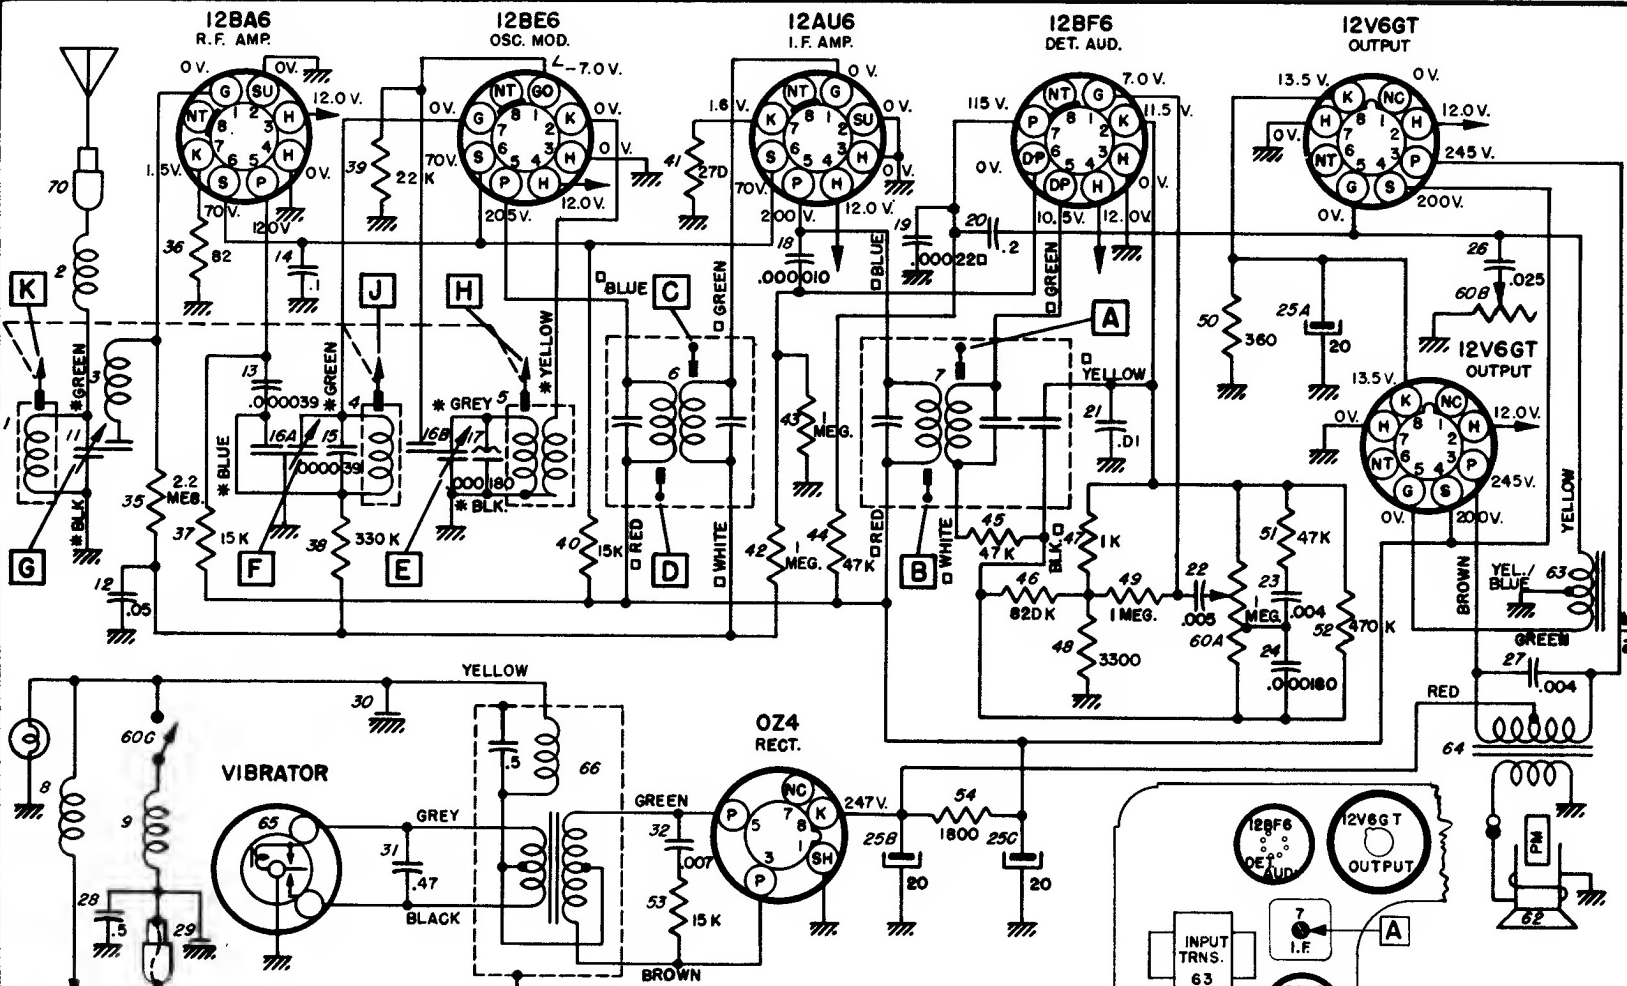

VOLTAGES MEASURED TERMINAL TO CHASSIS WITH A VTVM.—NO SIGNAL AND 12.0 VOLTS AT ILLUS. 31.

* —INDICATES LEAD FROM TUNER COIL ASS'Y.
□ —COLORS OF TERMINALS ON SERVICE PART.
△ —OSCILLATOR GRID VOLTAGE AT 1000 KC.

Step	Series Condenser or Dummy Antenna	Connect Signal Generator To	Signal Generator Frequency	Tune Receiver to	Adjust in Sequence For Max. Output
1	.01 Mfd.	12BE6 Grid (Pin #7)	262 KC	High Frequency Stop	A, B, C, D
2	.000082 Mfd.	Antenna Connector	1615 KC	High Frequency Stop	E, F, G
3	.000082 Mfd.	Antenna Connector	1000 KC	Signal Generator Signal	J, K
4	.000082 Mfd.	Antenna Connector	1615 KC	High Frequency Stop	F, G

