
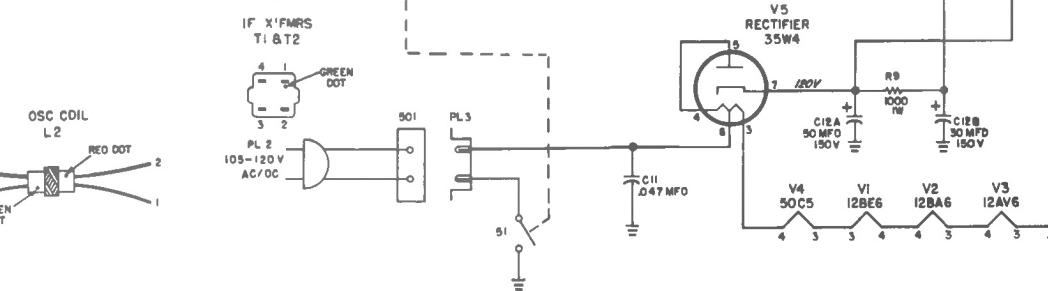




NOTES

1. Resistor values in ohms and capacitor values in MMF unless otherwise specified. K = 1000.
 2. IF = 455 KC.
 3. R-1, R-2, R-3 and R-8 are part of resistor plate RP-1.
 4. ▶ indicates numbered terminals on RP-1.
 5. (X) indicates location of high side of Volume control
- * Not used in some sets.

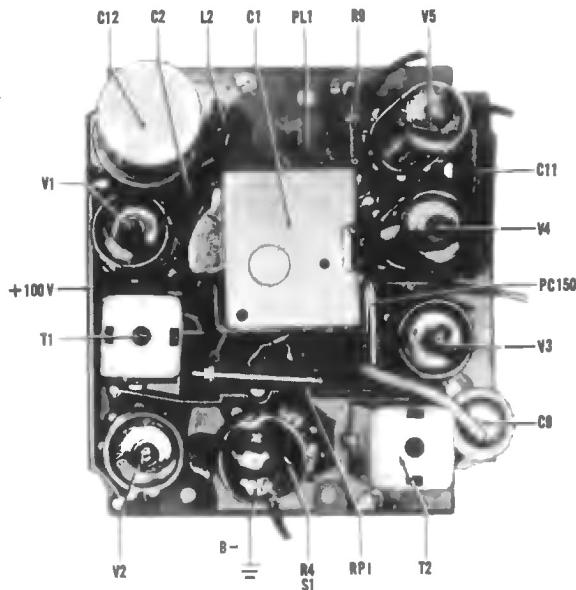

VOLTAGES

- Voltage readings taken under following conditions:
1. Line voltage—117 volts DC or 50/60 cycle AC.
 2. Voltages are DC and positive unless otherwise specified.
 3. DC voltages measured with VTVM between tube socket terminals and B- ($\frac{1}{2}$).
 4. AC voltages measured with 1000 ohms per volt meter.

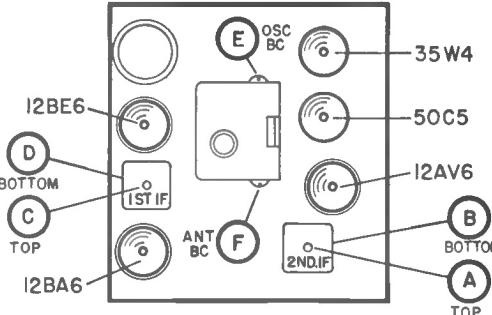

the hallicrafters co.
MODELS ATX-11, ATX-12 & ATX-13 (RUN 1)

the hallicrafters co.