
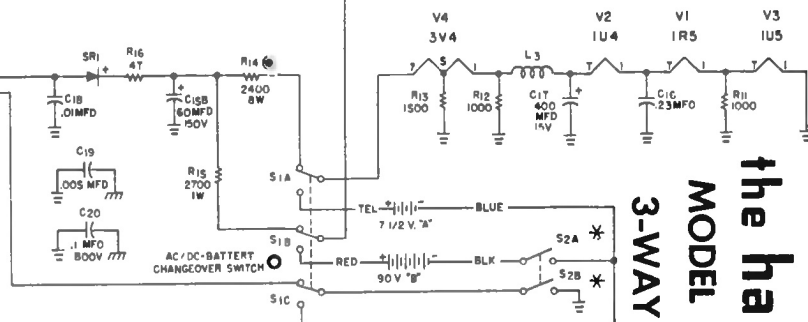
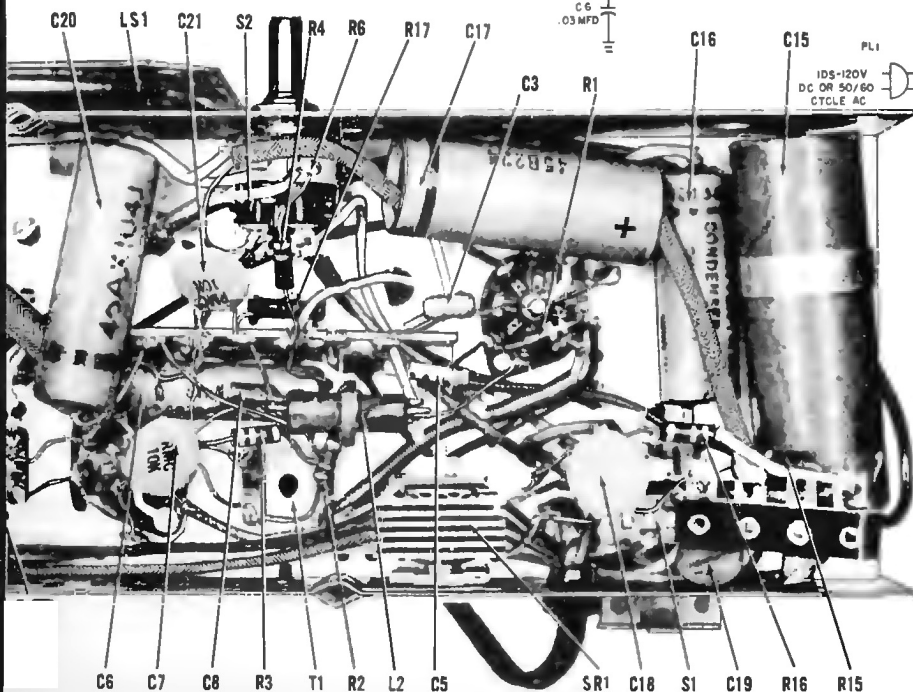


Frequency Coverage 535 to 1620 KC
Intermediate Frequency 455 KC

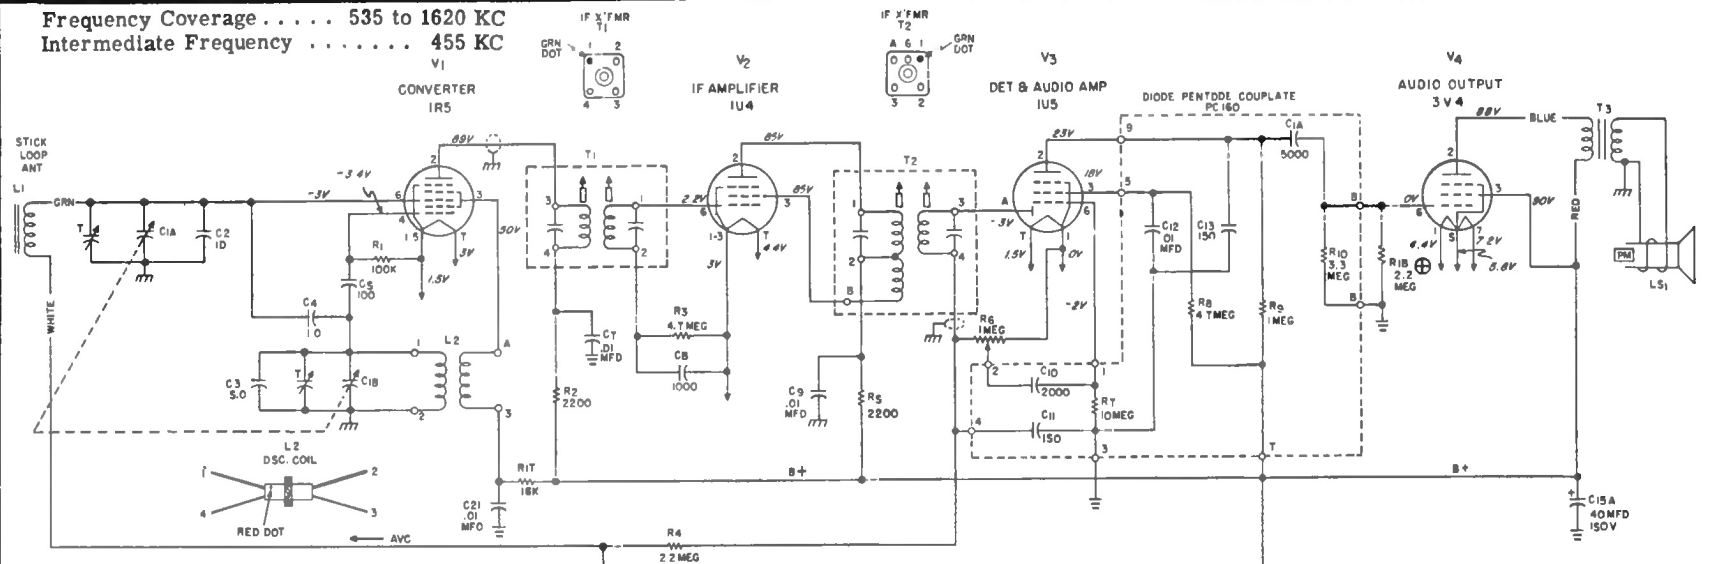

- NOTES**
1. RESISTANCE INDICATED IN OHMS AND CAPACITANCE IN MMF UNLESS OTHERWISE SPECIFIED.
 2. RESISTORS HAVE 1/2 WATT RATING UNLESS OTHERWISE SPECIFIED.
 3. INTERMEDIATE FREQUENCY 455 KC.
 4. LINE VOLTAGE - FOR AC/DC OPERATION - 117 VOLTS, 50/60 CYCLES. FOR BATTERY OPERATION - 1 1/2 V "A" AND 50V "B".
 5. ALL VOLTAGES ARE MEASURED WITH A VACUUM TUBE VOLTMETER (VTVM) AND ARE DC AND POSITIVE UNLESS OTHERWISE SPECIFIED.
 6. ALL VOLTAGES ARE MEASURED BETWEEN TUBE SOCKET TERMINALS AND B-(PIN 1 OF 1U5) WITH ANTENNA TERMINALS SHORTED AND TUNING GANG FULLY MESSED.
 7. K=1000
 8. PART OF VOLUME CONTROL R6.
 9. B-(COMMON GROUND)
 10. CHASSIS
 11. SWITCH S1 SHOWN IN AC/DC POSITION. TO PLACE SWITCH IN BATTERY POSITION, INSERT LINE CORD PLUG INTO CHASSIS RECEPTACLE.
 12. IN SOME SETS, R-14 IS REPLACED BY (1) 2700 OHM 8 WATT W/W RESISTOR AND (1) 22K OHM 1 WATT RESISTOR CONNECTED IN PARALLEL.
 13. USED IN "RUN 2" SETS ONLY

the hallicrafters co.
MODEL TW-25 (Runs 1 & 2)
3-WAY PORTABLE RADIO